Exposes the service on each node's IP at a static port (30000 - 32767) which is automatically assigned.

Nodeport

Good for development & simple external access.

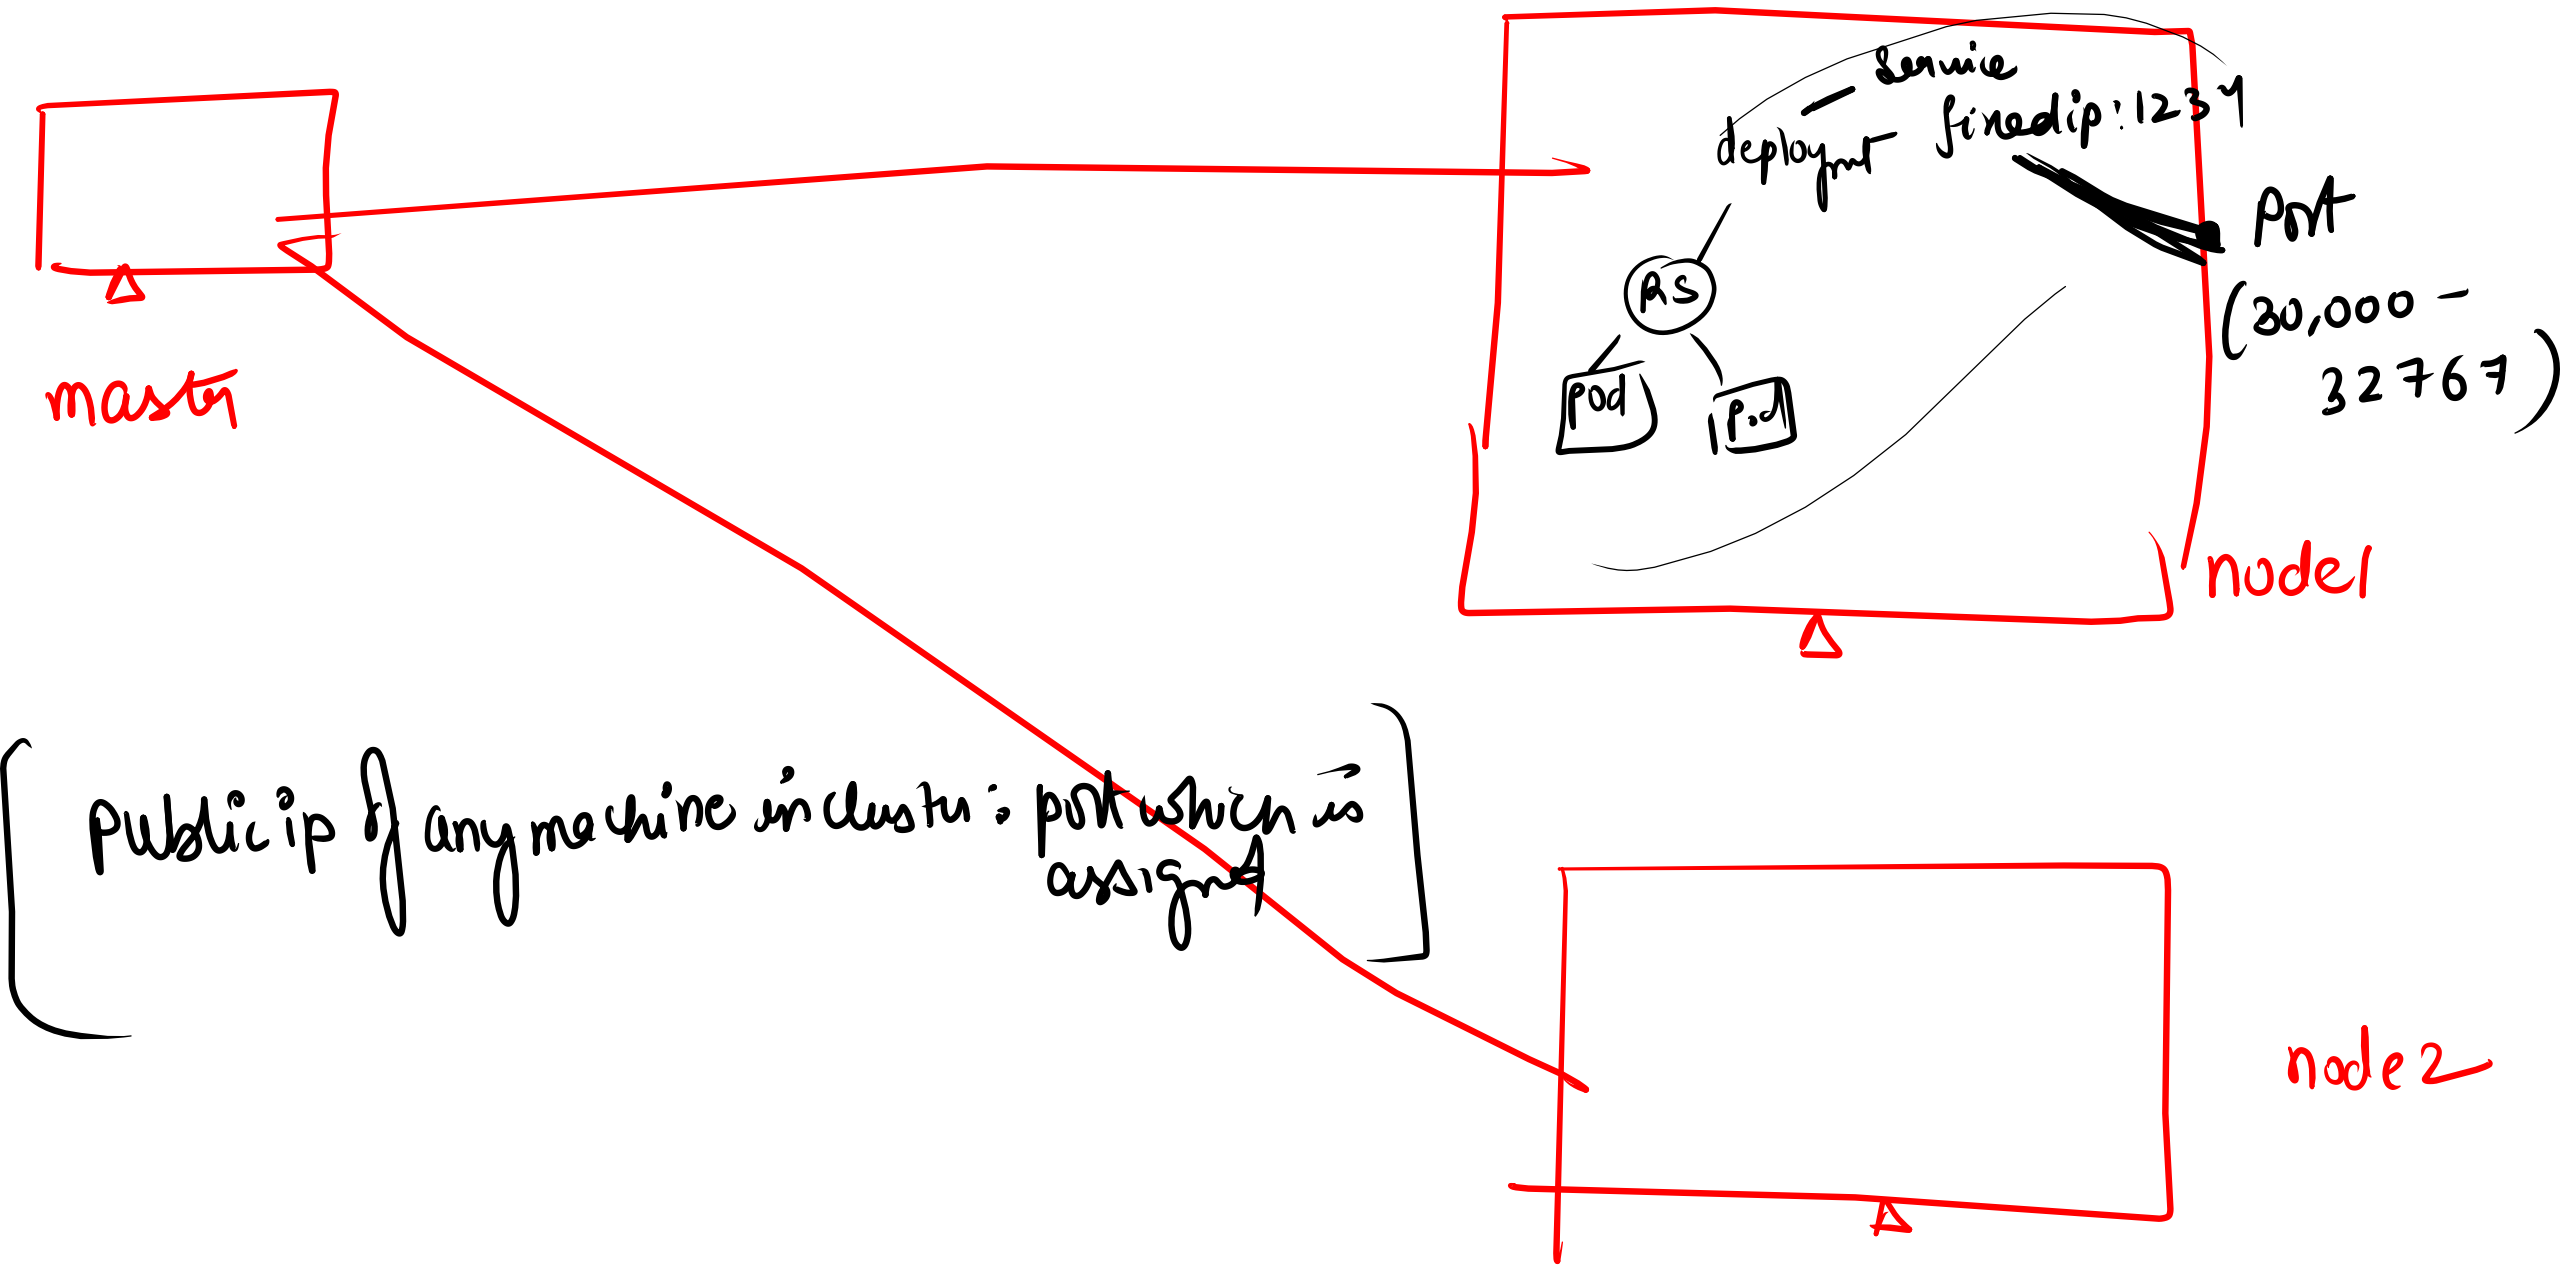

[Public ip of any machine in cluster : port which is assigned]

first lets delete the service

```
root@ip-172-31-6-141:/home/ubuntu# kubectl get service
NAME            TYPE        CLUSTER-IP       EXTERNAL-IP   PORT(S)    AGE
demoservices    ClusterIP   10.100.254.231   <none>        8080/TCP   37m
kubernetes      ClusterIP   10.96.0.1        <none>        443/TCP    2d1h
root@ip-172-31-6-141:/home/ubuntu# kubectl delete service demoservices
service "demoservices" deleted
root@ip-172-31-6-141:/home/ubuntu# kubectl get service
NAME          TYPE        CLUSTER-IP   EXTERNAL-IP   PORT(S)   AGE
kubernetes    ClusterIP   10.96.0.1    <none>        443/TCP   2d1h
root@ip-172-31-6-141:/home/ubuntu#
```

Now we will replace the clusterIP service with nodeport

```
vi service.yml
```

```yaml
kind: Service
apiVersion: v1
metadata:
  name: demoservices
spec:
  ports:
    - port: 8080
      targetPort: 80
  selector:
    name: deployment1
  type: NodePort
```

type should be NodePort
↑ capital

```
root@ip-172-31-6-141:/home/ubuntu# kubectl apply -f service.yml
service/demoservices created
```

```
root@ip-172-31-6-141:/home/ubuntu# kubectl get service
NAME            TYPE        CLUSTER-IP    EXTERNAL-IP   PORT(S)          AGE
demoservices    NodePort    10.98.91.46   <none>        8080:31335/TCP   27s
kubernetes      ClusterIP   10.96.0.1     <none>        443/TCP          2d1h
root@ip-172-31-6-141:/home/ubuntu#
```

fixed ip address which is accessible Internally within cluster only (Automatically assigned)

port mapped internally

Automatically assigned port mapped on machine

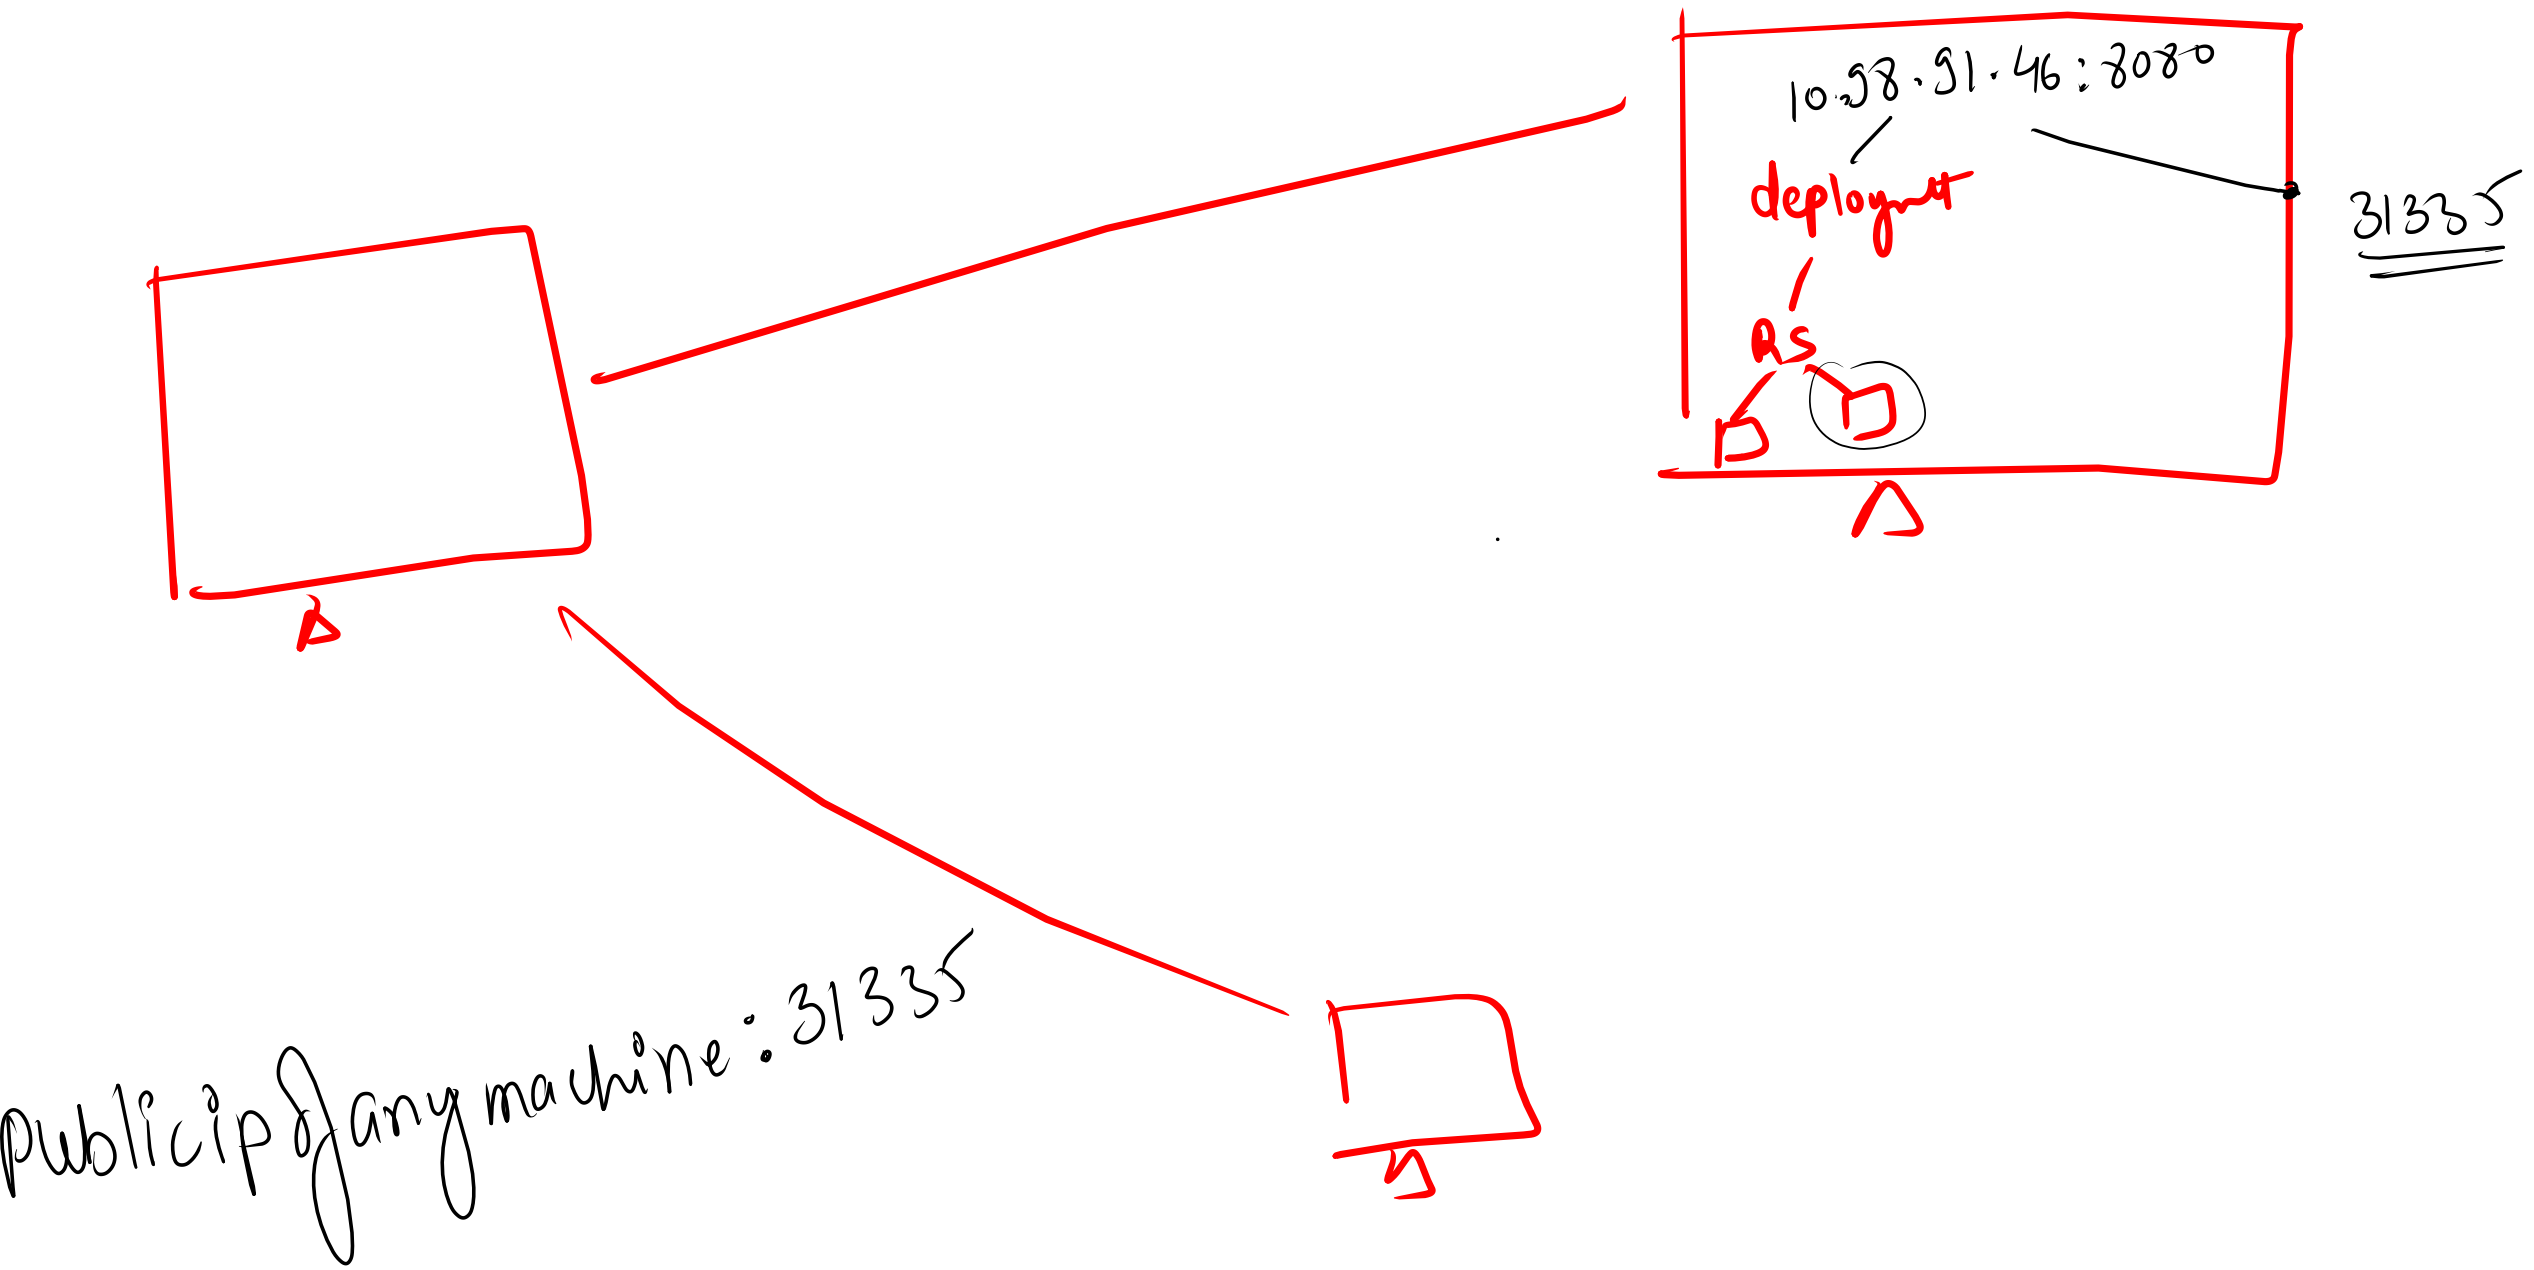
10.98.91.46:8080
deployment
RS
31335
publicIP of any machine : 31335

```
root@ip-172-31-6-141:/home/ubuntu# kubectl get service
NAME            TYPE        CLUSTER-IP    EXTERNAL-IP   PORT(S)          AGE
demoservices    NodePort    10.98.91.46   <none>        8080:31335/TCP   27s
kubernetes      ClusterIP   10.96.0.1     <none>        443/TCP          2d1h
root@ip-172-31-6-141:/home/ubuntu# curl 10.98.91.46:8080
<html><body><h1>It works!</h1></body></html>
root@ip-172-31-6-141:/home/ubuntu#
```

Not secure 13.126.21.200:31335

node 2 ip

It works!

Not secure 3.110.104.199:31335

node ip

It works!

Not secure 3.109.209.250:31335

master ip

It works!