

Cucumber Report

17-Oct-2024, 11:52:14 pm

Start : Oct 17, 11:52:13.153 pm

End : Oct 17, 11:52:13.345 pm

Duration : 0.192 s

Features


Scenarios

Steps

PASSED - 0
FAILED - 2
SKIPPED - 0


PASSED - 0
FAILED - 4
SKIPPED - 0

PASSED - 0
FAILED - 0
SKIPPED - 27

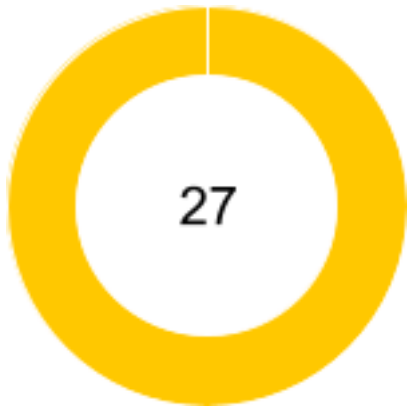


Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Customers</u>	0.089 s	1	0	1	0	11	0	0	11
<u>Login Page</u>	0.070 s	3	0	3	0	16	0	0	16

Tag	Scenario				Feature			
Name	<i>T</i>	<i>P</i>	<i>F</i>	<i>S</i>	<i>T</i>	<i>P</i>	<i>F</i>	<i>S</i>
@Regression	1	0	1	0	1	0	1	0
@Single	1	0	1	0	1	0	1	0
@Multiple	2	0	2	0	1	0	1	0

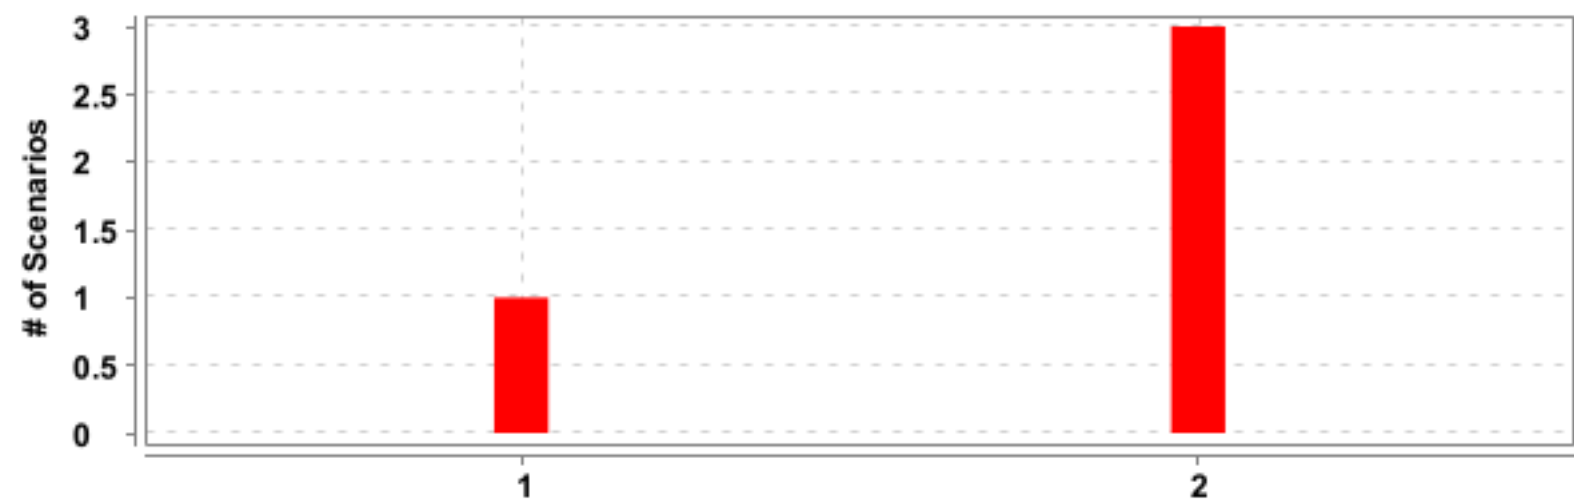



#	Feature Name	T	P	F	S	Duration
1	<u>Customers</u>	1	0	1	0	0.089 s
2	<u>Login Page</u>	3	0	3	0	0.070 s

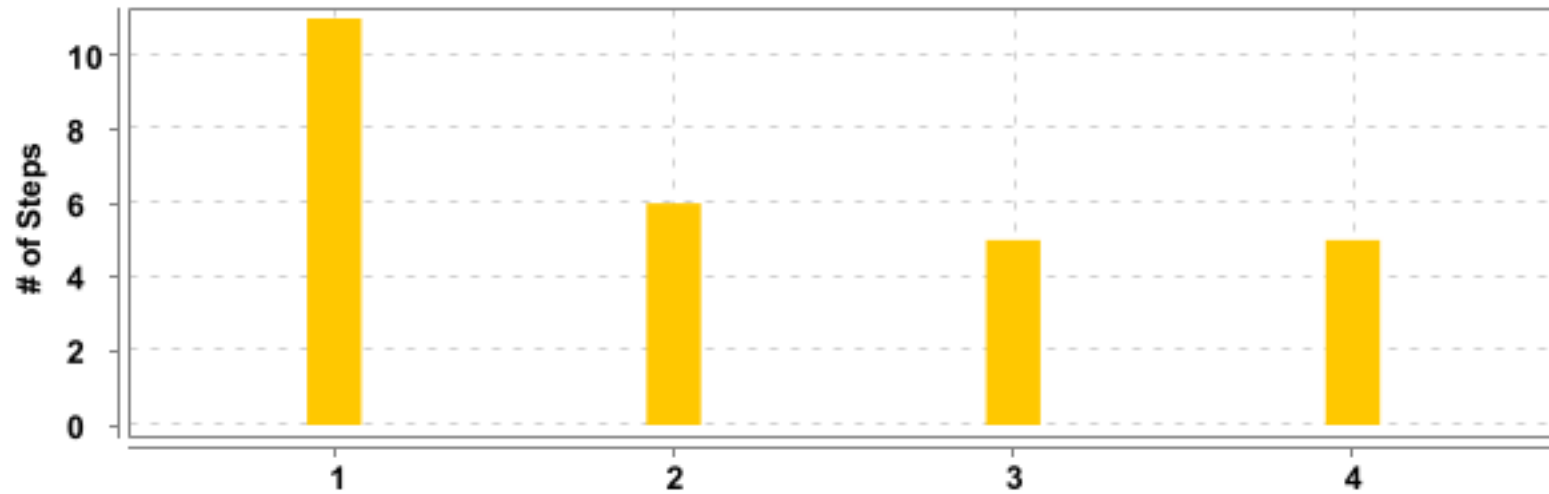



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Customers</u>	<u>Add new Customer</u>	11	0	0	11	0.085 s
2	<u>Login Page</u>	<u>Successful Login with Valid Credentials</u>	6	0	0	6	0.016 s
3	<u>Login Page</u>	<u>Login Data Driven</u>	5	0	0	5	0.010 s
4	<u>Login Page</u>	<u>Login Data Driven</u>	5	0	0	5	0.009 s

Customers

FAILED	DURATION - 0.089 s	Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0		Steps Total - 11 Pass - 0 Fail - 0 Skip - 11	
/ 11:52:13.153 pm // 11:52:13.242 pm /					

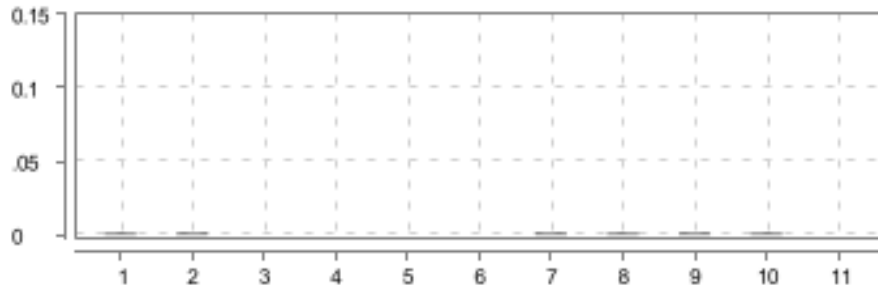

Add new Customer

<div>FAILED</div> <div>DURATION - 0.085 s</div>			<div>Steps</div> <div>Total - 11</div> <div>Pass - 0</div> <div>Fail - 0</div> <div>Skip - 11</div>	
<div>/ 11:52:13.157 pm // 11:52:13.242 pm /</div>				
<div>Customers</div>				
<div>@Regression</div>				



#	Step / Hook Details	Status	Duration
	BEFORE - com.hook.Hooks.beforeScenario(io.cucumber.java.Scenario) java.lang.IllegalStateException: The driver executable does not exist: C:\chromedriver.exe at com.google.common.base.Preconditions.checkState(Preconditions.java:585) at org.openqa.selenium.remote.service.DriverService.checkExecutable(DriverService.java:146) at org.openqa.selenium.remote.service.DriverService.findExecutable(DriverService.java:141) at org.openqa.selenium.chrome.ChromeDriverService.access\$000(ChromeDriverService.java:35) at org.openqa.selenium.chrome.ChromeDriverService\$Builder.findDefaultExecutable(ChromeDriverService.java:159) at org.openqa.selenium.remote.service.DriverService\$Builder.build(DriverService.java:355) at org.openqa.selenium.chrome.ChromeDriverService.createDefaultService(ChromeDriverService.java:94) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:123) at com.base.BaseClass.launchDriver(BaseClass.java:29) at com.hook.Hooks.beforeScenario(Hooks.java:17)	FAILED	0.041 s
1	Given User launch application	SKIPPED	0.001 s
2	When User enters Email as "admin@yourstore.com" and Password as "admin"	SKIPPED	0.001 s
3	And Click on Login	SKIPPED	0.000 s
4	Then Page title should be "Dashboard / nopCommerce administration"	SKIPPED	0.000 s
5	When User click on customers menu	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
6	And Click on customer menu item	SKIPPED	0.000 s
7	And Click on Add new button	SKIPPED	0.001 s
8	Then User can view Add new customer page	SKIPPED	0.001 s
9	When User enter customer info	SKIPPED	0.001 s
10	And Click on save button	SKIPPED	0.001 s
11	Then User can view confirmation message "The new customer has been added successfully."	SKIPPED	0.000 s
	AFTER - com.hook.Hooks.afterScenario(io.cucumber.java.Scenario)	FAILED	0.006 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "java.lang.ThreadLocal.get()" is null at com.utility.Util.takeScreenShot(Util.java:24) at com.hook.Hooks.afterScenario(Hooks.java:28)		

Login Page

FAILED	DURATION - 0.070 s	Scenarios Total - 3 Pass - 0 Fail - 3 Skip - 0		Steps Total - 16 Pass - 0 Fail - 0 Skip - 16	
/ 11:52:13.275 pm // 11:52:13.345 pm /					



Successful Login with Valid Credentials

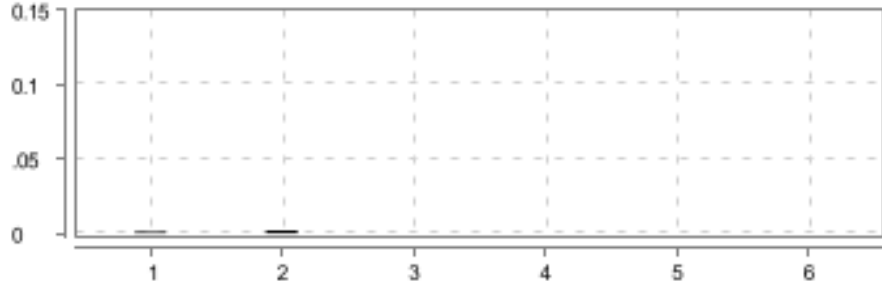FAILED	DURATION - 0.016 s		Steps	
/ 11:52:13.275 pm // 11:52:13.291 pm /			Total - 6	
Login Page			Pass - 0	
@Single			Fail - 0	
			Skip - 6	

#	Step / Hook Details	Status	Duration
	BEFORE - com.hook.Hooks.beforeScenario(io.cucumber.java.Scenario)	FAILED	0.002 s
	java.lang.IllegalStateException: The driver executable does not exist: C:\chromedriver.exe at com.google.common.base.Preconditions.checkState(Preconditions.java:585)		

#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.service.DriverService.checkExecutable(DriverService.java:146) at org.openqa.selenium.remote.service.DriverService.findExecutable(DriverService.java:141) at org.openqa.selenium.chrome.ChromeDriverService.access\$000(ChromeDriverService.java:35) at org.openqa.selenium.chrome.ChromeDriverService\$Builder.findDefaultExecutable(ChromeDriverService.java:159) at org.openqa.selenium.remote.service.DriverService\$Builder.build(DriverService.java:355) at org.openqa.selenium.chrome.ChromeDriverService.createDefaultService(ChromeDriverService.java:94) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:123) at com.base.BaseClass.launchDriver(BaseClass.java:29) at com.hook.Hooks.beforeScenario(Hooks.java:17) </pre>		
1	Given User launch application	SKIPPED	0.001 s
2	When User enters Email as "admin@yourstore.com" and Password as "admin"	SKIPPED	0.002 s
3	And Click on Login	SKIPPED	0.000 s
4	Then Page title should be "Dashboard / nopCommerce administration"	SKIPPED	0.000 s
5	When User click on Log out link	SKIPPED	0.000 s
6	Then Page title should be "Your store. Login"	SKIPPED	0.000 s
	AFTER - com.hook.Hooks.afterScenario(io.cucumber.java.Scenario) <pre> java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "java.lang.ThreadLocal.get()" is null at com.utility.Util.takeScreenShot(Util.java:24) at com.hook.Hooks.afterScenario(Hooks.java:28) </pre>	FAILED	0.001 s

Login Data Driven

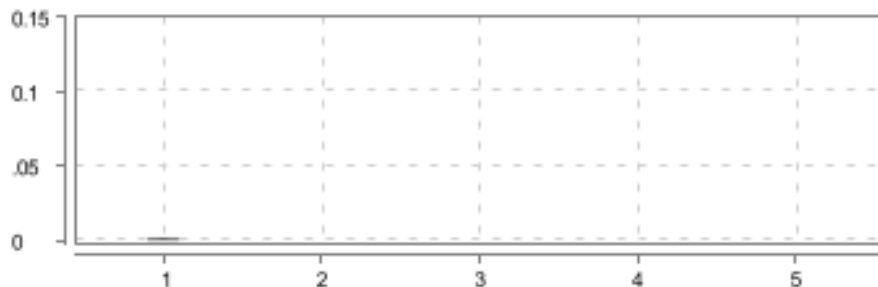FAILED DURATION - 0.010 s / 11:52:13.313 pm // 11:52:13.323 pm / Login Page @Multiple		Steps Total - 5 Pass - 0 Fail - 0 Skip - 5	
--	---	--	--

#	Step / Hook Details	Status	Duration
	BEFORE - com.hook.Hooks.beforeScenario(io.cucumber.java.Scenario) <pre> java.lang.IllegalStateException: The driver executable does not exist: C:\chromedriver.exe at com.google.common.base.Preconditions.checkNotNull(Preconditions.java:585) at org.openqa.selenium.remote.service.DriverService.checkExecutable(DriverService.java:146) </pre>	FAILED	0.003 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.service.DriverService.findExecutable(DriverService.java:141) at org.openqa.selenium.chrome.ChromeDriverService.access\$000(ChromeDriverService.java:35) at org.openqa.selenium.chrome.ChromeDriverService\$Builder.findDefaultExecutable(ChromeDriverService.java:159) at org.openqa.selenium.remote.service.DriverService\$Builder.build(DriverService.java:355) at org.openqa.selenium.chrome.ChromeDriverService.createDefaultService(ChromeDriverService.java:94) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:123) at com.base.BaseClass.launchDriver(BaseClass.java:29) at com.hook.Hooks.beforeScenario(Hooks.java:17)		
1	Given User launch application	SKIPPED	0.001 s
2	When User enters Email as "admin@yourstore.com" and Password as "admin"	SKIPPED	0.000 s
3	And Click on Login	SKIPPED	0.000 s
4	Then Page title should be "Dashboard / nopCommerce administration"	SKIPPED	0.000 s
5	When User click on Log out link	SKIPPED	0.000 s
	AFTER - com.hook.Hooks.afterScenario(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "java.lang.ThreadLocal.get()" is null at com.utility.Util.takeScreenShot(Util.java:24) at com.hook.Hooks.afterScenario(Hooks.java:28)	FAILED	0.001 s

Login Data Driven

<div>FAILED</div> <div>DURATION - 0.009 s</div>		<div><table border="1"><thead><tr><th>Step</th><th>Duration (s)</th></tr></thead><tbody><tr><td>1</td><td>0.001</td></tr><tr><td>2</td><td>0.001</td></tr><tr><td>3</td><td>0.001</td></tr><tr><td>4</td><td>0.001</td></tr><tr><td>5</td><td>0.001</td></tr></tbody></table></div>	Step	Duration (s)	1	0.001	2	0.001	3	0.001	4	0.001	5	0.001	<div>Steps</div> <div>Total - 5</div> <div>Pass - 0</div> <div>Fail - 0</div> <div>Skip - 5</div>	<div><div>5</div></div>
Step	Duration (s)															
1	0.001															
2	0.001															
3	0.001															
4	0.001															
5	0.001															
/ 11:52:13.336 pm // 11:52:13.345 pm /																
Login Page																
@Multiple																

#	Step / Hook Details	Status	Duration
	BEFORE - com.hook.Hooks.beforeScenario(io.cucumber.java.Scenario)	FAILED	0.002 s
	java.lang.IllegalStateException: The driver executable does not exist: C:\chromedriver.exe at com.google.common.base.Preconditions.checkNotNull(Preconditions.java:585) at org.openqa.selenium.remote.service.DriverService.checkExecutable(DriverService.java:146) at org.openqa.selenium.remote.service.DriverService.findExecutable(DriverService.java:141) at org.openqa.selenium.chrome.ChromeDriverService.access\$000(ChromeDriverService.java:35)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.chrome.ChromeDriverService\$Builder.findDefaultExecutable(ChromeDriverService.java:159) at org.openqa.selenium.remote.service.DriverService\$Builder.build(DriverService.java:355) at org.openqa.selenium.chrome.ChromeDriverService.createDefaultService(ChromeDriverService.java:94) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:123) at com.base.BaseClass.launchDriver(BaseClass.java:29) at com.hook.Hooks.beforeScenario(Hooks.java:17)		
1	Given User launch application	SKIPPED	0.001 s
2	When User enters Email as "admin1@yourstore.com" and Password as "admin"	SKIPPED	0.000 s
3	And Click on Login	SKIPPED	0.001 s
4	Then Page title should be "Dashboard / nopCommerce administration"	SKIPPED	0.001 s
5	When User click on Log out link	SKIPPED	0.001 s
	AFTER - com.hook.Hooks.afterScenario(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "java.lang.ThreadLocal.get()" is null at com.utility.Util.takeScreenShot(Util.java:24) at com.hook.Hooks.afterScenario(Hooks.java:28)	FAILED	0.001 s