
DOMS | Page No.
Date / /

* Compiler system.

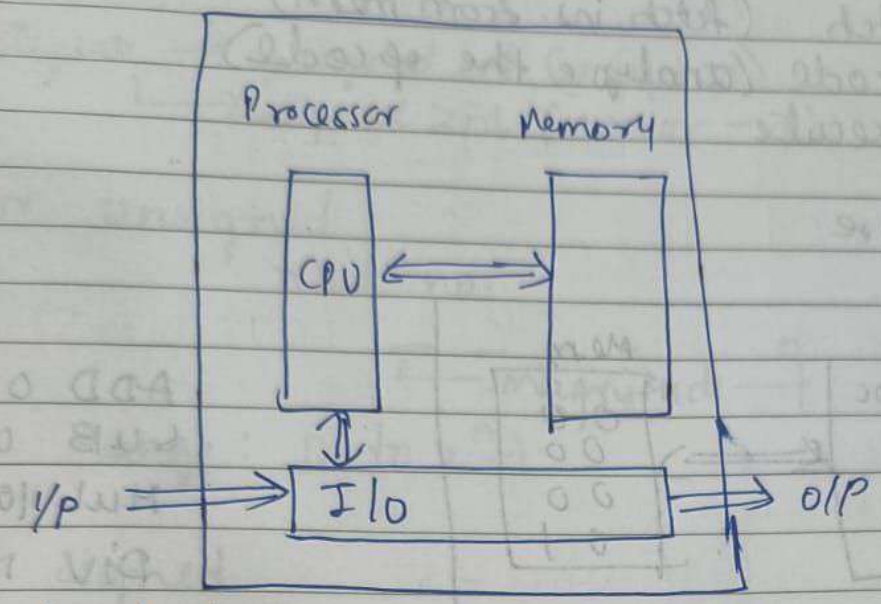

I/O device → for I/P & O/P
Processor → processing (execution of programs)
Memory → stores the program
(Mem. does not process or run programs)
Memory → Programs } stored as a series of 0's & 1's.
→ data.

→ a = b + c; // Higher level lang
ADD B, C; // Assembly language
0 1 1 0 1 0 1 1 // binary / machine / obj
opcode
} compiler

compiler → convert Higher level lang to machine language