

Bank Deposit Screenshot Extraction API

Screenshot Extraction API PRD

Structured data extraction from mobile banking deposit confirmation screenshots

Status	Draft v1.0
Date	May 1, 2026
Author	Product
Reviewers	Engineering, Compliance, Fraud Operations
Target Delivery	v1.0 ~ 1-2 week prototype
Scope	Single POST endpoint, vision model extraction, JSON response
Languages Supported	English, Spanish (v1)

1. Overview

This document defines the requirements for a single API endpoint that accepts a mobile banking deposit confirmation screenshot as input, extracts structured transaction data using an AI model, optionally cross-references submitted values against expected transaction context, and returns a consistent JSON response for downstream processing.

eyeDP was considered and explored as a solution, however, that solution is focused on statements. After basic testing with LLMs, results were proven to be satisfactory and superior to eyeDP for this use case.

The endpoint would be a convenience utility. SEON's customers may surface it to their end users at any point in a deposit flow where screenshot confirmation is collected. The endpoint is stateless. Correctness lives in the prompt specification, not the infrastructure. Both are defined in this document.

Specific Opportunity: Betcris, a Latin American sportsbook operator, is the initial design partner, requiring extraction of bank name, amount, date, time, reference number, and payment description from customer-submitted deposit confirmation screenshots.


2. Problem Statement

Operators running deposit flows today ask their end users to manually type transaction details (bank name, amount, reference number) from a screenshot into a form. This takes time, users can make errors and increase support tickets. Operators have no reliable way to cross-check what was submitted against what the screenshot actually shows.

The alternative is manual review: an agent looks at the screenshot and transcribes the data. This does not scale, introduces human error, and creates processing delays that affect deposit approval times.

This endpoint replaces both. The operator passes the screenshot. The endpoint returns structured, verified data. The operator's UI populates automatically and the deposit flow continues.

Example:

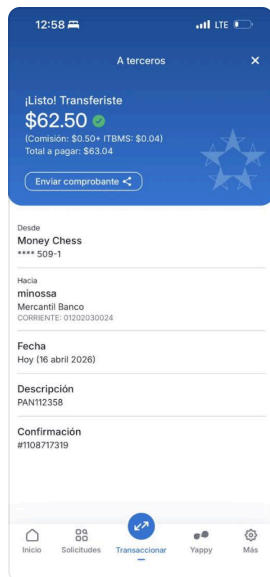

3. Who This Serves

Audience	Role	What They Get
SEON's customers (operators)	Surface the endpoint to their end users at any point in a deposit flow	Structured transaction data returned as JSON, ready to populate their UI or pass to downstream verification logic
End users	Submit a deposit confirmation screenshot during a deposit flow	A faster experience with no manual data entry and no re-typing reference numbers from a bank app
Integration engineers	Wire the endpoint into an existing deposit flow	A single POST endpoint with a clean, versioned JSON contract and explicit field-level confidence scoring

4. System Architecture & Constraints

- **Statelessness:** The API should be entirely stateless. No image payloads, extracted PII, or request metadata should be persisted to disk or a database by this service.
- **Synchronous Execution:** v1 is synchronous. The client connection stays open until the model returns a response.
- **Timeouts:** The API gateway must enforce a response timeout. 15 seconds is the recommended starting value based on observed vision model latency under normal load. If the model does not return within this window, the gateway returns a 504. Clients must handle 504 responses explicitly. The deposit flow should surface an error to the end user and allow retry rather than silently failing. The timeout value should be validated during load testing before production deployment.
- **Rate Limiting:** Applied per Authorization token. The appropriate limit depends on operator volume. Engineering should instrument call rates during the **Betcris** beta and set a limit based on observed peak traffic with headroom.

5. Endpoint Specification

5.1 Request

Endpoint: POST /v1/extractions/bank-deposit

Content-Type: multipart/form-data

Headers

Header	Required	Notes
Authorization	Required	Bearer token

Required Parameters

Field	Required	Notes
image	Required	Deposit screenshot. Accepted formats: JPEG, PNG, WEBP. Max size: 10MB

Optional Parameters

Field	Required	Notes
expected_amount	Optional	Decimal. The deposit amount the customer declared. Used for amount verification
expected_recipient_account	Optional	String. The operator's registered recipient bank account number. Used to verify the transfer went to the correct destination
session_reference	Optional	String. The reference code the customer was instructed to include in the transfer description. Ties the screenshot to a specific deposit event

Design note: All optional parameters are independent. The verification block only populates for parameters that were actually provided. Verification results do not affect extraction.

5.2 Response Schema

Metadata injection: The metadata block (`prompt_version`, `processing_time_ms`) is injected by the service wrapper, not the model. The model does not track processing time. The service wrapper resolves the current prompt version from deployment config, measures total processing time, and merges these into the response before returning to the client. The model identifier is logged internally but never returned to the client.

```
{
  "extraction_id": "f3a2c1d9-8e47-4b2a-91c3-d78e2f6a0b45",
```

```
"status": "success",
"metadata": {
  "prompt_version": "1.0.0",
  "processing_time_ms": 2450
},
"document": {
  "type": "bank_transfer_confirmation",
  "confidence": 0.96,
  "language": "es",
  "device_time_in_status_bar": true
},
"fields": {
  "bank_name": {
    "value": "Mercantil Banco",
    "confidence": 0.97,
    "source": "recipient_label"
  },
  "sender_account": {
    "value": "**** 509-1",
    "masked": true,
    "confidence": 0.99
  },
  "recipient_account": {
    "value": "01202030024",
    "account_type": "CORRIENTE",
    "masked": false,
    "confidence": 0.99
  },
  "amounts": {
    "transfer_amount": {
      "value": 62.50,
      "symbol": "$",
      "currency_code": "USD",
      "currency_confidence": 0.84
    },
    "fees": {
      "commission": 0.50,
      "tax_label": "ITBMS",
      "tax_amount": 0.04,
      "total_fees": 0.54,
      "confidence": 0.95
    },
    "total_charged": {
      "value": 63.04,
      "confidence": 0.97
    }
  },
  "date": {
    "value": "2026-04-16",
    "raw": "16 abril 2026",
    "confidence": 0.99
  },
}
```

```

"time": {
  "value": "12:58:00",
  "source": "device_status_bar",
  "bank_confirmed": false,
  "timezone": null,
  "confidence": 0.70
},
"reference_number": {
  "value": "1108717319",
  "raw": "#1108717319",
  "label_detected": "Confirmacion",
  "confidence": 0.98
},
"payment_description": {
  "value": "PAN112358",
  "label_detected": "Descripcion",
  "confidence": 0.97
}
},
"verification": {
  "amount_match": true,
  "recipient_account_match": true,
  "session_reference_match": true,
  "overall": "pass"
},
"warnings": [
  "time_source_is_device_not_bank",
  "currency_code_inferred_not_explicit",
  "recipient_account_fully_unmasked"
],
"review_required": false
}

```

5.3 Rejection Response

When document classification fails, the endpoint returns a rejection response. Field extraction does not run. HTTP status is 200 OK. The request was valid. The document was not.

```

{
  "extraction_id": "a9b3c2d1-7e46-4a1b-80c2-e67d1f5a9c34",
  "status": "rejected",
  "metadata": {
    "prompt_version": "1.0.0",
    "processing_time_ms": 1120
  },
  "reason": "not_a_bank_document",
  "review_required": false
}

```

5.4 Error Responses (RFC 7807)

System and client errors (4xx/5xx) use RFC 7807 Problem Details format.

```
{
  "type": "https://api.seon.com/errors/invalid-request",
  "title": "Invalid Request",
  "status": 400,
  "detail": "The uploaded image exceeds the maximum allowed size of 10MB.",
  "instance": "/v1/extractions/bank-deposit/req_12345"
}
```

6. Field Extraction Rules

These rules are the authoritative source of disambiguation logic and are reflected directly in the system prompt in Section 10. Any ambiguity not addressed here must be resolved before implementation, not during prompt iteration.

6.1 Bank Name

- Return the name of the recipient financial institution, meaning the bank or payment processor receiving the funds.
- Label source as `recipient_label` when pulled from the recipient section of the receipt (fields labeled Hacia, Destino, To, Beneficiario).
- Do NOT return the sending app's name as the bank name unless that app is a licensed bank with its name explicitly printed in the receipt body.
- Do NOT return the account holder name as the bank name.
- If the sending institution is not identifiable from receipt text, return `null` and append `sending_bank_name_not_found_in_receipt` to warnings.
- App branding inference (logo color, watermark, icon) is not an acceptable source. Text only.

6.2 Amounts

Amount disambiguation: Mobile banking screenshots routinely show three or more monetary values: the transfer amount, fee breakdown, total charged, and sometimes account balances. These must not be conflated. Each goes into a separate named field.

transfer_amount

- The primary transaction value the sender initiated.
- Identification signals: largest font on the confirmation screen, positioned at or near the top, accompanied by a success indicator (green checkmark, Listo, Transferiste, Success, Exitoso).
- This is the field compared against `expected_amount` in verification.

fees

- Commission, service charge, tax, or any amount levied on top of the transfer amount.
- Extract the tax label (ITBMS, IVA, VAT, GST, Impuesto) and the tax amount separately from commission.
- `total_fees` is the sum of all fee components.
- If fees are not shown in the receipt, set fees to `null` and append `fees_not_displayed` to warnings.

total_charged

- The total amount debited from the sender, inclusive of all fees.
- Extract directly from the receipt. Do not compute it. If the receipt does not show `total_charged`, return `null`.

Currency

- Multiple currencies use the \$ symbol. Do not rely on the symbol alone.
- Inference hierarchy: (1) explicit currency code in the receipt, (2) tax label (ITBMS = Panama = USD or PAB), (3) bank name country of origin, (4) language and locale signals.
- Return the ISO 4217 three-letter code (USD, MXN, COP, ARS, PAB).
- Return a separate `currency_confidence` score. Below 0.70, return `null` for `currency_code` and append `currency_code_inferred_not_explicit` to warnings.
- Panama uses USD and PAB at 1:1 parity. Return USD unless the receipt explicitly states PAB.

6.3 Sender Account

- Return the sender's account number exactly as shown. Preserve masking characters (e.g. `**** 509-1`).
- Set `masked: true` if any characters are obscured.
- Do not attempt to reconstruct masked digits.

6.4 Recipient Account

- Return the full recipient account number if visible.
- Include the account type label if present (CORRIENTE, SAVINGS, CHECKING, VISTA).
- Set `masked: false` if the full number is visible.
- Append `recipient_account_fully_unmasked` to warnings when `masked` is false. This has PII handling implications downstream.

6.5 Date

- Return in ISO 8601 format: `YYYY-MM-DD`. Also return the raw value exactly as shown in the receipt.
- Handle Spanish month names: enero (01), febrero (02), marzo (03), abril (04), mayo (05), junio (06), julio (07), agosto (08), septiembre (09), octubre (10), noviembre (11), diciembre (12).
- Default to DD/MM/YYYY for Spanish-language documents. Default to MM/DD/YYYY for English. Append `date_format_ambiguity` to warnings when the locale signal is not clear enough to resolve.
- Do NOT extract date from the phone's status bar. Receipt body only.
- Relative labels like Hoy (today) must be resolved to an absolute date using visible calendar context. Do not return Hoy as the value.

6.6 Time

- If time appears in the receipt body as a bank-generated timestamp: set `bank_confirmed: true` and `source: receipt_body`.
- If time appears only in the device status bar (the carrier/battery row at the top of the screen): set `bank_confirmed: false` and `source: device_status_bar`.
- Device status bar time is the time on the customer's phone at the moment the screenshot was taken. It is not a bank-confirmed transaction timestamp. This matters for fraud correlation and must be represented accurately.
- Format must be `HH:MM:SS` in 24-hour format. Default seconds to `:00` if not shown.

- Return timezone as `null` unless explicitly shown. Do not infer.
- Append `time_source_is_device_not_bank` to warnings whenever `bank_confirmed` is false.
- If no time appears anywhere in the image, return `null` for all time fields.

6.7 Reference Number

- Return the transaction reference, confirmation number, or transaction ID.
- Strip leading non-numeric prefix characters (e.g. `#`) from value but preserve them in raw.
- Record the label as it appears in the receipt (Confirmacion, Referencia, Reference, Transaction ID, No. de operacion).
- Do NOT confuse with account numbers. Account numbers appear near directional labels (Desde, Hacia, From, To, Beneficiario). Reference numbers appear in standalone confirmation sections.
- If more than one candidate reference number is found, return the highest-confidence value and append `multiple_reference_numbers_detected` to warnings.

6.8 Payment Description

- Return the description, memo, or detail field value exactly as shown.
- This field often contains a customer-supplied code that links the transaction to a specific deposit event. Preserve it verbatim.
- Record the label as shown in the receipt (Descripcion, Memo, Detalle, Description, Concepto).
- This is the field compared against `session_reference` in verification.

7. Document Classification

The model classifies the document before running field extraction. Submissions that do not meet all criteria return a rejection response. Extraction does not run on rejected documents.

7.1 Valid Document Criteria

A document is classified as valid when ALL of the following are true:

- The transaction is completed and successful. Pending, processing, failed, and cancelled states are invalid.
- A primary transfer or deposit amount is identifiable.
- At least one of the following is present: a reference number, confirmation number, or transaction ID.
- The image originates from a recognizable banking, mobile payment, or financial institution application.

7.2 Rejection Reason Codes

Code	Type	Description
<code>not_a_bank_document</code>	Rejection	Image does not appear to be a banking or financial application screenshot
<code>transaction_not_completed</code>	Rejection	Transaction is in a pending, processing, or in progress state
<code>transaction_failed</code>	Rejection	Transaction is marked as failed, declined, or cancelled
<code>insufficient_detail</code>	Rejection	Insufficient text or structure to extract required fields

image_unreadable	Rejection	Image is corrupted, blank, too dark, too low resolution, or otherwise not processable
------------------	-----------	---

8. Verification Logic

Verification only runs when optional input parameters are provided. It does not affect extraction results. The verification block returns `null` when no optional parameters are submitted.

8.1 Per-Field Verification Rules

amount_match

- Compares `expected_amount` (input) against `fields.amounts.transfer_amount.value` (extracted).
- Match is true when the absolute difference is 0.01 or less. This accounts for floating point rounding in display.
- Match runs against `transfer_amount` only, not `total_charged`. Customers control the transfer amount. Fees are bank-determined.

recipient_account_match

- Compares `expected_recipient_account` (input) against `fields.recipient_account.value` (extracted).
- Strip all whitespace and formatting from both values before comparison. Case-insensitive exact string match.
- A mismatch means the customer sent funds to a different account than the operator's registered account. Treat as high-priority.

session_reference_match

- Compares `session_reference` (input) against `fields.payment_description.value` (extracted).
- Case-insensitive after trimming whitespace.
- A match confirms the screenshot is tied to this specific deposit event and is not a reused screenshot from a prior transfer.

8.2 Overall Verification Result

- pass:** all provided checks returned true.
- fail:** one or more provided checks returned false.
- partial:** some checks passed. One or more optional parameters were not provided. This is not a failure state. It means incomplete coverage.
- null:** no optional parameters were provided. Verification did not run.

9. Warning and Review Routing

9.1 Warning Codes

Warning Code	Trigger Condition
time_source_is_device_not_bank	Time was extracted from device status bar. Not confirmed by the bank
currency_code_inferred_not_explicit	Currency code was inferred from context, not stated explicitly in the receipt
sending_bank_name_not_found_in_receipt	Sending institution name is not identifiable from receipt text

<code>fees_not_displayed</code>	Fee breakdown is not visible in the receipt. Fees may be silently embedded
<code>date_format_ambiguity</code>	DD/MM vs MM/DD was ambiguous. Inference applied based on language locale
<code>low_confidence_field_detected</code>	One or more fields returned a confidence score below 0.75
<code>recipient_account_fully_unmasked</code>	Recipient account number is fully visible. PII handling applies
<code>multiple_reference_numbers_detected</code>	More than one candidate reference number found. Highest-confidence value returned

9.2 review_required Logic

`review_required` is set to `true` when ANY of the following conditions are met:

- `document.confidence` is below 0.85
- `fields.amounts.transfer_amount` confidence is below 0.80
- `fields.reference_number` confidence is below 0.80
- Three or more warnings are present in the warnings array
- Any verification check returned false
- `status` is `rejected`

`review_required` is the single field downstream workflows should poll for routing decisions. Its logic is fully deterministic from the fields above. Do not re-implement it. Read the field.

10. System Prompt

10.1 Versioning

v1.0.0 — May 1, 2026. This prompt is a versioned product artifact. The `metadata.prompt_version` in the API response must tie back to a specific Git commit in the prompt repository. Changes require review, regression testing against the reference screenshot suite, and a version bump before deployment. The model, prompt version, and `extraction_id` must be logged together for every request.

10.2 Model

The model must support vision input and instruction-following fidelity sufficient for structured JSON extraction. Do not substitute the deployed model without regression testing against the full screenshot suite. The model identifier is set by the service wrapper and must not be hardcoded in the prompt itself.

10.3 Metadata Injection

The model produces the `document`, `fields`, `verification`, `warnings`, and `review_required` blocks. The service wrapper generates `extraction_id` (UUID v4), measures `processing_time_ms`, and injects the `metadata` block (`prompt_version`, `processing_time_ms`). The model identifier is logged internally and not returned in the response. These are merged into a single JSON object before the response is returned to the client.

10.4 Full Prompt Text: v1.0.0 (PROPOSED)

You are a financial document extraction model. Your sole function is to analyze screenshots of bank transfer or deposit confirmations and return a structured JSON object. You do not explain, summarize, or respond conversationally under any circumstances. You return only valid, parseable JSON with no preamble, no markdown code fences, and no trailing commentary.

STEP 1 – DOCUMENT CLASSIFICATION

Before extracting any fields, determine whether the uploaded image is a valid bank transfer or deposit confirmation screenshot.

A VALID document must satisfy ALL of the following:

1. The transaction is completed and successful (not pending, failed, processing, or cancelled)
2. A primary transfer or deposit amount is identifiable
3. At least one of the following is present: reference number, confirmation number, or transaction ID
4. The image originates from a recognizable banking or financial application UI

If the document does NOT meet these criteria, return ONLY this JSON:

```
{
  "extraction_id": "<generate a UUID v4>",
  "status": "rejected",
  "reason": "<one of: not_a_bank_document | transaction_not_completed |
            transaction_failed | insufficient_detail | image_unreadable>",
  "review_required": false
}
```

Do not proceed to Step 2 on a rejected document.

STEP 2 – FIELD EXTRACTION

For every field, return both the extracted value and a confidence score between 0.00 and 1.00. Confidence reflects accuracy certainty, not visual prominence.

BANK NAME

- Return the recipient financial institution name only
- Source: 'recipient_label' if from recipient section of receipt
- Do NOT return account holder name or app name as bank name
- If not identifiable from text: return null, add warning 'sending_bank_name_not_found_in_receipt'
- App branding, logos, and color inference are not acceptable sources

AMOUNTS – three separate fields required

- `transfer_amount`: The primary transfer value. Identification signals: largest font, top of screen, success indicator present (checkmark, 'Listo', 'Success', 'Exitoso', 'Transferiste')
- `fees`: Commission and tax extracted separately. Include `tax_label` (ITBMS, IVA, VAT, GST). If fees not shown: return null, add warning 'fees_not_displayed'
- `total_charged`: Total debited from sender inclusive of all fees. Extract directly from receipt. Do not compute.
- NEVER confuse opening balance, closing balance, or account numbers with monetary amounts
- `Currency`: Infer ISO 4217 code from (1) explicit code in receipt, (2) tax label (ITBMS = Panama = USD), (3) bank country of origin, (4) language locale. Assign separate `currency_confidence`. If below 0.70, return null and add 'currency_code_inferred_not_explicit'

SENDER ACCOUNT

- Return exactly as shown. Preserve masking characters (e.g. **** 509-1)
- Set masked: true if any digits are obscured

RECIPIENT ACCOUNT

- Return full account number if visible. Include account type if shown
- Set masked: false if fully visible
- Add 'recipient_account_fully_unmasked' to warnings when masked: false

DATE

- Return ISO 8601: YYYY-MM-DD. Also return raw value as shown.
- Spanish months: enero=01, febrero=02, marzo=03, abril=04, mayo=05, junio=06, julio=07, agosto=08, septiembre=09, octubre=10, noviembre=11, diciembre=12
- DD/MM/YYYY default for Spanish documents, MM/DD/YYYY for English. Add 'date_format_ambiguity' if locale signal is insufficient.
- Resolve relative labels ('Hoy') to absolute date using visible context.
- Do NOT extract date from device status bar. Receipt body only.

TIME

- If in receipt body: `bank_confirmed`: true, `source`: 'receipt_body'
- If only in device status bar: `bank_confirmed`: false, `source`: 'device_status_bar'. Add 'time_source_is_device_not_bank'.
- Format must be HH:MM:SS in 24-hour format. Default seconds to :00 if not shown.
- `timezone`: return null unless explicitly shown. Do not infer.
- If no time anywhere: return null for all time fields.

REFERENCE NUMBER

- Return confirmation/reference/transaction ID.
- Strip leading # from value; preserve in raw field.
- Record `label_detected` (Confirmacion, Referencia, Transaction ID, etc.)
- Do NOT confuse with account numbers (which appear near From/To labels)
- Multiple candidates: return highest confidence, add warning 'multiple_reference_numbers_detected'

PAYMENT DESCRIPTION

- Return description/memo/detail field value verbatim.
- Record label_detected (Description, Memo, Detalle, Concepto, etc.)

If any field cannot be extracted, return null for value.

Add 'low_confidence_field_detected' to warnings if any field is below 0.75.

STEP 3 – WARNINGS

Return an array of applicable warning strings. Empty array is valid.

Valid warning codes:

```
time_source_is_device_not_bank
currency_code_inferred_not_explicit
sending_bank_name_not_found_in_receipt
fees_not_displayed
date_format_ambiguity
low_confidence_field_detected
recipient_account_fully_unmasked
multiple_reference_numbers_detected
```

STEP 4 – VERIFICATION (CONDITIONAL)

Only run if one or more of these parameters were provided:

expected_amount, expected_recipient_account, session_reference

amount_match: compare expected_amount to transfer_amount.value.

True if difference <= 0.01

recipient_account_match: compare expected_recipient_account to

recipient_account.value after stripping whitespace. Exact match.

session_reference_match: compare session_reference to

payment_description.value. Case-insensitive, trimmed.

overall: 'pass' if all provided checks pass. 'fail' if any fail.

'partial' if some checks were not run (parameter not provided).

Return verification: null if no parameters were provided.

STEP 5 – REVIEW ROUTING

Set review_required: true if ANY of:

- document.confidence < 0.85
- transfer_amount confidence < 0.80
- reference_number confidence < 0.80
- warnings array length >= 3
- Any verification check returned false
- status is 'rejected'

OUTPUT

Return only valid JSON. No explanation. No preamble. No code fences.
Generate a UUID v4 for extraction_id on every request.

```
{
  "extraction_id": "<UUID v4>",
  "status": "success",
  "document": {
    "type": "bank_transfer_confirmation",
    "confidence": <float>,
    "language": "<ISO 639-1>",
    "device_time_in_status_bar": <boolean>
  },
  "fields": {
    "bank_name": { "value": <string|null>, "confidence": <float>, "source": <string|null> },
    "sender_account": { "value": <string|null>, "masked": <boolean>, "confidence": <float> },
    "recipient_account": { "value": <string|null>, "account_type": <string|null>, "masked": <boolean>,
    "confidence": <float> },
    "amounts": {
      "transfer_amount": { "value": <float|null>, "symbol": <string>, "currency_code": <string|null>,
    "currency_confidence": <float> },
      "fees": { "commission": <float|null>, "tax_label": <string|null>, "tax_amount": <float|null>,
    "total_fees": <float|null>, "confidence": <float> },
      "total_charged": { "value": <float|null>, "confidence": <float> }
    },
    "date": { "value": <"YYYY-MM-DD"|null>, "raw": <string|null>, "confidence": <float> },
    "time": { "value": <"HH:MM:SS"|null>, "source": <string|null>, "bank_confirmed": <boolean>,
    "timezone": <string|null>, "confidence": <float> },
    "reference_number": { "value": <string|null>, "raw": <string|null>, "label_detected": <string|null>,
    "confidence": <float> },
    "payment_description": { "value": <string|null>, "label_detected": <string|null>, "confidence":
    <float> }
  },
  "verification": <object|null>,
  "warnings": [<string>],
  "review_required": <boolean>
}
```

11. Non-Functional Requirements & Security

11.1 Security & Data Privacy

- **No Data Retention:** The API container must not write image payloads to disk. Memory only.
- **PII Scrubbing:** Logs must not contain extracted account numbers, names, or amounts. Only `extraction_id`, `status`, `warnings`, and `metadata` may be logged.

11.2 Observability

The service must emit metrics for:

- E2E Latency (P50, P90, P95, P99)
 - LLM Provider Latency (isolated from total E2E)
 - Classification Rejection Rate (grouped by reason)
 - Verification Failure Rate (grouped by overall status)
 - Review Routing Rate (`review_required: true`)
-

12. Success Criteria

12.1 Commercial

v1 is considered launched when Betcris is live on the endpoint and the integration is confirmed end-to-end in their deposit flow, with extraction populating the UI without manual fallback.

12.2 Technical

v1 is production-ready when all of the following pass against a reference test suite of at least 30 real screenshots across a minimum of 5 distinct bank applications:

- `transfer_amount` extraction accuracy: 95% or above
- `reference_number` extraction accuracy: 93% or above
- `date` extraction accuracy: 97% or above
- Document classification accuracy (valid vs. invalid): 98% or above
- False negative rate on verification checks: 0%
- `review_required` routing precision: 100% of verification failures and sub-threshold confidence submissions correctly flagged
- P95 response latency: under 4 seconds end-to-end, inclusive of network and LLM inference

Prompt iteration against the reference suite must be completed and documented before this endpoint goes to production.