

$\partial_i \partial_j \tilde{N} \square \tilde{N}, \partial_\mu \partial^{1/4} \partial^\circ \tilde{N} f \tilde{N} \ddagger \partial_\mu \tilde{N}, \partial^\circ$
 $\tilde{N} f \tilde{N} \square \partial_\zeta \partial_\mu \partial^2 \partial^\circ \partial_\mu \partial^{1/4} \partial^{3/4} \tilde{N} \square \tilde{N}, \partial_\zeta$
 $\tilde{N} \square \tilde{N}, \tilde{N} f \partial' \partial_\mu \partial^{1/2} \tilde{N}, \partial^{3/4} \partial^2$

AUTHOR
 Version 1.0

Table of Contents

Table of contents

Class Index

Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

[illegible]

File Index

File List

Here is a list of all files with brief descriptions:

```
admin.cpp (Ð ÐµÐ°»Ð, Ð·Ð°Ñ†Ð, Ñ ÐµÐ¶Ð¶Ð, Ð¼Ð°Ð°  
Ð°Ð´¼Ð, Ð¼Ð°, Ñ Ð°, Ñ, ÑÐ°Ñ, Ð¼ÑÐ°ÑÐ° ) .....7  
database.h (Ð$Ð°Ð°Ñ Ð Ð°»Ñ Ð Ð°±Ð¼Ñ, Ñ Ð Ð±Ð°Ð·Ð¼ Ð°Ð°Ð¼ÑÑ...  
PostgreSQL ) .....9  
main.cpp (Ð¼¼Ñ†Ð°Ð° Ð²Ñ...Ð¼Ð°Ð° Ð² Ð¼ÑÐ³Ð¼ÑÐ°Ð¼¼Ñf "Ð;Ð, Ñ Ð°, ÐµÐ¼¼Ð°  
ÑfÑ†ÐµÑ, Ð° ÑfÑ Ð¼¼ÐµÐ²Ð°Ð¼¼¼Ñ Ð, ") .....13  
prepod.cpp (Ð ÐµÐ°»Ð, Ð·Ð°Ñ†Ð, Ñ Ð µÐ¶Ð¶Ð, Ð¼Ð°Ð°  
Ð¼ÑÐµÐ¼¼Ð¼¼Ð°Ð°Ð°Ñ, ÐµÐµÑ ) .....15  
student.cpp (Ð ÐµÐ°»Ð, Ð·Ð°Ñ†Ð, Ñ Ð µÐ¶Ð¶Ð, Ð¼Ð°Ð°Ñ ÐÑ, ÑfÐµÐ¼¼Ñ, Ð° ) .....16
```

Database Class Reference

Public Member Functions

- ## Private Attributes

- ### Detailed Description

Constructor & Destructor Documentation

$$\begin{aligned} & \mathbb{D}'' \mathbb{D} \mu \tilde{N} \square \tilde{N}, \tilde{N} \in \tilde{N} f \mathbb{D}^\circ \tilde{N}, \mathbb{D}^{3/4} \tilde{N} \in \\ & \mathbb{D} - \mathbb{D}^\circ \mathbb{D}^\circ \tilde{N} \tilde{N}, \mathbb{D}^2 \mathbb{D}^\circ \mathbb{D} \mu \tilde{N}, \quad \tilde{N} \bullet \mathbb{D}^{3/4} \mathbb{D} \mu \mathbb{D}' \mathbb{D}, \mathbb{D}^{1/2} \mathbb{D} \mu \mathbb{D}^{1/2} \mathbb{D}, \mathbb{D} \mu \quad \tilde{N} \bullet \quad \mathbb{D} \pm \mathbb{D}^\circ \mathbb{D} \bullet \mathbb{D}^{3/4} \mathbb{D}^1 \\ & \mathbb{D}' \mathbb{D}^\circ \mathbb{D}^{1/2} \mathbb{D}^{1/2} \tilde{N} \tilde{N} \dots \end{aligned}$$

Database::~Database () [inline]

Member Function Documentation

bool Database::checkAdmin (std::string *secret*) [inline]

ĐŸŃ€Đ¼Đ²ĐµŃ€Đ°Đ° Ń□ĐµĐ°Ń€ĐµŃ,Đ½Đ³⁄₄Đ³⁄₄ Đ°Đ»ŃŽŃ‡Đ°
Đ°Đ´Đ¼Đ,Đ½Đ,Ń□Ń,Ń€Đ°Ń,Đ³⁄₄Ń€Đ°

Parameters

<i>secret</i>	Đ₁ĐµĐ°Ń€ĐµŃ,Đ½Ń«Đ¹ Đ°Đ»ŃŽŃ‡, Đ²Đ²ĐµĐ´ĐµĐ½Đ½Ń«Đ¹ ĐġĐ³⁄₄Đ»Ń€Đ·Đ³⁄₄Đ²Đ°Ń,ĐµĐ»ĐµĐ¼
---------------	---

Returns

true ĐµŃ□Đ»Đ, Đ°Đ»ŃŽŃ‡ Ń□Đ³⁄₄Đ²ĐġĐ°Đ´Đ°ĐµŃ, Ń□ SECRET_NAME Đ,Đ· .env,
Đ,Đ½Đ°Ń‡Đµ false

Đ□Đ²Ń,Đ³⁄₄Ń€Đ,Đ·Đ°Ń†Đ,Ń□ ĐġŃ€ĐµĐġĐ³⁄₄Đ´Đ°Đ²Đ°Ń,ĐµĐ»Ń□

Parameters

<i>login</i>	Đ·Đ³⁄₄Đ³Đ,Đ½
<i>password</i>	ĐŸĐ°Ń€Đ³⁄₄Đ»Ń€

Returns

true ĐµŃ□Đ»Đ, Ń,Đ°Đ°Đ³⁄₄Đ¹ ĐġŃ€ĐµĐġĐ³⁄₄Đ´Đ°Đ²Đ°Ń,ĐµĐ»Ń€
Ń□ŃŸŃ%ĐµŃ□Ń,Đ²ŃŸĐµŃ, Đ² Đ°Đ”

pqxx::connection * Database::getConnection () [inline]

ĐŸĐ³⁄₄Đ»ŃŸŃ‡Đ,Ń,Ń€ ŃŸĐ°Đ°Đ·Đ°Ń,ĐµĐ»Ń€ Đ½Đ° Ń• Đ³⁄₄ĐµĐ´Đ,Đ½ĐµĐ½Đ,Đµ

Returns

pqxx::connection*

int Database::getStudentId (std::string *login*) [inline]

std::string Database::getStudentName (int *id*) [inline]

std::string Database::getTeacherGroup (std::string *login*) [inline]

std::string Database::getTeacherSubject (std::string *login*) [inline]

bool Database::verifyStudent (std::string *login*, std::string *password*) [inline]

bool Database::verifyTeacher (std::string *login*, std::string *password*) [inline]

Member Data Documentation

`std::string Database::adminSecret [private]`

`pqxx::connection* Database::conn [private]`

The documentation for this class was generated from the following file:
database.h

$$\begin{aligned} \tilde{N} \square \tilde{N}, \tilde{N} f \mathcal{D}' \mathcal{D}_\mu \mathcal{D}^{\frac{1}{2}} \tilde{N}, \mathcal{D}^\circ, & \quad \mathcal{D}' \mathcal{D}^{\frac{3}{4}} \mathcal{D}^\pm \mathcal{D}^\circ \mathcal{D}^2 \mathcal{D} \gg \mathcal{D}_\mu \mathcal{D}^{\frac{1}{2}} \mathcal{D}, \mathcal{D}_\mu \\ \mathcal{D}_\zeta \tilde{N} \in \mathcal{D}_\mu \mathcal{D}_\zeta \mathcal{D}^{\frac{3}{4}} \mathcal{D}' \mathcal{D}^\circ \mathcal{D}^2 \mathcal{D}^\circ \tilde{N}, \mathcal{D}_\mu \mathcal{D} \gg \tilde{N} \square, & \quad \mathcal{D}_\zeta \tilde{N} \in \mathcal{D}^{\frac{3}{4}} \tilde{N} \square \mathcal{D}^{\frac{1}{4}} \mathcal{D}^{\frac{3}{4}} \tilde{N}, \tilde{N} \in \tilde{N} \square \mathcal{D}_\zeta \mathcal{D}, \tilde{N} \square \mathcal{D}^\circ \mathcal{D}^{\frac{3}{4}} \mathcal{D}^2. \end{aligned}$$

database.h File Reference

ĐšĐ»Đ°Ń□Ń□ Đ'Đ»Ń□ Ń€Đ°Đ±Đ¾¼Ń,ŃŃŃ□ Đ±Đ°Đ·Đ¾¼Đ¹ Đ'Đ°Đ¹½Đ¹½ŃŃ... PostgreSQL.


```
#include <pqxx/pqxx>
```

```
#include <iostream>
```


```
#include <string>
```

```
#include <fstream>
```

Include dependency graph for database.h:

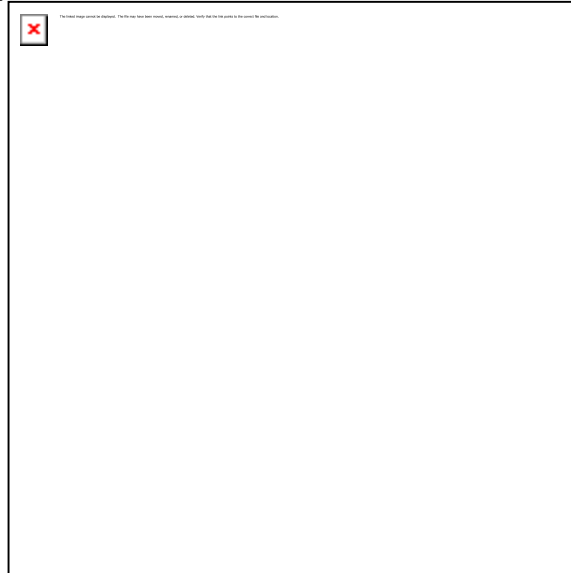

This graph shows which files directly or indirectly include this file:

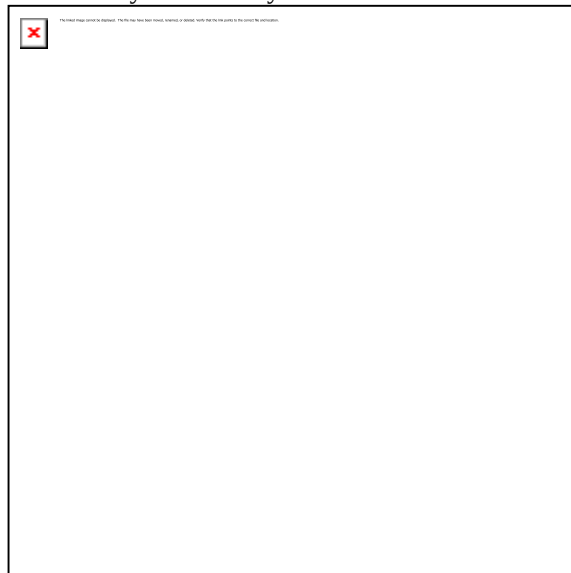

Classes

$$\text{class Database } D \in \mathcal{D} \mid \tilde{N} \in \mathcal{D}^{\circ} \mathcal{D}^2 \mathcal{D} \gg \tilde{N} \square \mathcal{D} \mu \tilde{N}, \quad \mathcal{D} \in \mathcal{D}^3 \mathcal{D}^4 \mathcal{D}^{\circ} \mathcal{D}^{\circ} \gg \tilde{N} \tilde{Z} \tilde{N} \ddagger \mathcal{D} \mu \mathcal{D}^{\frac{1}{2}} \mathcal{D}, \mathcal{D} \mu \mathcal{D}^{\frac{1}{4}} \quad \mathcal{D}^{\circ} \quad \mathcal{D}^{\circ} \mathcal{D}^{\circ} \quad \mathcal{D}, \\ \mathcal{D} \in \mathcal{D}^3 \mathcal{D}^4 \mathcal{D}^2 \mathcal{D} \mu \tilde{N} \in \mathcal{D}^{\circ} \mathcal{D}^3 \mathcal{D}^4 \mathcal{D}^1 \quad \mathcal{D} \in \mathcal{D}^3 \mathcal{D}^4 \mathcal{D} \gg \tilde{N} \in \mathcal{D}^{\circ} \mathcal{D}^3 \mathcal{D}^4 \mathcal{D}^2 \mathcal{D}^{\circ} \tilde{N}, \mathcal{D} \mu \mathcal{D} \gg \mathcal{D} \mu \mathcal{D}^1$$

Detailed Description

ĐšĐ»Đ°Ń□Ń□ Đ'Đ»Ń□ Ń€Đ°Đ±Đ³/₄Ń,Ń< Ń□ Đ±Đ°Đ·Đ³/₄Đ¹ Đ'Đ°Đ¹/₂Đ¹/₂Ń<Ń...
PostgreSQL.

database.h

Go to the documentation of this file.

```
1 #ifndef DATABASE_H
2 #define DATABASE_H
3
4 #include <pqxx/pqxx>
5 #include <iostream>
6 #include <string>
7 #include <fstream>
8
19 class Database {
20 private:
21     pqxx::connection* conn;
22     std::string adminSecret;
23
24 public:
28     Database() {
34         std::string dbname = "distance system";
35         std::string user = "postgres";
36         std::string password = "Htmlpagelev_2007";
37         std::string host = "localhost";
38         std::string conn string = "host=" + host + " dbname=" + dbname + " user=" + user
+ " password=" + password;
39         conn = new pqxx::connection(conn string);
40         if (conn->is_open()) {
41             std::cout << "Database is open" << std::endl;
42         }
43
44         std::ifstream envFile(".env");
45         std::string line;
46         while (getline(envFile, line)) {
47             if (line.find("SECRET_NAME=") == 0) {
48                 adminSecret = line.substr(12);
49             }
50         }
51         envFile.close();
52     }
53
54     ~Database() {
55         delete conn;
56     }
61     pqxx::connection* getConnection() {
62         return conn;
63     }
69     bool checkAdmin(std::string secret)
76     {
77         return secret == adminSecret;
78     }
79
80     bool verifyTeacher(std::string login, std::string password) {
81         try {
82             pqxx::work txn(*conn);
83             std::string sql = "SELECT COUNT(*) FROM teachers WHERE login = '" + login
+ "' AND password = '" + password + "'";
84             pqxx::result r = txn.exec(sql);
85             txn.commit();
86             return r[0][0].as<int>() > 0;
87         } catch(...) {
88             return false;
89         }
90     }
91
92     bool verifyStudent(std::string login, std::string password) {
93         try {
94             pqxx::work txn(*conn);
95             std::string sql = "SELECT COUNT(*) FROM students WHERE login = '" + login
+ "' AND password = '" + password + "'";
96             pqxx::result r = txn.exec(sql);
97             txn.commit();
98             return r[0][0].as<int>() > 0;
99         } catch(...) {
100             return false;
101         }
102     }
```

```

103
104     int getIdStudent(std::string login) {
105         try {
106             pqxx::work txn(*conn);
107             std::string sql = "SELECT id FROM students WHERE login = '" + login + "'";
108             pqxx::result r = txn.exec(sql);
109             txn.commit();
110             return r[0][0].as<int>();
111         } catch(...) {
112             return -1;
113         }
114     }
115
116     std::string getIdStudentName(int id) {
117         try {
118             pqxx::work txn(*conn);
119             std::string sql = "SELECT full_name FROM students WHERE id = " +
std::to_string(id);
120             pqxx::result r = txn.exec(sql);
121             txn.commit();
122             return r[0][0].as<std::string>();
123         } catch(...) {
124             return "";
125         }
126     }
127
128     std::string getIdTeacherGroup(std::string login) {
129         try {
130             pqxx::work txn(*conn);
131             std::string sql = "SELECT group_name FROM teachers WHERE login = '" + login
+ "'";
132             pqxx::result r = txn.exec(sql);
133             txn.commit();
134             return r[0][0].as<std::string>();
135         } catch(...) {
136             return "";
137         }
138     }
139
140     std::string getIdTeacherSubject(std::string login) {
141         try {
142             pqxx::work txn(*conn);
143             std::string sql = "SELECT subject FROM teachers WHERE login = '" + login
+ "'";
144             pqxx::result r = txn.exec(sql);
145             txn.commit();
146             return r[0][0].as<std::string>();
147         } catch(...) {
148             return "";
149         }
150     }
151 };
152
153 #endif

```


main.cpp File Reference

$$\begin{aligned} & \mathbb{D}_C \mathbb{D}^{\frac{3}{4}} \mathbb{N}^{\frac{1}{4}} \mathbb{D}^{\circ} \mathbb{D}^{\circ} \mathbb{D}^2 \mathbb{N} \dots \mathbb{D}^{\frac{3}{4}} \mathbb{D}^{\circ} \mathbb{D}^2 \mathbb{D}_C \tilde{\mathbb{N}} \mathbb{E} \mathbb{D}^{\frac{3}{4}} \mathbb{D}^3 \tilde{\mathbb{N}} \mathbb{E} \mathbb{D}^{\circ} \mathbb{D}^{\frac{1}{4}} \mathbb{D}^{\frac{1}{4}} \tilde{\mathbb{N}} f \text{ "D}_i \mathbb{D}, \tilde{\mathbb{N}} \square \mathbb{N}, \mathbb{D}_{\mu} \mathbb{D}^{\frac{1}{4}} \mathbb{D}^{\circ} \tilde{\mathbb{N}} f \tilde{\mathbb{N}}^{\frac{1}{4}} \mathbb{D}_{\mu} \tilde{\mathbb{N}}, \mathbb{D}^{\circ} \\ & \tilde{\mathbb{N}} f \tilde{\mathbb{N}} \square \mathbb{D}_C \mathbb{D}_{\mu} \mathbb{D}^2 \mathbb{D}^{\circ} \mathbb{D}_{\mu} \mathbb{D}^{\frac{1}{4}} \mathbb{D}^{\frac{3}{4}} \tilde{\mathbb{N}} \square \mathbb{N}, \mathbb{D}_i \text{ "}. \end{aligned}$$

```
#include <iostream>
```

```
#include <string>
```

Include dependency graph for main.cpp:

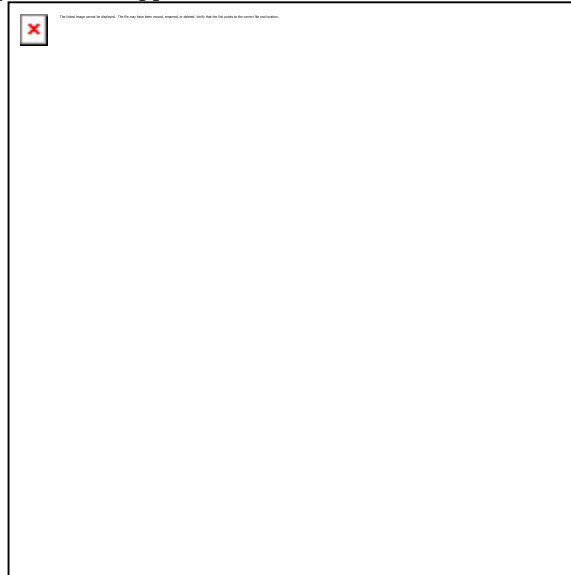

Functions

- void **studentMode** ()
 $\mathcal{D} \text{ “} \mathcal{D} \rangle \rangle \mathcal{D}^{\circ} \mathcal{D}^2 \mathcal{D}' \text{ } \frac{1}{2} \mathcal{D}^{\circ} \tilde{N} \square \tilde{N}_{,,} \tilde{N} f \mathcal{D}' \text{ } \frac{1}{2} \mathcal{D}^{\circ} \tilde{N} \nmid \mathcal{D}, \tilde{N} \square$
- void **prepodMode** ()
 $\mathcal{D} \text{ “} \mathcal{D} \rangle \rangle \mathcal{D}^{\circ} \mathcal{D}^2 \mathcal{D}' \text{ } \frac{1}{2} \mathcal{D}^{\circ} \tilde{N} \square \tilde{N}_{,,} \tilde{N} f \mathcal{D}' \text{ } \frac{1}{2} \mathcal{D}^{\circ} \tilde{N} \nmid \mathcal{D}, \tilde{N} \square \tilde{N} \epsilon \mathcal{D}_{\mu} \mathcal{D} \P \mathcal{D}, \mathcal{D}' \text{ } \frac{1}{4} \mathcal{D}^{\circ}$
 $\mathcal{D}_{\zeta} \tilde{N} \epsilon \mathcal{D}_{\mu} \mathcal{D}_{\zeta} \mathcal{D}' \text{ } \frac{3}{4} \mathcal{D}' \mathcal{D}^{\circ} \mathcal{D}^2 \mathcal{D}^{\circ} \tilde{N}, \mathcal{D}_{\mu} \mathcal{D} \rangle \rangle \tilde{N} \bullet$
- void **adminMode** ()
 $\mathcal{D} \text{ “} \mathcal{D} \rangle \rangle \mathcal{D}^{\circ} \mathcal{D}^2 \mathcal{D}' \text{ } \frac{1}{2} \mathcal{D}^{\circ} \tilde{N} \square \tilde{N}_{,,} \tilde{N} f \mathcal{D}' \text{ } \frac{1}{2} \mathcal{D}^{\circ} \tilde{N} \nmid \mathcal{D}, \tilde{N} \square \tilde{N} \epsilon \mathcal{D}_{\mu} \mathcal{D} \P \mathcal{D}, \mathcal{D}' \text{ } \frac{1}{4} \mathcal{D}^{\circ}$
 $\mathcal{D}^{\circ} \mathcal{D}' \mathcal{D}' \text{ } \frac{1}{4} \mathcal{D}_{,,} \mathcal{D}' \text{ } \frac{1}{2} \mathcal{D}_{,,} \tilde{N} \square \tilde{N}, \tilde{N} \epsilon \mathcal{D}^{\circ} \tilde{N}, \mathcal{D}' \text{ } \frac{3}{4} \tilde{N} \epsilon \mathcal{D}^{\circ}$
- int **main** ()

Detailed Description

$$\begin{aligned} & \mathbb{D}_\zeta \mathbb{D}^{\frac{3}{4}} \tilde{N} \ddagger \mathbb{D}^0 \mathbb{D}^0 \quad \mathbb{D}^2 \tilde{N} \dots \mathbb{D}^{\frac{3}{4}} \mathbb{D}^0 \mathbb{D}^0 \quad \mathbb{D}^2 \quad \mathbb{D}_\zeta \tilde{N} \mathbb{D}^{\frac{3}{4}} \mathbb{D}^3 \tilde{N} \mathbb{D}^0 \mathbb{D}^{\frac{1}{4}} \mathbb{D}^{\frac{1}{4}} \tilde{N} f \quad " \mathbb{D}_\zeta \mathbb{D} \tilde{N} \square \tilde{N}, \mathbb{D}_\mu \mathbb{D}^{\frac{1}{4}} \mathbb{D}^0 \\ & \tilde{N} f \tilde{N} \ddagger \mathbb{D}_\mu \tilde{N}, \mathbb{D}^0 \tilde{N} f \tilde{N} \square \mathbb{D}_\zeta \mathbb{D}_\mu \mathbb{D}^2 \mathbb{D}^0 \mathbb{D}_\mu \mathbb{D}^{\frac{1}{4}} \mathbb{D}^{\frac{3}{4}} \tilde{N} \square \tilde{N}, \mathbb{D} ". \end{aligned}$$

Function Documentation

void adminMode ()

Đ“Đ»Đ°Đ²Đ½Đ°Ñ□ Ñ,,ÑƒĐ½Đ°Ñ†Đ,Ñ□ Ñ€ĐμĐ¶Đ,Đ¼Đ°
Đ°Đ’Đ¼Đ,Đ½Đ,Ñ□Ñ,Ñ€Đ°Ñ,Đ³¼Ñ€Đ°
ĐŸÑ€Đ³⁄₄Đ²ĐμÑ€Ñ□ĐμÑ, Ñ□ĐμĐ°Ñ€ĐμÑ,Đ½Ñ<Đ¹ Đ°Đ»ÑŽÑ‡ Ñ‡ĐμÑ€ĐμĐ·
Database::checkAdmin(), Đ·Đ°Ñ,ĐμĐ¼ Đ² Ñ†Đ,Đ°Đ»Đμ
Đ¿Đ³⁄₄Đ°Đ·Ñ<Đ²Đ°ĐμÑ, Đ¼ĐμĐ½ÑŽ: Đ’Đ³⁄₄Đ±Đ°Đ²Đ»ĐμĐ½Đ,Đμ
Ñ□Ñ,ÑƒĐ’ĐμĐ½Ñ,Đ°, Đ’Đ³⁄₄Đ±Đ°Đ²Đ»ĐμĐ½Đ,Đμ
Đ¿Ñ€ĐμĐ¿Đ³⁄₄Đ’Đ°Đ²Đ°Ñ,ĐμĐ»Ñ□, Đ¿Ñ€Đ³⁄₄Ñ□Đ¼Đ³⁄₄Ñ,Ñ€ Ñ□Đ¿Đ,Ñ□Đ°Đ³⁄₄Đ².

int main ()

void prepodMode ()

Đ“Đ»Đ°Đ²Đ½Đ°Ñ□ Ñ,,ÑƒĐ½Đ°Ñ†Đ,Ñ□ Ñ€ĐμĐ¶Đ,Đ¼Đ°
Đ¿Ñ€ĐμĐ¿Đ³⁄₄Đ’Đ°Đ²Đ°Ñ,ĐμĐ»Ñ·
Đ□Đ²Ñ,Đ³⁄₄Ñ€Đ,Đ·ÑƒĐμÑ,
Đ¿Đ³⁄₄Đ°Đ·Ñ<Đ²Đ°ĐμÑ, ĐμĐ³⁄₄ Đ³Ñ€ÑƒĐ¿Đ¿ÑƒĐ/Đ¿Ñ€ĐμĐ’Đ¼ĐμÑ,,
Đ²Ñ<Đ²Đ³⁄₄Đ’Đ,Ñ, Ñ□Đ¿Đ,Ñ□Đ³⁄₄Đ° Ñ□Ñ,ÑƒĐ’ĐμĐ½Ñ,Đ³⁄₄Đ² Đ,
Đ¿Đ³⁄₄Đ·Đ²Đ³⁄₄Đ»Ñ□ĐμÑ, Đ²Ñ<Ñ□Ñ,Đ°Đ²Đ,Ñ,Ñ€ Đ³⁄₄Ñ†ĐμĐ½Đ°Ñƒ.

void studentMode ()

Đ“Đ»Đ°Đ²Đ½Đ°Ñ□ Ñ,,ÑƒĐ½Đ°Ñ†Đ,Ñ□
Đ’Ñ<Đ²Đ³⁄₄Đ’Đ,Ñ, Đ¼ĐμĐ½ÑŽ Đ²Ñ<Đ±Đ³⁄₄Ñ€Đ° Ñ€ĐμĐ¶Đ,Đ¼Đ° Đ,
Đ²Ñ<Đ·Ñ<Đ²Đ°ĐμÑ, Ñ□Đ³⁄₄Đ³⁄₄Ñ,Đ²ĐμÑ,Ñ· Ñ,Đ²ÑƒÑŽÑ%Đ,Đμ
Ñ,,ÑƒĐ½Đ°Ñ†Đ,Đ,:
• 1: **studentMode()**
• 2: **prepodMode()**
• 3: **adminMode()**
• 4: Đ’Ñ<Ñ...Đ³⁄₄Đ’

Returns

0 Đ¿Ñ€Đ, ÑƒÑ□Đ¿ĐμÑˆĐ½Đ³⁄₄Đ¼ Đ·Đ°Đ²ĐμÑ€ÑˆĐμĐ½Đ,Đ,
Đ“Đ»Đ°Đ²Đ½Đ°Ñ□ Ñ,,ÑƒĐ½Đ°Ñ†Đ,Ñ□
Đ—Đ°Đ¿Ñ€Đ°ÑˆĐ,Đ²Đ°ĐμÑ, Đ»Đ³⁄₄Đ³Đ,Đ½/Đ¿Đ°Ñ€Đ³⁄₄Đ»Ñ€,
Đ¿Ñ€Đ³⁄₄Đ²ĐμÑ€Ñ□ĐμÑ, Đ,Ñ... Ñ‡ĐμÑ€ĐμĐ· **Database::verifyStudent()** Đ,
Đ²Ñ<Đ²Đ³⁄₄Đ’Đ,Ñ, Ñ,Đ°Đ±Đ»Đ,Ñ†Ñƒ Ñ□ Đ³⁄₄Ñ†ĐμĐ½Đ°Đ’Đ¼Đ, Đ,Đ·
Ñ,Đ°Đ±Đ»Đ,Ñ†Ñ< grades.

prepod.cpp File Reference


$$\mathbb{D} \cdot \mathbb{D}_\mu \mathbb{D}^\circ \mathbb{D} \gg \mathbb{D}, \mathbb{D} \cdot \mathbb{D}^\circ \tilde{\mathbb{N}}^\dagger \mathbb{D}, \tilde{\mathbb{N}} \square \tilde{\mathbb{N}} \in \mathbb{D}_\mu \mathbb{D}^\dagger \mathbb{D}, \mathbb{D}^{1/4} \mathbb{D}^\circ \mathbb{D}, \tilde{\mathbb{N}} \in \mathbb{D}_\mu \mathbb{D}, \mathbb{D}^{3/4} \mathbb{D}^\dagger \mathbb{D}^\circ \mathbb{D}^2 \mathbb{D}^\circ \tilde{\mathbb{N}}, \mathbb{D}_\mu \mathbb{D} \gg \tilde{\mathbb{N}}.$$

```
#include "database.h"
```

```
#include <iostream>
```

```
#include <string>
```

Include dependency graph for prepod.cpp:

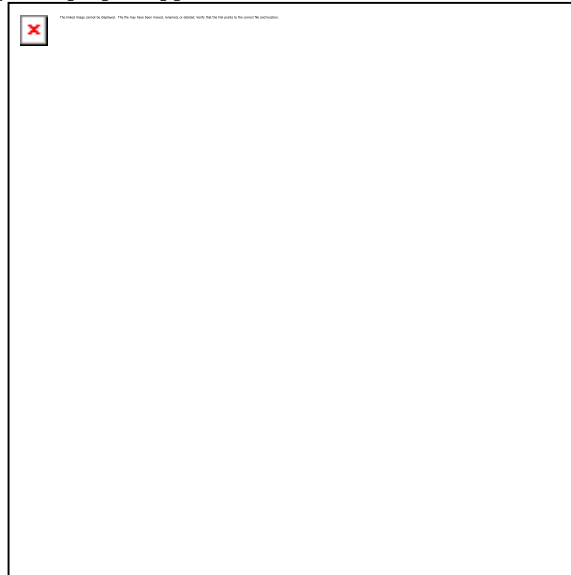

Functions

- void **prepodMode** ()
 $D^{\circ}D^{\circ}D^2D^{1/2}D^{\circ}\tilde{N}$
 $\tilde{N}, \tilde{N}fD^{1/2}D^{\circ}\tilde{N}^\dagger D, \tilde{N}$
 $\tilde{N}\in D_{\mu}D^{\parallel}D, D^{1/4}D^{\circ}$
 $D_{\zeta}\tilde{N}\epsilon D_{\mu}D_{\zeta}D^{3/4}D^{\circ}D^2D^{\circ}\tilde{N}, D_{\mu}D\rangle\tilde{N}.$

Detailed Description

$$\mathbb{D} \mathbb{D} \mu \mathbb{D}^{\circ} \mathbb{D} \gg \mathbb{D}, \mathbb{D} \cdot \mathbb{D}^{\circ} \tilde{\mathbb{N}} \dagger \mathbb{D}, \tilde{\mathbb{N}} \square \tilde{\mathbb{N}} \in \mathbb{D} \mu \mathbb{D} \P \mathbb{D}, \mathbb{D}^{1/4} \mathbb{D}^{\circ} \mathbb{D}, \tilde{\mathbb{N}} \in \mathbb{D} \mu \mathbb{D}; \mathbb{D}^{3/4} \mathbb{D}^{\circ} \mathbb{D}^{\circ} \mathbb{D}^{\circ} \tilde{\mathbb{N}}, \mathbb{D} \mu \mathbb{D} \gg \tilde{\mathbb{N}} \square$$

Function Documentation

```
void prepodMode ()
```

[illegible]

student.cpp File Reference


Đ ĐμĐ°Đ»Đ,Đ·Đ°Ñ†Đ,Ñ □ Ñ€ĐμĐ¶Đ,Đ¼Đ° Ñ □ Ñ,ÑfĐ'ĐμĐ½Ñ,Đ°

```
#include "database.h"
```

```
#include <iostream>
```

```
#include <string>
```

Include dependency graph for student.cpp:

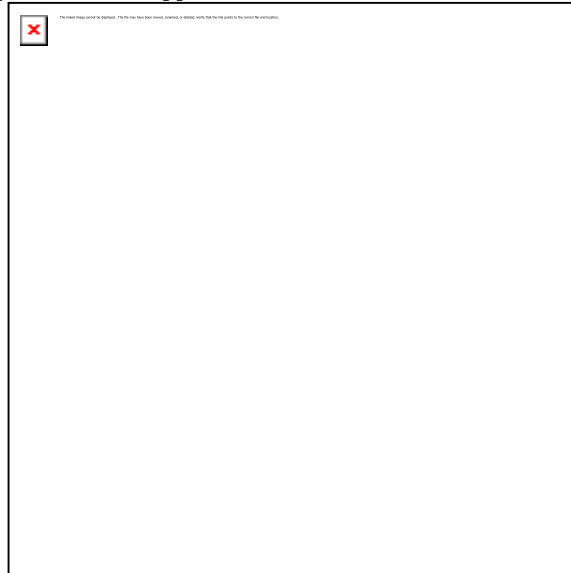

Functions

- void **studentMode** ()
Đ“Đ»Đ°Đ²Đ½Đ°Ñ □ Ñ,,ÑfĐ½Đ°Ñ†Đ,Ñ □ Ñ€ĐμĐ¶Đ,Đ¼Đ° Ñ □ Ñ,ÑfĐ'ĐμĐ½Ñ,Đ°

Detailed Description

Đ ĐμĐ°Đ»Đ,Đ·Đ°Ñ†Đ,Ñ □ Ñ€ĐμĐ¶Đ,Đ¼Đ° Ñ □ Ñ,ÑfĐ'ĐμĐ½Ñ,Đ°

Function Documentation

void studentMode ()

Đ“Đ»Đ°Đ²Đ½Đ°Ñ □ Ñ,,ÑfĐ½Đ°Ñ†Đ,Ñ □ Ñ€ĐμĐ¶Đ,Đ¼Đ° Ñ □ Ñ,ÑfĐ'ĐμĐ½Ñ,Đ°

Đ“Đ»Đ°Đ²Đ½Đ°Ñ □ Ñ,,ÑfĐ½Đ°Ñ†Đ,Ñ □

Đ—Đ°Đ¿Ñ€Đ°ÑˆĐ,Đ²Đ°ĐμÑ, Đ»Đ³⁄₄Đ³Đ,Đ½⁄₄Đ¿Đ°Ñ€Đ³⁄₄Đ»Ñ€,
Đ¿Ñ€Đ³⁄₄Đ²ĐμÑ€Ñ □ ĐμÑ, Đ,Ñ... Ñ‡ĐμÑ€ĐμĐ· **Database::verifyStudent()** Đ,
Đ²Ñ<Đ²Đ³⁄₄Đ'Đ,Ñ, Ñ,Đ°Đ±Đ»Đ,Ñ†Ñf Ñ □ Đ³⁄₄Ñ†ĐμĐ½Đ°Đ°Đ¼Đ, Đ,Đ·
Ñ,Đ°Đ±Đ»Đ,Ñ†Ñ< grades.

Index

INDEX