

Requêtes AJAX en jQuery

(JavaScript)


HTTP request with URL

GET "http://lewagon.org/program"

Client

HTTP request with URL

GET "http://lewagon.org/program"

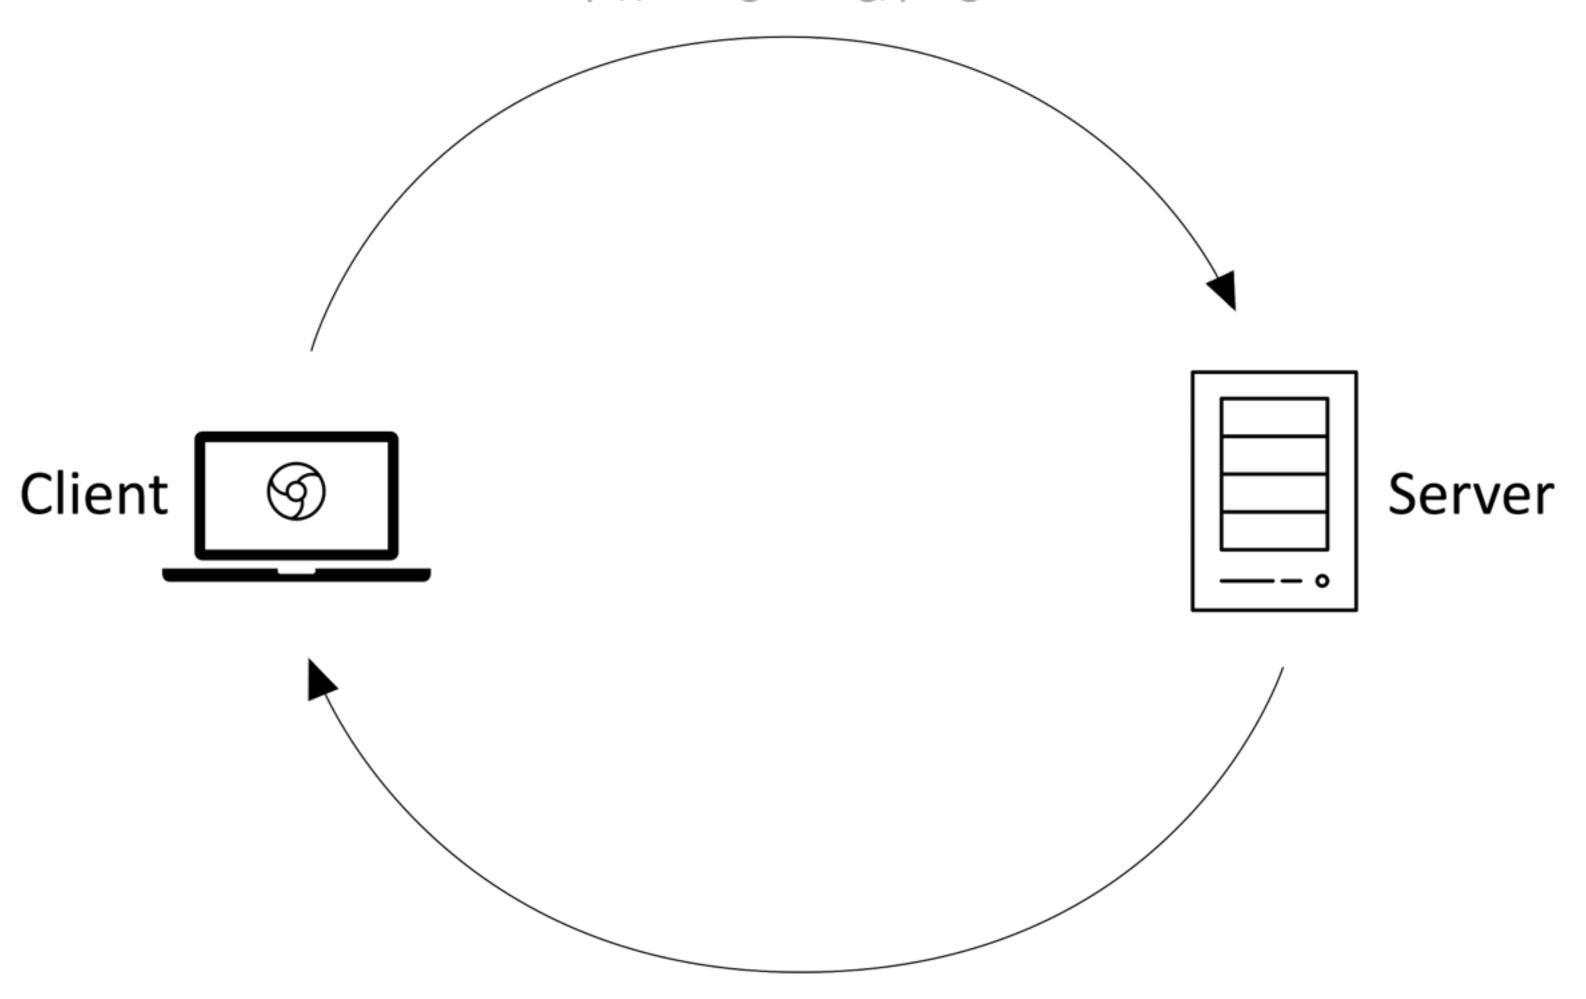

HTTP response with HTML file



```
response.xml
response.xml
    <response>
       <restaurant>
         <name>La Tour d'Argent</name>
         <address>15 Quai de la Tournelle, 75005 Paris</address>
    </restaurant>
 6 < restaurant>
        <name>Le Dindon en Laisse</name>
         <address>18 Rue Beautreillis, 75004 Paris</address>
      </restaurant>
    </response>
Line 11, Column 1
                                                    Spaces: 2
                                                                XML
```



```
response.json
response.json
       "restaurants": [
           "name": "La Tour d'Argent",
           "address": "15 Quai de la Tournelle, 75005 Paris"
           "name": "Le Dindon en Laisse",
           "address": "18 Rue Beautreillis, 75004 Paris"
Line 13, Column 1
                                                       Spaces: 2
                                                                   JSON
```

JSON

JavaScript Object Notation

```
$.ajax(
```

);

```
$.ajax({
```

```
});
```

```
$.ajax({
   url:
   success:
```

});

```
$.ajax({
   url: "http://...",
   success: function(data) {
      // Do something
   }
});
```

```
$.ajax({
  url: "http://...",
  success: function(data) {
    // Do something
             Callback
```

\$.get

```
$.get("https://...", function(data) {
   // Do something
});
```