




le wagon 



jQuery et le DOM

(JavaScript)

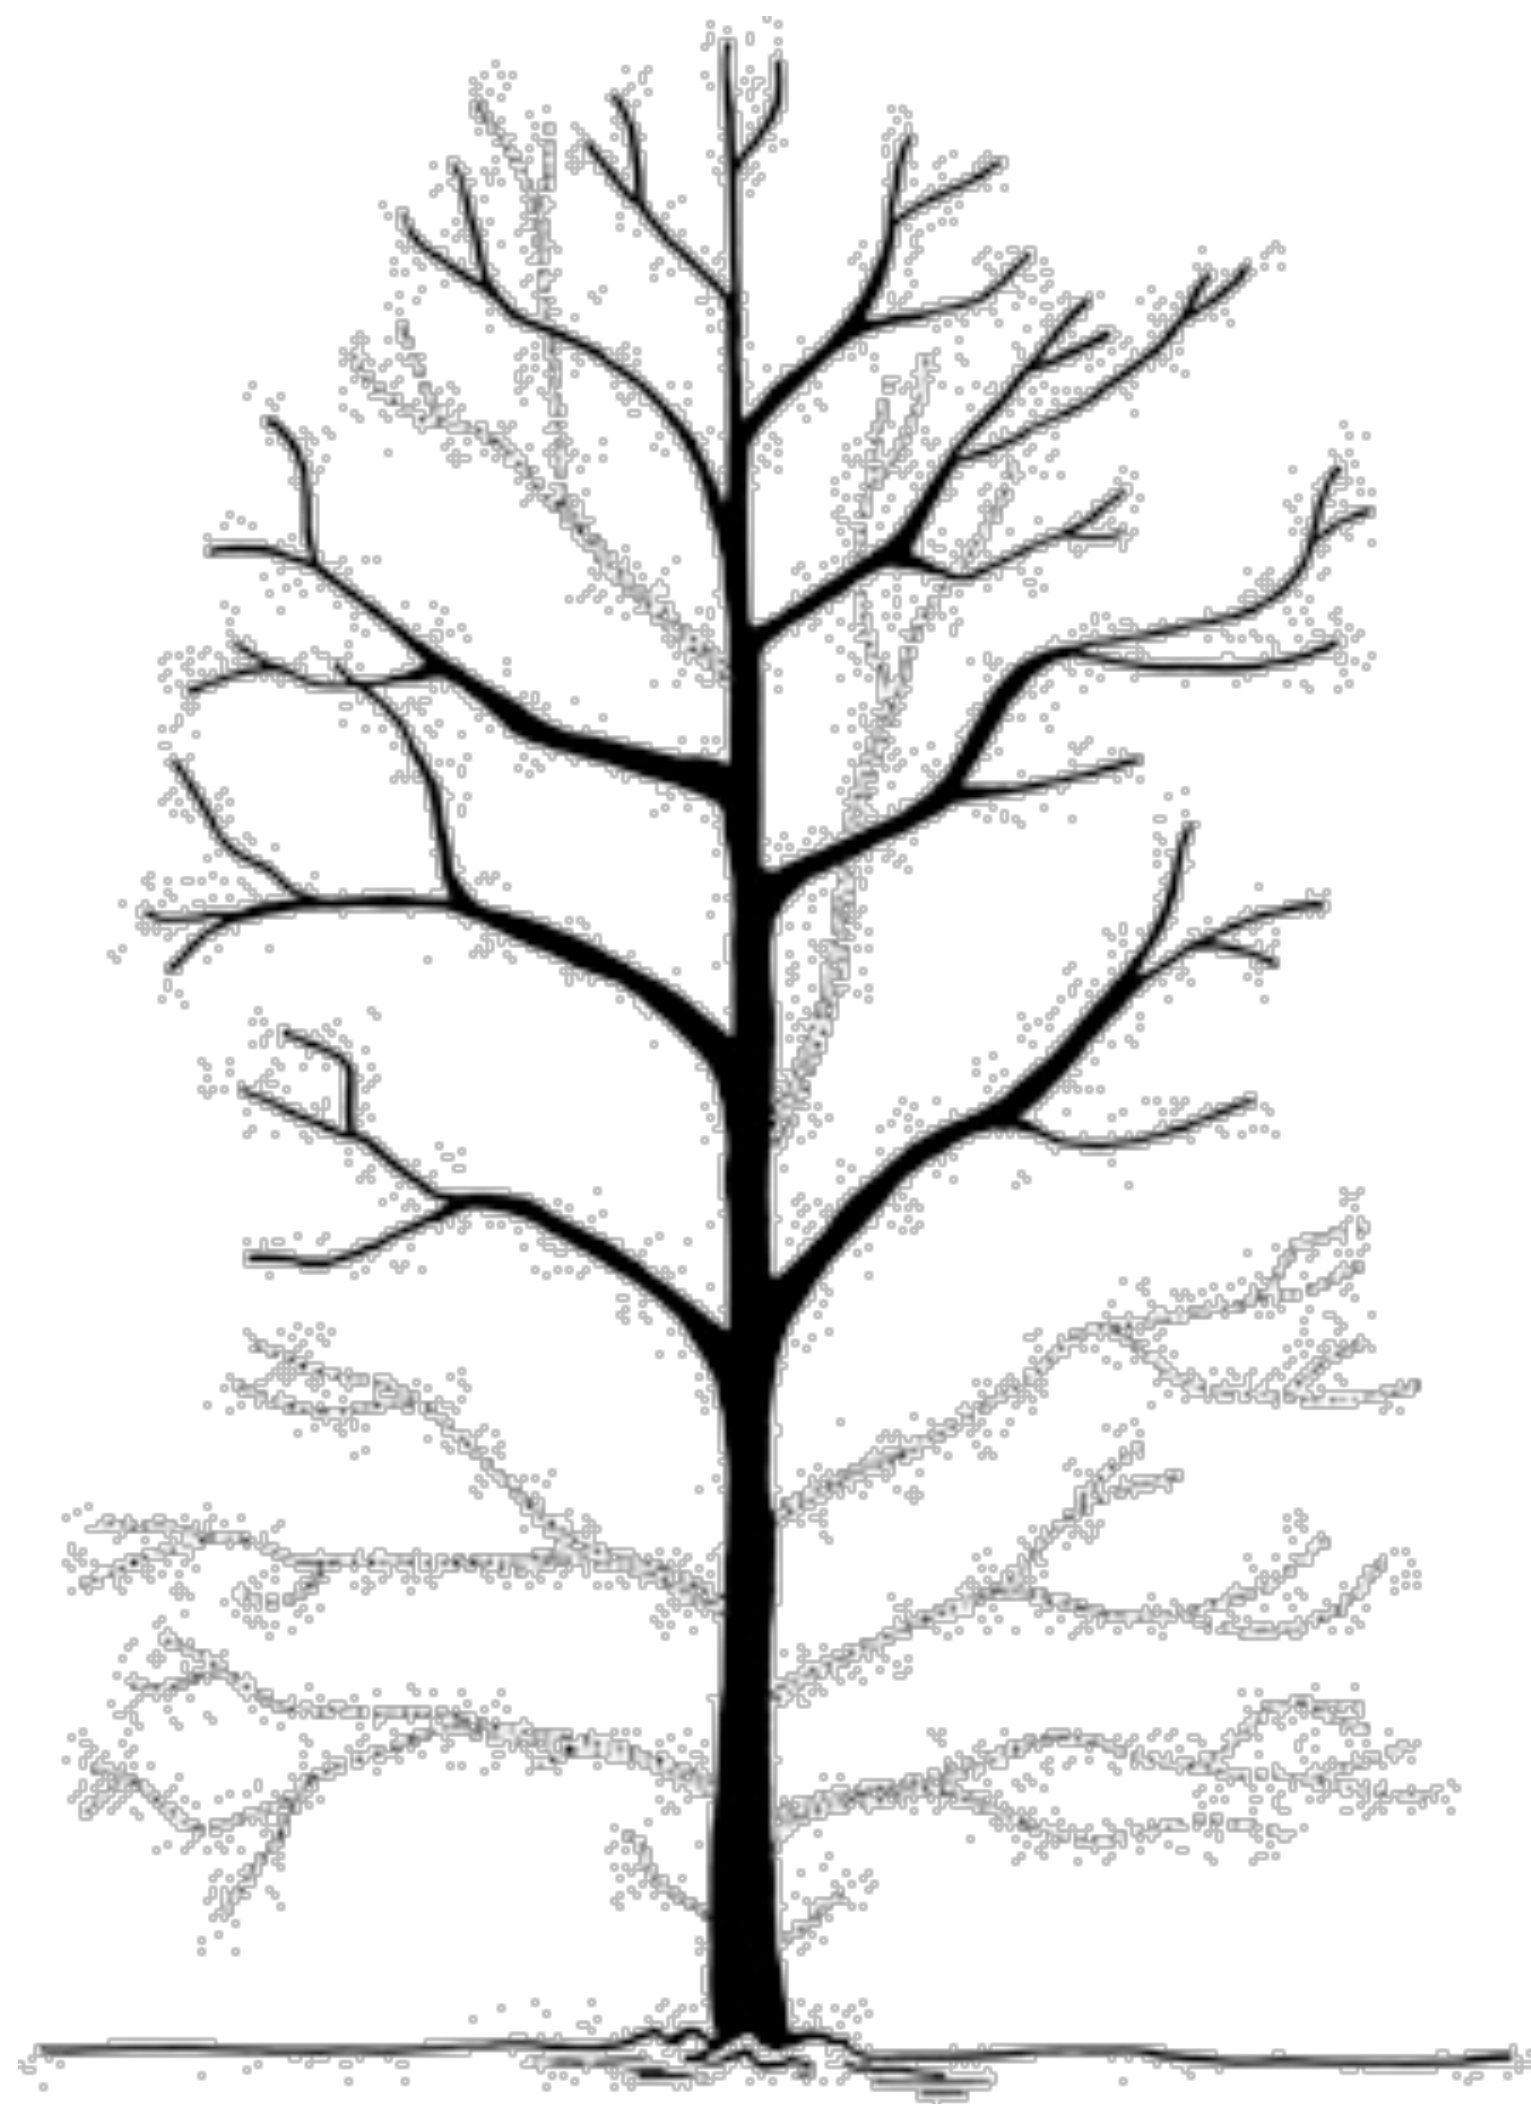

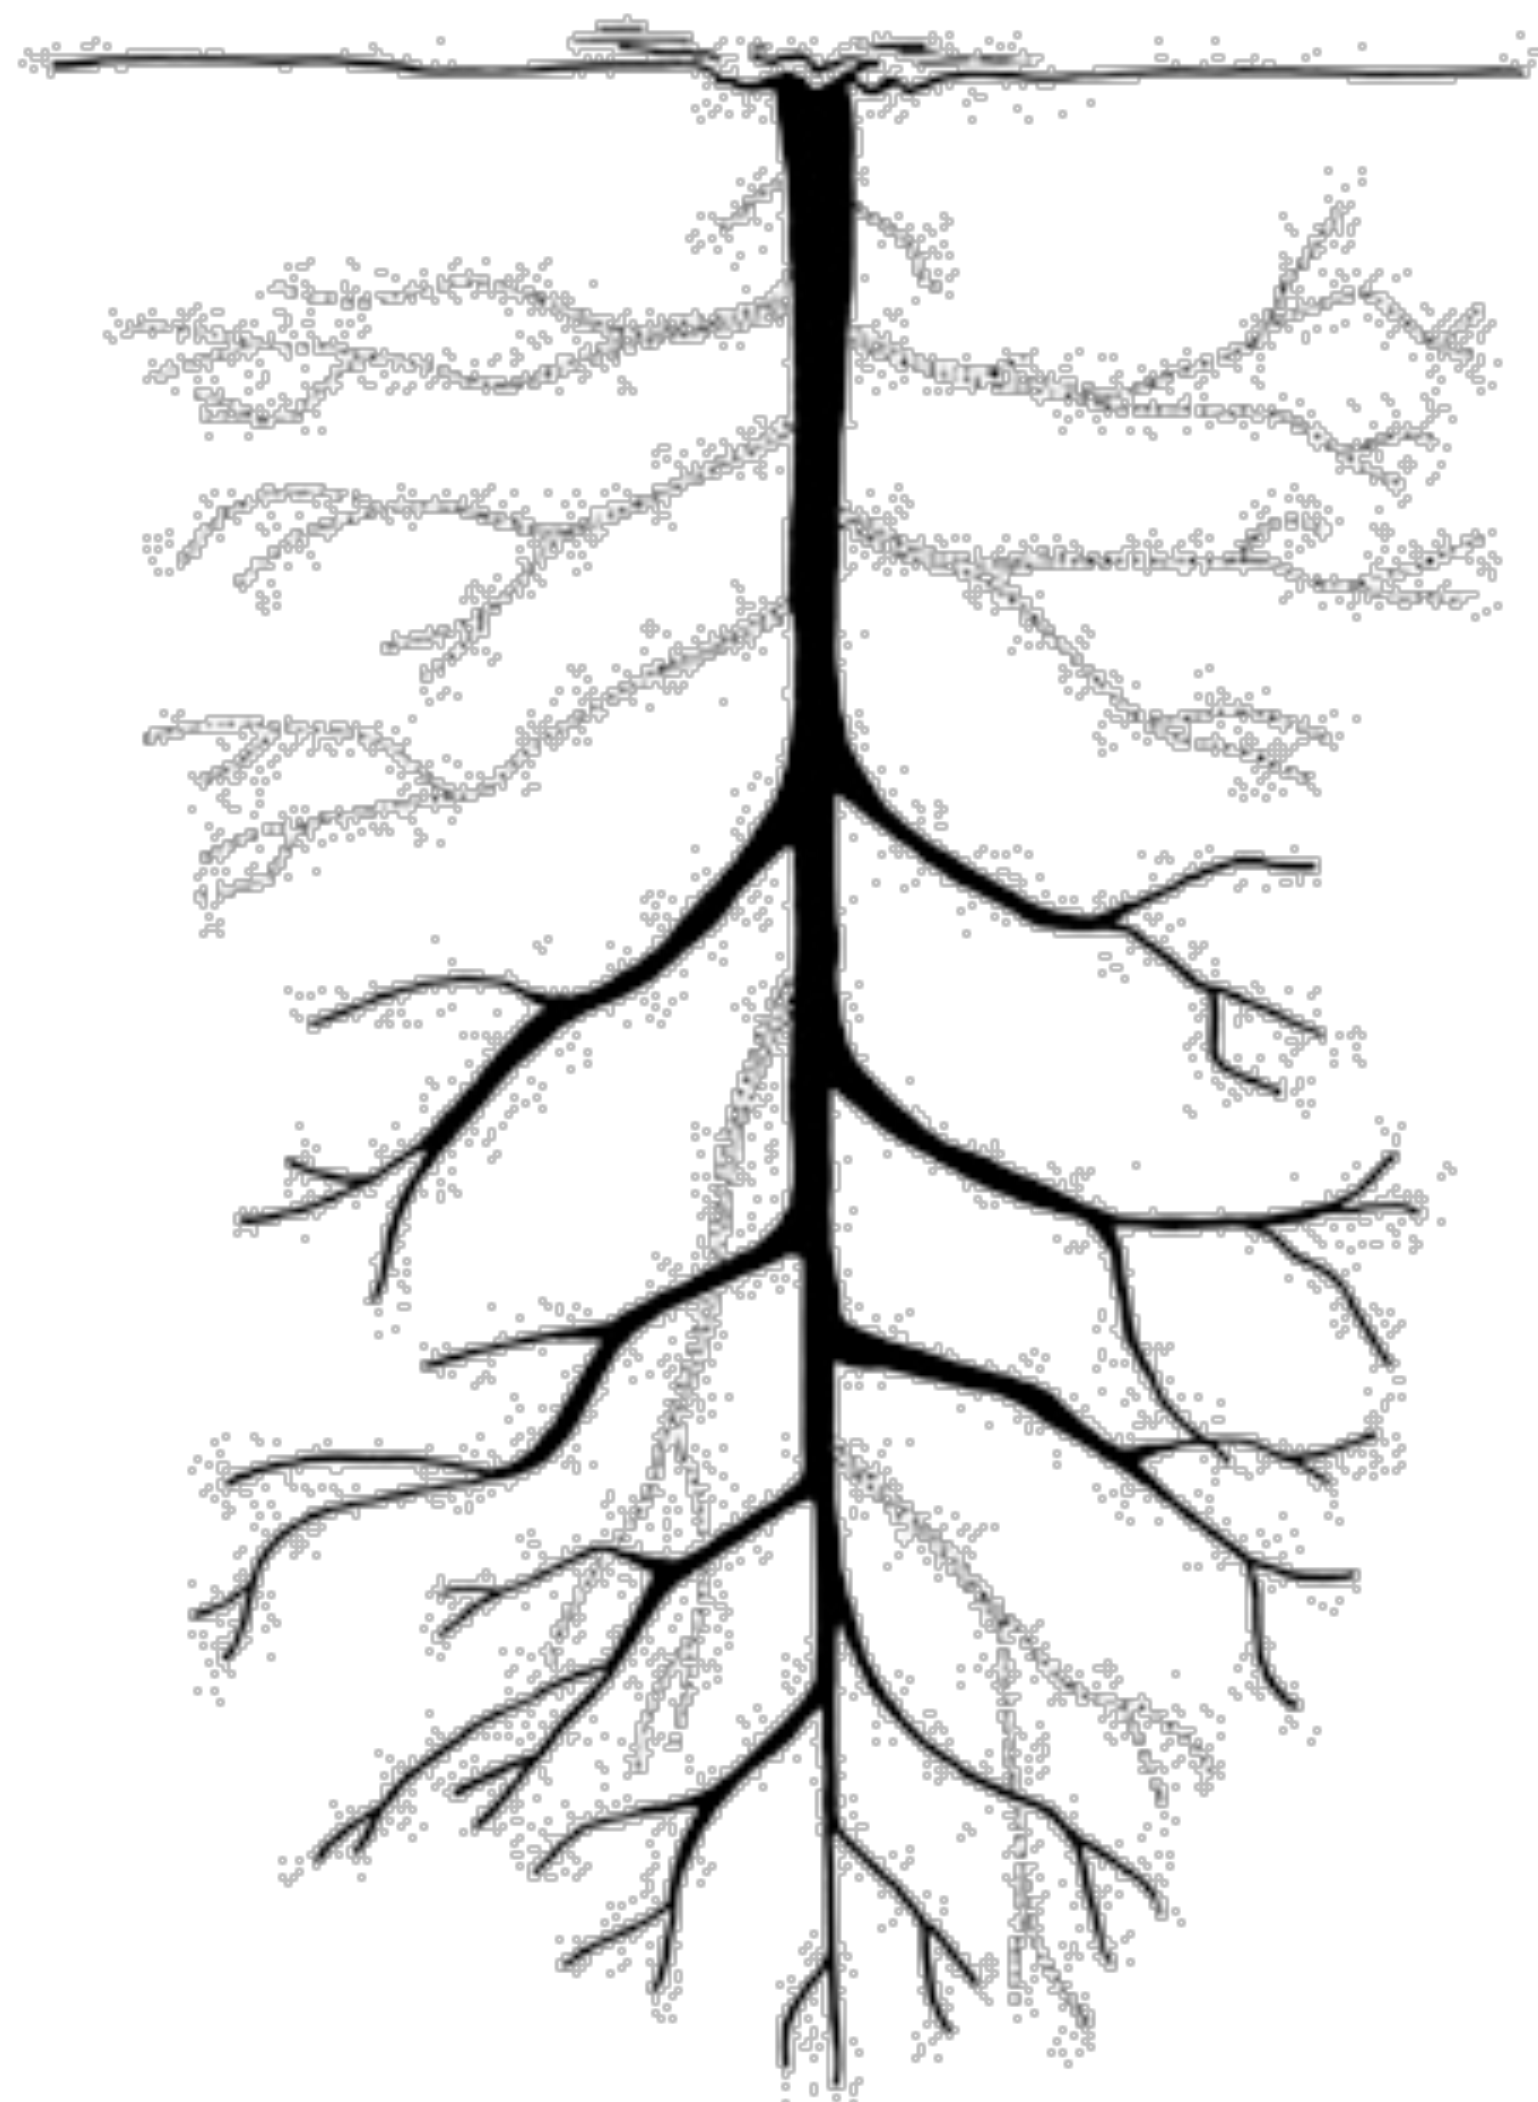

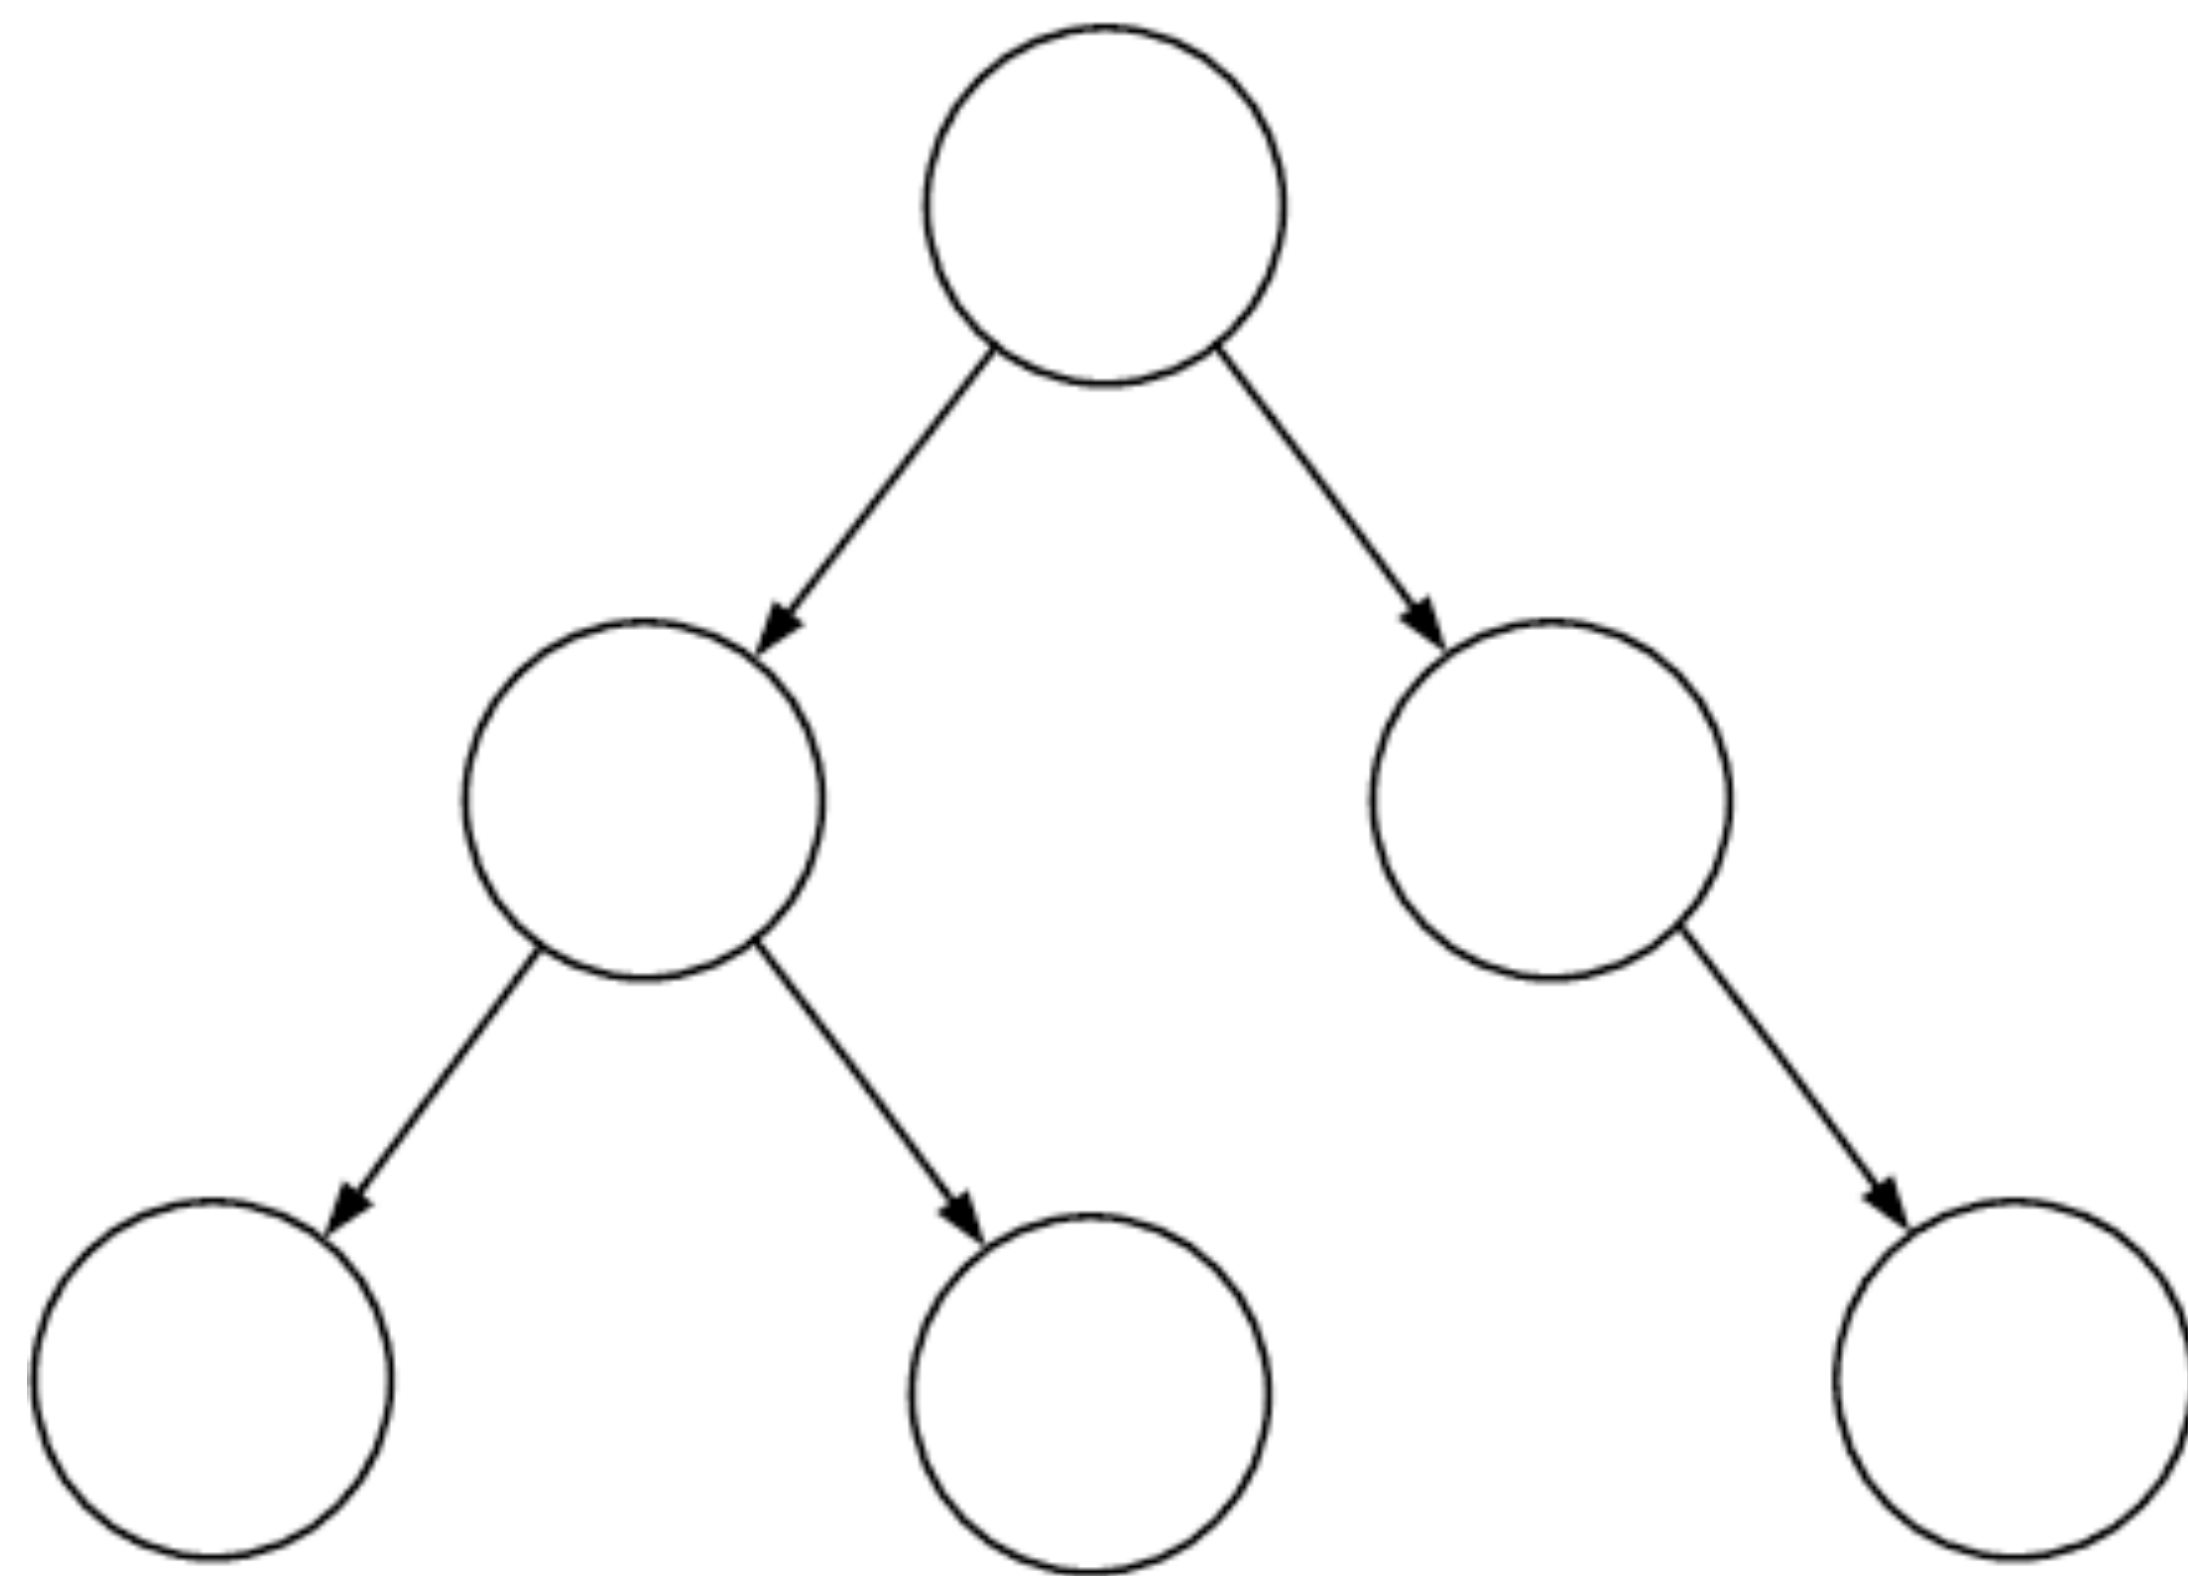

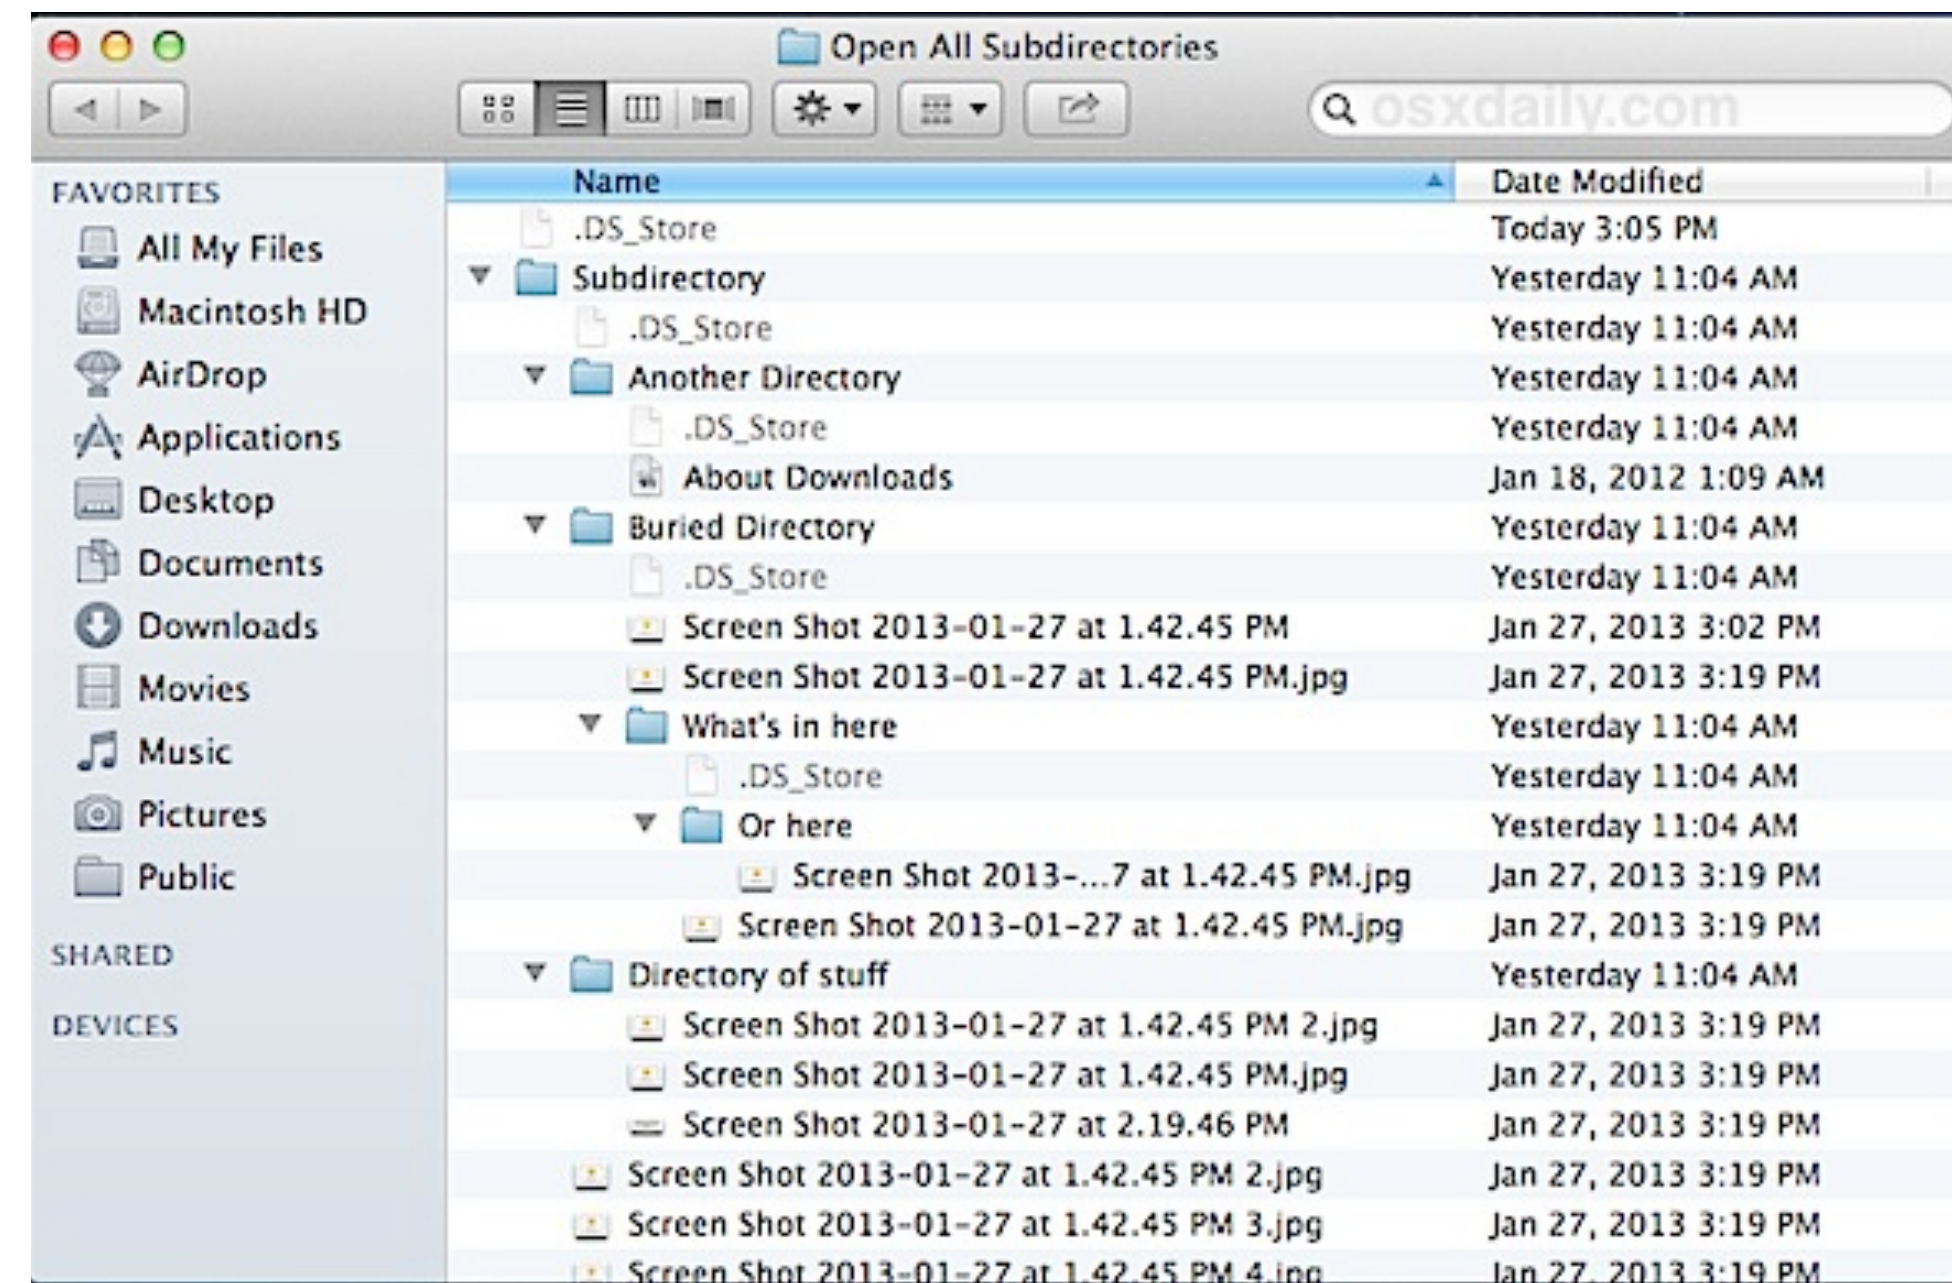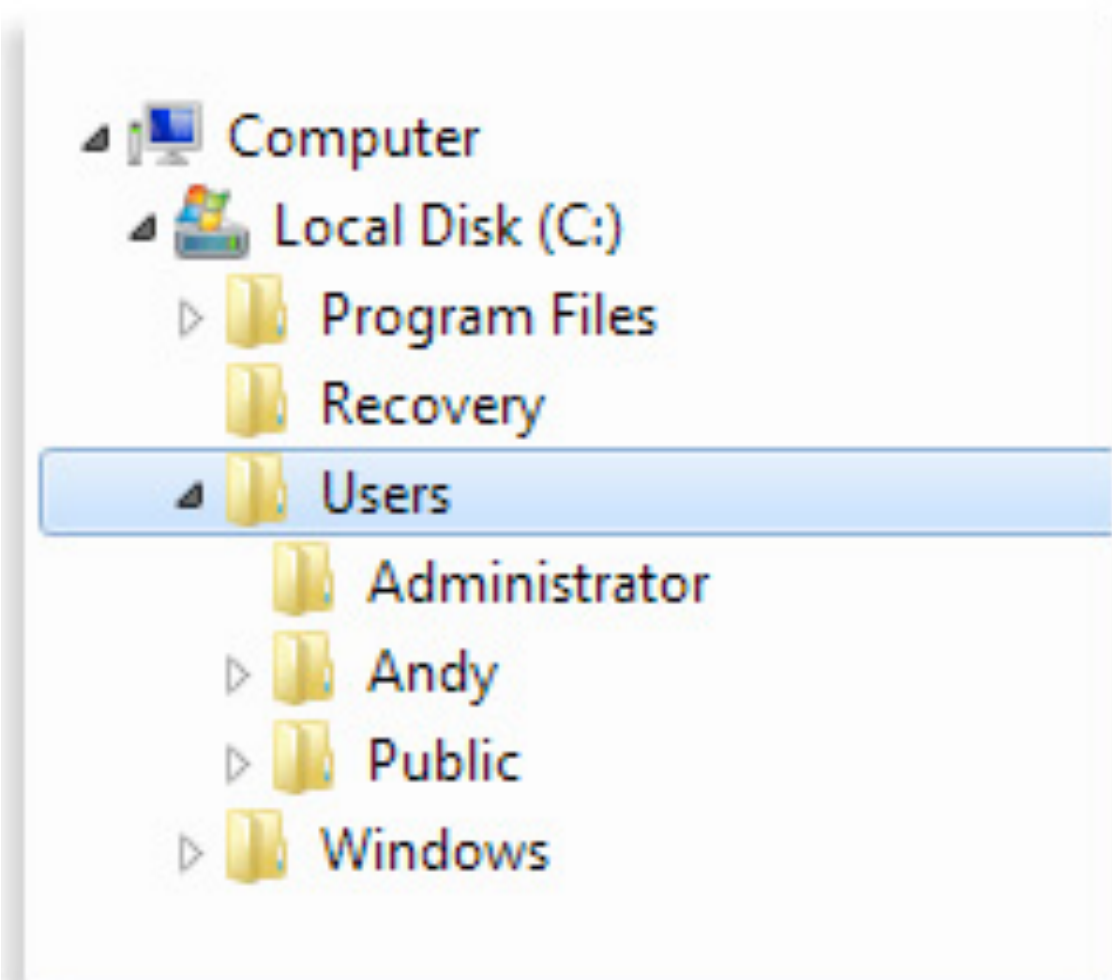

```
<html>
```

```
  <head>
```

```
    <title>Hello</title>
```

```
  </head>
```

```
  <body>
```

```
    <h1>
```

```
      Hello
```

```
    </h1>
```

```
    <p>
```

```
      Lorem Ipsum..
```


```
    </p>
```

```
  </body>
```


```
</html>
```

html


```
<html>
  <head>
    <title>Hello</title>
  </head>
  <body>
    <h1>
      Hello
    </h1>
    <p>
      Lorem Ipsum..
    </p>
  </body>
</html>
```

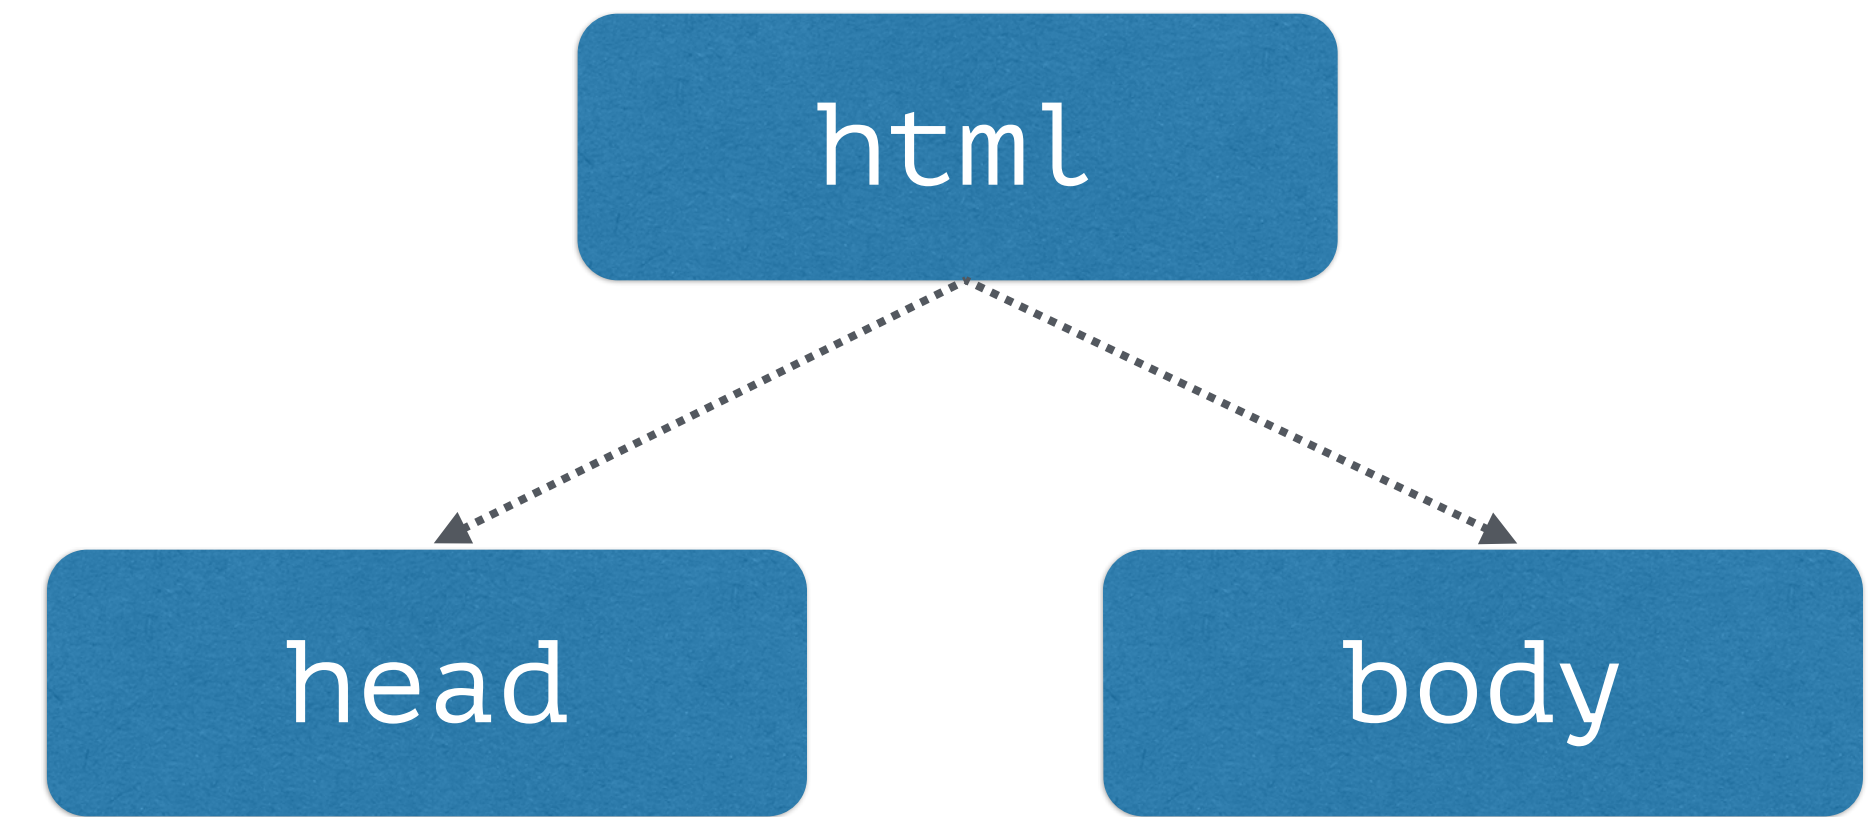

```
<html>
  <head>
    <title>Hello</title>
  </head>
  <body>
    <h1>
      Hello
    </h1>
    <p>
      Lorem Ipsum..
    </p>
  </body>
</html>
```

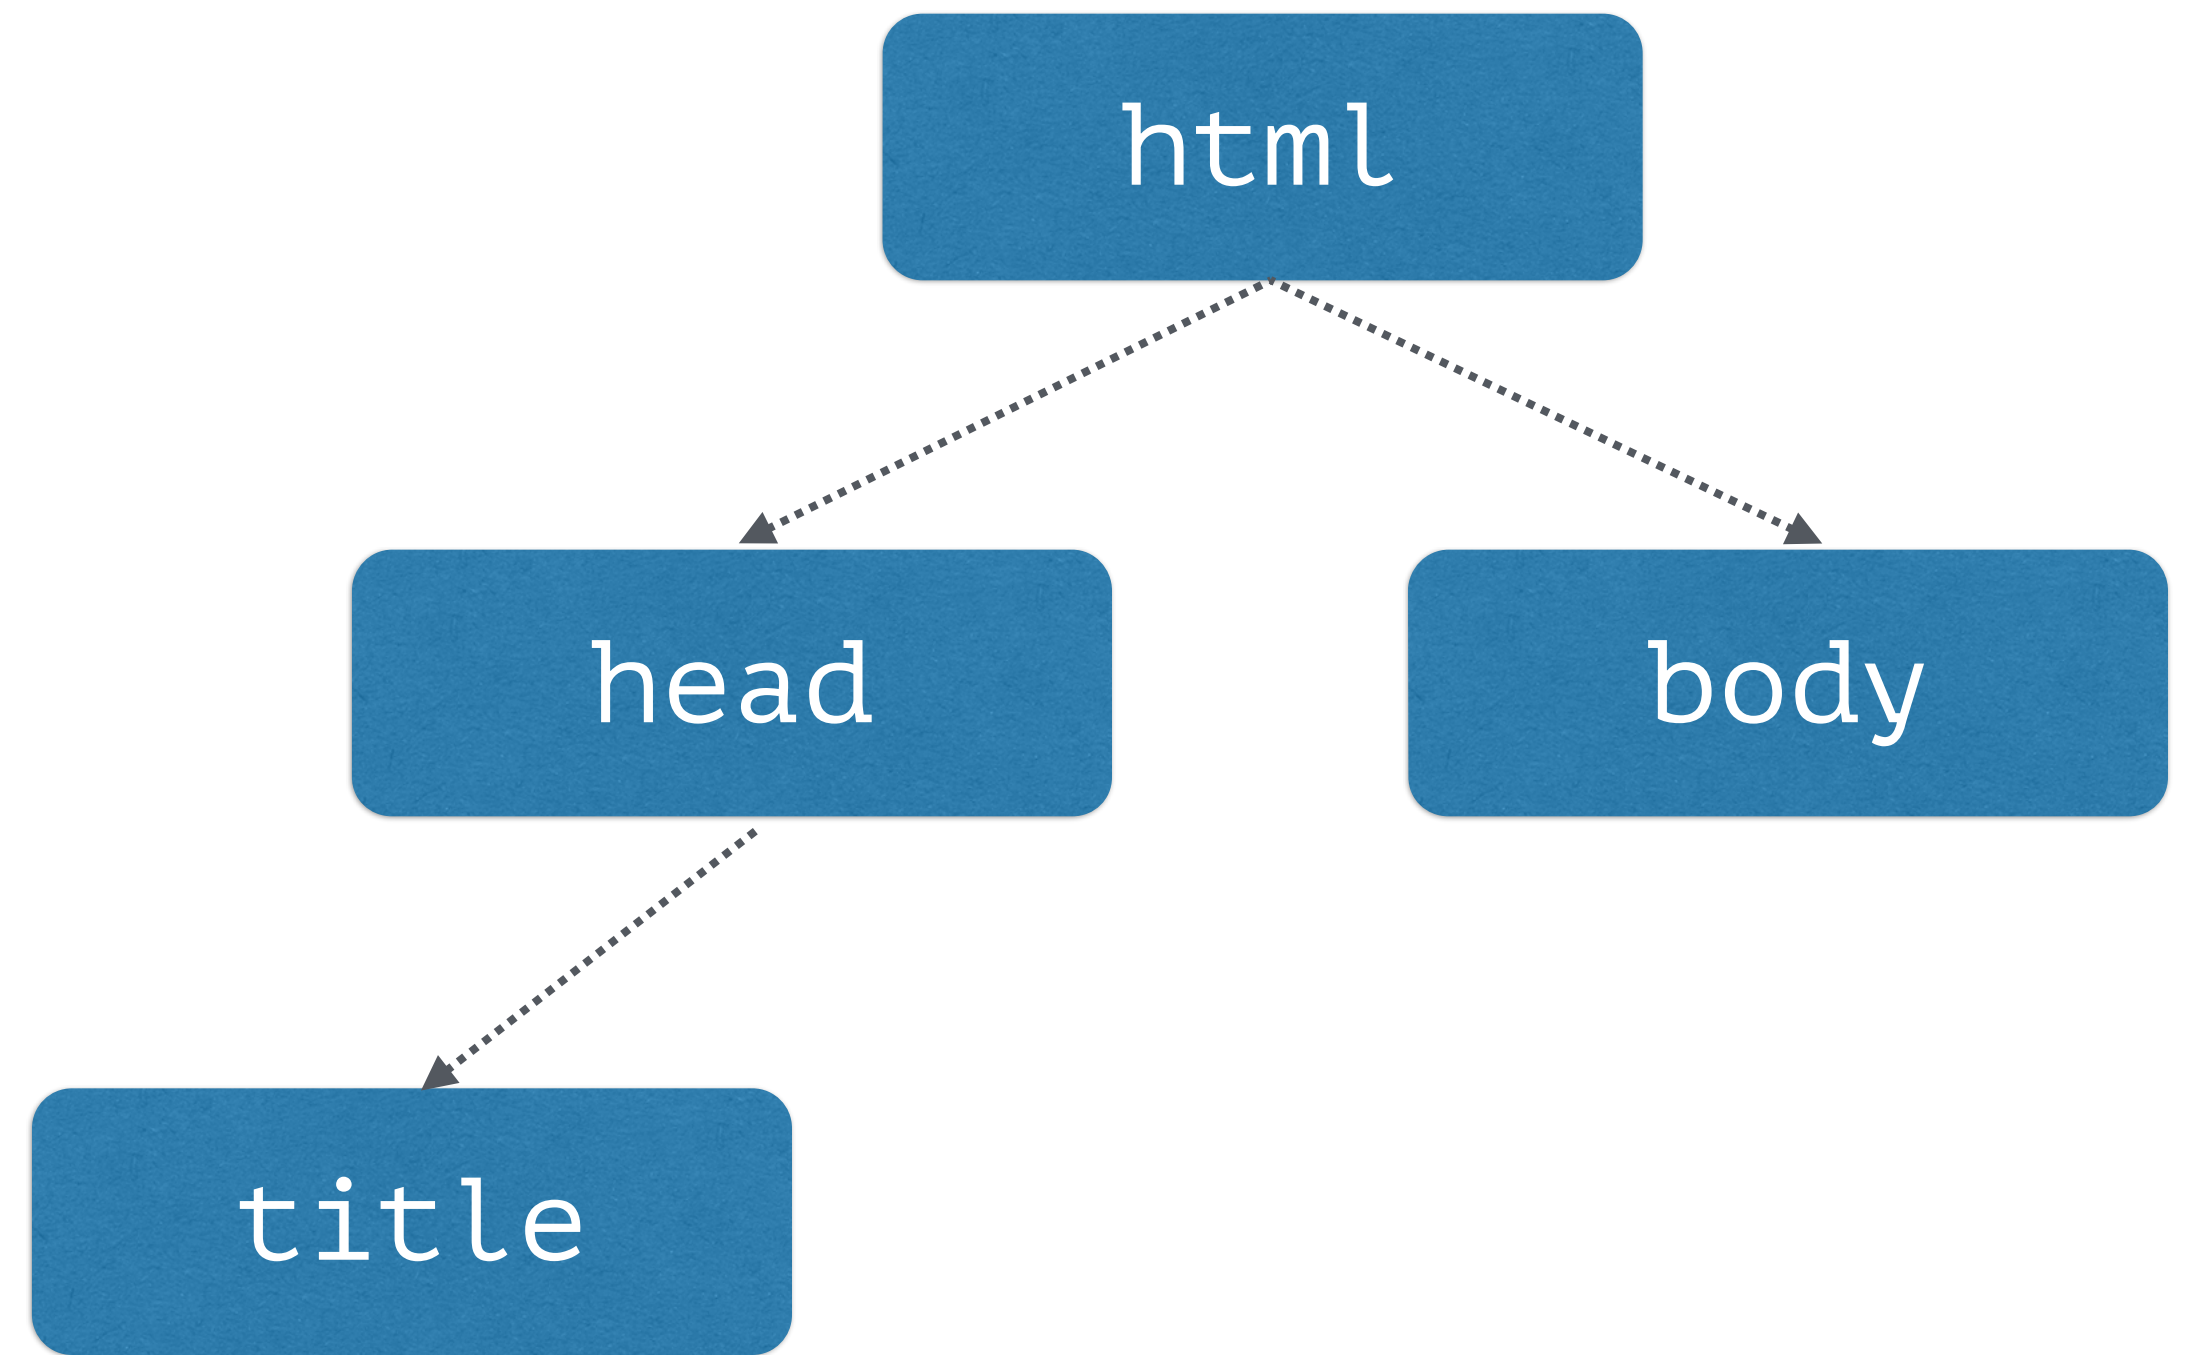



```
<html>
  <head>
    <title>Hello</title>
  </head>
  <body>
    <h1>
      Hello
    </h1>
    <p>
      Lorem Ipsum..
    </p>
  </body>
</html>
```

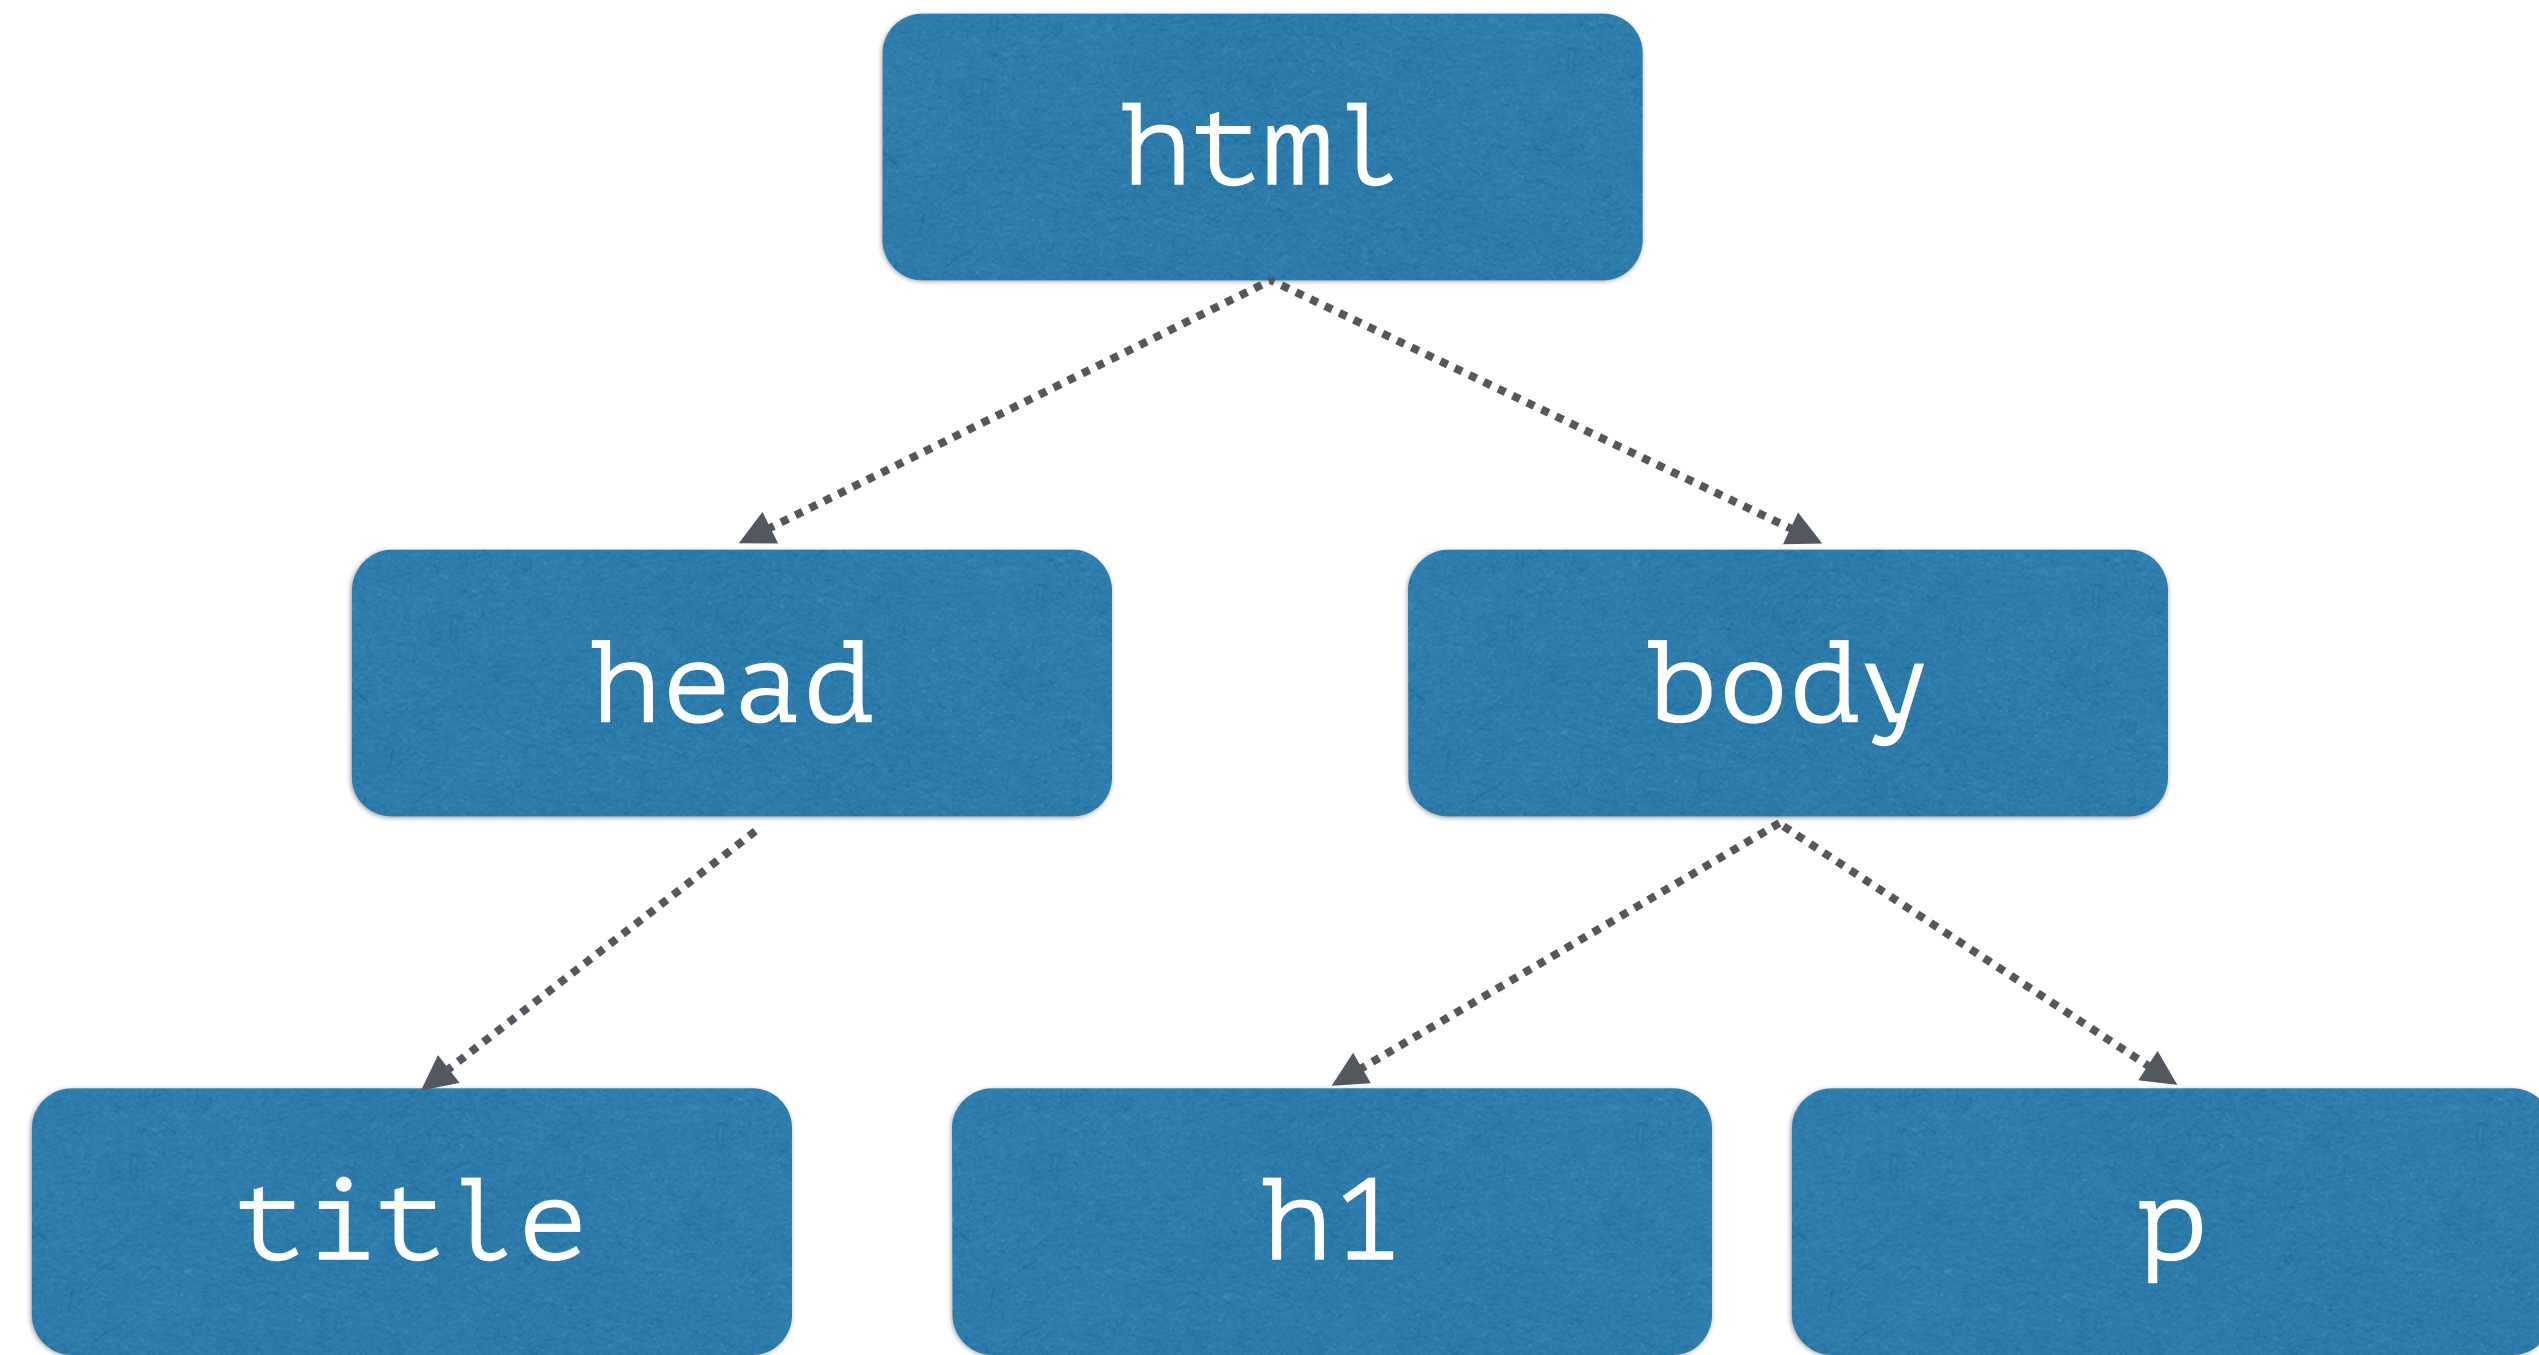


HTTP request with URL

GET "http://lewagon.org/program"

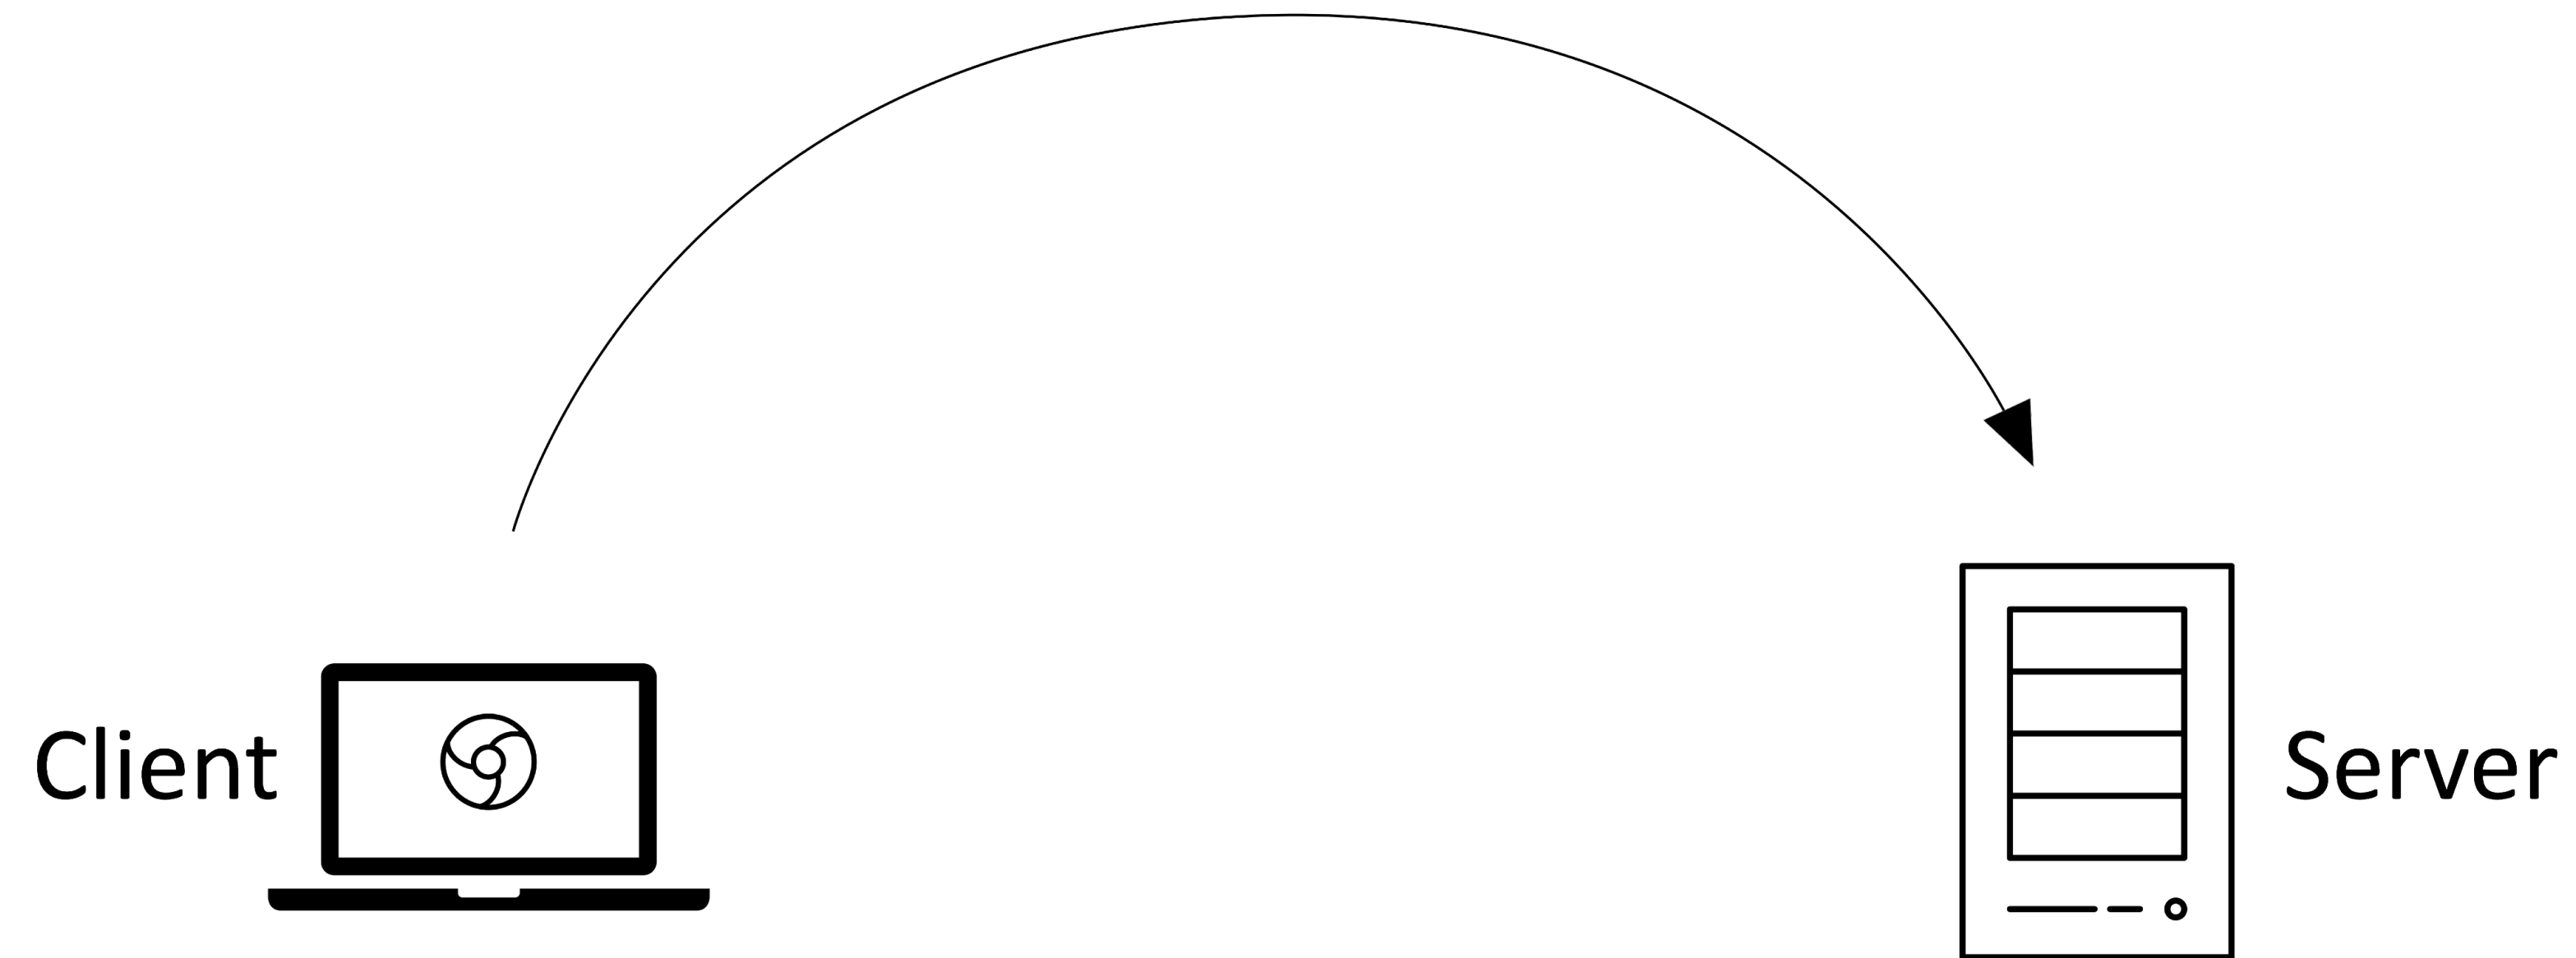


HTTP request with URL


GET "http://lewagon.org/program"

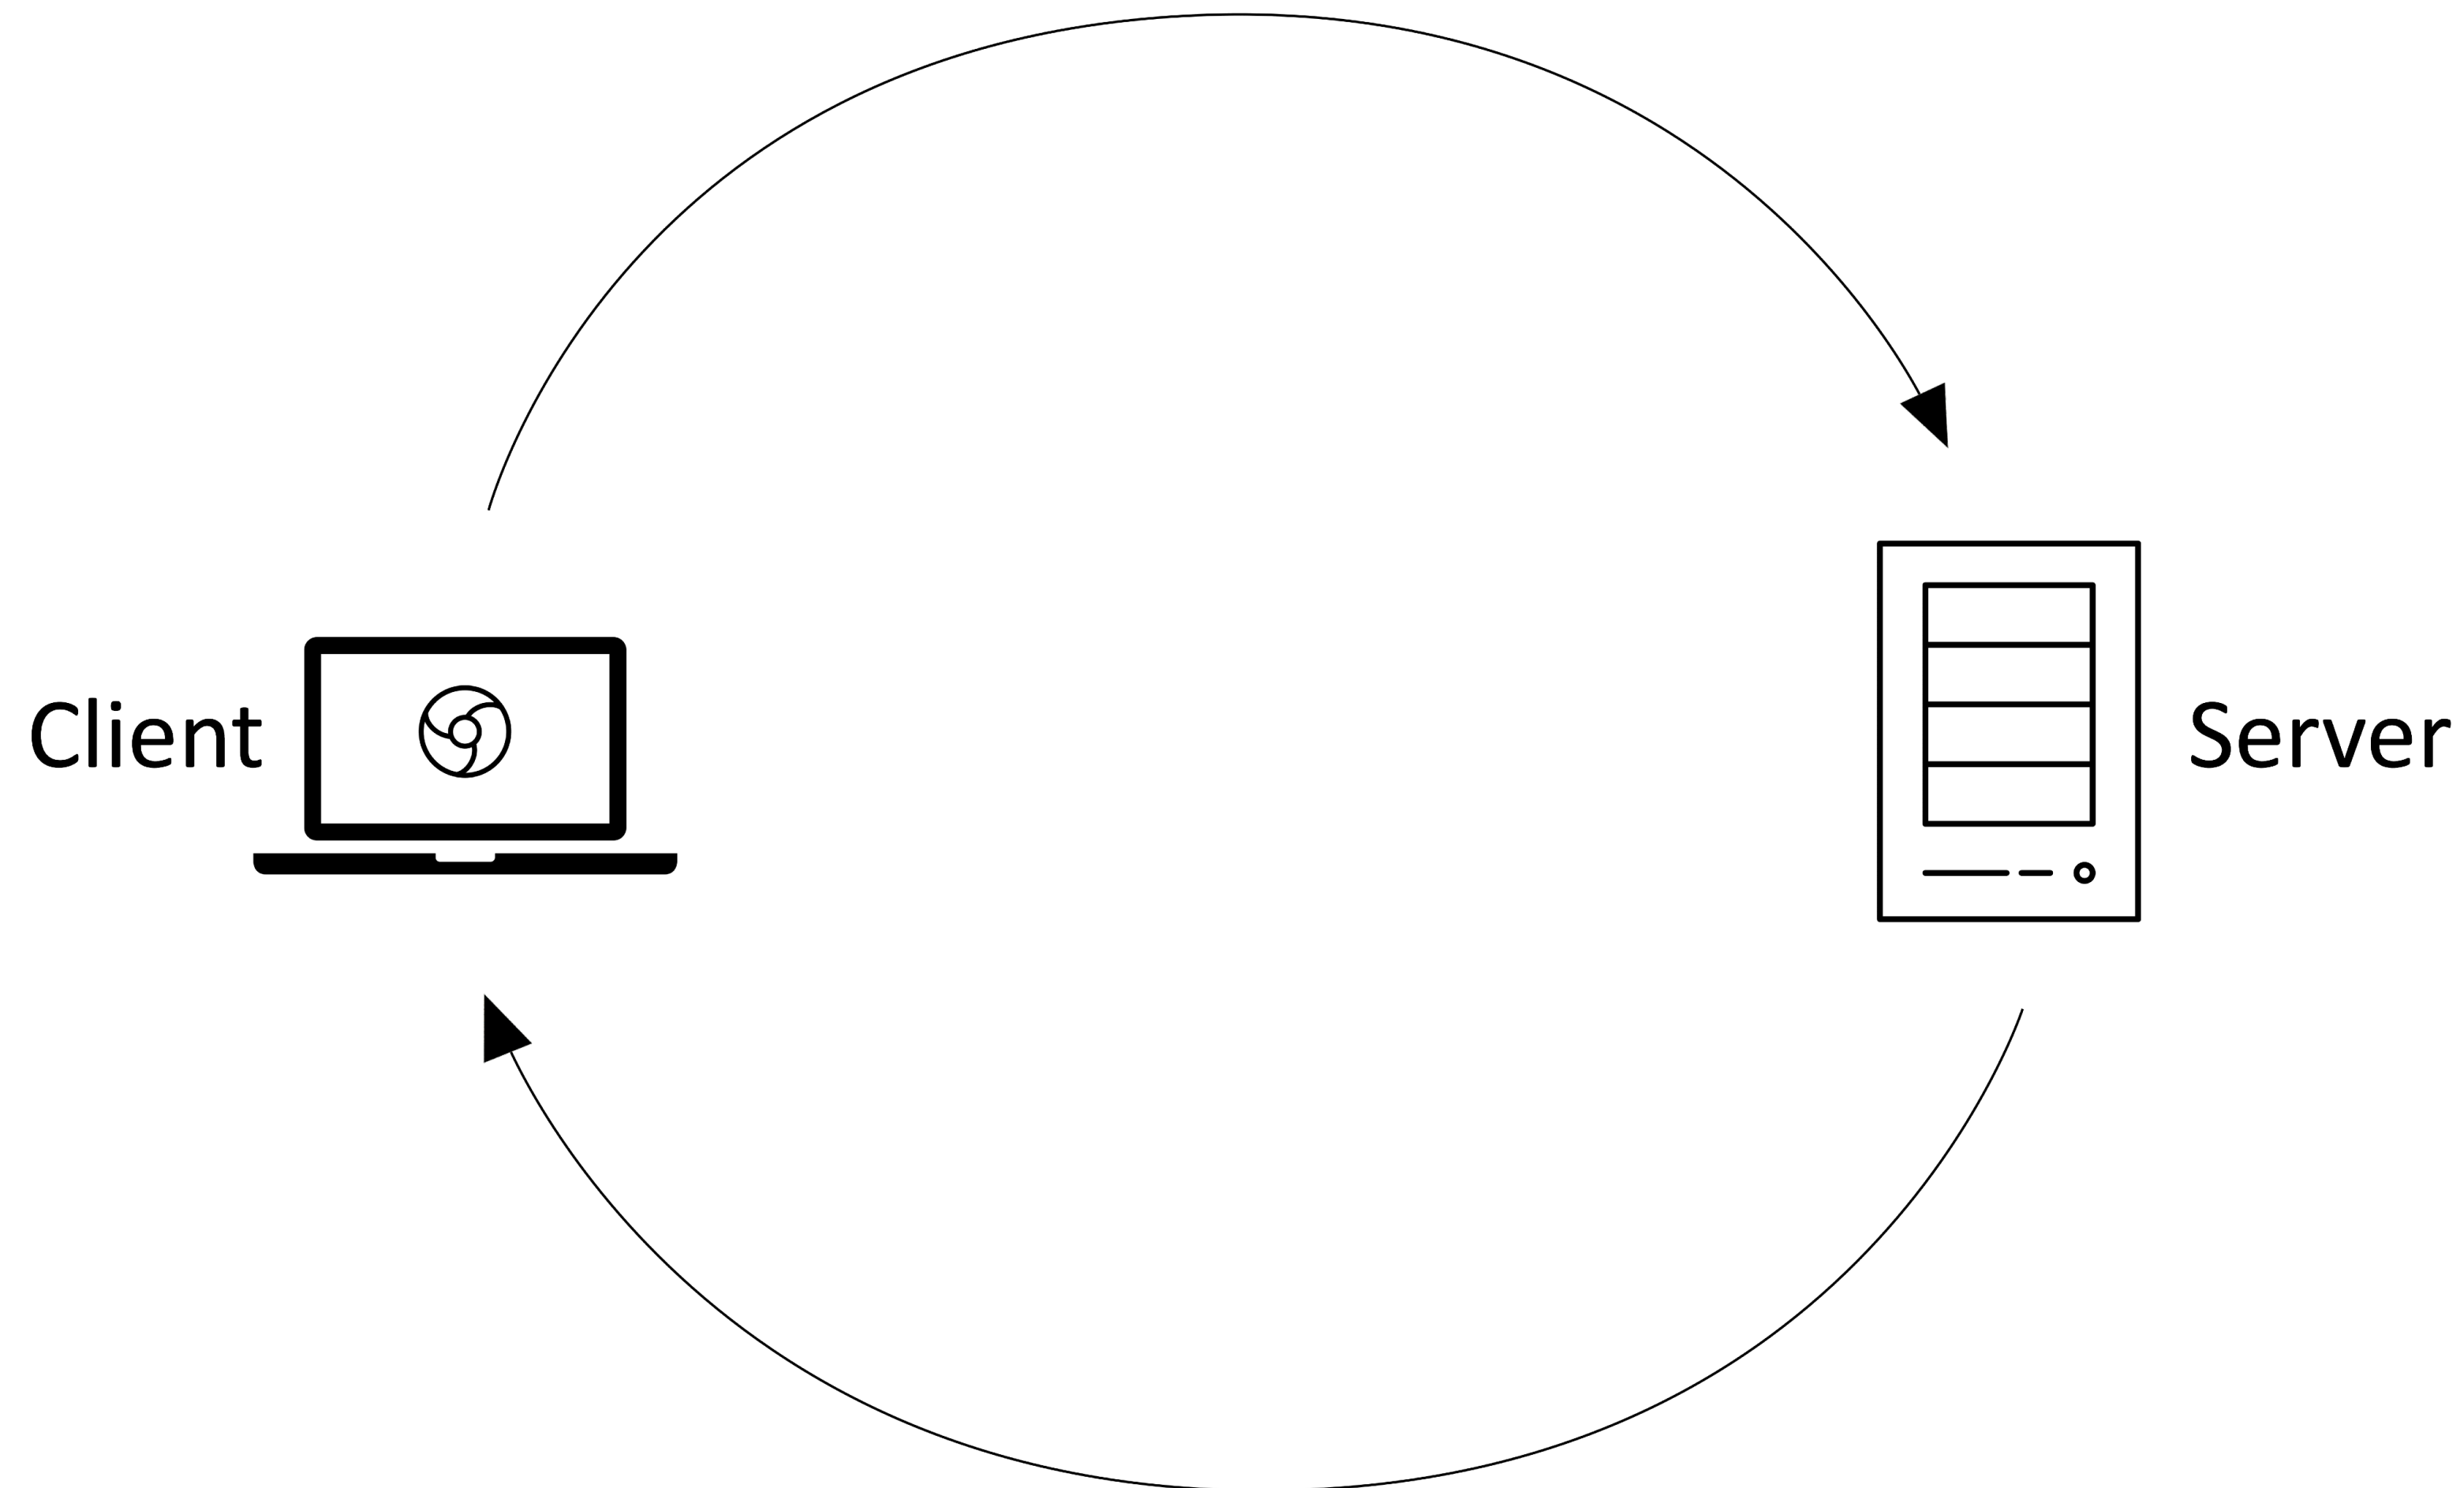

HTTP response with **HTML** file



Document Object Model

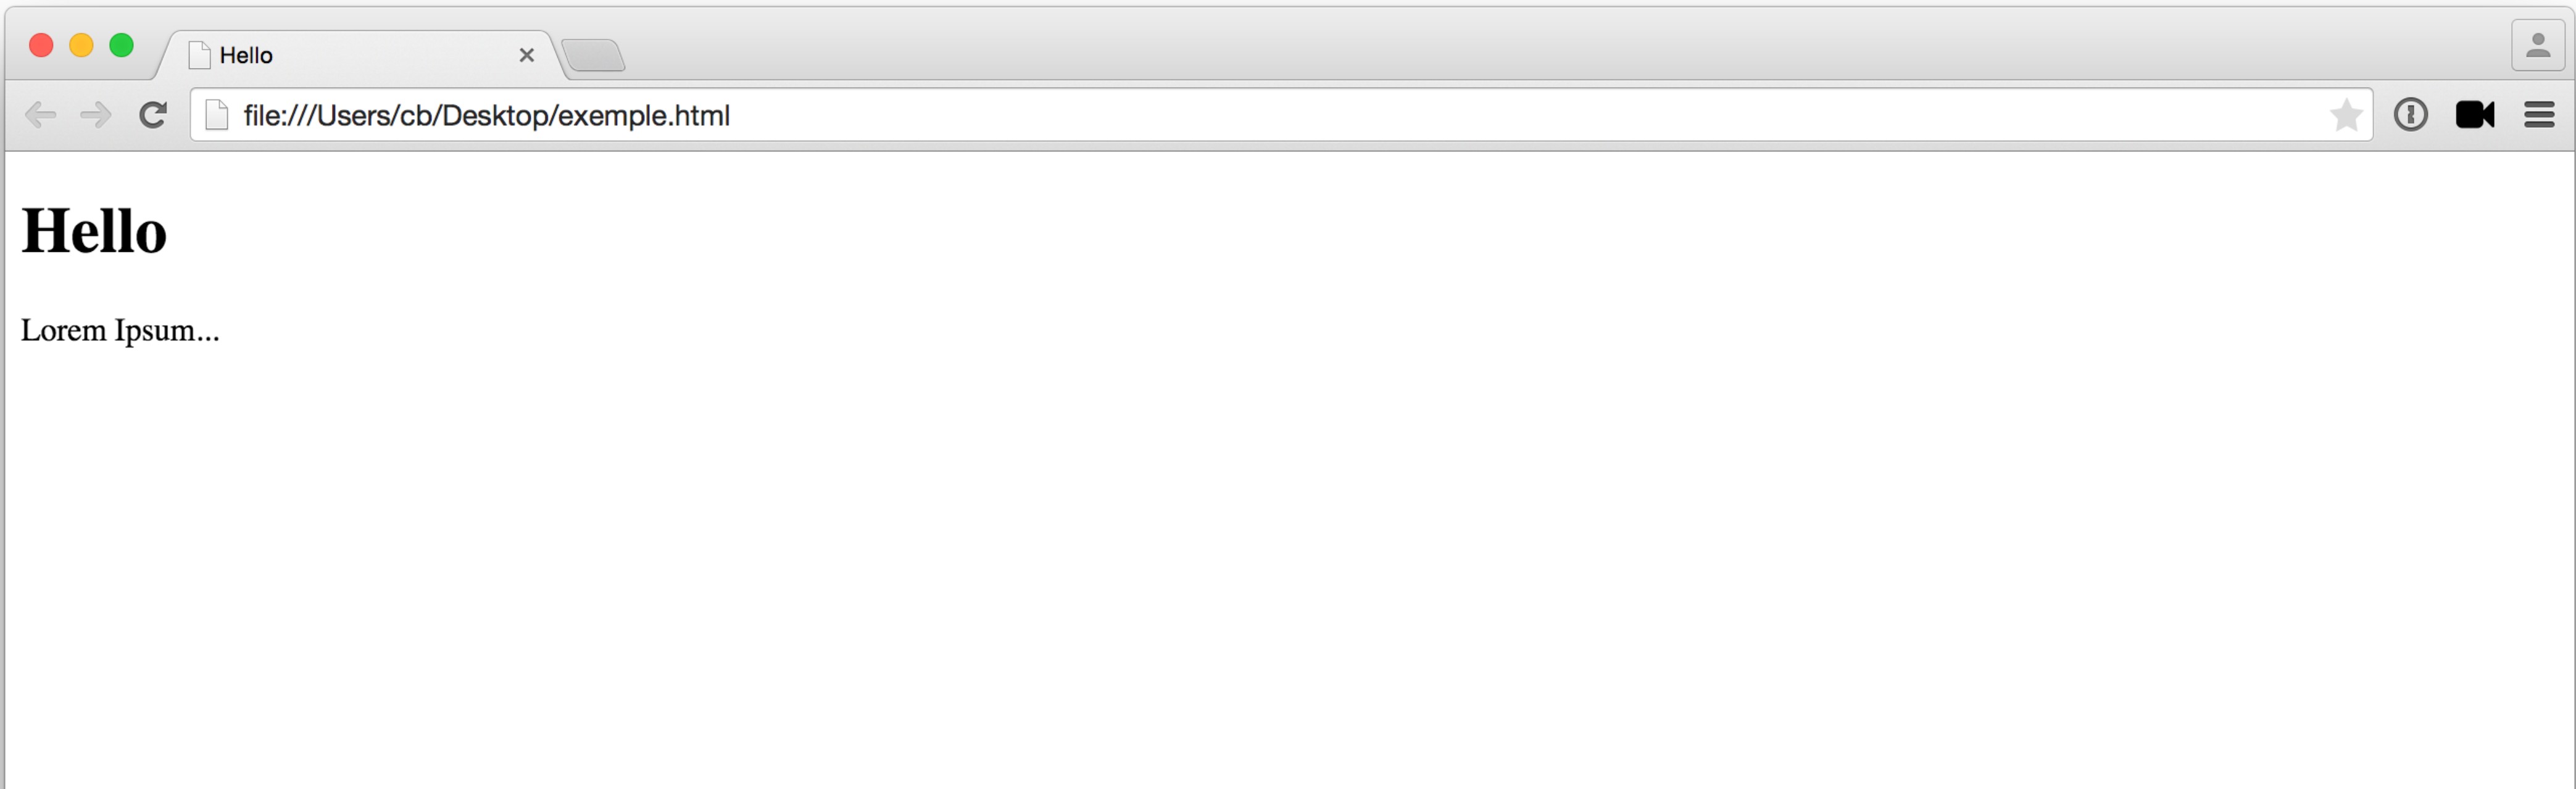

Q📄ElementsNetworkSourcesTimelineProfilesResourcesAuditsConsole

<!DOCTYPE html>
▼<html>
 ▼<head>
 <title>Hello</title>
 </head>
 ▼<body>
 <h1>
 Hello
 </h1>
 <p>
 Lorem Ipsum...
 </p>
 </body>
</html>

htmlbody

#

StylesComputedEvent Listeners»

element.style {
}

h1 {
 display: block;
 font-size: 2em;
 -webkit-margin-before: 0.67em;
 -webkit-margin-after: 0.67em;
 -webkit-margin-start: 0px;
 -webkit-margin-end: 0px;
 font-weight: bold;
}

margin21.440

border-

Find in Styles

`.hide()`

```
$(".target").hide();
```

`$(".target")`

```
<h1>  
  Hello
```

```
</h1>
```

```
<p>  
  Lorem Ipsum...
```

```
</p>
```

```
<p>  
  Autrum Ipsum...
```

```
</p>
```

p

```
$("p").hide();
```

```
<h1>
  Hello
</h1>
<div id="cart">
  [...]
</div>
<div>
  [...]
</div>
```

#cart

```
$("#cart").hide();
```

```
<div class="green">  
  Hello  
</h1>  
<div class="red">  
  [...]  
</div>  
<div class="red">  
  [...]  
</div>
```

.red

```
$(".red").hide();
```



```
<div id="cart" class="red">  
  [...]  
</div>
```

```
<div id="cart" class="red">  
  [...]  
</div>
```



```
$( "#cart" ).addClass( 'bold' );
```

```
<div id="cart" class="red">  
  [...]  
</div>
```



```
$("#cart").addClass('bold');
```



```
<div id="cart" class="bold red">  
  [...]  
</div>
```

```
<div id="cart" class="bold red">  
  [...]  
</div>
```



```
$( "#cart" ).removeClass( 'bold' );
```



```
<div id="cart" class="red">  
  [...]  
</div>
```

```
var john = {};
```

```
var john = new Object();
```