Pragmatics in CTSL - Norming for Feature Selection (ENGLISH)

```
## `summarise()` regrouping output by 'img_name' (override with `.groups` argument)
```

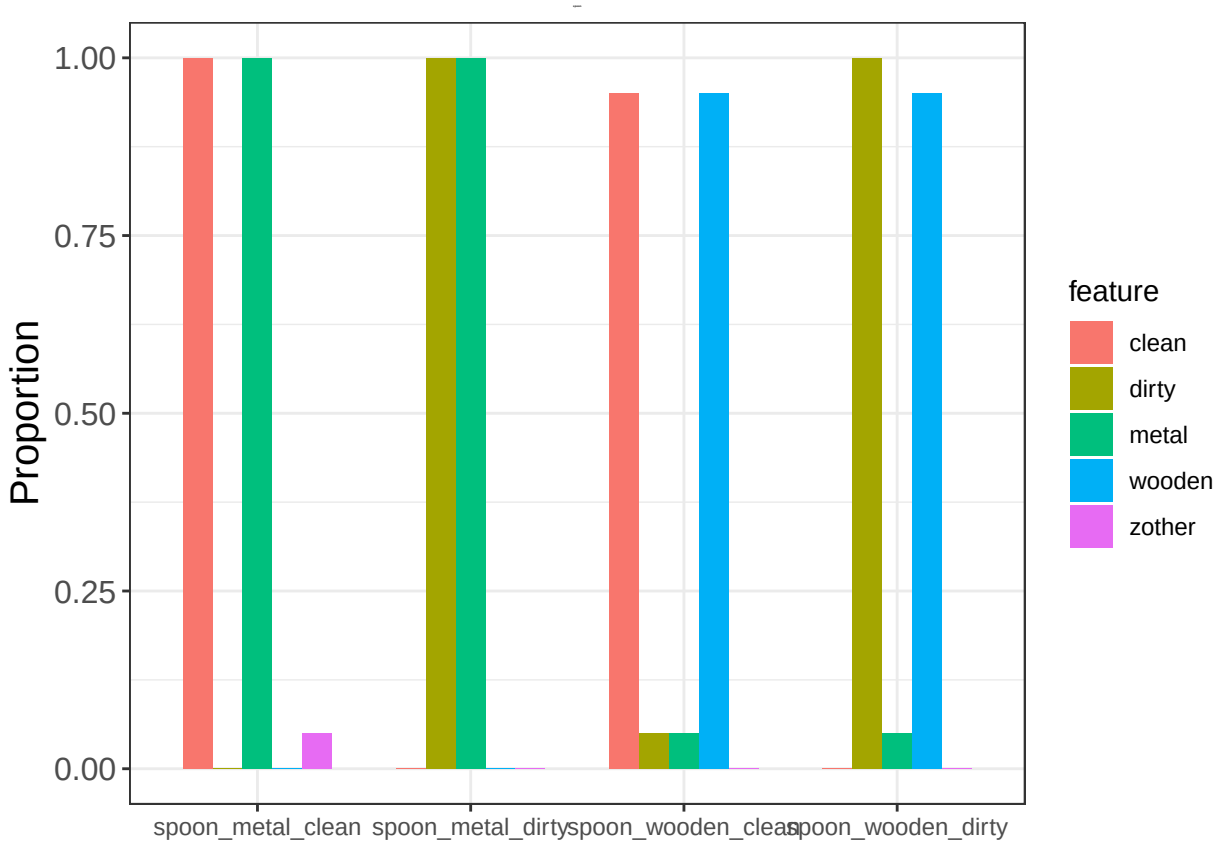


```
## `summarise()` regrouping output by 'img_name' (override with `.groups` argument)
```

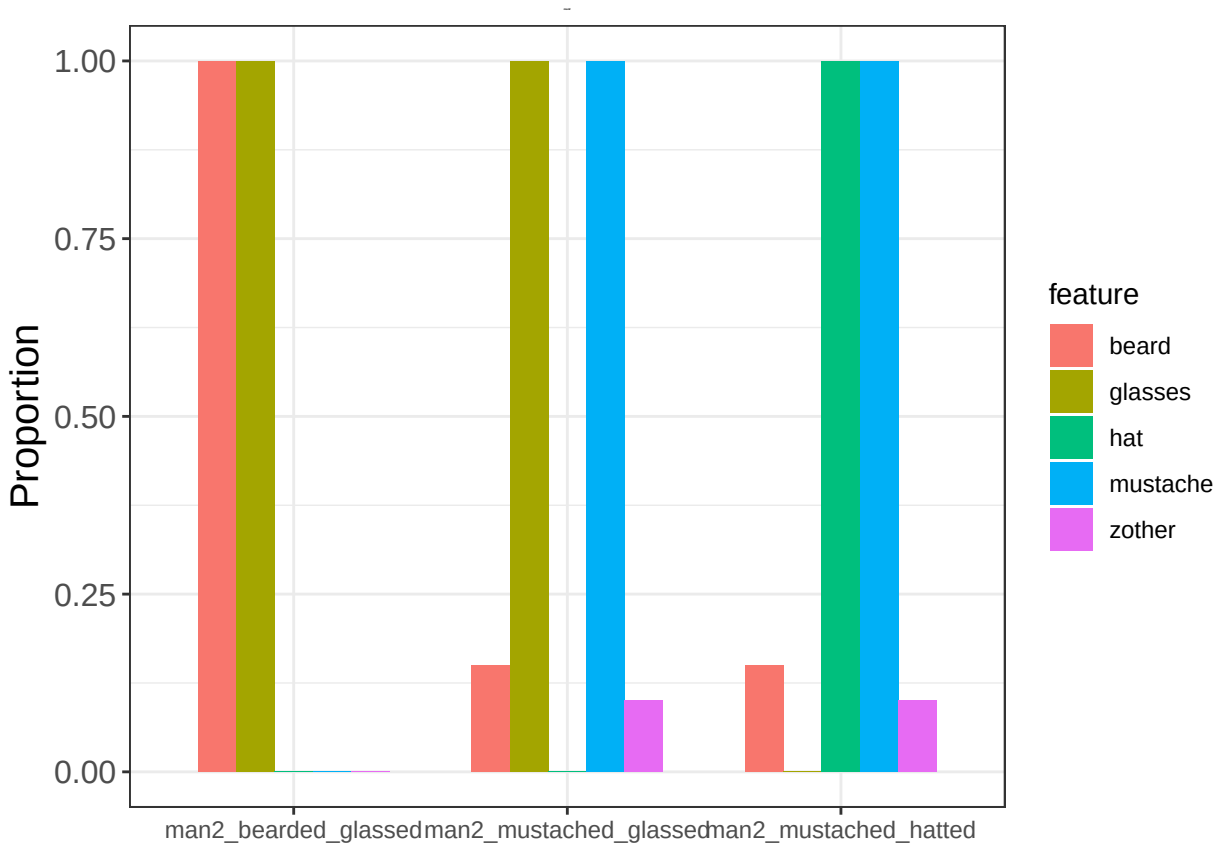


```
## `summarise()` regrouping output by 'img_name' (override with `.groups` argument)
```

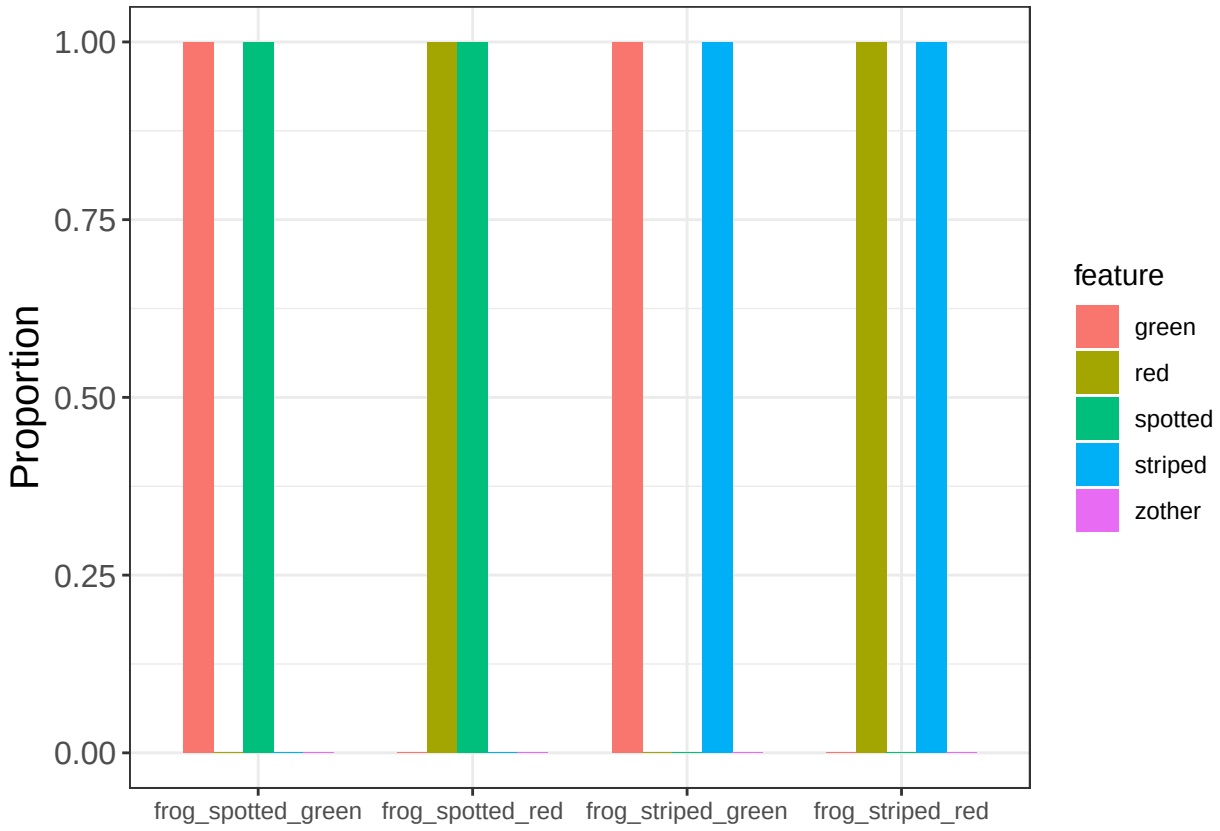


```
## `summarise()` regrouping output by 'img_name' (override with `.groups` argument)
```

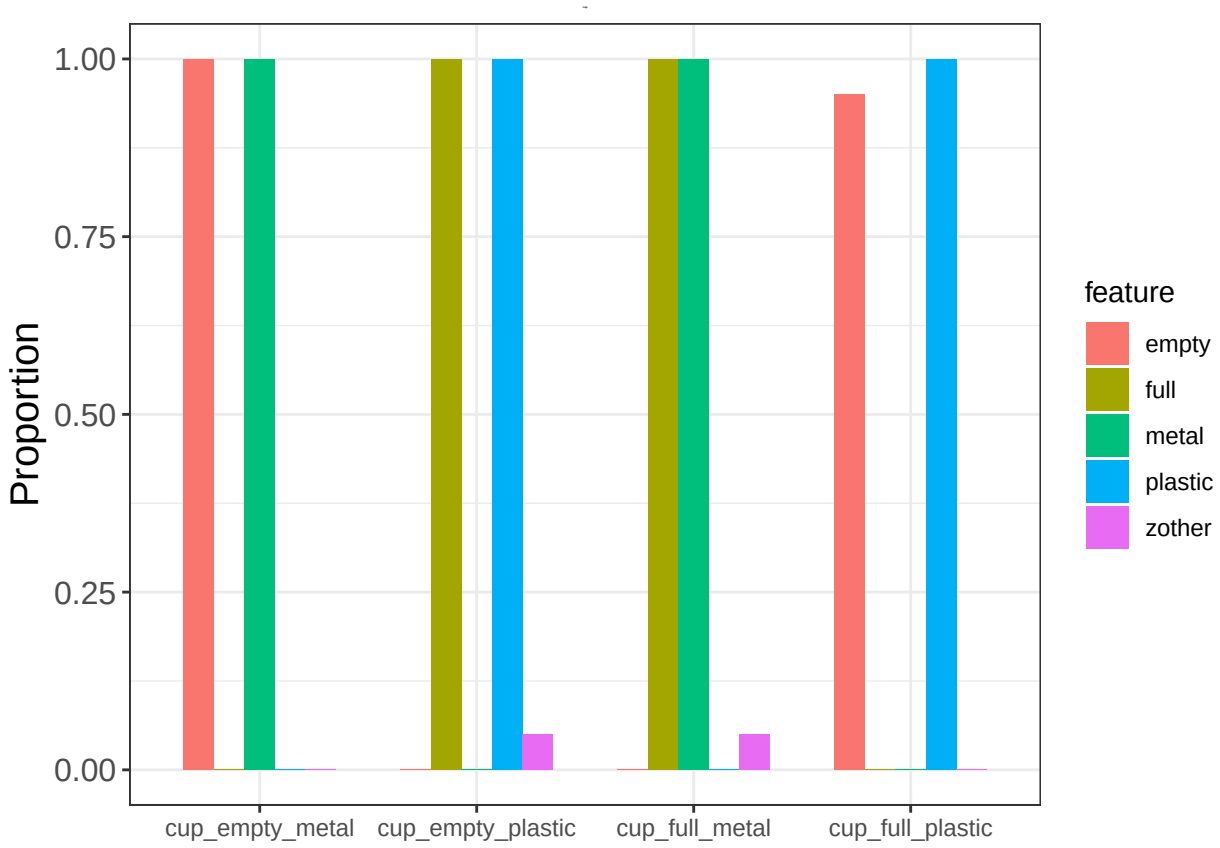


```
## `summarise()` regrouping output by 'img_name' (override with `.groups` argument)
```

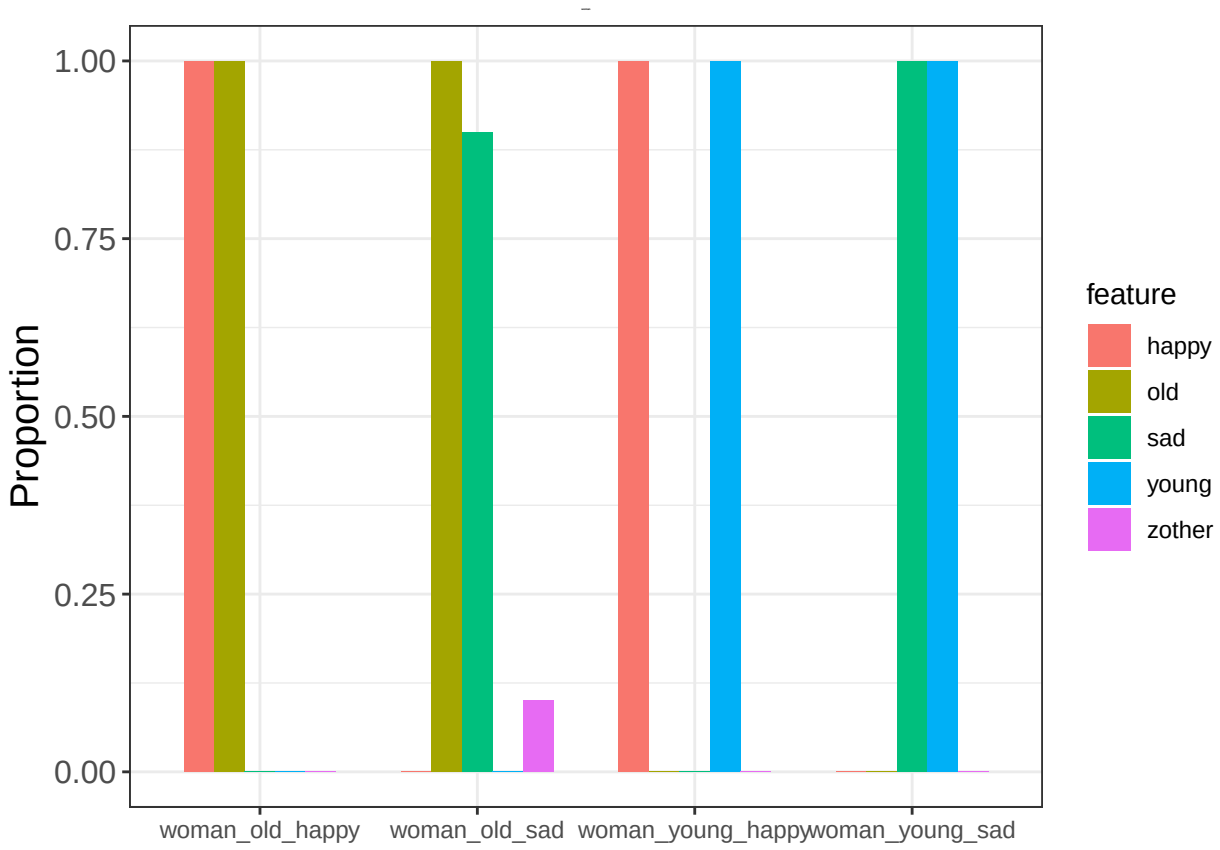


```
## `summarise()` regrouping output by 'img_name' (override with `.groups` argument)
```

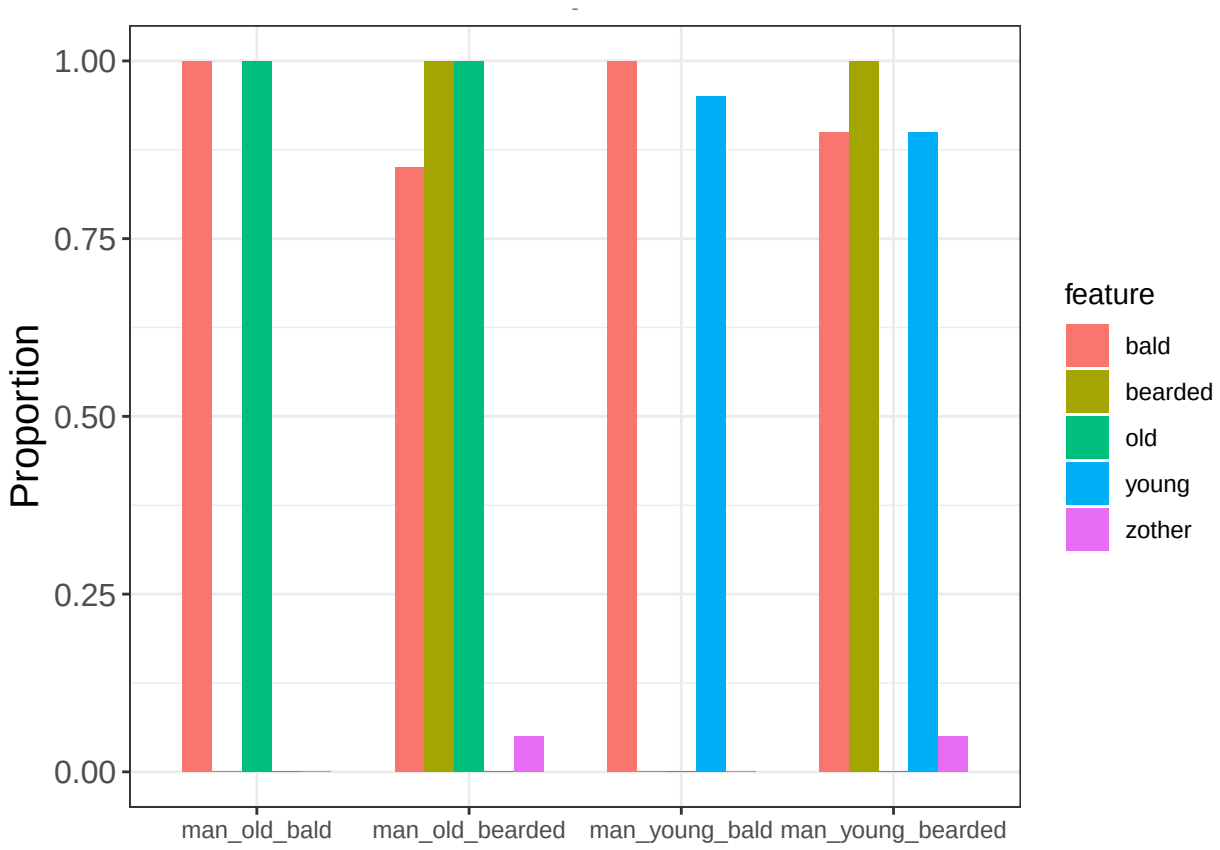


```
## `summarise()` regrouping output by 'img_name' (override with `.groups` argument)
```

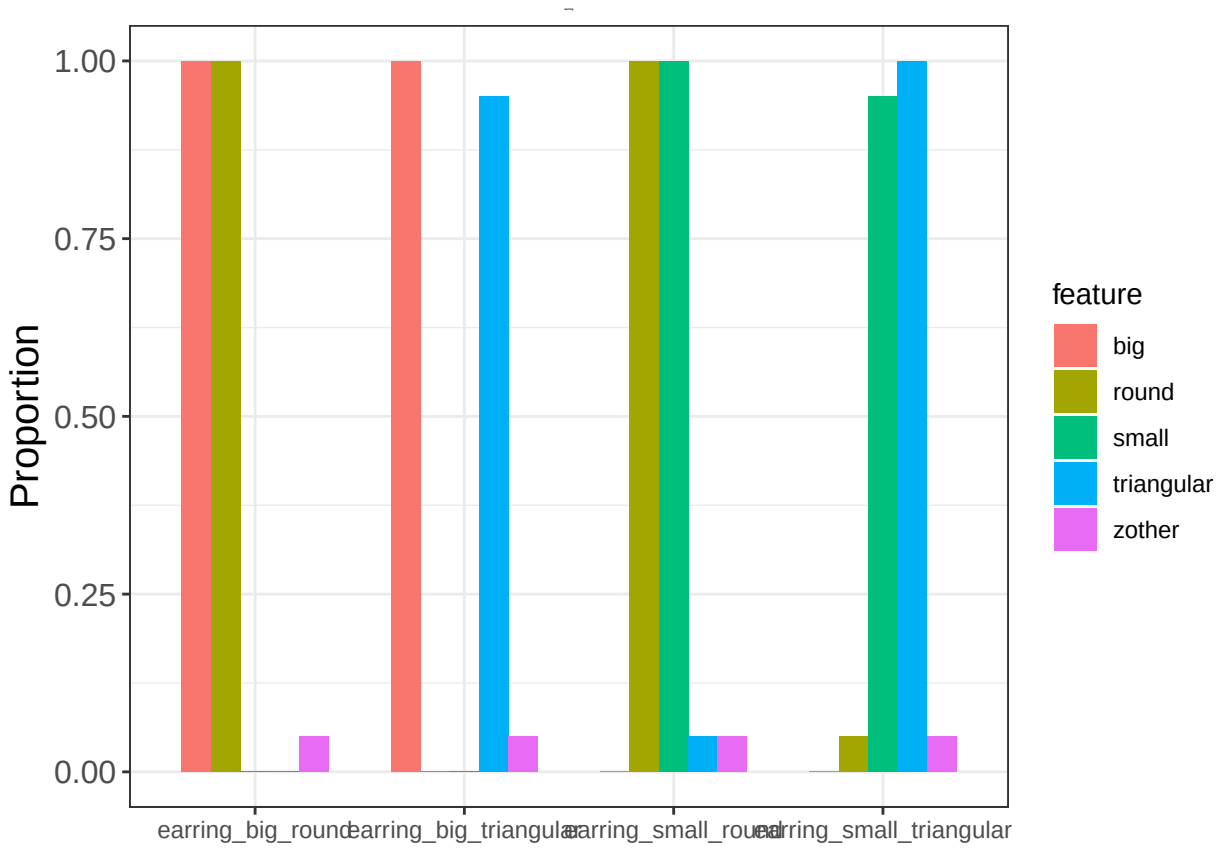


```
## `summarise()` regrouping output by 'img_name' (override with `.groups` argument)
```

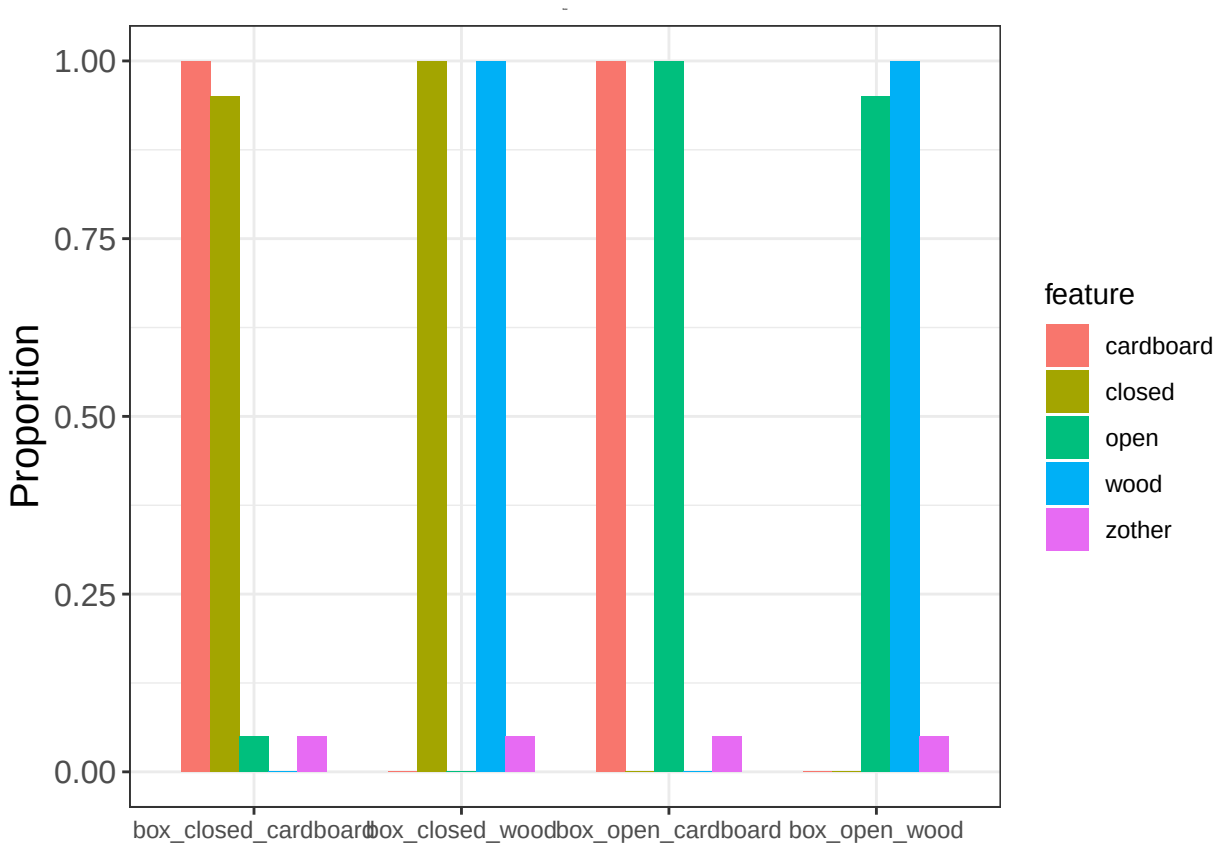


```
## `summarise()` regrouping output by 'img_name' (override with `.groups` argument)
```

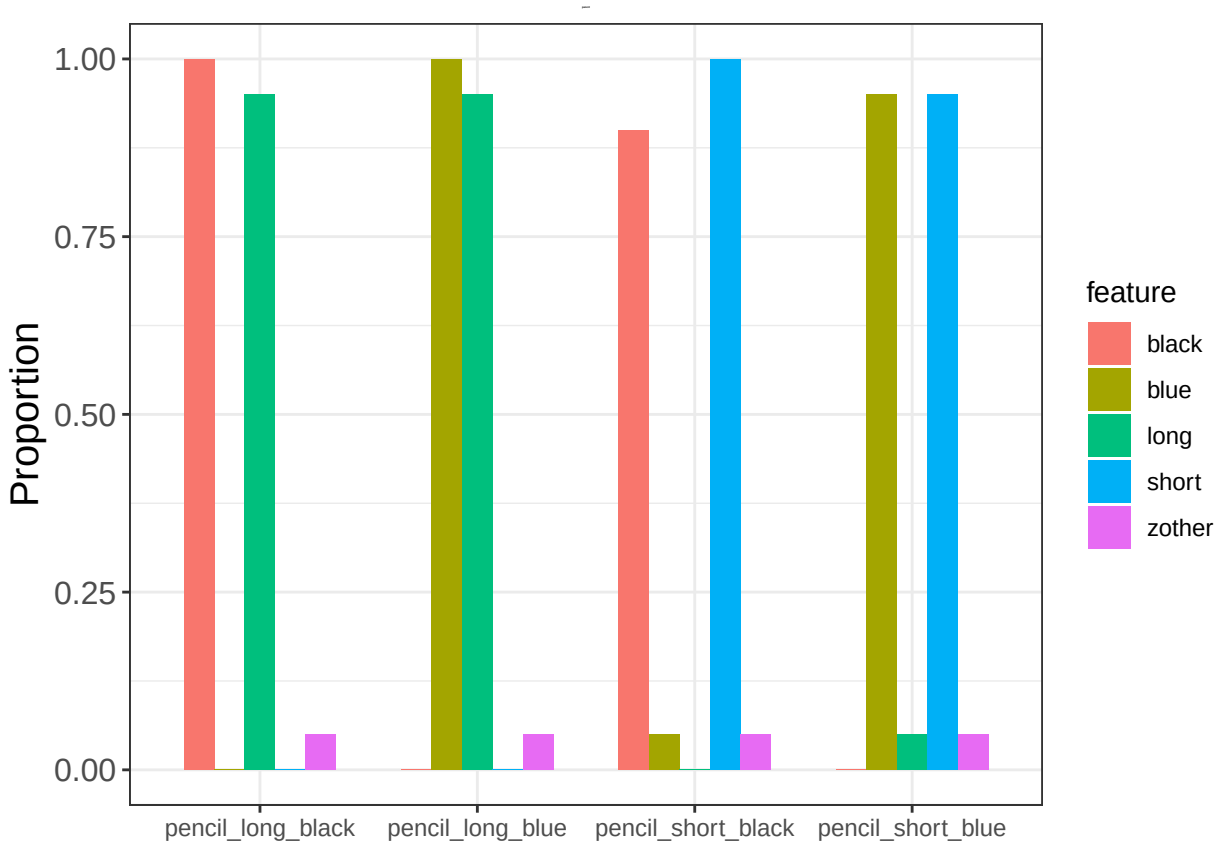


```
## `summarise()` regrouping output by 'img_name' (override with `.groups` argument)
```

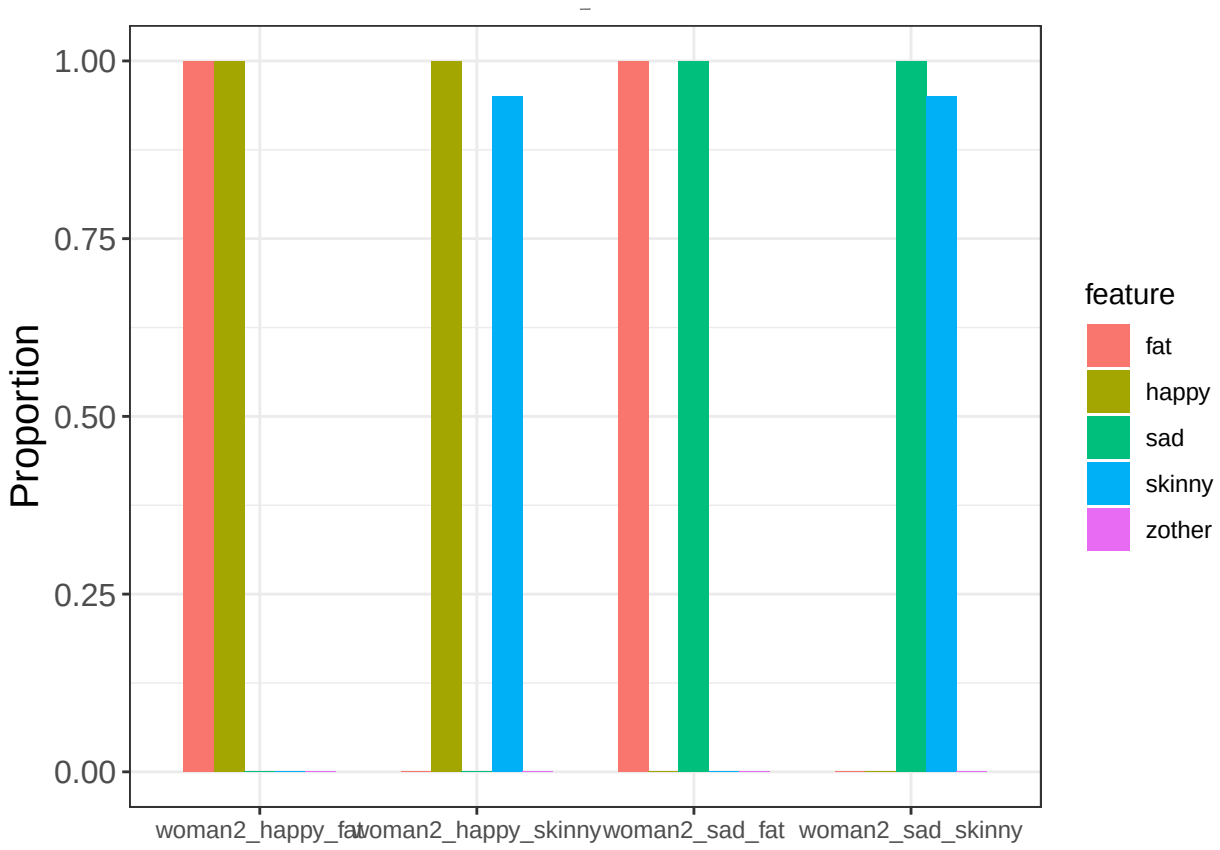


```
## `summarise()` regrouping output by 'img_name' (override with `.groups` argument)
```

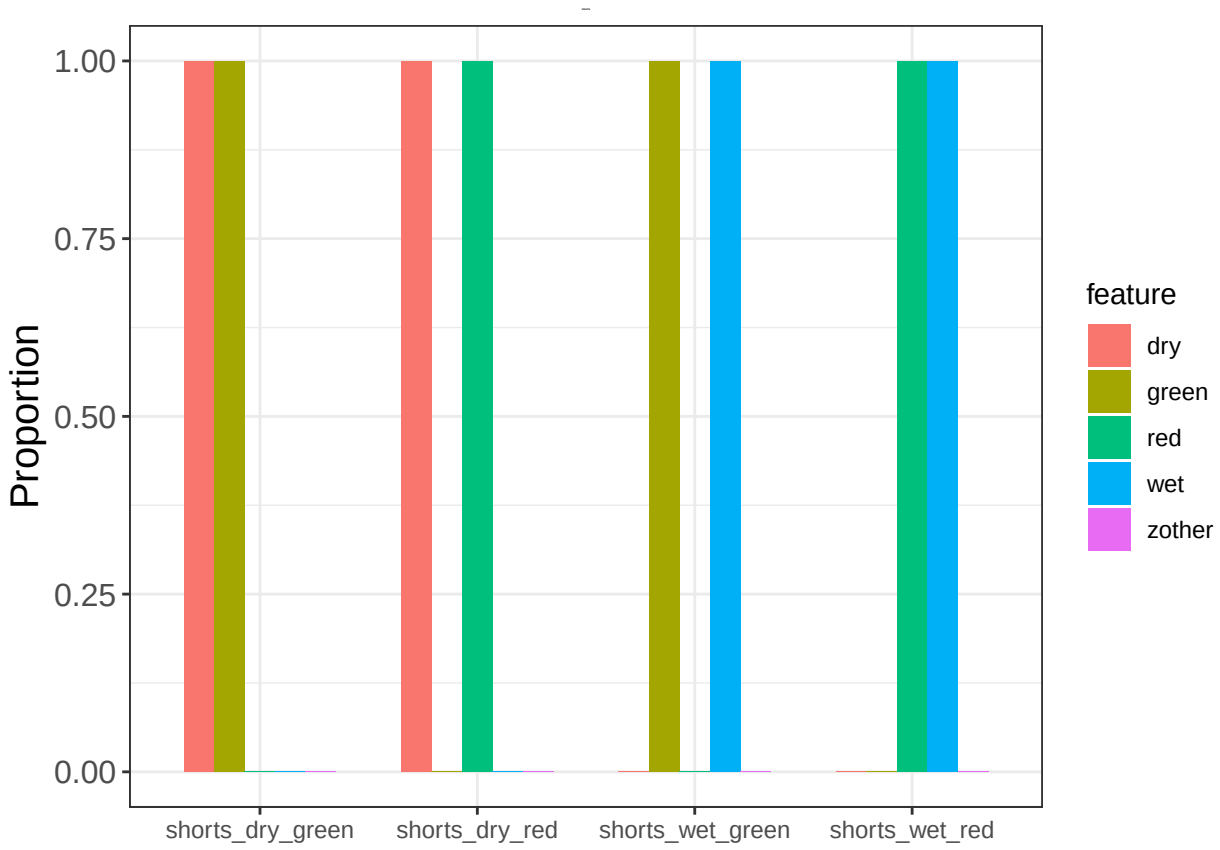


```
## `summarise()` regrouping output by 'img_name' (override with `.groups` argument)
```

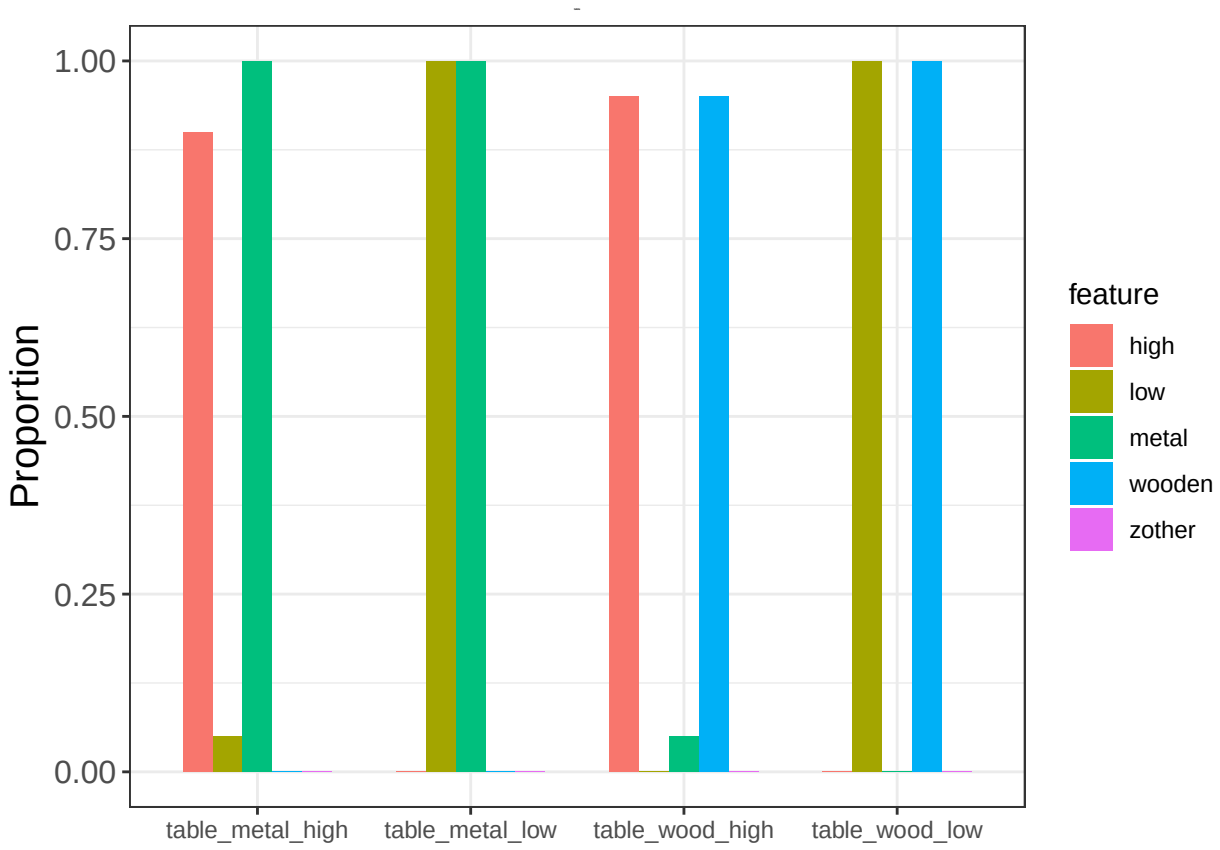


```
## `summarise()` regrouping output by 'img_name' (override with `.groups` argument)
```

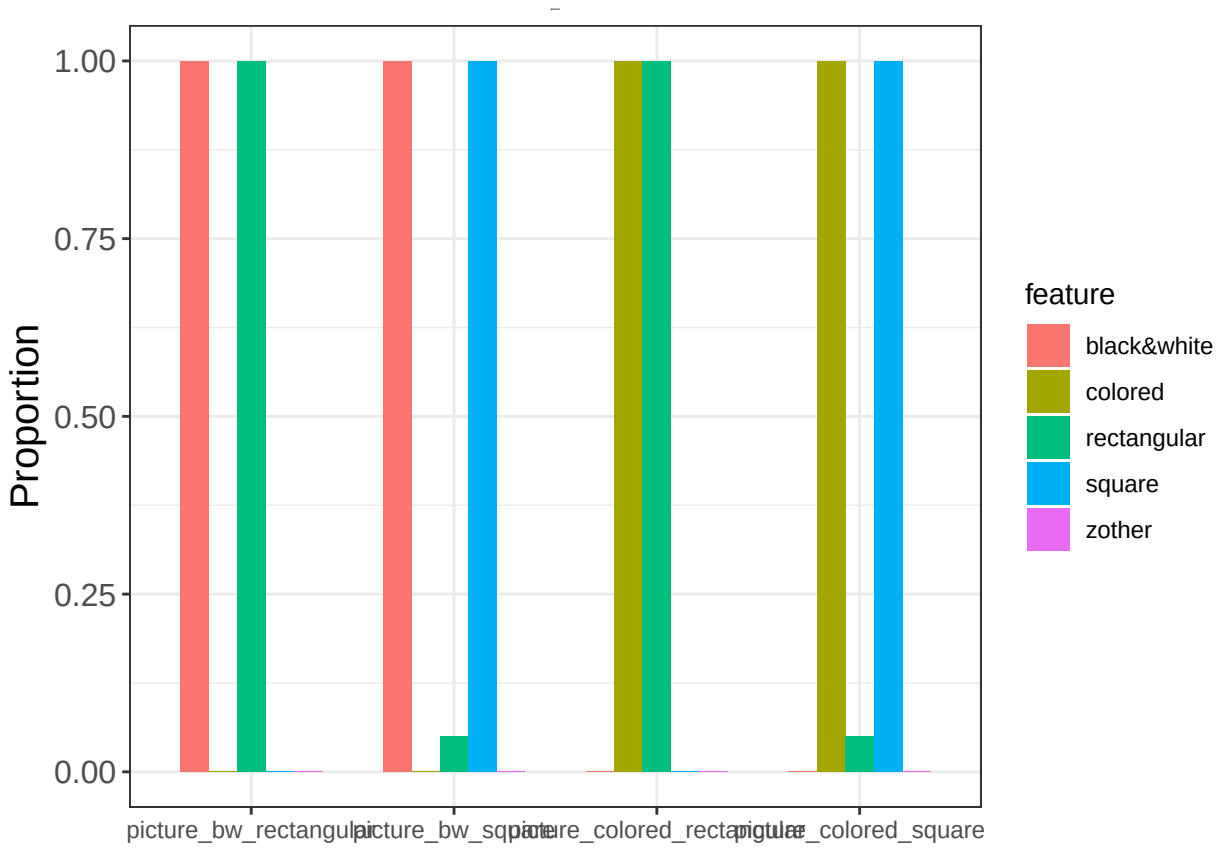


```
## `summarise()` regrouping output by 'img_name' (override with `.groups` argument)
```

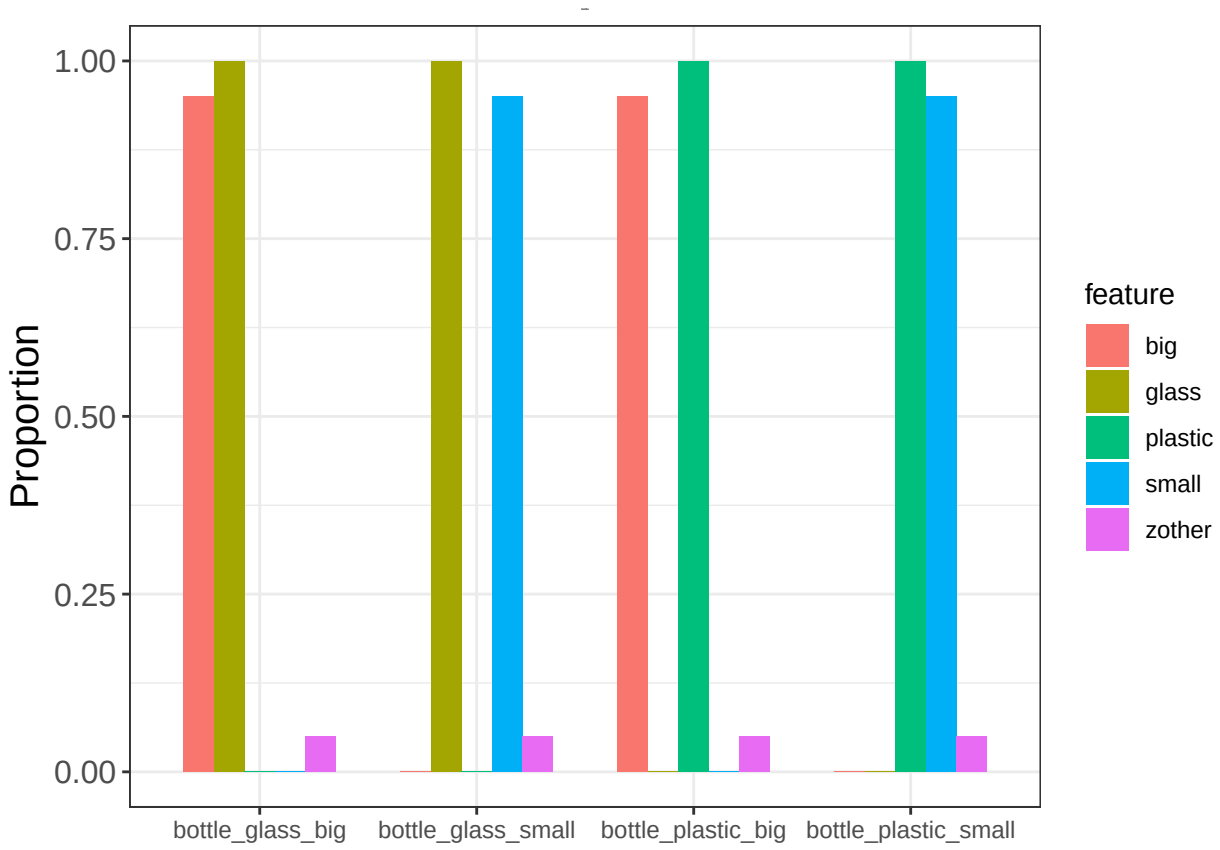


```
## `summarise()` regrouping output by 'img_name' (override with `.groups` argument)
```

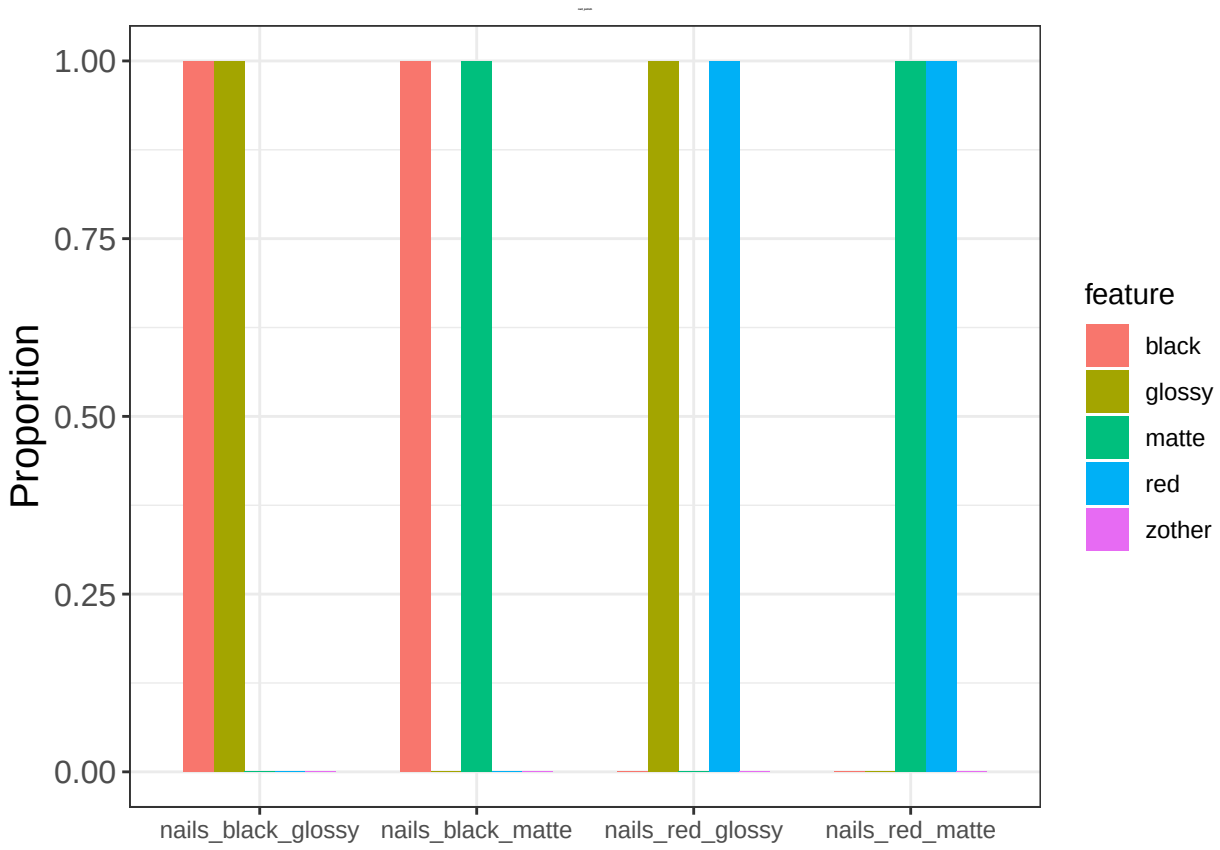


```
## `summarise()` regrouping output by 'img_name' (override with `.groups` argument)
```

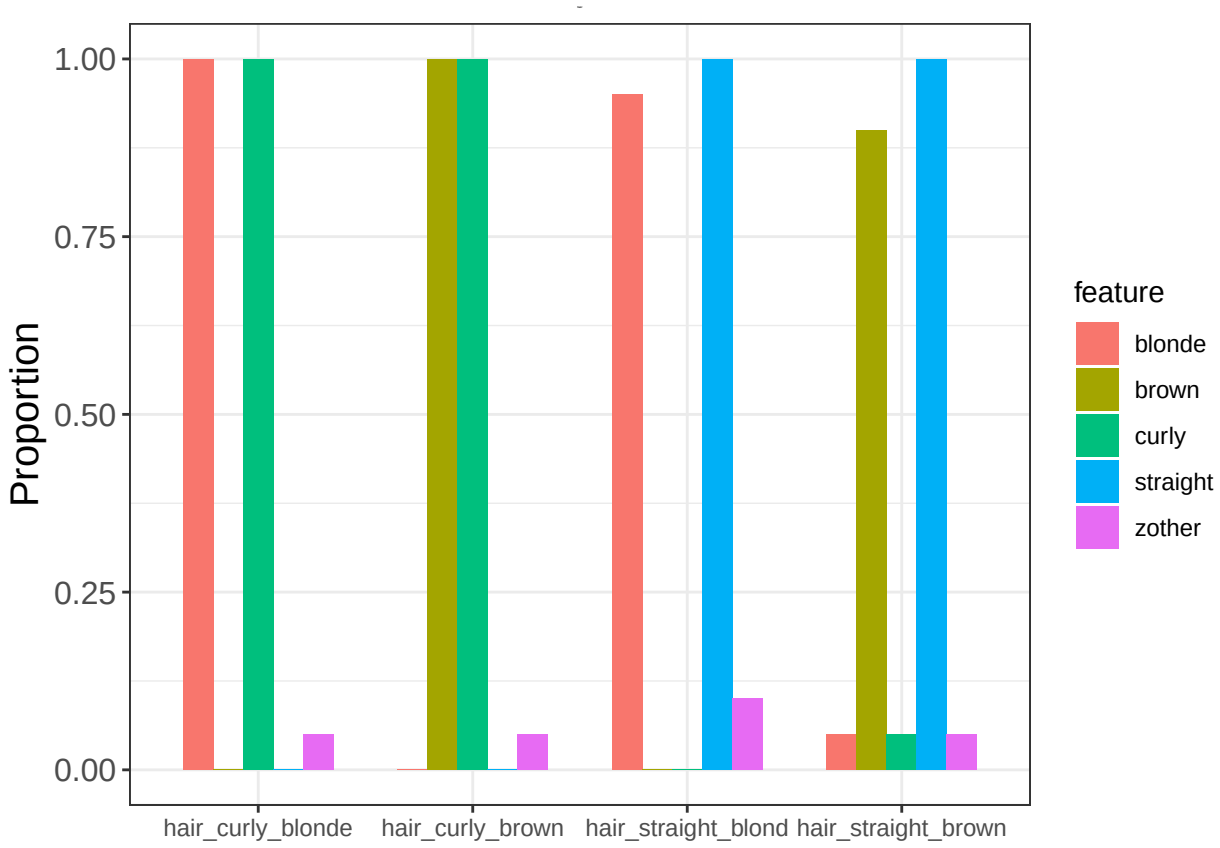
1.00
0.75
0.50
0.25
0.00
Proportion
hair_curly_blonde
hair_curly_brown
hair_straight_blond
hair_straight_brown
feature
blonde
brown
curly
straight
zother