

# Class 10: Structural Bioinformatics (pt1)

Linh Dang (PID: A16897764)

## Table of contents

The PDB Database . . . . .	1
2. Visualizing with Mol-star . . . . .	3
3. Using the bio3d package in R . . . . .	6
Visualization in R . . . . .	8
Predicting functional motions of a single structure . . . . .	8

## The PDB Database

The main repository of biomolecular structure data is called the [Protein Data Bank](#) (PDB for short). It is the second oldest database (after Genbank).

What is currently in the PDB? We can access current composition stats [here](#)

```
stats <- read.csv("Data Export Summary.csv")
head(stats)
```

	Molecular.Type	X.ray	EM	NMR	Multiple.methods	Neutron	Other
1	Protein (only)	171,959	18,083	12,622	210	84	32
2	Protein/Oligosaccharide	10,018	2,968	34	10	2	0
3	Protein/NA	8,847	5,376	286	7	0	0
4	Nucleic acid (only)	2,947	185	1,535	14	3	1
5	Other	170	10	33	0	0	0
6	Oligosaccharide (only)	11	0	6	1	0	4
	Total						
1	202,990						
2	13,032						
3	14,516						
4	4,685						

```
5      213
6       22
```

Q1: What percentage of structures in the PDB are solved by X-Ray and Electron Microscopy?

```
as.numeric(gsub(",", "", stats$X.ray))
```

```
[1] 171959 10018 8847 2947 170 11
```

```
x <- stats$X.ray
#Substitute comma for nothing
y <- gsub(",", "", x)
# convert to numeric
sum(as.numeric( y ))
```

```
[1] 193952
```

Turn this snippet into a function so I can use it any time I have this comma problem (i.e. the other columns of this `stats` table).

```
comma.sum <- function(x) {
  #Substitute comma for nothing
  y <- gsub(",", "", x)

  # convert to numeric and sum
  return( sum(as.numeric( y )) )
}
```

```
xray.sum <- comma.sum(stats$X.ray)
em.sum <- comma.sum(stats$EM)
total.sum <- comma.sum(stats$Total)
```

```
xray.sum/total.sum*100
```

```
[1] 82.37223
```

```
em.sum/total.sum*100
```

```
[1] 11.30648
```

Q2: What proportion of structures in the PDB are protein?

```
as.numeric(gsub(",", "", stats$Total[1]))/total.sum
```

```
[1] 0.862107
```

Q3: Type HIV in the PDB website search box on the home page and determine how many HIV-1 protease structures are in the current PDB?

SKIPPED

## 2. Visualizing with Mol-star

Explore the HIV-1 protease structure with PDB code: 1HSG Mol-star homepage at: <https://molstar.org/viewer/>.

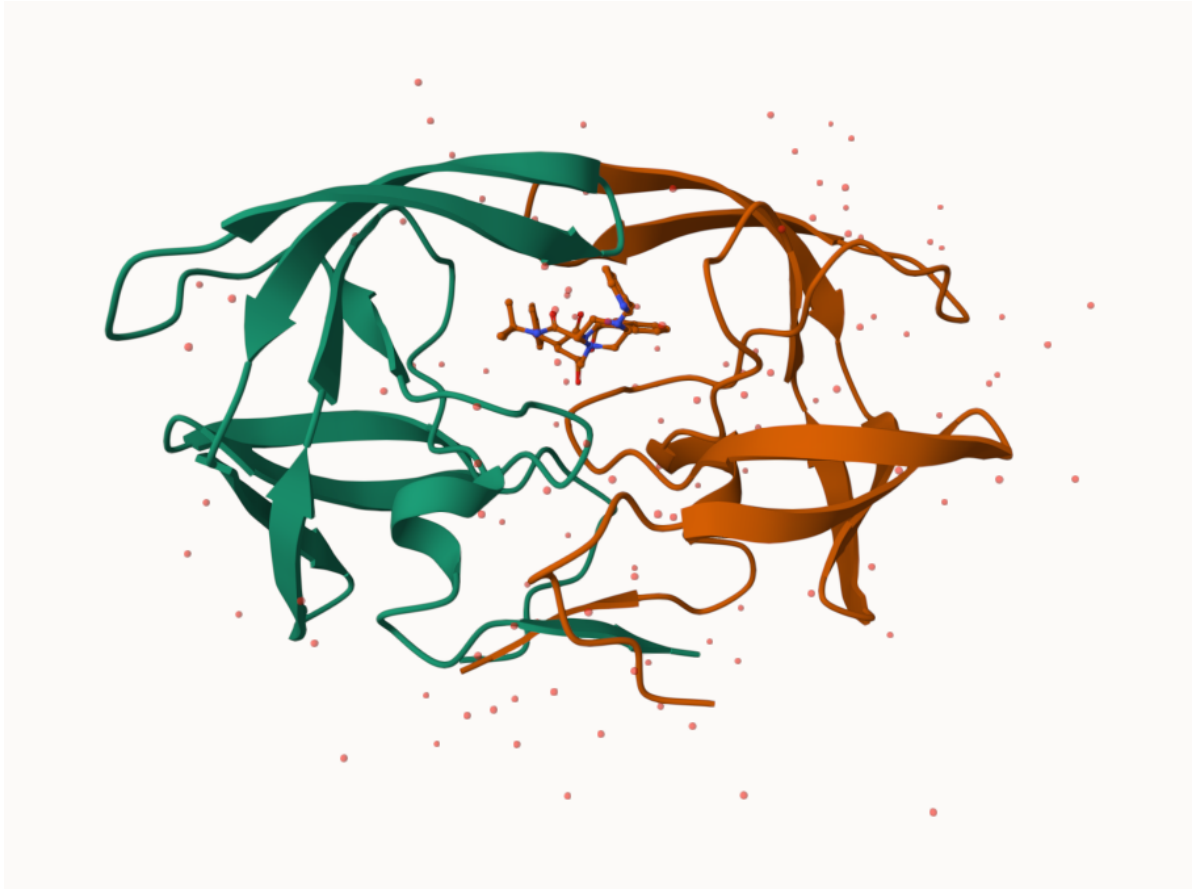


Figure 1: A first view of HIV-Pr

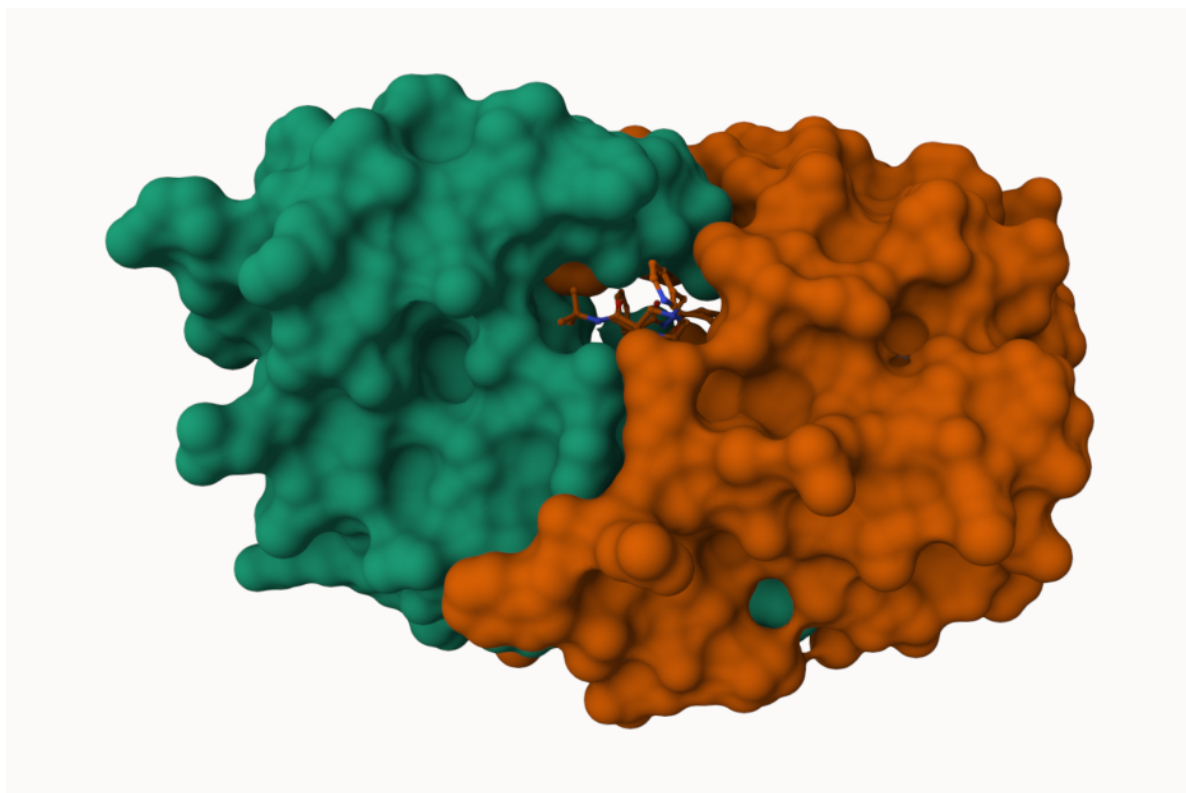


Figure 2: Molecular Structure

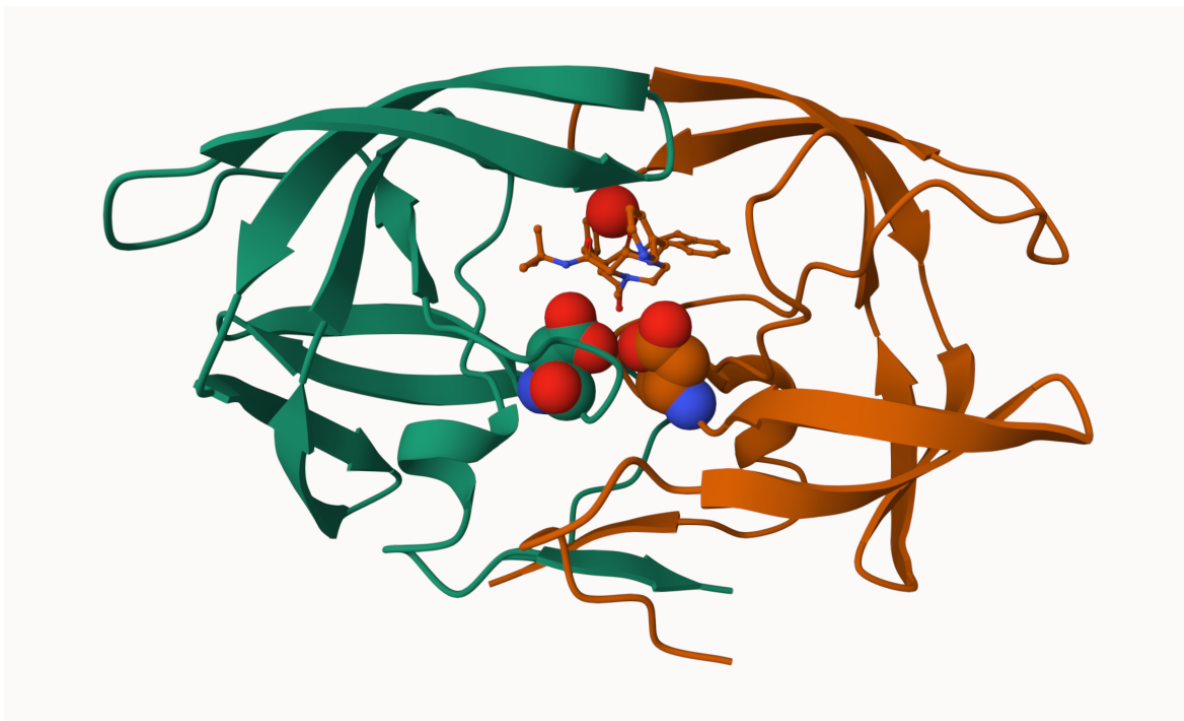


Figure 3: Interaction Structure

### 3. Using the bio3d package in R

The Bio3D package is focused in structural bioinformatics analysis and allows us to read and analyze PDB (and related) data.

```
library(bio3d)
```

```
pdb <- read.pdb("1hsg")
```

Note: Accessing on-line PDB file

```
pdb
```

```
Call: read.pdb(file = "1hsg")
```

```
Total Models#: 1
```

Total Atoms#: 1686, XYZs#: 5058 Chains#: 2 (values: A B)

Protein Atoms#: 1514 (residues/Calpha atoms#: 198)

Nucleic acid Atoms#: 0 (residues/phosphate atoms#: 0)

Non-protein/nucleic Atoms#: 172 (residues: 128)

Non-protein/nucleic resid values: [ HOH (127), MK1 (1) ]

Protein sequence:

```
PQITLWQRPLVTIKIGGQLKEALLDTGADDTVLEEMSLPGRWKPKMIGGIGGFIKVRQYD
QILIEICGHKAIGTVLVGPTPVNIIGRNLLTQIGCTLNFPQITLWQRPLVTIKIGGQLKE
ALLDTGADDTVLEEMSLPGRWKPKMIGGIGGFIKVRQYDQILIEICGHKAIGTVLVGPTP
VNIIGRNLLTQIGCTLNF
```

+ attr: atom, xyz, seqres, helix, sheet,  
calpha, remark, call

```
attributes(pdb)
```

\$names

```
[1] "atom" "xyz" "seqres" "helix" "sheet" "calpha" "remark" "call"
```

\$class

```
[1] "pdb" "sse"
```

We can see atom with `pdb$atom`:

```
head(pdb$atom)
```

	type	eleno	elety	alt	resid	chain	resno	insert	x	y	z	o	b
1	ATOM	1	N	<NA>	PRO	A	1	<NA>	29.361	39.686	5.862	1	38.10
2	ATOM	2	CA	<NA>	PRO	A	1	<NA>	30.307	38.663	5.319	1	40.62
3	ATOM	3	C	<NA>	PRO	A	1	<NA>	29.760	38.071	4.022	1	42.64
4	ATOM	4	O	<NA>	PRO	A	1	<NA>	28.600	38.302	3.676	1	43.40
5	ATOM	5	CB	<NA>	PRO	A	1	<NA>	30.508	37.541	6.342	1	37.87
6	ATOM	6	CG	<NA>	PRO	A	1	<NA>	29.296	37.591	7.162	1	38.40

	segid	elesy	charge
1	<NA>	N	<NA>
2	<NA>	C	<NA>
3	<NA>	C	<NA>
4	<NA>	O	<NA>

```
5 <NA>      C   <NA>
6 <NA>      C   <NA>
```

```
head( pdbseq(pdb) )
```

```
  1   2   3   4   5   6
"P" "Q" "I" "T" "L" "W"
```

## Visualization in R

We can make quick 3D viz with the `view.pdb()` function:

```
library(bio3dview)
library(NGLViewerR)

#view.pdb(pdb, backgroundColor="pink", colorScheme="sse")
```

```
sel <- atom.select(pdb, resno=25)

#view.pdb(pdb, cols = c("green", "orange"),
#         highlight = sel,
#         highlight.style="spacefill") |>
# setRock()
```

## Predicting functional motions of a single structure

We can finish off today with a bioinformatics prediction of the functional motions of a protein.

We will run a Normal Mode Analysis (NMA)

```
adk <- read.pdb("6s36")
```

```
Note: Accessing on-line PDB file
      PDB has ALT records, taking A only, rm.alt=TRUE
```

```
adk
```



```
Call: read.pdb(file = "6s36")
```

```
Total Models#: 1
```

```
Total Atoms#: 1898, XYZs#: 5694 Chains#: 1 (values: A)
```

```
Protein Atoms#: 1654 (residues/Calpha atoms#: 214)
```

```
Nucleic acid Atoms#: 0 (residues/phosphate atoms#: 0)
```

```
Non-protein/nucleic Atoms#: 244 (residues: 244)
```

```
Non-protein/nucleic resid values: [ CL (3), HOH (238), MG (2), NA (1) ]
```

```
Protein sequence:
```

```
MRIILLGAPGAGKGTQAQFIMEKYGIPQISTGDMLRAAVKSGSELGKQAKDIMDAGKLV  
TDELVIALVKERIAQEDCRNGFLLDGFPRTPQADAMKEAGINVDYVLEFDVPDELIVDKI  
VGRRVHAPSGRVYHVKFNPVKVEGKDDVTGEELTTRKDDQEETVRKRLVEYHQMTAPLIG  
YYSKEAEAGNTKYAKVDGTPVAEVRADLEKILG
```


```
+ attr: atom, xyz, seqres, helix, sheet,  
      calpha, remark, call
```

```
m <- nma(adk)
```

```
Building Hessian... Done in 0.022 seconds.
```

```
Diagonalizing Hessian... Done in 0.464 seconds.
```

```
plot(m)
```

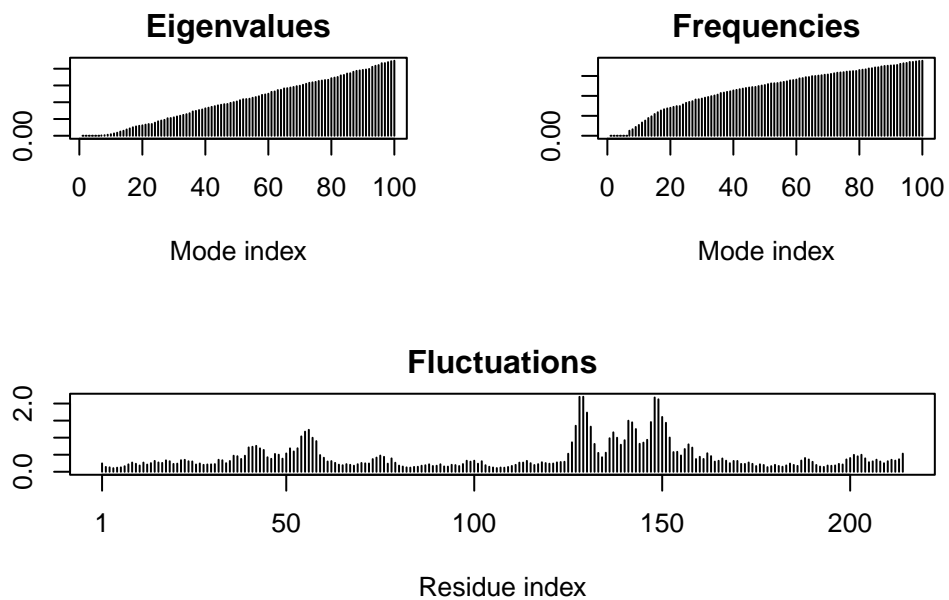

```
#view.nma(m)
```

We can write out a trajectory of the predicted dynamics and view this in Mol-star

```
mktrj(m, file="nma.pdb")
```