Machine-Level Programming IV: Data

Introduction to Computer Systems 7th Lecture, Sep. 29, 202

Instructors:

Class 1: Chen Xiangqun, Liu Xianhua

Class 2: Guan Xuetao

Class 3: Lu Junlin

Today

Arrays

- One-dimensional
- Multi-dimensional (nested)
- Multi-level

Structures

- Allocation
- Access
- Alignment


■ Floating Point

Array Allocation

Basic Principle

```
T A[L];
```

- Array of data type T and length L
- Contiguously allocated region of L * sizeof (T) bytes in memory

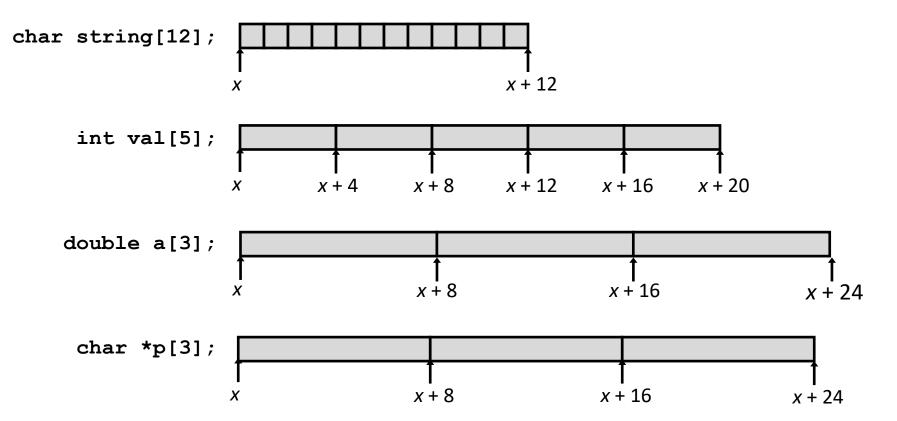

Array Access

■ Basic Principle

```
T A[L];
```

- Array of data type T and length L
- Identifier A can be used as a pointer to array element 0: Type T*

■ Reference Type Value

```
val[4] int
val int *
val+1 int *
&val[2] int *
val[5] int
*(val+1) int
val + i int *
```

Array Access

■ Basic Principle

```
T A[L];
```

- Array of data type T and length L
- Identifier A can be used as a pointer to array element 0: Type T*

```
■ Reference
                Type
                              Value
  val[4]
                int
                int *
  val
  val+1
                int *
  &val[2]
                int *
  val[5]
                int
  * (val+1)
                int
  val + i
                int *
```

Array Access

■ Basic Principle

```
T A[L];
```


- Array of data type T and length L
- Identifier A can be used as a pointer to array element 0: Type T*

Reference	Type	Value
val[4]	int	3
val	int *	x
val+1	int *	x + 4
&val[2]	int *	x + 8
val [5]	int	??
* (val+1)	int	5 //val[1]
val + <i>i</i>	int *	x + 4 * i //&val[i]

Array Example


```
#define ZLEN 5
typedef int zip_dig[ZLEN];

zip_dig cmu = { 1, 5, 2, 1, 3 };
zip_dig mit = { 0, 2, 1, 3, 9 };
zip_dig ucb = { 9, 4, 7, 2, 0 };
```

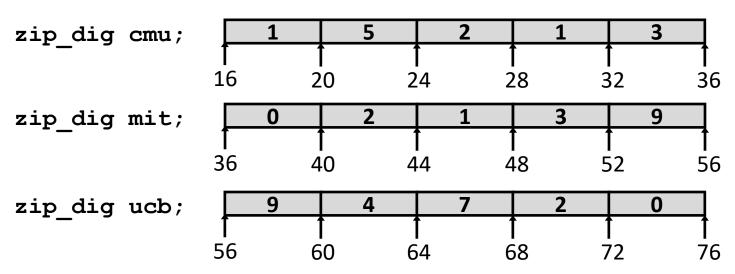

- Declaration "zip dig cmu" equivalent to "int cmu[5]"
- Example arrays were allocated in successive 20 byte blocks
 - Not guaranteed to happen in general

Array Accessing Example



```
int get_digit
  (zip_dig z, int digit)
{
  return z[digit];
}
```

IA32

```
# %rdi = z
# %rsi = digit
movl (%rdi, %rsi, 4), %eax # z[digit]
```

- Register %rdi contains starting address of array
- Register %rsi contains array index
- Desired digit at %rdi + 4*%rsi
- Use memory reference (%rdi,%rsi,4)

Array Loop Example

```
void zincr(zip_dig z) {
   size_t i;
   for (i = 0; i < ZLEN; i++)
    z[i]++;
}</pre>
```

```
# %rdi = z
 movl $0, %eax
                         \# i = 0
                         # goto middle
 jmp .L3
.L4:
                         # loop:
 addl $1, (%rdi,%rax,4) # z[i]++
 addq $1, %rax
                         # 1++
.L3:
                         # middle
 cmpq $4, %rax
                         # i:4
                         # if <=, goto loop</pre>
 jbe .L4
 rep; ret
```

Multidimensional (Nested) Arrays

Declaration

 $T \mathbf{A}[R][C];$

- 2D array of data type T
- R rows, C columns
- Type T element requires K bytes


Array Size

R * C * K bytes


Arrangement

Row-Major Ordering

int A[R][C];

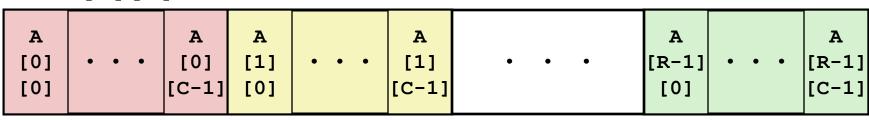


4*R*C Bytes

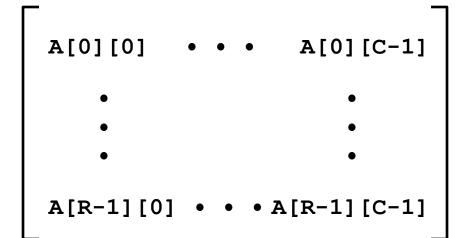

Nested Array Example

```
#define PCOUNT 4
zip_dig pgh[PCOUNT] =
   {{1, 5, 2, 0, 6},
    {1, 5, 2, 1, 3},
    {1, 5, 2, 1, 7},
    {1, 5, 2, 2, 1 }};
```

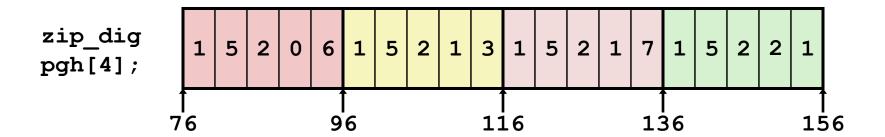



- "zip dig pgh[4]" equivalent to "int pgh[4][5]"
 - Variable pgh: array of 4 elements, allocated contiguously
 - Each element is an array of 5 int's, allocated contiguously
- "Row-Major" ordering of all elements in memory

Nested Array Row Access

Row Vectors

- A[i] is array of C elements
- Each element of type T requires K bytes
- Starting address A + i * (C * K)



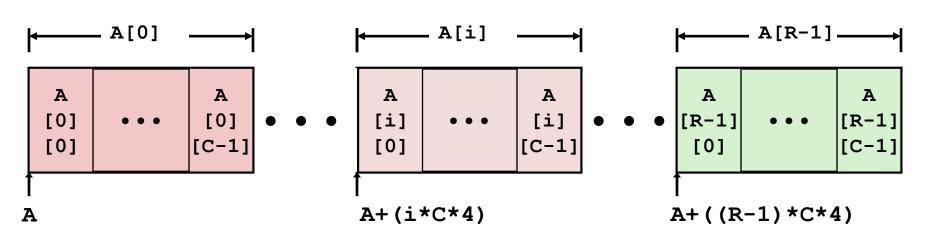

Nested Array Row Access Code

```
pgh

# %rdi = index
leag (%rdi %rdi 4) %rax # 5 * index

1 5 2 0 6 1 5 2 1 3 1 5 2 1 7 1 5 2 2 1

int *get_pgh_zip(int index)
{
    return pgh[index];
}
```

```
# %rd1 = index
leaq (%rdi,%rdi,4),%rax # 5 * index
leaq pgh(,%rax,4),%rax # pgh + (20 * index)
```

Row Vector

- pgh[index] is array of 5 int's
- Starting address pgh+20*index

Machine Code

- Computes and returns address
- Compute as pgh + 4* (index+4*index)

Nested Array Element Access

- Array Elements
 - **A[i][j]** is element of type *T*, which requires *K* bytes
 - Address **A** + i * (C * K) + j * K = A + (i * C + j) * K

A+(i*C*4)+(j*4)

Nested Array Element Access Code

```
leaq (%rdi,%rdi,4), %rax # 5*index
addl %rax, %rsi # 5*index+dig
movl pgh(,%rsi,4), %eax # M[pgh + 4*(5*index+dig)]
```

Array Elements


- pgh[index][dig] is int
- Address: pgh + 20*index + 4*dig
 = pgh + 4*(5*index + dig)

Multi-Level Array Example

```
zip_dig cmu = { 1, 5, 2, 1, 3 };
zip_dig mit = { 0, 2, 1, 3, 9 };
zip_dig ucb = { 9, 4, 7, 2, 0 };
```


```
#define UCOUNT 3
int *univ[UCOUNT] = {mit, cmu, ucb};
```

- Variable univ denotes array of 3 elements
- Each element is a pointer
 - 8 bytes
- Each pointer points to array of int's

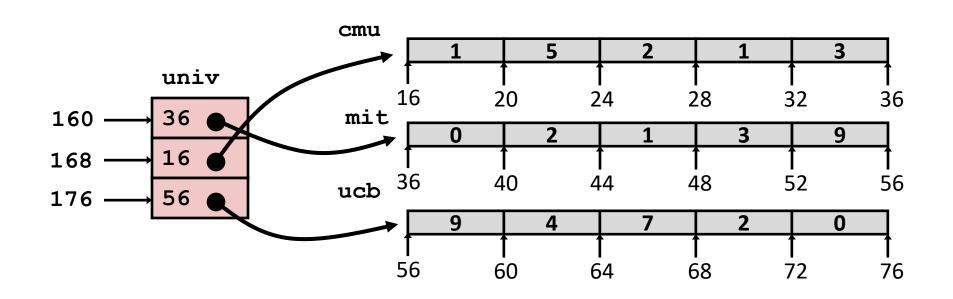

Element Access in Multi-Level Array

```
int get_univ_digit
  (size_t index, size_t digit)
{
  return univ[index][digit];
}
```

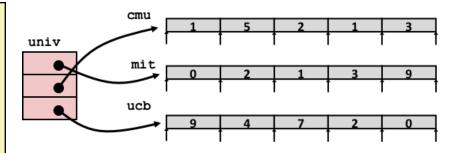

```
salq $2, %rsi  # 4*digit
addq univ(,%rdi,8), %rsi # p = univ[index] + 4*digit
movl (%rsi), %eax  # return *p
ret
```

Computation

- Element access Mem [Mem [univ+8*index]+4*digit]
- Must do two memory reads
 - First get pointer to row array
 - Then access element within array


Array Element Accesses


Nested array

```
int get_pgh_digit
   (size_t index, size_t digit)
{
   return pgh[index][digit];
}
```

Multi-level array

```
int get_univ_digit
   (size_t index, size_t digit)
{
   return univ[index][digit];
}
```



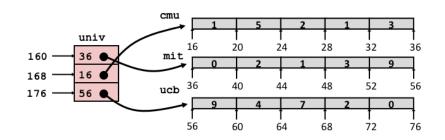

Accesses looks similar in C, but address computations very different:

Mem[pgh+20*index+4*digit] Mem[Mem[univ+8*index]+4*digit]

N X N Matrix Code

- Fixed dimensions
 - Know value of N at compile time
- Variable dimensions, explicit indexing
 - Traditional way to implement dynamic arrays
- Variable dimensions, implicit indexing
 - Now supported by gcc

16 X 16 Matrix Access

Array Elements

- Address **A** + i * (C * K) + j * K
- C = 16, K = 4

```
/* Get element a[i][j] */
int fix_ele(fix_matrix a, size_t i, size_t j) {
  return a[i][j];
}
```

```
# a in %rdi, i in %rsi, j in %rdx
salq $6, %rsi  # 64*i
addq %rsi, %rdi  # a + 64*i
movl (%rdi,%rdx,4), %eax # M[a + 64*i + 4*j]
ret
```

n X n Matrix Access

Array Elements

- Address **A** + i * (C * K) + j * K
- C = n, K = 4
- Must perform integer multiplication

```
/* Get element a[i][j] */
int var_ele(size_t n, int a[n][n], size_t i, size_t j)
{
  return a[i][j];
}
```

```
# n in %rdi, a in %rsi, i in %rdx, j in %rcx
imulq %rdx, %rdi  # n*i
leaq (%rsi,%rdi,4), %rax # a + 4*n*i
movl (%rax,%rcx,4), %eax # a + 4*n*i + 4*j
ret
```

Example: Array Access

```
#include <stdio.h>
#define ZLEN 5
#define PCOUNT 4
typedef int zip dig[ZLEN];
int main(int argc, char** argv) {
zip dig pgh[PCOUNT] =
    \{\{1, 5, 2, 0, 6\},
    {1, 5, 2, 1, 3},
    {1, 5, 2, 1, 7},
    {1, 5, 2, 2, 1 }};
    int *linear zip = (int *) pgh;
    int *zip2 = (int *) pgh[2];
    int result =
       pgh[0][0] +
       linear zip[7] +
        *(linear zip + 8) +
        zip2[1];
   printf("result: %d\n", result);
    return 0;
```

linux> ./array

Example: Array Access

```
#include <stdio.h>
#define ZLEN 5
#define PCOUNT 4
typedef int zip dig[ZLEN];
int main(int argc, char** argv) {
zip dig pgh[PCOUNT] =
    \{\{1, 5, 2, 0, 6\},
    \{1, 5, 2, 1, 3\},\
    {1, 5, 2, 1, 7},
    {1, 5, 2, 2, 1 }};
    int *linear zip = (int *) pgh;
    int *zip2 = (int *) pgh[2];
    int result =
       pgh[0][0] +
       linear zip[7] +
        *(linear zip + 8) +
        zip2[1];
   printf("result: %d\n", result);
    return 0;
```

```
linux> ./array
result: 9
```

Today

Arrays

- One-dimensional
- Multi-dimensional (nested)
- Multi-level

Structures

- Allocation
- Access
- Alignment

■ Floating Point

Structure Representation

```
struct rec {
   int a[4];
   size_t i;
   struct rec *next;
};
```

```
r
a i next
0 16 24 32
```

- Structure represented as block of memory
 - Big enough to hold all of the fields
- Fields ordered according to declaration
 - Even if another ordering could yield a more compact representation
- Compiler determines overall size + positions of fields
 - Machine-level program has no understanding of the structures in the source code

Generating Pointer to Structure Member

```
struct rec {
   int a[4];
   size_t i;
   struct rec *next;
};
```

```
r r+4*idx
| a i next
0 16 24 32
```

Generating Pointer to Array Element

- Offset of each structure member determined at compile time
- Compute as r + 4*idx


```
int *get_ap
  (struct rec *r, size_t idx)
{
   return &r->a[idx];
}
```

```
# r in %rdi, idx in %rsi
leaq (%rdi,%rsi,4), %rax
ret
```

Following Linked List

C Code

```
void set_val
   (struct rec *r, int val)
{
   while (r) {
     int i = r->i;
     r->a[i] = val;
     r = r->next;
   }
}
```

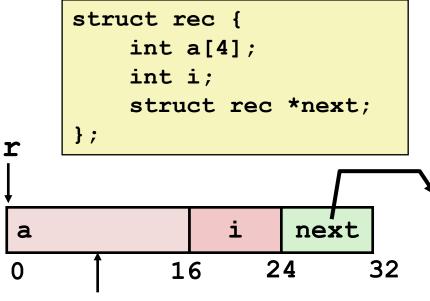

Element i

Register	Value
%rdi	r
%rsi	val

Structures & Alignment


Unaligned Data

```
c i[0] i[1] v
p p+1 p+5 p+9 p+17
```

```
struct S1 {
  char c;
  int i[2];
  double v;
} *p;
```

Aligned Data

- Primitive data type requires K bytes
- Address must be multiple of *K*

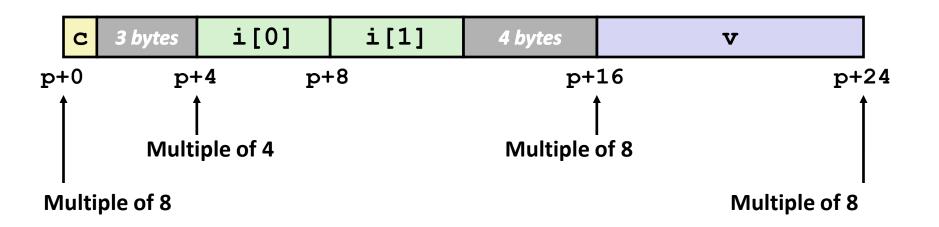

Alignment Principles

Aligned Data

- Primitive data type requires K bytes
- Address must be multiple of *K*
- Required on some machines; advised on x86-64

Motivation for Aligning Data

- Memory accessed by (aligned) chunks of 4 or 8 bytes (system dependent)
 - Inefficient to load or store datum that spans quad word boundaries
 - Virtual memory trickier when datum spans 2 pages

Compiler

Inserts gaps in structure to ensure correct alignment of fields

Specific Cases of Alignment (x86-64)

- 1 byte: char, ...
 - no restrictions on address
- 2 bytes: short, ...
 - lowest 1 bit of address must be 02
- 4 bytes: int, float, ...
 - lowest 2 bits of address must be 002
- 8 bytes: double, long, char *, ...
 - lowest 3 bits of address must be 0002
- 16 bytes: long double (GCC on Linux)
 - lowest 4 bits of address must be 00002

Satisfying Alignment with Structures

Within structure:

Must satisfy each element's alignment requirement

Overall structure placement

- Each structure has alignment requirement K
 - **K** = Largest alignment of any element
- Initial address & structure length must be multiples of K


Example:

K = 8, due to double element NOTE: K < sizeof(struct S1)</p>

```
p+0 p+4 p+8 p+16 p+24
Multiple of 4 Multiple of 8

Multiple of 8

Internal padding
```

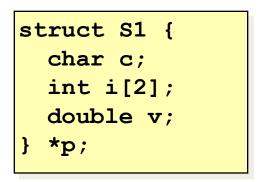

Meeting Overall Alignment Requirement

- For largest alignment requirement K
- Overall structure must be multiple of K

```
struct S2 {
  double v;
  int i[2];
  char c;
} *p;
```

| v | i[0] | i[1] | c | 7 bytes | p+24 |


Multiple of K=8

Arrays of Structures

- Overall structure length multiple of K
- Satisfy alignment requirement for every element


```
struct S2 {
  double v;
  int i[2];
  char c;
} a[10];
```





Accessing Array Elements

- **■** Compute array offset 12*idx
 - sizeof (S3), including alignment spacers
- Element j is at offset 8 within structure
- Assembler gives offset a+8
 - Resolved during linking





```
short get_j(int idx)
{
  return a[idx].j;
}
```

```
# %rdi = idx
leaq (%rdi,%rdi,2),%rax # 3*idx
movzwl a+8(,%rax,4),%eax
```

```
struct S3 {
   short i;
   float v;
   short j;
} a[10];
```


Saving Space

Put large data types first

```
struct S4 {
   char c;
   int i;
   char d;
} *p;
struct S5 {
   int i;
   char c;
   char d;
} *p;

c 3 bytes i d 3 bytes
12 bytes
```

Effect (largest alignment requirement K=4)



Today

Arrays

- One-dimensional
- Multi-dimensional (nested)
- Multi-level

Structures

- Allocation
- Access
- Alignment

Floating Point

Background


History

- x87 FP
 - Legacy, very ugly
- SSE FP
 - Supported by server machines
 - Special case use of vector instructions
- AVX FP
 - Newest version
 - Similar to SSE
 - Documented in book


Programming with SSE3

XMM Registers

- 16 total, each 16 bytes
- 16 single-byte integers

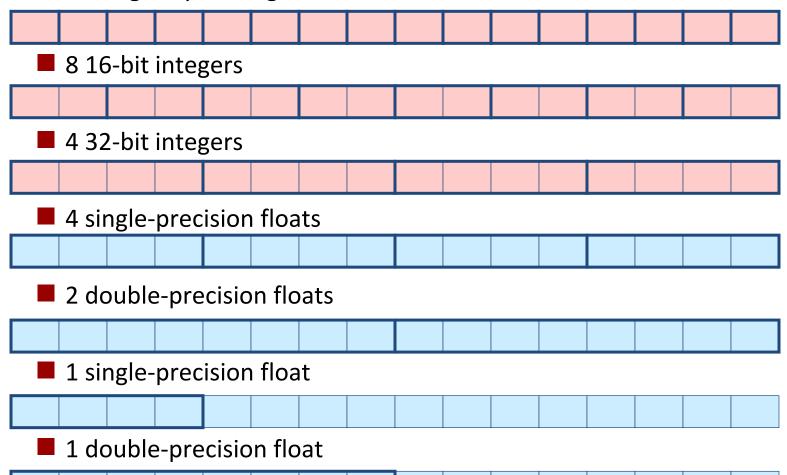

Scalar & SIMD Operations

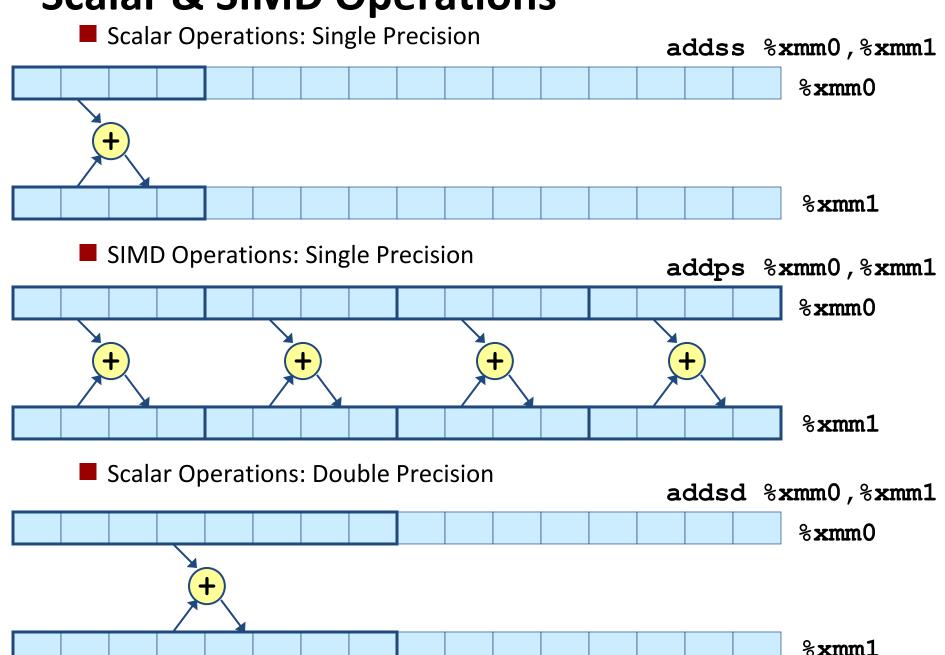

FP Basics

- Arguments passed in %xmm0, %xmm1, ...
- Result returned in %xmm0
- All XMM registers caller-saved

```
float fadd(float x, float y)
{
   return x + y;
}
```

```
double dadd(double x, double y)
{
    return x + y;
}
```

```
# x in %xmm0, y in %xmm1
addss %xmm1, %xmm0
ret
```

```
# x in %xmm0, y in %xmm1
addsd %xmm1, %xmm0
ret
```

FP Memory Referencing

- Integer (and pointer) arguments passed in regular registers
- FP values passed in XMM registers
- Different mov instructions to move between XMM registers, and between memory and XMM registers

```
double dincr(double *p, double v)
{
    double x = *p;
    *p = x + v;
    return x;
}
```

```
# p in %rdi, v in %xmm0
movapd %xmm0, %xmm1  # Copy v
movsd (%rdi), %xmm0  # x = *p
addsd %xmm0, %xmm1  # t = x + v
movsd %xmm1, (%rdi) # *p = t
ret
```

Other Aspects of FP Code

Lots of instructions

Different operations, different formats, ...

Floating-point comparisons

- Instructions ucomiss and ucomisd
- Set condition codes ZF, PF and CF
- Zeros OF and SF

Parity Flag

UNORDERED: ZF,PF,CF←111

GREATER THAN: ZF,PF,CF←000

LESS THAN: ZF,PF,CF←001

EQUAL: ZF,PF,CF←100

Using constant values

- Set XMM0 register to 0 with instruction xorpd %xmm0, %xmm0
- Others loaded from memory

Summary

Arrays

- Elements packed into contiguous region of memory
- Use index arithmetic to locate individual elements

Structures

- Elements packed into single region of memory
- Access using offsets determined by compiler
- Possible require internal and external padding to ensure alignment

Combinations

Can nest structure and array code arbitrarily

Floating Point

Data held and operated on in XMM registers

Additional Slides


Decl	An			*An				
	Cmp	Bad	Size	Cmp	Bad	Size		
int A1[3]								
int *A2								


Cmp: Compiles (Y/N)

Bad: Possible bad pointer reference (Y/N)

Size: Value returned by sizeof

Decl		An				
	Cmp	Bad	Size	Cmp	Bad	Size
int A1[3]	Y	N	12	Y	N	4
int *A2	Y	N	8	Y	Y	4



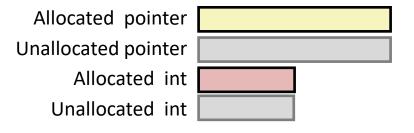

- Cmp: Compiles (Y/N)
- Bad: Possible bad pointer reference (Y/N)
- Size: Value returned by sizeof


Decl		An *An **An				*An			
	Cmp	Bad	Size	Cmp	Bad	Size	Cmp	Bad	Size
int A1[3]									
int *A2[3]									
int (*A3)[3]									
int (*A4[3])									

Cmp: Compiles (Y/N)

Bad: Possible bad pointer reference (Y/N)

Size: Value returned by sizeof

Decl		An *An **An			*A <i>n</i>				
	Cmp	Bad	Size	Cmp	Bad	Size	Cmp	Bad	Size
int A1[3]	Y	N	12	Y	N	4	N	_	_
int *A2[3]	Y	N	24	Y	N	8	Y	Y	4
int (*A3)[3]	Y	N	8	Y	Y	12	Y	Y	4
int (*A4[3])	Y	N	24	Y	N	8	Y	Y	4

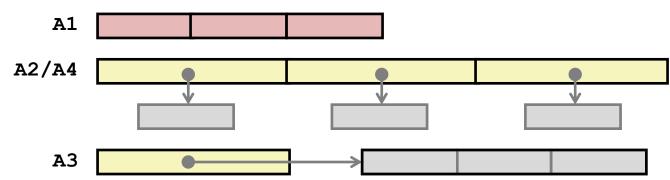


	Allocated pointer
	Unallocated pointer
	Allocated int
48	Unallocated int

Decl	A <i>n</i>			*A <i>n</i>			**An		
	Cmp	Bad	Size	Cmp	Bad	Size	Cmp	Bad	Size
int A1[3][5]									
int *A2[3][5]									
int (*A3)[3][5]									
int *(A4[3][5])									
int (*A5[3])[5]									

- Cmp: Compiles (Y/N)
- Bad: Possible bad pointer reference (Y/N)
- Size: Value returned by sizeof

Decl	***An					
	Cmp	Bad	Size			
int A1[3][5]						
int *A2[3][5]						
int (*A3)[3][5]						
int *(A4[3][5])						
int (*A5[3])[5]						

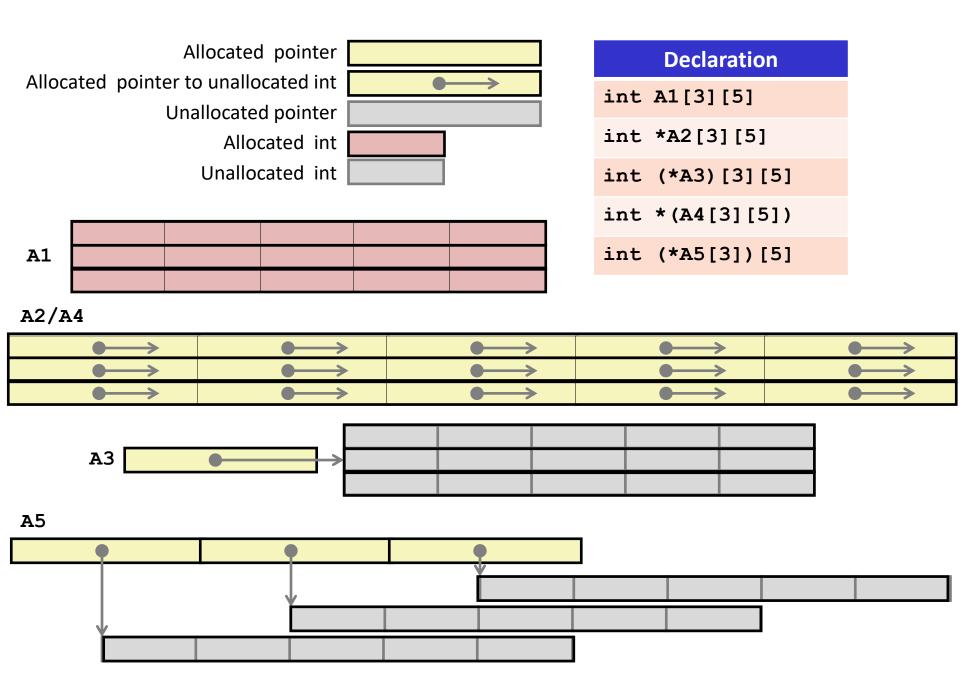

Decl	A <i>n</i>			*A <i>n</i>			**An		
	Cmp	Bad	Size	Cmp	Bad	Size	Cmp	Bad	Size
int A1[3][5]	Y	N	60	Y	N	20	Y	N	4
int *A2[3][5]	Y	N	120	Y	N	40	Y	N	8
int (*A3)[3][5]	Y	N	8	Y	Y	60	Y	Y	20
int *(A4[3][5])	Y	N	120	Y	N	40	Y	N	8
int (*A5[3])[5]	Y	N	24	Y	N	8	Y	Y	20

- Cmp: Compiles (Y/N)
- Bad: Possible bad pointer reference (Y/N)
- Size: Value returned by sizeof

Decl	***An				
	Cmp	Bad	Size		
int A1[3][5]	N	-	-		
int *A2[3][5]	Y	Y	4		
int (*A3)[3][5]	Y	Y	4		
int *(A4[3][5])	Y	Y	4		
int (*A5[3])[5]	Y	Y	4		