

Arrays

Chapter 7

Problem Solving & Program Design in C

Eighth Edition

Jeri R. Hanly & Elliot B. Koffman

Chapter Objectives

- To learn how to declare and use arrays for storing collections of values of the same type
- To understand how to use a subscript to reference the individual values in an array
- To learn how to process the elements of an array in sequential order using loops

Chapter Objectives

- To understand how to pass individual array elements and entire arrays through function arguments
- To learn a method for searching an array
- To learn a method for sorting an array
- To learn how to use multidimensional arrays for storing tables of data
- To understand the concept of parallel arrays
- To learn how to declare and use your own data types

Basic Terminology

- data structure
 - a composite of related data items stored under the same name
- array
 - a collection of data items of the same type

Declaring and Referencing Arrays

- array element
 - a data item that is part of an array
- subscripted variable
 - a variable followed by a subscript in brackets, designating an array element
- array subscript
 - a value or expression enclosed in brackets after the array name, specifying which array element to access

```
double x[8];
```

Array x

x[0] x[1] x[2] x[3] x[4] x[5] x[6] x[7]

| | | | | | | | |
|------|------|-----|-----|-----|------|------|-------|
| 16.0 | 12.0 | 6.0 | 8.0 | 2.5 | 12.0 | 14.0 | -54.5 |
|------|------|-----|-----|-----|------|------|-------|

Array Initialization

```
int prime_lt_100[] = {2, 3, 5, 7, 11, 13, 17, 19,  
    23, 29, 31, 37, 41, 43, 47, 53, 59, 61,  
    67, 71, 73, 79, 83, 89, 97}
```

```
char vowels[] = {'a', 'e', 'i', 'o', 'u', 'y'}
```

Using **for** Loops for Sequential Access

```
for (i = 0; i < SIZE; ++i)  
    square[i] = i * i;
```

Array square

| [0] | [1] | [2] | [3] | [4] | [5] | [6] | [7] | [8] | [9] | [10] |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|
| 0 | 1 | 4 | 9 | 16 | 25 | 36 | 49 | 64 | 81 | 100 |

TABLE 7.1 Statements That Manipulate Array *x*

| Statement | Explanation |
|------------------------------------|---|
| <code>printf("%.1f", x[0]);</code> | Displays the value of <code>x[0]</code> , which is 16.0. |
| <code>x[3] = 25.0;</code> | Stores the value 25.0 in <code>x[3]</code> . |
| <code>sum = x[0] + x[1];</code> | Stores the sum of <code>x[0]</code> and <code>x[1]</code> , which is 28.0 in the variable <code>sum</code> . |
| <code>sum += x[2];</code> | Adds <code>x[2]</code> to <code>sum</code> . The new <code>sum</code> is 34.0. |
| <code>x[3] += 1.0;</code> | Adds 1.0 to <code>x[3]</code> . The new <code>x[3]</code> is 26.0. |
| <code>x[2] = x[0] + x[1];</code> | Stores the sum of <code>x[0]</code> and <code>x[1]</code> in <code>x[2]</code> . The new <code>x[2]</code> is 28.0. |

Array *x*

| | | | | | | | |
|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| <code>x[0]</code> | <code>x[1]</code> | <code>x[2]</code> | <code>x[3]</code> | <code>x[4]</code> | <code>x[5]</code> | <code>x[6]</code> | <code>x[7]</code> |
| 16.0 | 12.0 | 28.0 | 26.0 | 2.5 | 12.0 | 14.0 | -54.5 |

Array Subscripts

- Syntax:

aname [subscript]


- Examples:

$x[3]$


$x[i + 1]$

Array x

| $x[0]$ | $x[1]$ | $x[2]$ | $x[3]$ | $x[4]$ | $x[5]$ | $x[6]$ | $x[7]$ |
|--------|--------|--------|--------|--------|--------|--------|--------|
| 16.0 | 12.0 | 6.0 | 8.0 | 2.5 | 12.0 | 14.0 | -54.5 |

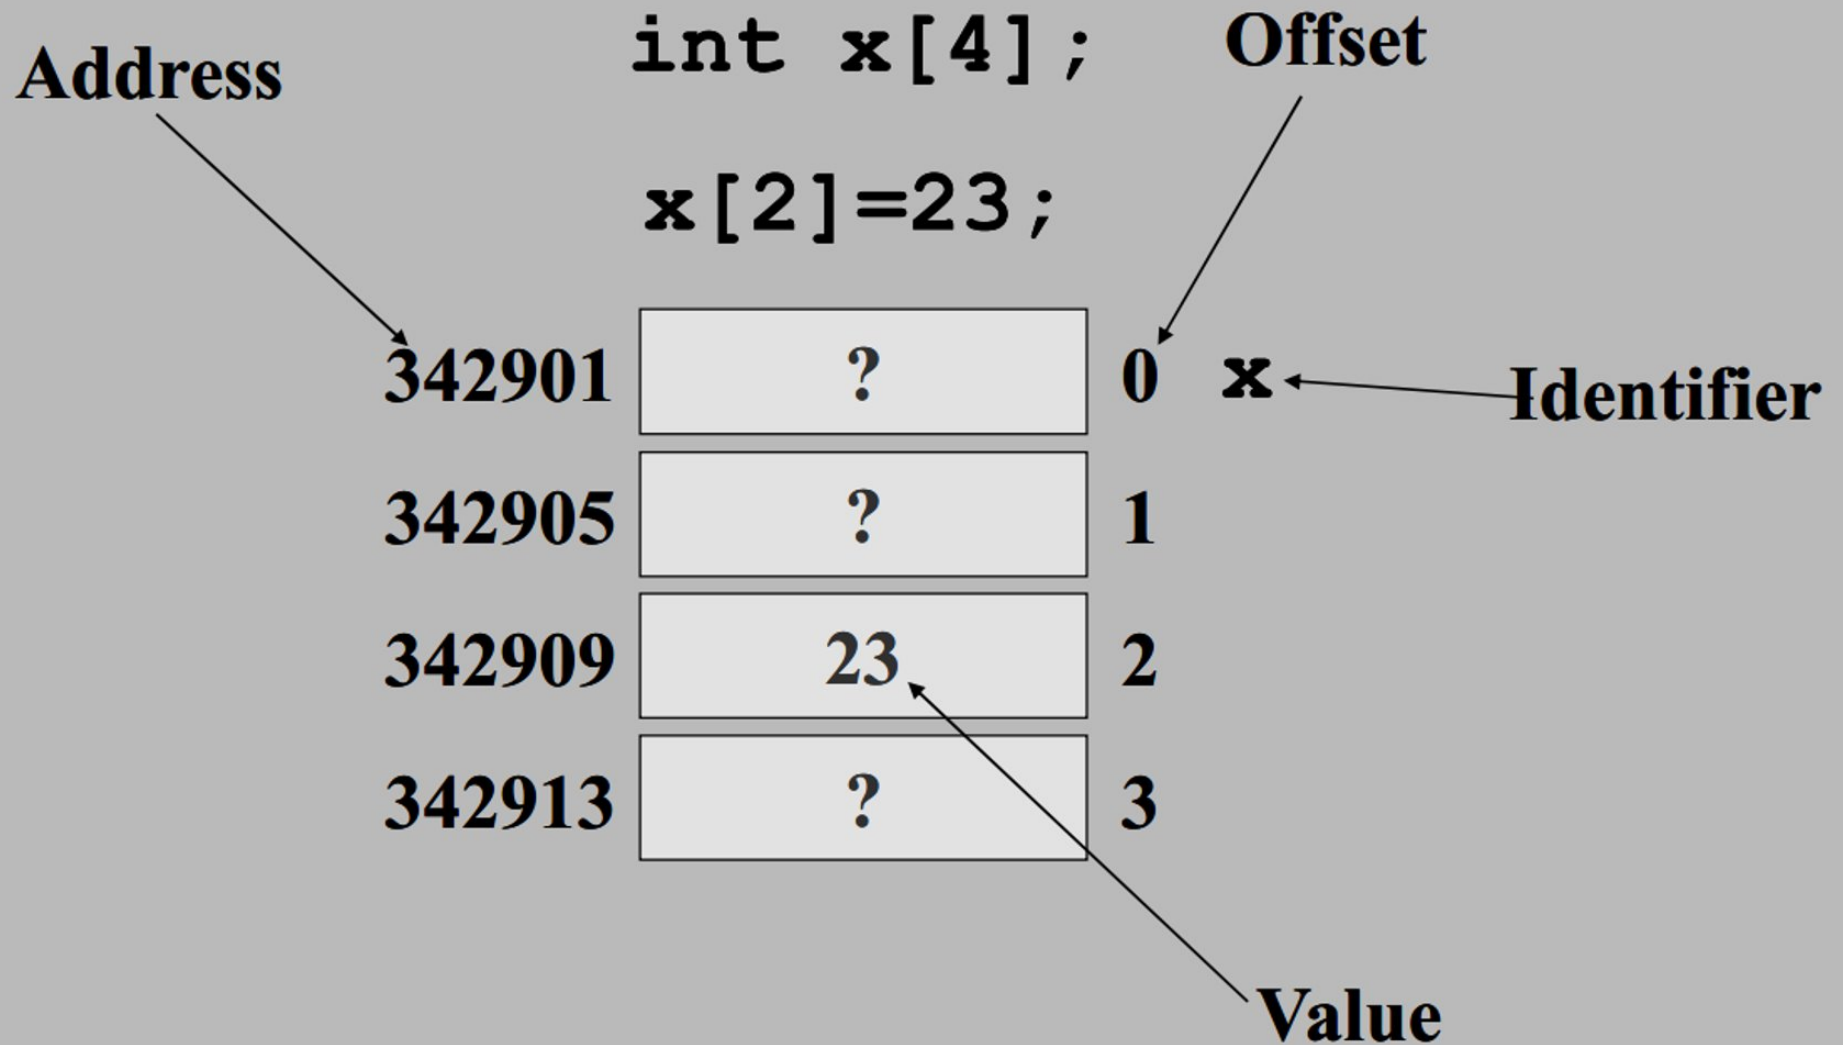

What's at x[5]?

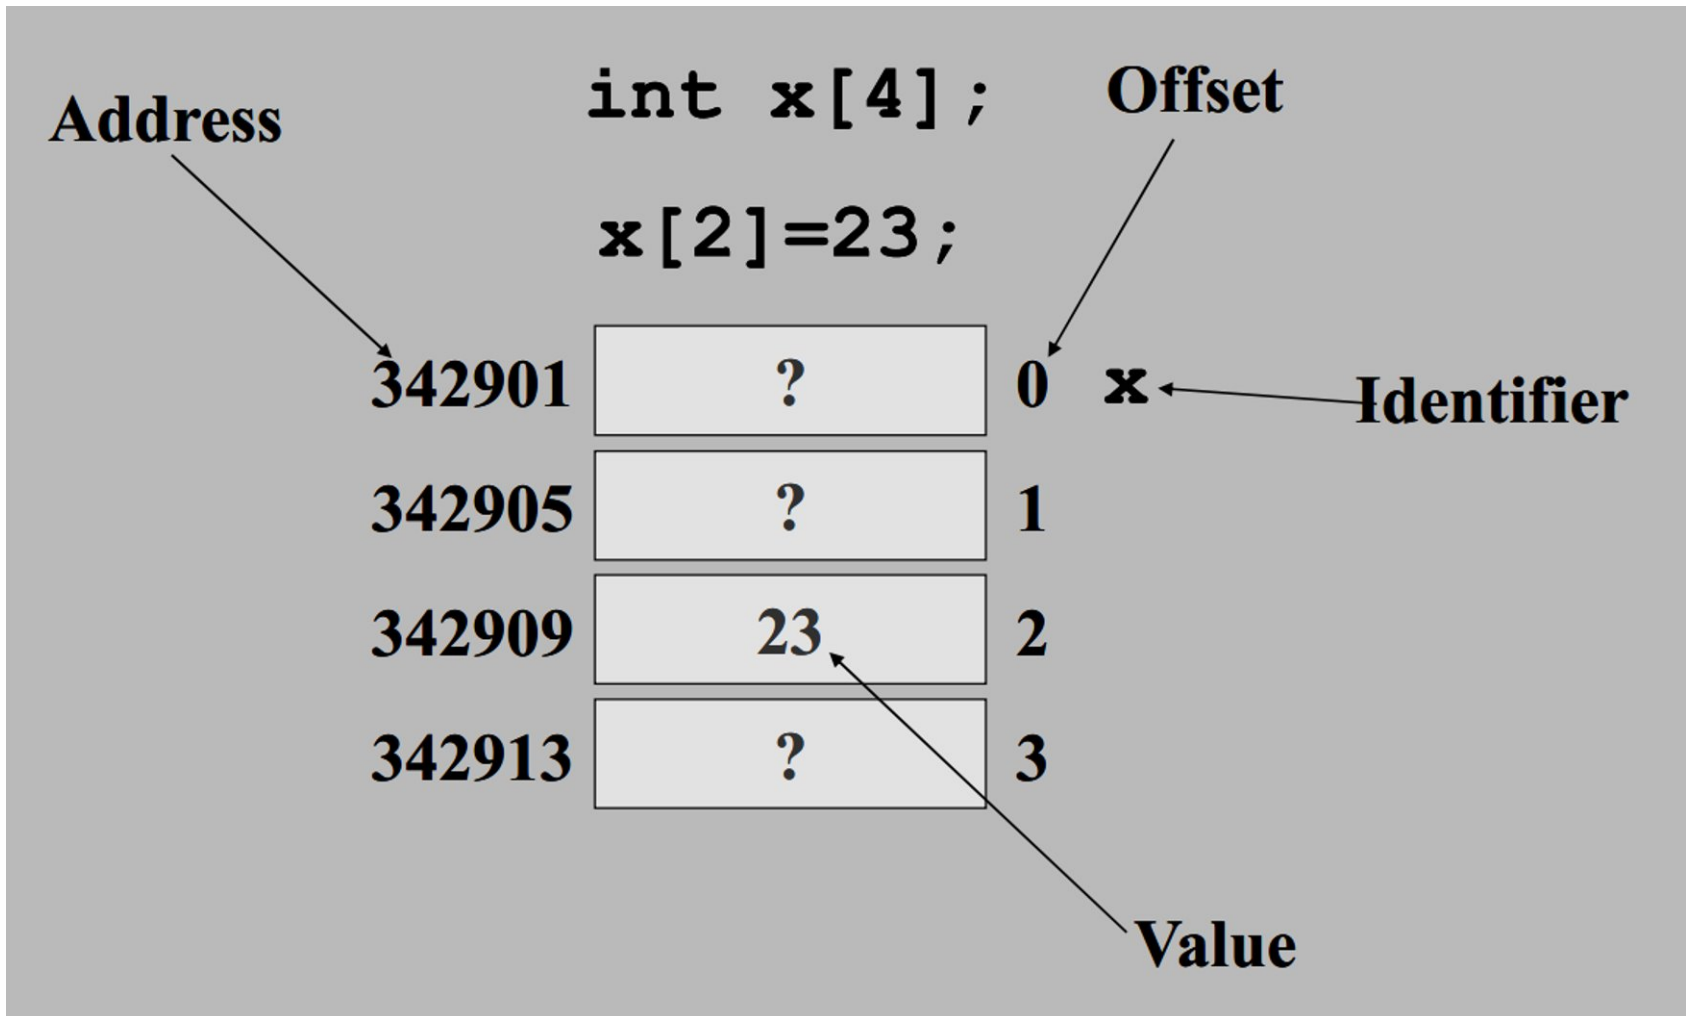

Partially Filled Arrays

- A program may need to process many lists of similar data but the lists may not all be the same length.
- In order to reuse an array for processing more than one data set, you can declare an array large enough to hold the largest data set anticipated.
- Then your program should keep track of how many array elements are actually in use.

Multidimensional Arrays

- multidimensional array

type arr_name[dim1val][dim2val]

tictac[3][3]

FIGURE 7.20

A Tic-tac-toe Board
Stored as Array
tictac

| | | Column | | |
|-----|---|--------|---|------------------|
| | | 0 | 1 | 2 |
| Row | 0 | X | O | X |
| | 1 | O | X | O ← tictac[1][2] |
| | 2 | O | X | X |

Using Array Elements as Function Arguments


```
scanf("%lf", &x[i]);
```

FIGURE 7.21 Function to Check Whether Tic-tac-toe Board Is Filled

```
1.  /* Checks whether a tic-tac-toe board is completely filled.          */
2.  int
3.  filled(char ttt_brd[3][3])  /* input - tic-tac-toe board              */
4.  {
5.      int r, c, /* row and column subscripts    */
6.      ans; /* whether or not board filled */
7.
8.      /* Assumes board is filled until blank is found                    */
9.      ans = 1;
10.
11.     /* Resets ans to zero if a blank is found                          */
12.     for (r = 0; r < 3; ++r)
13.         for (c = 0; c < 3; ++c)
14.             if (ttt_brd[r][c] == ' ')
15.                 ans = 0;
16.
17.     return (ans);
18. }
```


FIGURE 7.22

Three-Dimensional
Array enroll

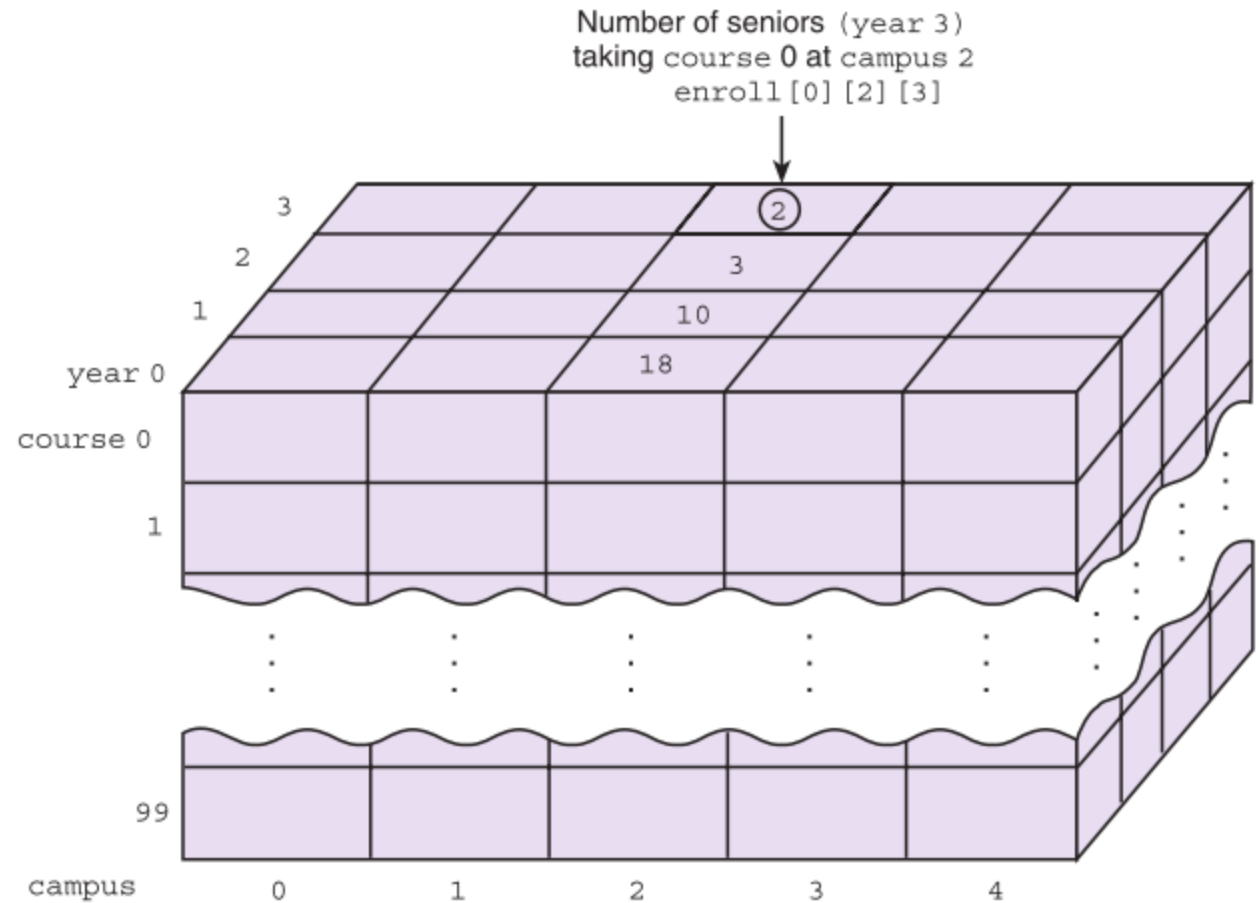

Array Arguments


- We can write functions that have arrays as arguments.
- Such functions can manipulate some, or all, of the elements corresponding to an actual array argument.

FIGURE 7.4 Function fill_array

```
1.  /*
2.   * Sets all elements of its array parameter to in_value.
3.   * Pre: n and in_value are defined.
4.   * Post: list[i] = in_value, for 0 <= i < n.
5.   */
6.  void
7.  fill_array (int list[],      /* output - list of n integers          */
8.             int n,          /* input - number of list elements    */
9.             int in_value)    /* input - initial value              */
10. {
11.
12.     int i;                  /* array subscript and loop control    */
13.
14.     for (i = 0; i < n; ++i)
15.         list[i] = in_value;
16. }
```

FIGURE 7.5

Data Areas Before
Return from
`fill_array`
`(x, 5, 1);`

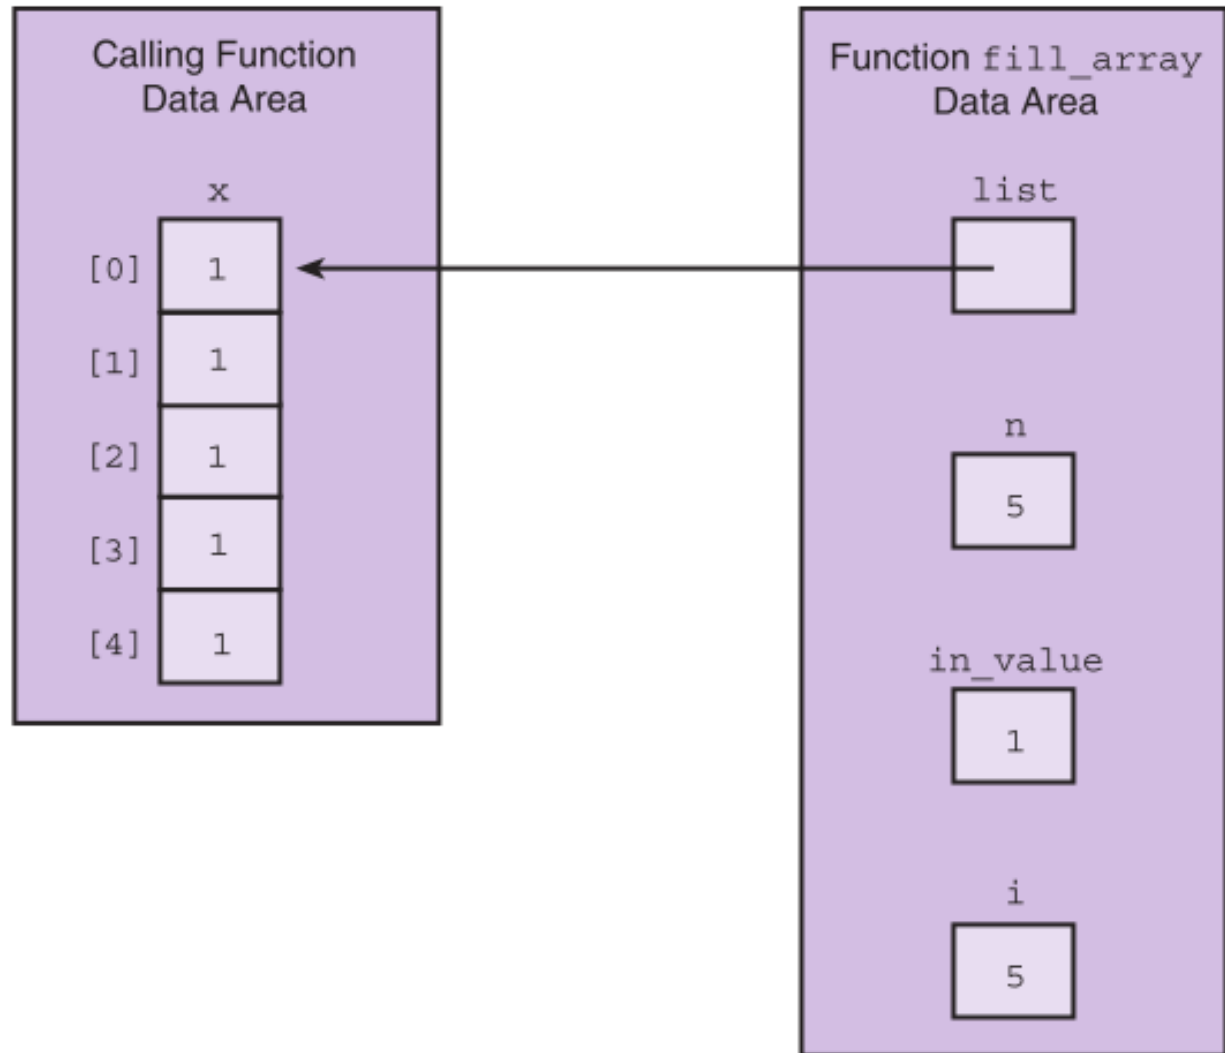


Arrays as Input Arguments

- ANSI C provides a qualifier that we can include in the declaration of the array formal parameter in order to notify the C compiler that the array is only an input to the function and the function does not intend to modify the array.
- The qualifier **const** allows the compiler to mark as an error any attempt to change an array element within the function.

FIGURE 7.6 Function to Find the Largest Element in an Array

```
1.  /*
2.   * Returns the largest of the first n values in array list
3.   * Pre: First n elements of array list are defined and n > 0
4.   */
5.  int
6.  get_max(const int list[], /* input - list of n integers          */
7.          int n)          /* input - number of list elements to examine */
8.  {
9.      int i,
10.      cur_large;          /* largest value so far          */
11.
12.      /* Initial array element is largest so far.          */
13.      cur_large = list[0];
14.
15.      /* Compare each remaining list element to the largest so far;
16.         save the larger          */
17.      for (i = 1; i < n; ++i)
18.          if (list[i] > cur_large)
19.              cur_large = list[i];
20.
21.      return (cur_large);
22. }
```

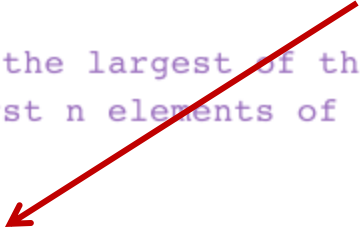

Returning an Array Result

- In C, it is not legal for a function's return type to be an array.
- You need to use an output parameter to send your array back to the calling module.

FIGURE 7.7

Diagram of a Function That Computes an Array Result


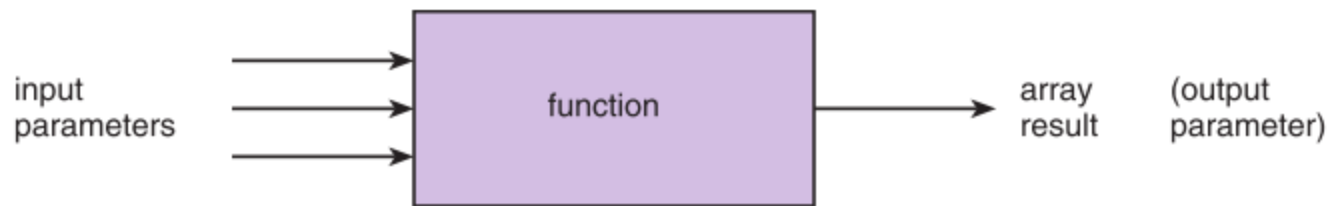


FIGURE 7.8 Function to Add Two Arrays

```
1.  /*
2.   * Adds corresponding elements of arrays ar1 and ar2, storing the result in
3.   * arsum. Processes first n elements only.
4.   * Pre: First n elements of ar1 and ar2 are defined. arsum's corresponding
5.   *       actual argument has a declared size >= n (n >= 0)
6.   */
7.  void
8.  add_arrays(const double ar1[],    /* input -                      */
9.            const double ar2[],    /* arrays being added        */
10.            double      arsum[],   /* output - sum of corresponding
11.                                     elements of ar1 and ar2
12.            int          n)        /* input - number of element
13.                                     pairs summed
14.  {
15.      int i;
16.
17.      /* Adds corresponding elements of ar1 and ar2
18.      for (i = 0; i < n; ++i)
19.          arsum[i] = ar1[i] + ar2[i];
20.  }
```

FIGURE 7.9

Function Data
Areas for add_
arrays(x, y,
x_plus_y, 5);

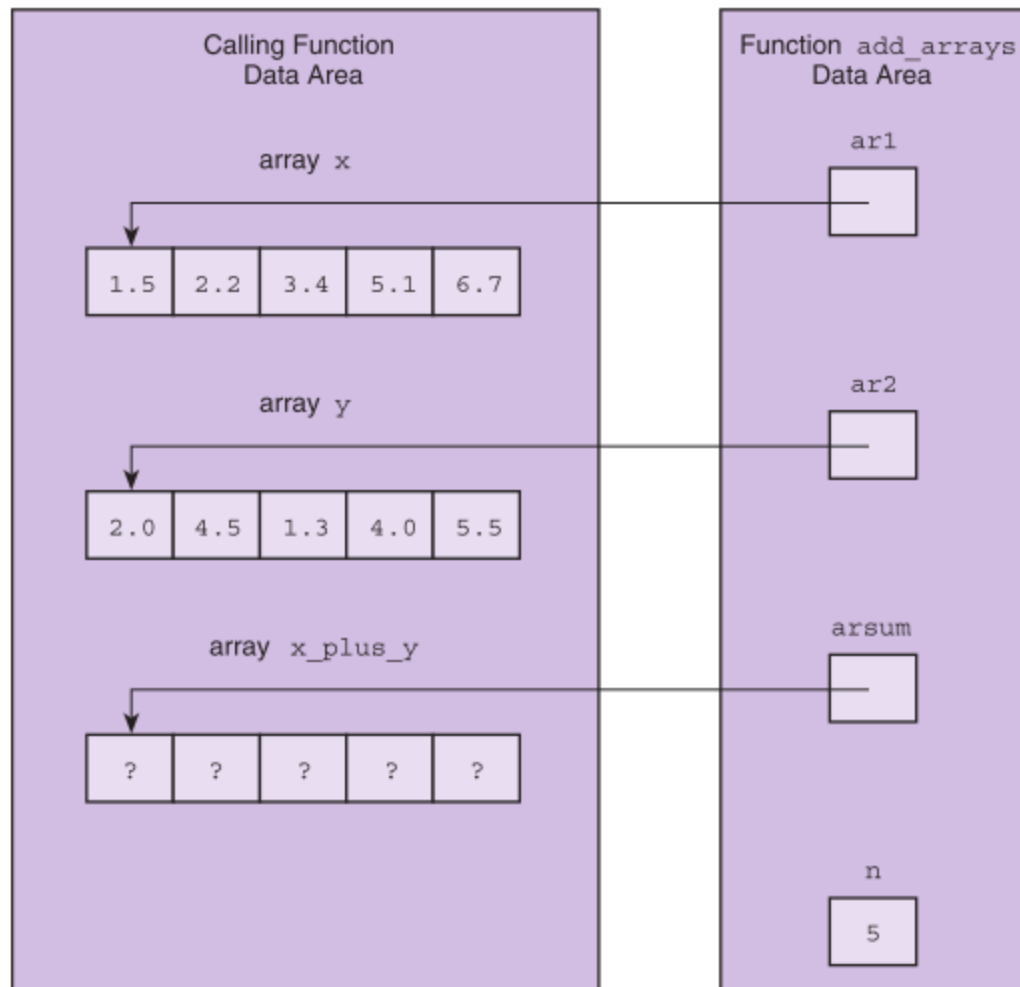

Array Search

1. Assume the target has not been found.
2. Start with the initial array element.
3. repeat while the target is not found and there are more array elements
 4. if the current element matches the target
 5. Set a flag to indicate that the target has been found
 - else
 6. Advance to the next array element.
7. if the target was found
 8. Return the target index as the search result
 - else
 9. Return -1 as the search result.

Selection Sort

1. for each value of `fill` from `0` to `n-2`
2. Find `index_of_min`, the index of the smallest element in the unsorted subarray `list[fill]` through `list[n-1]`
3. if `fill` is not the position of the smallest element (`index_of_min`)
4. Exchange the smallest element with the one at position `fill`.

FIGURE 7.15

Trace of Selection
Sort

| [0] | [1] | [2] | [3] |
|-----|-----|-----|-----|
| 74 | 45 | 83 | 16 |

`fill` is 0. Find the smallest element in subarray `list[1]` through `list[3]` and swap it with `list[0]`.

| [0] | [1] | [2] | [3] |
|-----|-----|-----|-----|
| 16 | 45 | 83 | 74 |

`fill` is 1. Find the smallest element in subarray `list[1]` through `list[3]`—no exchange needed.

| [0] | [1] | [2] | [3] |
|-----|-----|-----|-----|
| 16 | 45 | 83 | 74 |

`fill` is 2. Find the smallest element in subarray `list[2]` through `list[3]` and swap it with `list[2]`.

| [0] | [1] | [2] | [3] |
|-----|-----|-----|-----|
| 16 | 45 | 74 | 83 |

Wrap Up

- A data structure is a grouping of related data items in memory.
- An array is a data structure used to store a collection of data items of the same type.