

Hortonworks Data Platform

Ambari Views Guide

(Nov 9, 2015)

Hortonworks Data Platform : Ambari Views Guide

Copyright © 2012-2015 Hortonworks, Inc. All rights reserved.

The Hortonworks Data Platform, powered by Apache Hadoop, is a massively scalable and 100% open source platform for storing, processing and analyzing large volumes of data. It is designed to deal with data from many sources and formats in a very quick, easy and cost-effective manner. The Hortonworks Data Platform consists of the essential set of Apache Hadoop projects including MapReduce, Hadoop Distributed File System (HDFS), HCatalog, Pig, Hive, HBase, Zookeeper and Ambari. Hortonworks is the major contributor of code and patches to many of these projects. These projects have been integrated and tested as part of the Hortonworks Data Platform release process and installation and configuration tools have also been included.

Unlike other providers of platforms built using Apache Hadoop, Hortonworks contributes 100% of our code back to the Apache Software Foundation. The Hortonworks Data Platform is Apache-licensed and completely open source. We sell only expert technical support, [training](#) and partner-enablement services. All of our technology is, and will remain free and open source. Please visit the [Hortonworks Data Platform](#) page for more information on Hortonworks technology. For more information on Hortonworks services, please visit either the [Support](#) or [Training](#) page. Feel free to [Contact Us](#) directly to discuss your specific needs.

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

Table of Contents

1. Using Ambari Views	1
2. Preparing Ambari Server for Views	2
3. Running Ambari Server Standalone	3
3.1. Prerequisites	3
3.2. Standalone Server Setup	4
3.3. Reverse Proxy	4
4. Configuring Views for Kerberos	6
5. Using the Tez View	7
5.1. Configuring Your Cluster for Tez View	7
5.2. Creating or Editing the Tez View Instance	8
5.2.1. User Permissions for Tez Views	10
5.2.2. Kerberos Setup for Tez Views	11
5.3. Using the Tez View	12
5.3.1. Understanding Directed Acyclic Graphs (DAGs), Vertices, and Tasks	13
5.3.2. Identifying the Tez DAG for Your Job	13
5.3.3. Understanding How Your Tez Job Is Executed	15
5.3.4. Identifying Causes of Failed Jobs	16
5.3.5. Viewing All Failed Tasks	16
5.3.6. Using Counters to Identify the Cause of Slow-Performing Jobs	16
6. Using the Pig View	18
6.1. Configuring Your Cluster for Pig View	18
6.2. Creating the Pig View Instance	19
6.2.1. Getting Correct Configuration Values for Manually-Deployed Clusters	21
6.2.2. User Permissions for Pig Views	22
6.2.3. Kerberos Setup for Pig Views	23
6.3. Using the Pig View	24
6.3.1. Writing Pig Scripts	24
6.3.2. Viewing Pig Script Execution History	25
6.3.3. User-Defined Functions (UDFs) Tab	25
7. Using the Capacity Scheduler View	26
7.1. Configuring your Cluster for the Capacity Scheduler View	26
7.2. Creating a Capacity Scheduler View Instance	26
7.2.1. User Permissions for Capacity Scheduler Views	29
7.3. Using the Capacity Scheduler View	33
7.3.1. Setting up Queues	33
7.3.2. Configuring Queues	38
7.3.3. Configuring Cluster Scheduler Settings	39
7.3.4. Applying the Configuration Changes	40
7.4. Troubleshooting	41
8. Using the Hive View	43
8.1. Configuring Your Cluster	43
8.1.1. Setup HDFS Proxy User	43
8.1.2. Setup HDFS User Directory	44
8.2. Creating the Hive View Instance	45
8.2.1. Settings and Cluster Configuration	45
8.2.2. User Permissions for Hive Views	47
8.2.3. Kerberos Setup for Hive Views	47

8.3. Using the Hive View	48
8.3.1. Query Tab	48
8.3.2. Saved Queries Tab	52
8.3.3. History Tab	53
8.3.4. UDF Tab	53
8.4. Troubleshooting	54
9. Using the Slider View	55
9.1. Deploying the Slider View	55
10. Using the Files View	56
10.1. Configuring Your Cluster	56
10.2. Creating and Configuring a Files View Instance	57
10.2.1. Kerberos Settings	58
10.2.2. Cluster Configuration: Local	58
10.2.3. Cluster Configuration: Custom	58
10.2.4. Troubleshooting	59

List of Figures

3.1. Configuring Views with your HDP Cluster	3
5.1. Tez View Create Instance Page	8
5.2. Tez View Instance Page	10
5.3. Granting User Permissions to Tez Views	10
5.4. SQL Query Execution in Hive	13
5.5. Tez View Column Selector Dialog Box	14
5.6. View Tab in Tez View	15
5.7. DAG Details Window	16
5.8. Tez View All Tasks Tab	16
5.9. Tez View DAG-Level Counters Tab	17
5.10. Tez View Vertex-Level Counters Tab	17
5.11. Tez View Task-Level Counters Tab	17
6.1. Pig View Details and Settings	20
6.2. Pig View Cluster Configuration	20
6.3. HDFS Service Page in Ambari	22
6.4. Using the Filter to Search Advanced hdfs-site Settings	22
6.5. Granting User Permissions to Pig Views	23
6.6. Kerberos Settings for Pig Views	24
6.7. Pig Script Running in the Pig View	24
6.8. Pig View Script History Tab	25
6.9. Pig View UDFs Tab	25
8.1. HDFS Service Page in Ambari	46
8.2. Using the Filter to Search Advanced hdfs-site Settings	47
8.3. Granting User Permissions to Hive Views	47
8.4. Hive View Kerberos Configuration Example	48
8.5. Hive View Database Explorer	49
8.6. Query Editor	49
8.7. Query Results and Logs in Hive View Query Editor	50
8.8. Query Editor Textual Explain Feature	51
8.9. Query Editor Visual Explain Feature	51
8.10. Tez View Query Debugging Option	52
8.11. Query Editor Error Message Summary Window	52
8.12. Query Editor Error Message Details Window	52
8.13. Saved Queries Tab	53
8.14. History Tab	53
8.15. UDF Tab	53

List of Tables

5.1. Cluster Configurations for Tez View	7
5.2. Cluster Configuration Values for the Tez View in Ambari	9
5.3. Kerberos Settings for Tez Views	11
5.4. In core-site.xml	11
5.5. In yarn-site.xml	12
5.6. Tez Job Status Descriptions	14
6.1. Finding Cluster Configuration Values for the Pig View in Ambari	21
6.2. Pig View Settings for NameNode High Availability	21
8.1. Hive View Instance Details	45
8.2. Finding Cluster Configuration Values for the Hive View in Ambari	45
8.3. Hive View Settings for NameNode High Availability	46
8.4. Kerberos Settings for Hive Views	47
8.5. Troubleshooting Hive Views Errors	54

1. Using Ambari Views

Ambari includes the [Ambari Views Framework](#), which allows for developers to create UI components that “plug into” the Ambari Web interface. Ambari includes a built-in set of Views that are pre-deployed for you to use with your cluster. This guide provides information on configuring the built-in set of Views, as well as information on how to configure Ambari Server for “standalone” operation.

Views can be deployed and managed in the “operational” Ambari Server that is operating your cluster. In addition, Views can be deployed and managed in one or more separate “standalone” Ambari Servers. Running “standalone” Ambari Server instances is useful when users who will access views will not have (and should not) have access to that Ambari Server that is operating the cluster. As well, you can run one or more separate Ambari Server instances “standalone” for a scale-out approach to handling a large number of users. See [Running Ambari Standalone](#) for more information.



Important

It is critical that you prepare your Ambari Server for hosting views. It is strongly recommended you increase the amount of memory available to your Ambari Server, and that you run additional “standalone” Ambari Servers to host the views. See [Preparing Ambari Server for Views](#) and [Running Ambari Server Standalone](#) for more information.

View	Description	HDP Stacks	Required Services
Capacity Scheduler	Provides a visual way to configure YARN capacity scheduler queue capacity.	HDP 2.3 or later	YARN
Files	Allows you to browse the HDFS file system.	HDP 2.2 or later	HDFS
Hive	Exposes a way to find, author, execute and debug Hive queries.	HDP 2.3 or later	HDFS, YARN, Hive
Pig	Provides a way to author and execute Pig Scripts.	HDP 2.2 or later	HDFS, Hive (WebHCat), Pig
Slider	A tool to help deploy and manage Slider-based applications.	HDP 2.1 or later	HDFS, YARN
Tez	View information related to Tez jobs that are executing on the cluster.	HDP 2.2.4.2 or later	HDFS, YARN, Tez

Learning More About Views

You can learn more about the Views Framework at the following resources:

Resource	URL
Administering Views	Ambari Administration Guide - Managing Views
Ambari Project Wiki	https://cwiki.apache.org/confluence/display/AMBARI/Views
Example Views	https://github.com/apache/ambari/tree/trunk/ambari-views/examples
View Contributions	https://github.com/apache/ambari/tree/trunk/contrib/views

2. Preparing Ambari Server for Views

When hosting multiple views in Ambari, it is **strongly recommended** you increase the amount of memory available to the Ambari Server. Since each view requires its own memory footprint, increasing the Ambari Server maximum allocable memory will help support multiple deployed views and concurrent use.

1. On the Ambari Server host, edit the `ambari-env.sh` file:

```
vi /var/lib/ambari-server/ambari-env.sh
```

2. For the `AMBARI_JVM_ARGS` variable, replace the default `-Xmx2048m` with the following:

```
-Xmx4096m -XX:PermSize=128m -XX:MaxPermSize=128m
```

3. Restart Ambari Server for this change to take effect.

```
ambari-server restart
```


3. Running Ambari Server Standalone

You can run one or more separate Ambari Server instances running in “standalone” mode. Running “standalone” Ambari Server instances is useful when users who will access views will not have (and should not) have access to that Ambari Server that is operating the cluster. As well, you can run one or more separate Ambari Server instances “standalone” for a scale-out approach to handling a large amount of users. See [Reverse Proxy](#) for more information.


3.1. Prerequisites

There are several requirements that need to be considered when setting up multiple Ambari Server “standalone” instances:

- Ambari Server instances should be the same version.
- The Ambari Server instances should point to the same underlying database. Ensure that it is **not** the same database that is being used by an Operational Ambari Server managing the HDP cluster.
- Ambari database should be scaled and made highly-available, independent of Ambari Server.
- If using an external authentication source (such as LDAP or Active Directory), Ambari Server authentication should be configured the same for all Ambari Server instances.
- If the cluster you are accessing with Views is Kerberos-enabled, you need to configure Ambari and the Views for Kerberos.
- Run the multiple “standalone” Ambari Server instances behind a Reverse Proxy.

After your standalone Ambari Servers are setup and configured, you can configure the views to communicate with your HDP cluster.

Figure 3.1. Configuring Views with your HDP Cluster

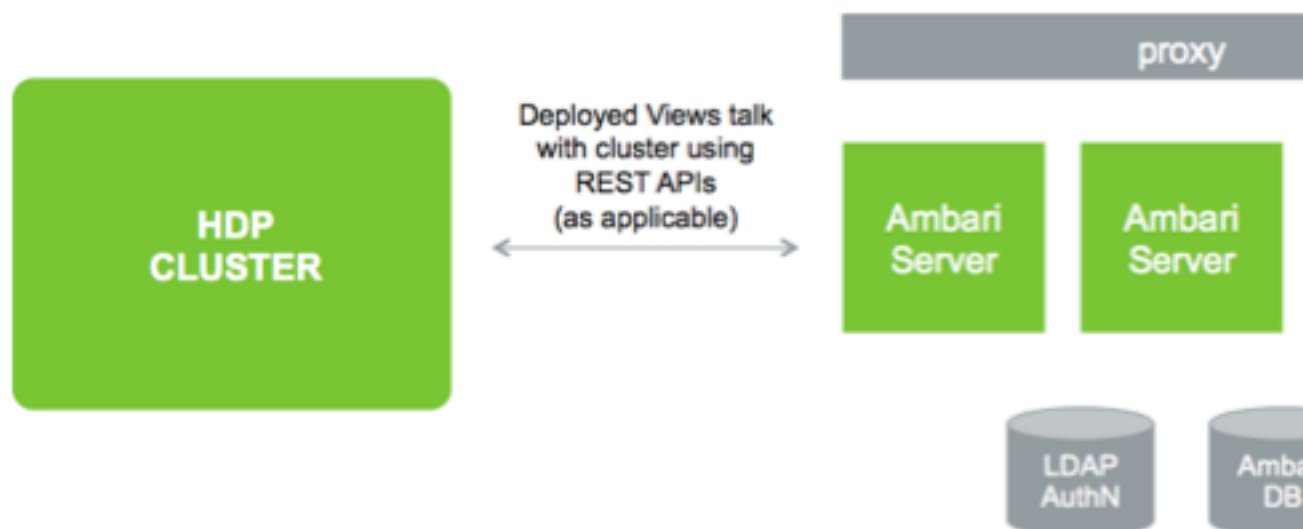

3.2. Standalone Server Setup

Setting up a standalone Ambari Server instance is very similar to setting up an operational Ambari Server. Many of the steps are the same, with one key **exception: you do not install a cluster with a standalone Ambari Server**. A standalone Ambari Server does not manage a cluster and does not deploy or communicate with Ambari Agents. The standalone Ambari Server runs as web server instance, serving views for users.



Important

Refer to the [Ambari Install Guide](#) for the details steps for setting up an Ambari Server. For a standalone Ambari Server instance, you are not required to install a cluster.



Important

Refer to [Managing Views](#) in the Ambari Administration Guide for information on deploying and configuring Views.

The following table compares the high-level tasks required to setup an operational Ambari Server vs. a standalone Ambari Server.

	Operational Ambari Server	Standalone Ambari Server
1	Install ambari-server package	Install ambari-server package
2	Run ambari-server setup (DB, JDK)	Run ambari-server setup (DB, JDK) <div data-bbox="922 1129 1008 1215" data-label="Image"> </div> <div data-bbox="1062 1129 1235 1171" data-label="Section-Header"> <h3>Important</h3> </div> <div data-bbox="1062 1192 1446 1245" data-label="Text"> <p>Do not share the DB with an Operational Ambari Server.</p> </div>
3	Configure external LDAP authentication	Configure external LDAP authentication
4	Install Cluster	NA
5	Deploy views	Deploy views
6	Create + configure view instances	Create + configure view instances
7		(Optional) Repeat for each Ambari Server instance
8		(Optional) Setup proxy for Ambari Server instances

3.3. Reverse Proxy

If you require a larger number of users to access Ambari Views, it may be necessary to “scale-out” the Ambari Server by installing and running multiple Ambari Server standalone instances that host Ambari Views and run those instances behind a reverse proxy.

If a reverse proxy fronts the standalone Ambari Server instances, the only requirement is that the reverse proxy honors session affinity, meaning that once a session has been established the reverse proxy routes each subsequent request to the same Ambari server instance. Depending on the reverse proxy implementation, this can be accomplished in a number of different ways, including hashing client IP and using the JSESSIONID header.



Important

Using multiple Ambari Server instances and a reverse proxy in front of those instances is **not supported** for an operational Ambari Server. It is only supported for standalone Ambari Server instances (i.e. Ambari instances that are not managing a cluster).

4. Configuring Views for Kerberos

If the cluster your views will communicate with is Kerberos-enabled, you need to configure the Ambari Server instance(s) for Kerberos and be sure to configure the views to work with Kerberos.

Refer to the [Set Up Kerberos for Ambari](#) for the instructions on how to configure Ambari Server for Kerberos. Be sure to configure all standalone Ambari Server instances for Kerberos.



Important

Be sure to install the Kerberos client utilities on the Ambari Server so that Ambari can kinit.

RHEL/CentOS/Oracle Linux

```
yum install krb5-workstation
```

SLES

```
zypper install krb5-client
```

Ubuntu/Debian

```
apt-get install krb5-user krb5-config
```

Once your Ambari Server is setup for Kerberos, be sure to follow the specific instructions with each view on how to configure the view for Kerberos and the cluster for Kerberos access from the view. Also, if the view requires HDFS or WebHCat to be configured for a proxy user, **instead of using the ambari-server daemon user as the proxy user, you must use primary Kerberos principal**. For example, if you configure Ambari Server for Kerberos principal **ambari-server@EXAMPLE.COM**, this value would be **ambari-server**.

5. Using the Tez View

Tez is an framework for building high performance batch and interactive data processing applications. Apache Hive and Pig use the Tez framework. When you run a job such as a Hive query or Pig script using Tez, you can use the Tez View to track and debug the execution of that job. Topics in this chapter describe how to configure, deploy and use the Tez View to execute jobs in your cluster:

- [Configuring Your Cluster for Tez View](#)
- [Creating the Tez View Instance](#)
- [Using the Tez View](#)

5.1. Configuring Your Cluster for Tez View

When you deploy a cluster with Ambari, a Tez View instance is automatically created. However, you must verify that the configurations listed in the following table have been correctly set.

If you have manually deployed your cluster, you must set the properties listed in the following table to configure your cluster before you create the Tez View on your standalone Ambari server.

To configure your cluster for the Tez View:

1. Confirm the following configurations are set:

Table 5.1. Cluster Configurations for Tez View

Component	Configuration	Property	Comments
YARN	yarn-site.xml	yarn.resourcemanager. system-metrics- publisher.enabled	Enable the generic history service in the Timeline Server. Verify that this property is set to <code>true</code> .
YARN	yarn-site.xml	yarn.timeline- service.enabled	Enable the Timeline Server for logging details. Verify that this property is set to <code>true</code> .
YARN	yarn-site.xml	yarn.timeline- service.webapp.address	Value must be the <code>IP:PORT</code> on which the Timeline Server is running.

2. If you changed any settings, you must restart the YARN ResourceManager and the Timeline Server for your changes to take effect.



Important

If you do not need to reconfigure the Ambari-created Tez View, see [Using the Tez View](#).

5.2. Creating or Editing the Tez View Instance

Depending on whether you must create a new Tez View instance for a manually deployed cluster or modify an Ambari-created Tez View, see one of the following sections:

- [Modifying a Tez View Instance on an Ambari-Managed Cluster \[8\]](#)
- [Creating a New Tez View Instance on a Manually-Deployed Cluster \[8\]](#)

To modify a Tez View instance on an Ambari-managed cluster:

1. Navigate to the Ambari Administration interface.
2. Click **Views** and expand the **Tez View**.
3. On the Create Instance page, change the appropriate configuration parameters.
4. Select **Local Ambari-Managed Cluster**:

Figure 5.1. Tez View Create Instance Page

The screenshot shows the 'Tez View Create Instance' page. At the top, there's a 'View' dropdown set to 'TEZ' and a 'Version' dropdown set to '0.7.0.2.3.0.0-2108'. Below this is a 'Details' section with input fields for 'Instance Name', 'Display Name', and 'Description', and a 'Visible' checkbox. The 'Cluster Configuration' section has two radio buttons: 'Local Ambari Managed Cluster' (selected) and 'Custom'. Under 'Local Ambari Managed Cluster', there's a 'Cluster Name' dropdown set to 'MyCluster'. Under 'Custom', there are input fields for 'YARN Timeline Server URL' (set to 'yarn.timeline-service.hostname:8188') and 'YARN ResourceManager URL' (set to 'yarn.resourcemanager.hostname:8088'). At the bottom right are 'Cancel' and 'Save' buttons.



Important

Secure clusters that use wire encryption (SSL/TSL) cannot use the **Local Ambari Managed Cluster** option. Instead you must configure the view as described in the [instructions for manually-deployed clusters \[8\]](#).

5. Click **Save**, grant Permissions on the view (see [User Permissions for Tez Views](#)), and click **Go to instance** to use the view. See [Using the Tez View](#).

To create a new Tez View instance for a manually-deployed cluster:

1. Navigate to the Ambari Administration interface.


2. Click **Views**, expand the **Tez View**, and click **Create Instance**.
3. On the Create Instance page, select the **Version**.
4. Enter the Details (required). The Instance Name appears in the URI, the Display Name appears in the Views drop-down list, and the Description helps multiple users identify the view.
5. Scroll down to the Cluster Configuration, verify that **Custom** is checked and enter the following values, which tell the Tez View how to access resources in the cluster:

Table 5.2. Cluster Configuration Values for the Tez View in Ambari

Property	Value
YARN Timeline Server URL (required)	<p>The URL to the YARN Application Timeline Server, used to provide Tez information. Typically, this is the <code>yarn.timeline-service.webapp.address</code> property that is specified in the <code>etc/hadoop/conf/yarn-site.xml</code>.</p> <p>When you enter the value in the view definition, prepend "http://" to the value you find in the <code>yarn-site.xml</code> file. For example, <code>http://<timeline server host>:8188</code></p> <p>For wire encryption-enabled clusters:</p> <p>Set this based on the value of <code>yarn.timeline-service.webapp.https.address</code> in <code>yarn-site.xml</code></p> <p>When you enter the value in the view definition, prepend "https://" to the value. For example, <code>https://<timeline server host>:8190</code></p>
YARN ResourceManager URL (required)	<p>The URL to the YARN ResourceManager, used to provide YARN Application data. Typically, this is the <code>yarn.resourcemanager.webapp.address</code> property that is specified in the <code>etc/hadoop/conf/yarn-site.xml</code>.</p> <p>When you enter the value in the view definition, prepend "http://" to the value you find in the <code>yarn-site.xml</code> file. For example, <code>http://<resourcemanager host>:8088</code></p> <p>For wire encryption-enabled clusters:</p> <p>Set this based on the value of <code>yarn.resourcemanager.webapp.https.address</code> in <code>yarn-site.xml</code></p> <p>When you enter the value in the view definition, prepend "https://" to the value. For example, <code>https://<resourcemanager host>:8090</code></p>

6. Click **Save** and grant Permissions on the view (see [User Permissions for Tez Views](#)).
7. At the top of the view instance configuration page, click **Go to instance**.
8. When your browser is at the view instance page, copy the URL for the Tez View from your browser address bar:

Figure 5.2. Tez View Instance Page

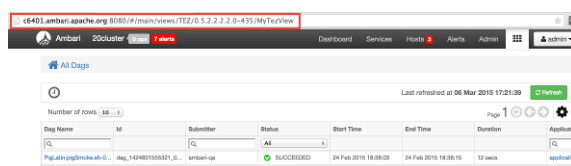

9. In `tez-site.xml`, specify the URL that you copied in Step 8 as the value for the `tez.tez-ui.history-url.base` property, and save the file.

10 Restart the HiveServer2 daemon to make sure that your changes to `tez-site.xml` take effect.

To use the view, see [Using the Tez View](#).




Important

If your cluster is configured for Kerberos, you must set up Ambari Server for Kerberos for the Tez View to access the ATS component. See [Kerberos Setup for Tez Views](#).

5.2.1. User Permissions for Tez Views

After saving the Tez View instance definition, grant permission on the view for the set of users who can use the view:

Figure 5.3. Granting User Permissions to Tez Views

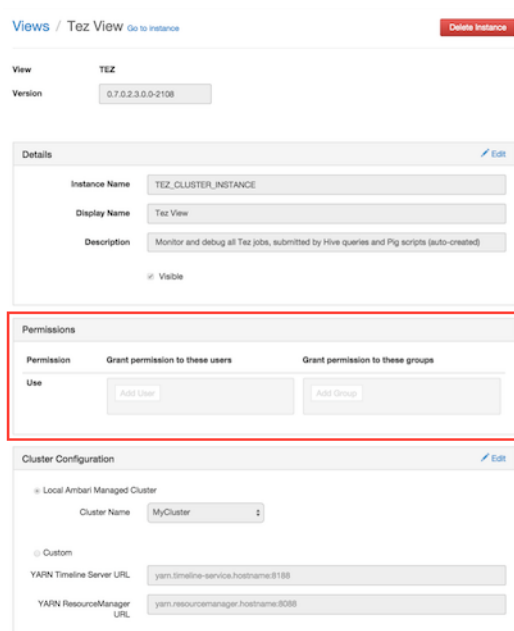



Note

To grant access to all Hive and Pig users, create a group that contains these users, and then grant permission to use the Tez View to that group. See also the ["Managing Users and Groups"](#) section in the *Administering Ambari* guide.

5.2.2. Kerberos Setup for Tez Views

To set up basic Kerberos for views, see ["Set Up Kerberos for Ambari Server"](#) in the *Ambari Security Guide*.

After you have set up basic Kerberos for the Tez View, you must set the following configuration properties:

1. **On the timeline server host**, set the following values for properties in the YARN configuration for Ambari-managed clusters or the `yarn-site.xml` for manually deployed clusters:

Table 5.3. Kerberos Settings for Tez Views

Property	Value
<code>yarn.timeline-service.http-authentication.proxyuser.\${ambari principal name}.hosts</code>	*
<code>yarn.timeline-service.http-authentication.proxyuser.\${ambari principal name}.users</code>	*
<code>yarn.timeline-service.http-authentication.proxyuser.\${ambari principal name}.groups</code>	*

For example, if the Kerberos principal used for the Ambari server is `ambari-service@EXAMPLE.COM`, replace `${ambari principal name}` with `ambari-service`.

2. Restart the Timeline Server so your configuration changes take effect.
3. **On the ResourceManager host**, add the following properties to kerberize and enable proxy-user access to the ResourceManager UI:

Table 5.4. In core-site.xml

Property	Value
<code>hadoop.http.authentication.type</code>	kerberos
<code>hadoop.http.filter.initializers</code>	<code>org.apache.hadoop.security.AuthenticationFilterInitializer</code>
<code>hadoop.http.authentication.kerberos.keytab</code>	<Path to keytab container HTTP principal> for example: <code><etc/security/keytabs/spnego.service.keytab></code>
<code>hadoop.http.authentication.kerberos.principal</code>	<code>HTTP/_HOST@REALM</code> for example: <code>HTTP/_HOST@EXAMPLE.COM</code>
<code>hadoop.http.authentication.signature.secret.file</code>	<Path to signature secret file for signing the authentication tokens>

Property	Value
	The same secret should be used for all nodes in the cluster, NameNode, DataNode, ResourceManager, NodeManager. For example: /etc/hadoop/conf/secret_http_file
hadoop.http.authentication.cookie.domain	<The domain to use for the HTTP cookie that stores the authentication token> for example: hortonworks.com. This setting is optional. The default is no domain.
hadoop.proxyuser.\${ambari_principal_name}.hosts	*
hadoop.proxyuser.\${ambari_principal_name}.groups	*
hadoop.proxyuser.\${ambari_principal_name}.users	*

Table 5.5. In yarn-site.xml

Property	Value
yarn.resourcemanager.webapp.delegation-token-auth-filter.enabled	true
yarn.timeline-service.http-authentication.proxyuser.\${ambari_principal_name}.hosts	*
yarn.timeline-service.http-authentication.proxyuser.\${ambari_principal_name}.groups	*
yarn.timeline-service.http-authentication.proxyuser.\${ambari_principal_name}.users	*
The following settings are optional, if proxyusers settings are added in core-site.xml:	
yarn.resourcemanager.proxyuser.\${ambari_principal_name}.hosts	*
yarn.resourcemanager.proxyuser.\${ambari_principal_name}.users	*
yarn.resourcemanager.proxyuser.\${ambari_principal_name}.groups	*

5.3. Using the Tez View

Tez provides a framework that enables human-interactive response times with Apache Hive queries and Apache Pig data transformations. The Tez View enables you to understand and debug submitted Tez jobs, such as Hive queries or Pig scripts, that are executed using the Tez execution engine.

The following sections discuss using the Tez Views to manage Hive and Pig tasks:

- [Understanding DAGs, Vertices, and Tasks](#)
- [Identifying the Tez DAG for Your Job](#)
- [Understanding How Your Tez Job Is Executed](#)
- [Identifying Causes of Failed Jobs](#)


- [Viewing All Failed Tasks](#)
- [Using Counters to Identify the Cause of Slow-Performing Jobs](#)

5.3.1. Understanding Directed Acyclic Graphs (DAGs), Vertices, and Tasks

To explain DAGs, vertices, and tasks, consider how Hive SQL queries are compiled and converted into a Tez execution graph also known as a DAG. A DAG is a collection of vertices where each vertex executes a fragment of the query or script. Directed connections between vertices determine the order in which they are executed. For example, the vertex to read a table must be run before a filter can be applied to the rows of that table.

As another example, consider when a vertex reads a user table. This table can be very large and distributed across multiple computers and multiple racks. Reading the table is achieved by running many tasks in parallel. The following figure shows the execution of a SQL query in Hive:

Figure 5.4. SQL Query Execution in Hive

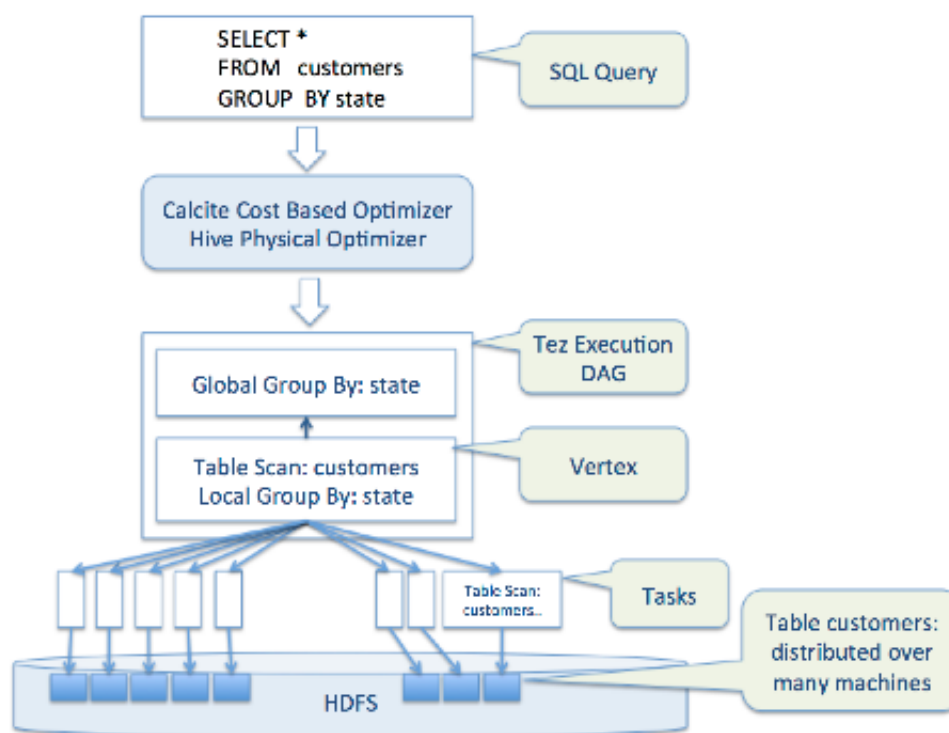

5.3.2. Identifying the Tez DAG for Your Job

To identify the Tez DAG for your job:

1. Navigate to the Tez View instance by clicking **Go to instance** on the Tez View page in Ambari. The Tez View instance page displays a list of jobs sorted by time, listing the latest jobs first. You can search a job using the following fields:


- **Dag Name** (DAG name for the job)
- **Id** (DAG identifier)
- **Submitter** (user who submitted the job)
- **Status** (job status)
- **Application ID**

2. When you have entered your search criteria, press **Enter**, and search results matching your criteria are returned below.

Selecting the Columns That Appear in Search Results

To select which columns are included in the Tez View search results, click the gear icon to the right of the search tool bar. A Column Selector dialog box appears where you can select which columns appear in the search results. Select the columns, and click **Ok** to return to the Tez View:

Figure 5.5. Tez View Column Selector Dialog Box

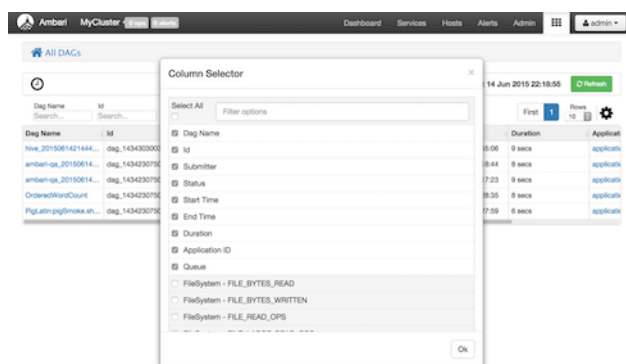

Note

To search for columns, use the search well at the top of the Column Selector dialog box. Check **Select All** to include all columns in your search results and uncheck it to clear all of your column selections.

Understanding Tez View Job Status

The following table explains the job status field that is returned for all search results returned in the Tez View:

Table 5.6. Tez Job Status Descriptions

Status	Description
Submitted	The DAG is submitted to Tez but is not running.
Running	The DAG is currently running.
Succeeded	The DAG completed successfully.
Failed	The DAG failed to complete successfully.

Status	Description
Killed	The DAG was stopped manually.
Error	An internal error occurred when executing the DAG.


5.3.3. Understanding How Your Tez Job Is Executed

The Tez View enables you to gain insight into the complexity and the progress of executing jobs.

The View tab shows the following:

- DAG graphical view
- All vertices
- Tasks per vertex on top right of the vertex
- Failed vertices display in red, successful vertices display in green
- Mouse over vertices to view timeline details

Figure 5.6. View Tab in Tez View

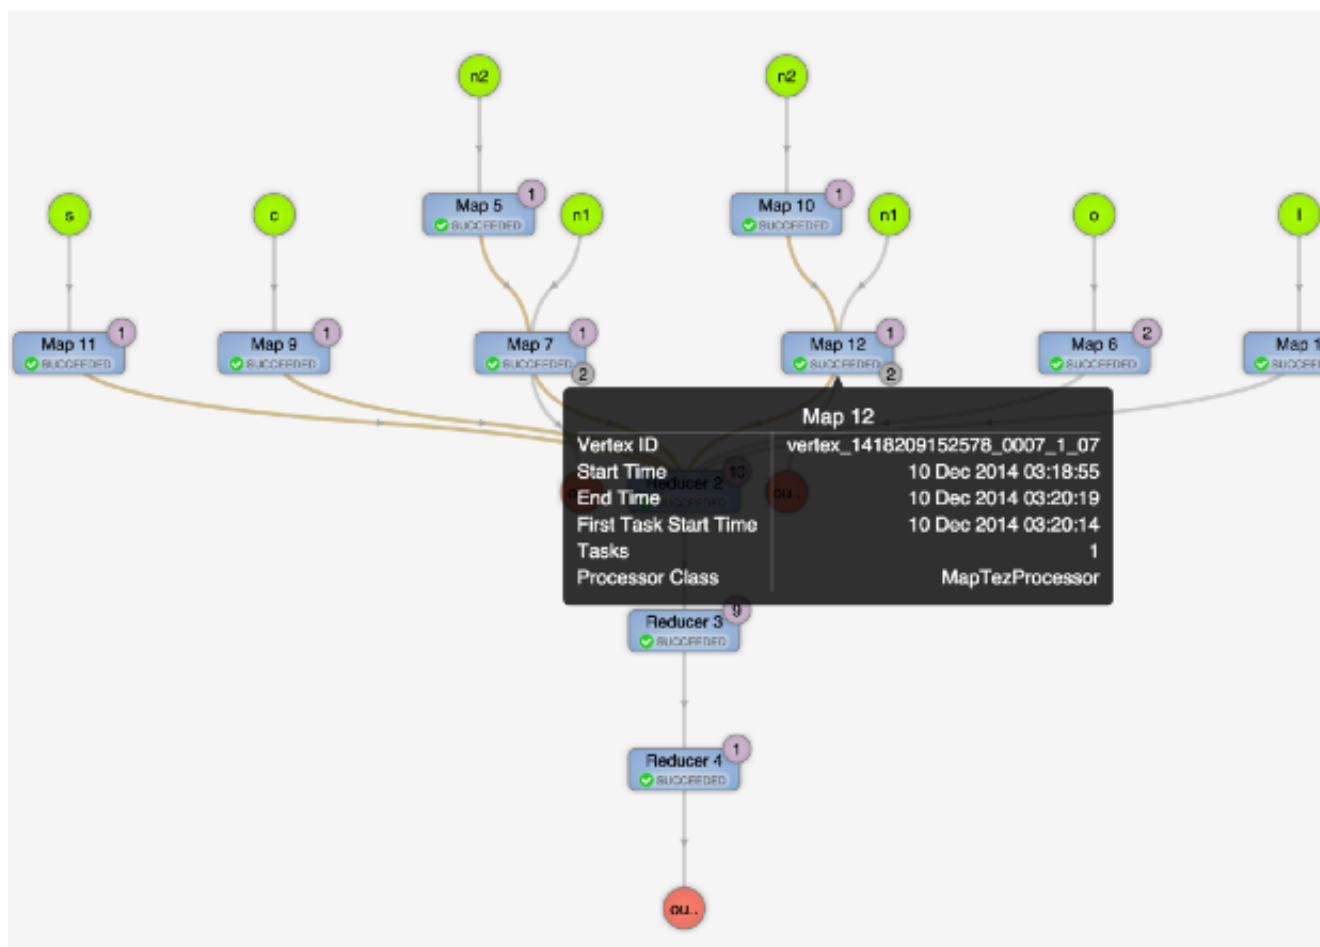

The View Tab enables you to investigate the vertices that have failures or are taking a long time.


5.3.4. Identifying Causes of Failed Jobs

The Tez View enables you to quickly find and report errors. When a Tez task fails, you must:

- Identify why the task failed
- Capture the reason for task failure

When a Tez task fails, the DAG Details tab explains the failure:


Figure 5.7. DAG Details Window

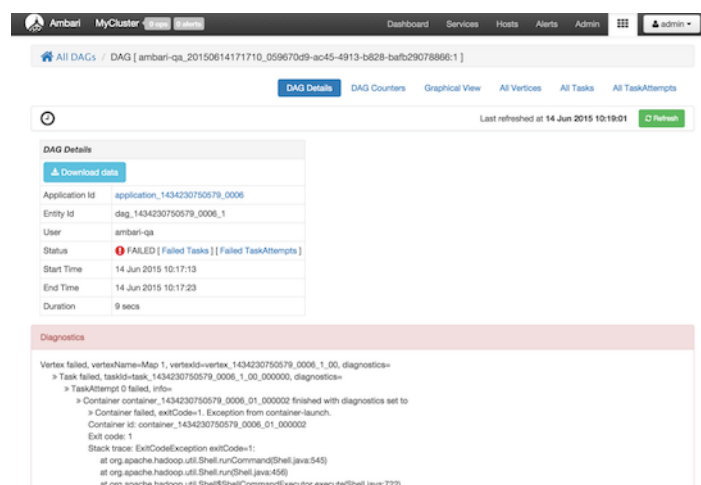

5.3.5. Viewing All Failed Tasks

Multiple task failures may occur. The Tez View All Tasks tab enables you to view all tasks that failed and examine the reason and logs for each failure. Logs for failed tasks, but not for aborted tasks are available to download from this tab:

Figure 5.8. Tez View All Tasks Tab

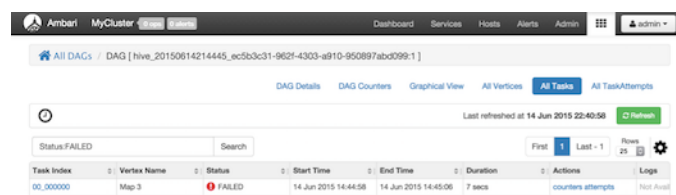

5.3.6. Using Counters to Identify the Cause of Slow-Performing Jobs

The Tez View shows counters so you can understand why a task performs more slowly than expected. Counters help you better understand the task size and enable you to locate anomalies. Elapsed time is one of the primary counters to look for.

Counters are available at the DAG, vertex, and task levels:

Figure 5.9. Tez View DAG-Level Counters Tab

Counter Name	Counter Value
Search...	
<i>org.apache.tez.common.counters.DAGCounter</i>	
NUM_SUCCEEDED_TASKS	3
TOTAL_LAUNCHED_TASKS	3
DATA_LOCAL_TASKS	1
AM_CPU_MILLISECONDS	1,550
AM_OG_TIME_MILLIS	196
<i>File System Counters</i>	
FILE_BYTES_READ	225
FILE_BYTES_WRITTEN	161

Figure 5.10. Tez View Vertex-Level Counters Tab

Counter Name	Counter Value
Search...	
<i>org.apache.tez.common.counters.DAGCounter</i>	
DATA_LOCAL_TASKS	1
<i>File System Counters</i>	
FILE_BYTES_READ	32
FILE_BYTES_WRITTEN	89

Figure 5.11. Tez View Task-Level Counters Tab

Counter Name	Counter Value
Search...	
<i>org.apache.tez.common.counters.DAGCounter</i>	
DATA_LOCAL_TASKS	1
<i>File System Counters</i>	
FILE_BYTES_READ	32
FILE_BYTES_WRITTEN	89

Monitoring Task Progress for Jobs

The Tez View shows task progress by increasing the count of completed tasks and total tasks. This enables you to identify the tasks that might be "hung" and to understand more about long-running tasks.

6. Using the Pig View

Apache Pig is a scripting platform for processing and analyzing large data sets. Pig was designed to perform extract-transform-load (ETL) operations, raw data research, and iterative data processing. The **Pig View** provides a web-based interface to compose, edit, and submit Pig scripts, download results, and view logs and the history of job submissions.

This chapter explains:

- [Configuring Your Cluster for the Pig View](#)
- [Creating the Pig View Instance](#)
- [Using the Pig View](#)

6.1. Configuring Your Cluster for Pig View

Configuring HDFS for Pig

You must set up an HDFS proxy user for the Ambari daemon account. For example, if `ambari-server` daemon is running as `root`, you set up a proxy user for `root` in `core-site` by clicking **HDFS > Configs > Advanced > Custom core-site > Add Property**, and then add the following key-value pairs in the Add Property dialog box:

```
hadoop.proxyuser.root.groups=*
```

```
hadoop.proxyuser.root.hosts=*
```

Click **Add** to add the property to `core-site`.

You must also set up an HDFS proxy user for WebHCat. For example, if your WebHCat server is running as `hcat`, you set up a proxy user for `hcat` in `core-site`. In the same HDFS advanced `core-site` settings pane, click **Add Property**, add the following key-value pairs to the Add Property dialog box, and then click **Add** to add them to `core-site`:

```
hadoop.proxyuser.hcat.groups=*
```

```
hadoop.proxyuser.hcat.hosts=*
```

Ambari views use the `doAs` option for commands. This option enables the Ambari *process user* to impersonate the Ambari *logged-in user*. To avoid receiving permissions errors for job submissions and file save operations, you must create HDFS users for all Ambari users that use the views.

Configuring WebHCat for Pig

You must set up a WebHCat proxy user for the Ambari daemon account. For example, if `ambari-server` daemon is running as `root`, you set up a proxy user for `root` in `webhcat-site` by clicking **Hive > Configs > Advanced > Custom webhcat-site > Add Property**, add the following key-value pairs in the Add Property dialog box, and then click **Add** to add them to `webhcat-site`:


```
webhcat.proxyuser.root.groups=*
```

```
webhcat.proxyuser.root.hosts=*
```



Note

If Ambari Server is running as a non-root user, such as 'ambari', and you are planning on using Ambari Views, the following properties in **Services > HDFS > Configs > Advanced core-site** must be added:

```
hadoop.proxyuser.ambari.groups=*
hadoop.proxyuser.ambari.hosts=*
```

See the Ambari Security Guide for more information about [How to Configure Ambari Server for Non-Root](#).



Note

This view stores user metadata in HDFS. By default, the location in HDFS for this metadata is `/user/<user name of logged in user>`. Since many users leverage the 'admin' account for getting started with Ambari, the `/user/admin` folder needs to be created. To do so execute the following commands as the hdfs user:

```
su - hdfs
hadoop fs -mkdir /user/admin
hadoop fs -chown admin:hadoop /user/admin
```

6.2. Creating the Pig View Instance

1. Browse to the Ambari Administration interface.
2. Click **Views**, expand the **Pig View**, and click **Create Instance**.
3. On the Create Instance page, select **Version**. If multiple Pig View jars are present, choose one.
4. Enter the Details and Settings. The Instance Name appears in the URI, the Display Name appears in the Views drop-down list, and the Description helps multiple users identify the view:

Figure 6.1. Pig View Details and Settings

The screenshot shows the 'Pig View' configuration interface. At the top, there's a 'View' section with a 'Version' dropdown set to '1.0.0'. Below this is the 'Details' section with fields for 'Instance Name' (ETLPig), 'Display Name' (ETL Pig), and 'Description' (Pig View for ETL team). There's also a 'Visible' checkbox. The 'Settings' section contains fields for 'WebHDFS Username' (\$username), 'WebHDFS Authentication' (auth=SIMPLE), 'WebHCat Username', 'Scripts HDFS Directory' (/user/\$username/pig/scripts), 'Jobs HDFS Directory' (/user/\$username/pig/jobs), and 'Meta HDFS Directory' (/user/\$username/pig/store).

5. Scroll down, and enter the Cluster Configuration information, which tells the Pig View how to access resources in the cluster. For a cluster that is deployed and managed by Ambari, select **Local Ambari Managed Cluster**:

Figure 6.2. Pig View Cluster Configuration

The screenshot shows the 'Cluster Configuration' section. It has two radio buttons: 'Local Ambari Managed Cluster' (selected) and 'Custom'. Under 'Local Ambari Managed Cluster', there's a 'Cluster Name' dropdown set to 'MyCluster'. Under 'Custom', there are several fields: 'WebHDFS FileSystem URI*' (webhdfs://namenode:50070), 'Logical name of the NameNode cluster', 'List of NameNodes', 'First NameNode RPC Address', 'Second NameNode RPC Address', 'First NameNode HTTP (WebHDFS) Address', 'Second NameNode HTTP (WebHDFS) Address', 'Failover Proxy Provider', 'WebHCat Hostname*' (webhcat-host.example.com), and 'WebHCat Port*' (50111).

6. Click **Save**, give Permissions to the appropriate users and groups, and click **Go to instance** at the top of the page to go to the view instance.

6.2.1. Getting Correct Configuration Values for Manually Deployed Clusters

If you have manually deployed your cluster, you must enter cluster configuration values in the Pig View Create Instance page. The following table explains where you can find cluster configuration settings in Ambari.

Table 6.1. Finding Cluster Configuration Values for the Pig View in Ambari

Property	Value
Scripts HDFS Directory*	/user/\${username}/pig/scripts
Jobs HDFS Directory*	/user/\${username}/pig/jobs
WebHDFS FileSystem URI*	Click HDFS > Configs > Advanced hdfs-site > dfs.namenode.http-address . When you enter the value in the view definition, pre-pend "webhdfs://" to the value you find in the advanced HDFS configuration settings. For example, webhdfs://c6401.ambari.apache.org:50070
WebHCat Hostname*	Click Hive > Configs > Advanced > WebHCat Server > WebHCat Server host to view the hostname. For example, c6402.ambari.apache.org
WebHCat Port*	Click Hive > Configs > Advanced > Advanced webhcat-site > templeton.port to view the port number. For example, 50111

For NameNode High Availability

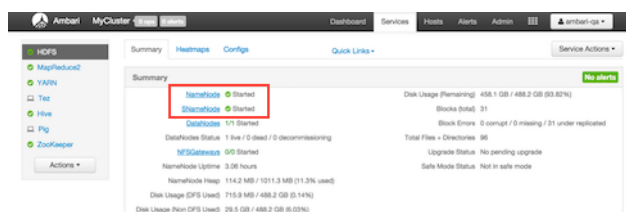
The following values must be entered for primary and secondary NameNodes:

Table 6.2. Pig View Settings for NameNode High Availability


Property	Value
First NameNode RPC Address or Second NameNode RPC Address	Select the primary or secondary NameNode to view settings from that host in the cluster. See how to get the NameNode RPC address [21] . When you enter the value in the view definition, pre-pend "http://" to the value you find in the advanced hdfs-site settings. For example, http://c6401.ambari.apache.org:8020
First NameNode HTTP (WebHDFS) Address or Second NameNode HTTP (WebHDFS) Address	Click HDFS > Configs > Advanced > Advanced hdfs-site > dfs.namenode.http-address . When you enter the value in the view definition, pre-pend "http://" to the value you find in the advanced hdfs-site settings. For example, http://c6401.ambari.apache.org:50070

To get First NameNode RPC Address values:

1. Navigate to the HDFS service page in Ambari that contains links to individual NameNodes. Click **NameNode** (primary) or **SNameNode** (secondary) to view the host page:

Figure 6.3. HDFS Service Page in Ambari

2. On the host page, click **Configs > Advanced**.
3. Enter "rpc" in the Filter search well at the top right corner of the page or navigate to the **Advanced hdfs-site** settings to find the `dfs.namenode.rpc-address` value that you can enter into the Pig View definition. Here is an example of using the Filter to locate a value:

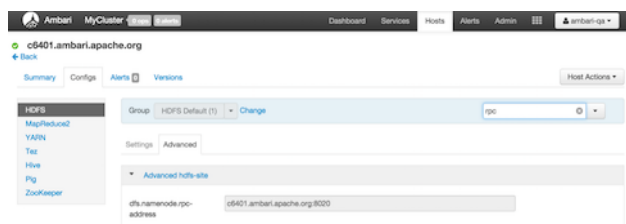Figure 6.4. Using the Filter to Search Advanced hdfs-site Settings

6.2.2. User Permissions for Pig Views

After saving the Pig View instance definition, grant permission on the view for the set of users who can use the view:

Figure 6.5. Granting User Permissions to Pig Views

The screenshot shows the Ambari Views interface for a Pig View named 'My Pig View'. The top navigation bar includes 'Views / My Pig View' and a 'Delete Instance' button. Below this, the 'View' is identified as 'PIG' and the 'Version' is '1.0.0'. The 'Details' section contains fields for 'Instance Name' (MyPigView), 'Display Name' (My Pig View), and 'Description' (description), along with a 'Visible' checkbox. The 'Permissions' section, highlighted with a red box, contains a table with columns 'Permission', 'Grant permission to these users', and 'Grant permission to these groups'. Under the 'Permission' column, the 'Use' permission is listed. The 'Grant permission to these users' column has an 'Add User' button, and the 'Grant permission to these groups' column has an 'Add Group' button. The 'Settings' section is partially visible at the bottom.

Permission	Grant permission to these users	Grant permission to these groups
Use	<input type="button" value="Add User"/>	<input type="button" value="Add Group"/>

6.2.3. Kerberos Setup for Pig Views

To set up basic Kerberos for views, see "Set Up Kerberos for Ambari Server" in the [Ambari Security Guide](#). After you have set up basic Kerberos for the Pig View, Pig requires that **WebHDFS Authentication** be set to `auth=KERBEROS;proxyuser=<ambari-user-principal>`

For example, see the following figure:

Figure 6.6. Kerberos Settings for Pig Views

Properties

WebHDFS FileSystem URI* webhdfs://erik-views-1.c.pramod-thangai.internal:50070

WebHDFS Username \$(username)

WebHDFS Authentication **auth=KERBEROS.proxyuser=ambaruser**

WebHCat URL* http://erik-views-3.c.pramod-thangai.internal:50111/templeton/v1

WebHCat Username \$(username)

Dataworker Username \$(username)

Scripts HDFS Directory* /user/\$(username)/pig/scripts

Jobs HDFS Directory* /user/\$(username)/pig/jobs

Meta HDFS Directory /user/\$(username)/pig/store

6.3. Using the Pig View

Use the Pig View to:

- Write Pig scripts
- Execute Pig scripts
- Add user-defined functions (UDFs) to Pig scripts
- View the history of all Pig scripts run by the current user

6.3.1. Writing Pig Scripts

Navigate to the Pig View instance Scripts page, and click **New Script** in the upper right corner of the window. Name the script in the New Script dialog box, click **Create**, and enter your script into the editor. After you have written the script, you can use the execute button on the upper right to run it. Check the box that is adjacent to the execute button to use Tez instead of the default MapReduce engine.

The following figure shows a running Pig script:

Figure 6.7. Pig Script Running in the Pig View

Ambari MyCluster

Dashboard Services Hosts Alerts Admin

Pig_ETL_1

Save Copy Delete

Script History

Pig_ETL_1

Execute on Tez Execute

```

1: batting = load 'batting.csv' using PigStorage();
2: run = FOR EACH batting GENERATE $0 as playerId, $1 as year, $2 as runs;
3: grp_data = GROUP run by (year);
4: max_runs = FOR EACH grp_data GENERATE group as grp,max(runs.runs) as max_runs;
5: join_max_run = JOIN max_runs by ($0, max_runs), run by (year,runs);
6: join_data = FOR EACH join_max_run GENERATE $0 as year, $2 as playerId, $1 as runs;
7: dump join_data;

```

Arguments

The pig script has no arguments defined.

Pig argument + Add

6.3.2. Viewing Pig Script Execution History

The History tab shows the history of Pig scripts run by the current user. A particular script in history can be clicked to open it in a new Script tab to view its details:


Figure 6.8. Pig View Script History Tab



6.3.3. User-Defined Functions (UDFs) Tab

UDFs can be added to Pig scripts by clicking **Create UDF** in the upper right corner of the UDFs window. In the Create UDF dialog box, point to a UDF in the system by specifying the name and path:

Figure 6.9. Pig View UDFs Tab

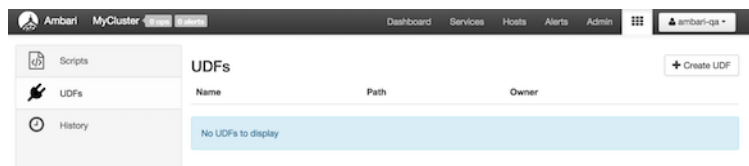

7. Using the Capacity Scheduler View

The Yarn Capacity Scheduler allows for multiple tenants in an HDP cluster to share compute resources according to configurable workload management policies.

The Capacity Scheduler View is designed to help hadoop operators configure these policies for YARN. In the View, operators can create hierarchical queues and tune configurations for each queue to define an overall workload management policy for the cluster.

In this section:

- [Configuring your Cluster for the Capacity Scheduler View](#)
- [Creating a Capacity Scheduler View Instance](#)
- [Using the Capacity Scheduler View](#)
- [Troubleshooting](#)

7.1. Configuring your Cluster for the Capacity Scheduler View

The Capacity Scheduler View requires that the cluster is managed by Ambari – the view utilizes the Ambari Server API.


7.2. Creating a Capacity Scheduler View Instance

When you deploy a cluster using Ambari, a Capacity Scheduler View instance is automatically created. If you do not need to reconfigure the Ambari-created cluster, proceed to the next section, [Using the Capacity Scheduler View](#).


If you have deployed your cluster manually, or if you need to re-configure the Ambari-created Capacity Scheduler View, you can use the information in this section to create and configure a view instance.

Use the following steps to set up a Capacity Scheduler view instance.


1. Select **admin > Manage Ambari** in the Ambari Web top menu.

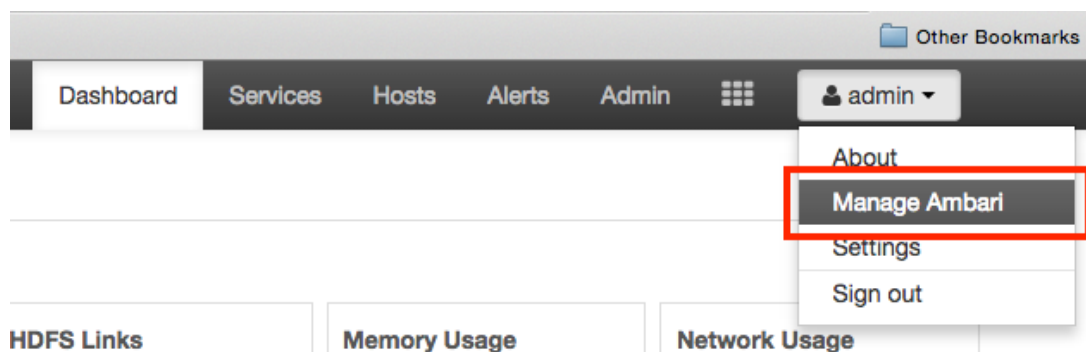

2. On the Manage Ambari page, click **Views**.

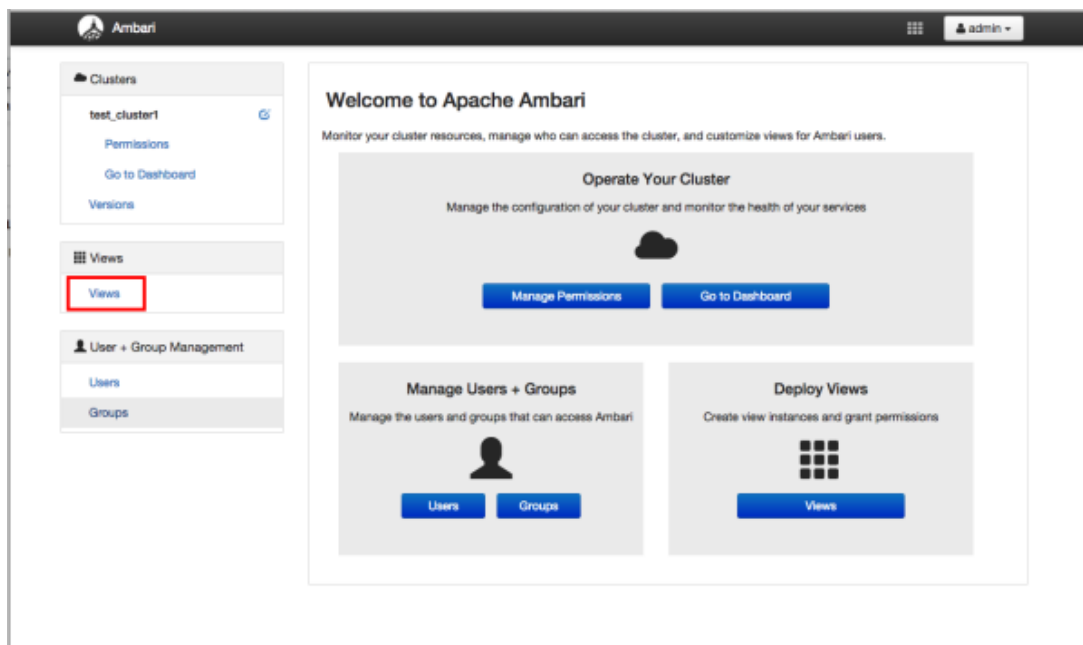

3. On the Views page, click **CAPACITY-SCHEDULER**, then click **Create Instance**.

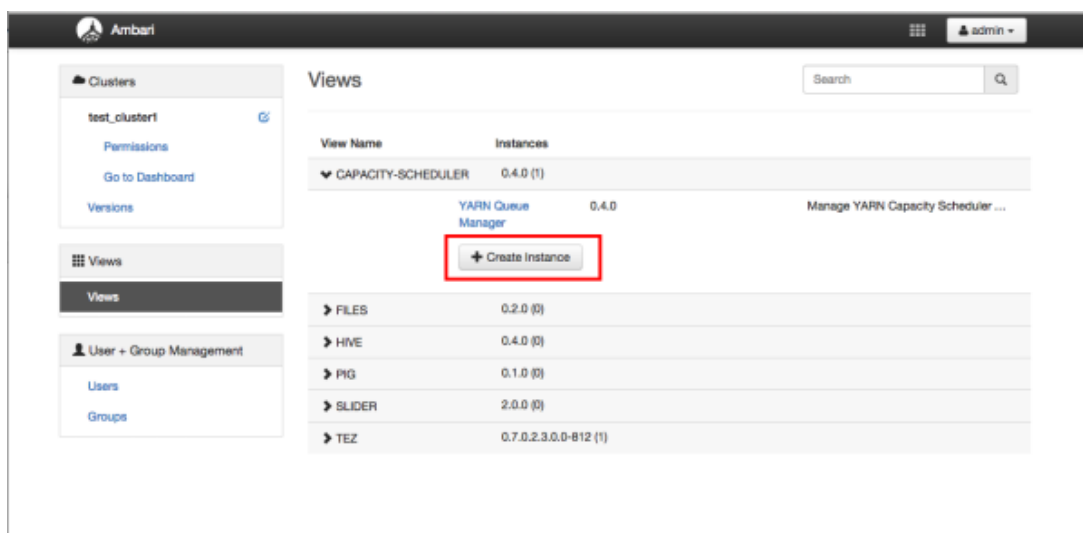

4. In the Details box on the Create Instance page, type in an instance name, display name, and a description for the view.



Note

The instance name cannot contain spaces or special characters.

5. In the Cluster Configuration box on the Create Instance page, configure the view to communicate with the HDP cluster.
- For HDP clusters that are local (managed by the local Ambari Server), select the **Local Ambari Managed Cluster** option, then select the local cluster name.

- To configure the view to work with HDP clusters that are remote (not part of this Ambari Server instance), select the **Custom** option, then specify the remote Ambari cluster API URL and the Ambari cluster user name and password.

6. Click **Save** at the bottom of the page.

The screenshot shows the Ambari web interface for creating a new instance of a view. The left sidebar contains navigation links for Clusters, Views, and User + Group Management. The main content area is titled 'Views / Create Instance'. It shows the 'CAPACITY-SCHEDULER' view selected with version '0.4.0'. The 'Details' section has fields for 'Instance Name' (Capacity_Scheduler_1), 'Display Name' (Capacity Scheduler 1), and 'Description' (Capacity Scheduler configuration 1). There is a 'Visible' checkbox which is checked. The 'Cluster Configuration' section has two options: 'Local Ambari Managed Cluster' (selected) and 'Custom'. Under 'Local Ambari Managed Cluster', the 'Cluster Name' is 'test_cluster1'. Under 'Custom', there are fields for 'Ambari Cluster URL' (http://ambari.server:8080/api/v1/clusters/MyCluster), 'Operator Username' (djones), and 'Operator Password' (masked). At the bottom right, there are 'Cancel' and 'Save' buttons, with the 'Save' button highlighted by a red rectangle.

7. The Capacity Scheduler View instance is created, and the configuration page for the instance appears.

The screenshot displays the Ambari web interface for configuring a Capacity Scheduler view. The sidebar on the left contains navigation links for Clusters, Views, and User + Group Management. The main content area is titled 'Views / Capacity Scheduler 1' and includes a 'Delete Instance' button. The 'View' section shows the view name 'CAPACITY-SCHEDULER' and version '0.4.0'. The 'Details' section includes fields for 'Instance Name' (Capacity_Scheduler_1), 'Display Name' (Capacity Scheduler 1), and 'Description' (Capacity Scheduler configuration 1), with a 'Visible' checkbox checked. The 'Permissions' section has a table with columns for 'Permission', 'Grant permission to these users', and 'Grant permission to these groups'. The 'Cluster Configuration' section shows the 'Local Ambari Managed Cluster' option selected, with a 'Cluster Name' dropdown set to 'test_cluster1'. The 'Custom' option is also available, with fields for 'Ambari Cluster URL', 'Operator Username', and 'Operator Password'.

7.2.1. User Permissions for Capacity Scheduler Views

Use the following procedure to add users and groups to a Capacity Scheduler view instance.

1. On the Capacity Scheduler view instance configuration page, click the box labeled Add User in the Permissions box.

Ambari

Views / Capacity Scheduler 1 [Go to instance](#) [Delete Instance](#)

View: CAPACITY-SCHEDULER
Version: 0.4.0

Details [Edit](#)

Instance Name: Capacity_Scheduler_1
Display Name: Capacity Scheduler 1
Description: Capacity Scheduler configuration 1
☒ Visible

Permissions

Permission	Grant permission to these users	Grant permission to these groups
Use	<div><input type="text" value="Add User"/></div>	<div><input type="text" value="Add Group"/></div>

Cluster Configuration [Edit](#)

☒ Local Ambari Managed Cluster
Cluster Name: test_cluster1

☐ Custom
Ambari Cluster URL*: http://ambari.server:8080/api/v1/clusters/MyCluster

2. Enter user names in the Use box, then click the blue check mark to add the users. You can use the same method to add groups in the Add Group box.

The screenshot shows the Ambari web interface for configuring a Capacity Scheduler. The left sidebar contains navigation links for Clusters, Views, and User + Group Management. The main content area is titled 'Views / Capacity Scheduler 1' and includes a 'Go to Instance' link and a 'Delete Instance' button. The 'View' is identified as 'CAPACITY-SCHEDULER' with version '0.4.0'. The 'Details' section shows the instance name 'Capacity_Scheduler_1', display name 'Capacity Scheduler 1', and description 'Capacity Scheduler configuration 1', with a 'Visible' checkbox checked. The 'Permissions' section has a table with columns for 'Permission', 'Grant permission to these users', and 'Grant permission to these groups'. The 'Use' row shows 'barnth' and 'djones' in the users column, with a red box highlighting the 'x' and 'checkmark' icons. The 'Cluster Configuration' section shows the 'Local Ambari Managed Cluster' option selected, with 'test_cluster1' as the cluster name and a custom URL.

Ambari

Views / Capacity Scheduler 1 [Go to Instance](#) [Delete Instance](#)

View: CAPACITY-SCHEDULER
Version: 0.4.0

Details [Edit](#)

Instance Name: Capacity_Scheduler_1
Display Name: Capacity Scheduler 1
Description: Capacity Scheduler configuration 1
☒ Visible

Permissions

Permission	Grant permission to these users	Grant permission to these groups
Use	<div>barnth x djones x</div> <div><input checked="" type="checkbox"/></div>	<div>Add Group</div>

Cluster Configuration [Edit](#)


☒ Local Ambari Managed Cluster
Cluster Name: test_cluster1

☐ Custom
Ambari Cluster URL*: http://ambari.server:8080/api/v1/clusters/MyCluster

- After you have finished adding users and groups, click **Go to instance** at the top of the page to open the Capacity Scheduler view instance.

The screenshot shows the Ambari web interface. On the left is a sidebar with navigation links: Clusters (test_cluster1, Permissions, Go to Dashboard, Versions), Views (Views), and User + Group Management (Users, Groups). The main content area is titled 'Views / Capacity Scheduler 1'. A red box highlights the 'Go to Instance' link. Below the title, the 'View' is 'CAPACITY-SCHEDULER' and the 'Version' is '0.4.0'. There is a 'Delete Instance' button. The 'Details' section shows: Instance Name (Capacity_Scheduler_1), Display Name (Capacity Scheduler 1), Description (Capacity Scheduler configuration 1), and a checked 'Visible' checkbox. The 'Permissions' section has a table with columns 'Permission', 'Grant permission to these users', and 'Grant permission to these groups'. Under 'Use', the 'users' column contains 'bsmith' and 'djones', and the 'groups' column contains 'product_management'. The 'Cluster Configuration' section has two radio buttons: 'Local Ambari Managed Cluster' (selected) and 'Custom'. Under 'Local Ambari Managed Cluster', the 'Cluster Name' is 'test_cluster1'. Under 'Custom', the 'Ambari Cluster URL*' is 'http://ambari.server:8080/api/v1/clusters/MyCluster' and the 'Operator Username*' is 'admin'.

4. The Capacity Scheduler view instance page appears.

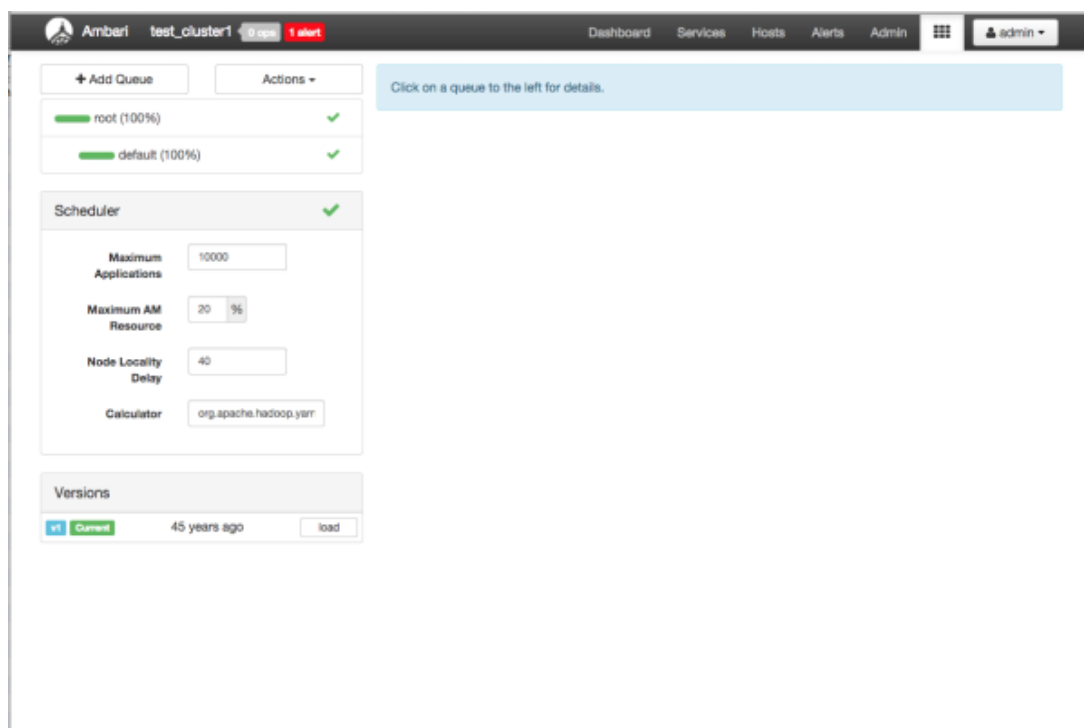

7.3. Using the Capacity Scheduler View

The Capacity Scheduler View is designed to help hadoop operators configure workload management policies for YARN. In the Capacity Scheduler View, operators can create hierarchical queues and tune configurations for each queue to define an overall workload management policy for the cluster.

7.3.1. Setting up Queues


Use the following steps to set up Capacity Scheduler queues on a view instance.

1. On the Capacity Scheduler view instance configuration page, click **Add Queue**. The queue will be added under the top level, or "root" queue. A "default" queue already exists under the root queue.




Note

To return to a previously created Capacity Scheduler view instance, click **Views** on the Manage Ambari page, then click **CAPACITY-SCHEDULER**. Click the applicable Capacity Scheduler view instance, then click **Go to instance** at the top of the page.

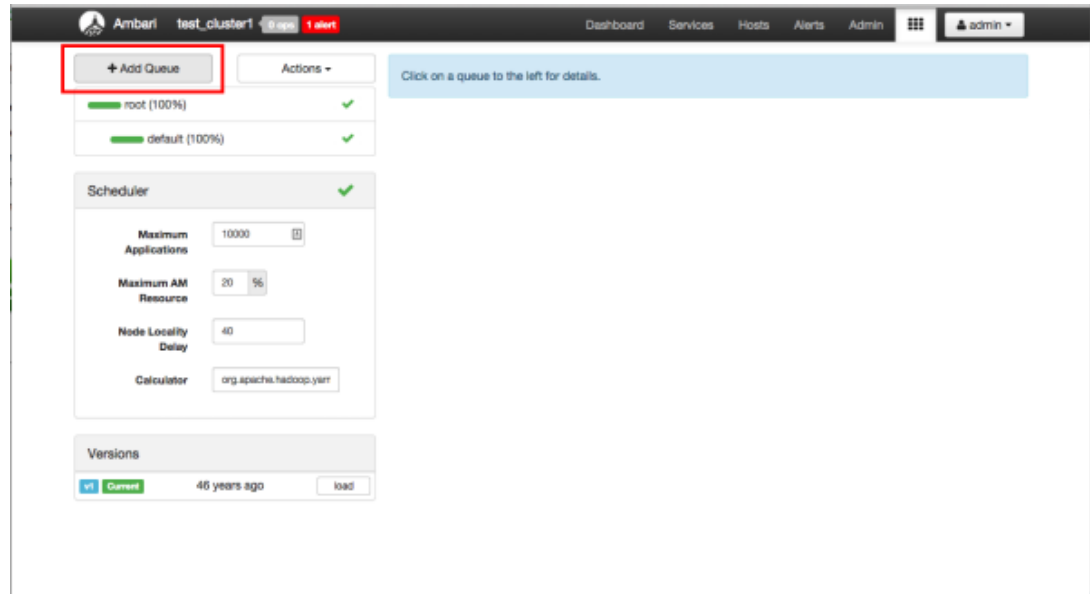

2. Type in a name for the new queue, then click the green check mark to create the queue. In the following example, we're creating the "Engineering" queue.

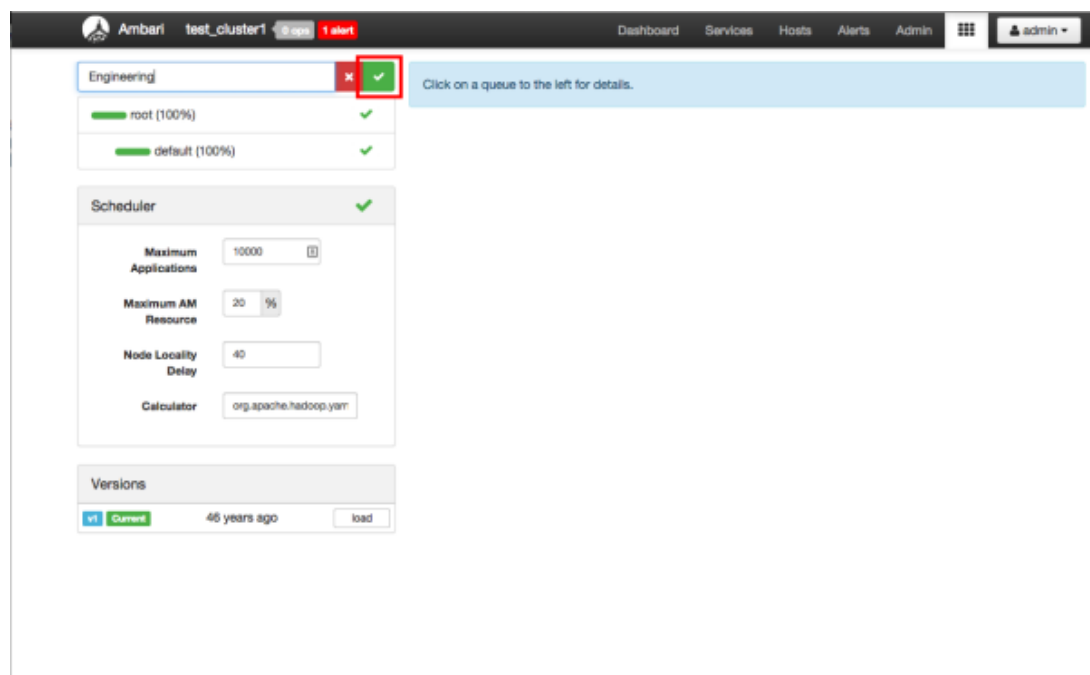

3. The "Engineering" queue is added, and its configuration page appears.

The screenshot shows the Ambari interface for configuring the 'Engineering' queue. On the left, a list of queues shows 'root (100%)', 'default (100%)', and 'Engineering (0%)'. The 'Engineering' queue is selected. The 'Capacity' section shows a 'Level Total' bar at 100%. The 'Engineering' section has a 'Capacity' slider set to 0% and a 'Max Capacity' slider set to 0%. The 'Scheduler' section shows settings for Maximum Applications (10000), Maximum AM Resource (20%), Node Locality Delay (40), and Calculator (org.apache.hadoop.yarn). The 'Access Control and Status' section shows the queue is 'Running'. The 'Resources' section shows settings for User Limit Factor (1), Minimum User Limit (100%), Maximum Applications (Inherited), Maximum AM Resource (Inherited), and Ordering policy (FIFO).

4. The sum of queue capacities at any level in the Capacity Scheduler configuration must total 100%. Here the default queue is already set to 100%. Therefore, if we try to set the "Engineering" queue capacity to 60%, error messages appear warning that the total at this level is 160%.

The screenshot shows the Ambari interface for configuring the 'Engineering' queue. On the left, the 'Engineering' queue is selected and its capacity is set to 60%. The 'Capacity' section shows a 'Level Total' bar at 160%. The 'Engineering' section has a 'Capacity' slider set to 60% and a 'Max Capacity' slider set to 60%. The 'Scheduler' section shows settings for Maximum Applications (10000), Maximum AM Resource (20%), Node Locality Delay (40), and Calculator (org.apache.hadoop.yarn). The 'Access Control and Status' section shows the queue is 'Running'. The 'Resources' section shows settings for User Limit Factor (1), Minimum User Limit (100%), Maximum Applications (Inherited), Maximum AM Resource (Inherited), and Ordering policy (FIFO).

5. If we click the "default" queue and set its capacity to 0%, the error messages no longer appear, and the Level Total bar at the top of the page lists the total queue capacity at this level as 60%.

The screenshot shows the Ambari interface for configuring a queue. On the left, a sidebar lists queues: 'root (100%)', 'default (0%)', and 'Engineering (80%)'. The 'default' queue is selected. The main panel displays the configuration for the 'default' queue. The 'Capacity' section shows a 'Level Total' of 60% and a 'default' capacity of 0% with a slider to 100%. The 'Access Control and Status' section shows the 'State' as 'Running'. The 'Resources' section includes fields for 'User Limit Factor' (1), 'Minimum User Limit' (100), 'Maximum Applications' (Inherited), 'Maximum AM Resource' (Inherited), and 'Ordering policy' (FIFO).

6. To add more queues at the root level, click the **root** queue, then click **Add Queue**. In the following example, we have added a "Support" queue set to 10% of the level capacity, and a "Marketing" queue set to 30%. The root-level queue capacities now total 100%.

The screenshot shows the Ambari interface for configuring a queue. On the left, a sidebar lists queues: 'root (100%)', 'default (0%)', 'Engineering (80%)', 'Marketing (30%)', and 'Support (10%)'. The 'Marketing' queue is selected. The main panel displays the configuration for the 'Marketing' queue. The 'Capacity' section shows a 'Level Total' of 100% and a 'Marketing' capacity of 30% with a slider to 30%. The 'Access Control and Status' section shows the 'State' as 'Running'. The 'Resources' section includes fields for 'User Limit Factor' (1), 'Minimum User Limit' (100), 'Maximum Applications' (Inherited), 'Maximum AM Resource' (Inherited), and 'Ordering policy' (FIFO).

7. To save your configuration, click **Actions > Save Only**. On the **Notes** pop-up, enter an optional description of your changes, then click **Save**. Each version is retained and listed in the Versions box.

The screenshot shows the Ambari web interface for configuring a queue named 'Marketing'. The top navigation bar includes 'Dashboard', 'Services', 'Hosts', 'Alerts', and 'Admin'. The left sidebar shows a list of queues: 'root (100%)', 'Marketing (30%)', and 'Support (10%)'. The 'Marketing' queue is selected. The 'Actions' menu is open, with 'Save Only' highlighted. The main panel displays the 'Marketing' queue configuration, including 'Capacity' (30%), 'Max Capacity' (30%), and 'Level Total' (100%). The 'Access Control and Status' section shows the queue is 'Running'. The 'Resources' section shows 'User Limit Factor' (1), 'Minimum User Limit' (100), 'Maximum Applications' (Inherited), 'Maximum AM Resource' (Infinite), and 'Ordering policy' (FIFO).

8. To build a queue hierarchy, click a top level queue, then click Add Queue. In the following example, the "qa" and "development" queues have been added under the "Engineering" queue.

The screenshot shows the Ambari web interface for configuring a queue named 'qa'. The top navigation bar includes 'Dashboard', 'Services', 'Hosts', 'Alerts', and 'Admin'. The left sidebar shows a list of queues: 'root (100%)', 'default (0%)', 'Engineering (80%)', 'development (20%)', 'qa (80%)', 'Marketing (30%)', and 'Support (10%)'. The 'qa' queue is selected. The main panel displays the 'qa' queue configuration, including 'Capacity' (80%), 'Max Capacity' (80%), and 'Level Total' (100%). The 'Access Control and Status' section shows the queue is 'Running'. The 'Resources' section shows 'User Limit Factor' (1), 'Minimum User Limit' (100), 'Maximum Applications' (Inherited), 'Maximum AM Resource' (Infinite), and 'Ordering policy' (FIFO). The 'development' queue is also visible under the 'Engineering' queue.

7.3.2. Configuring Queues

To configure a queue, click the queue name, then set the following queue parameters:



Note

Hold the cursor over a parameter name to display a description of the parameter.

Capacity

- **Capacity** – The percentage of cluster resources available to the queue. For a sub-queue, the percentage of parent queue resources.
- **Max Capacity** – The maximum percentage of cluster resources available to the queue. Setting this value tends to restrict elasticity, as the queue will be unable to utilize idle cluster resources beyond this setting.
- **Enable Node Labels** – Select this check box to enable node labels for the queue.

Access Control and Status

- **State** – Running is the default state. Setting this to Stopped lets you gracefully drain the queue of jobs (for example, before deleting a queue).
- **Administer Queue** – Click **Custom** to restrict administration of the queue to specific users and groups.
- **Submit Applications** – Click **Custom** to restrict the ability to run applications in the queue to specific users and groups.

Resources

- **User Limit Factor** – The default value of "1" means that any single user in the queue can at maximum only occupy the queue's configured capacity. This prevents users in a single queue from monopolizing resources across all queues in a cluster. Setting the value to "2" would restrict the queue's users to twice the queue's configured capacity. Setting it to a value of 0.5 would restrict any user from using resources beyond half of the queue capacity.
- **Minimum User Limit** – This property can be used to set the minimum percentage of resources allocated to each queue user. For example, to enable equal sharing of the queue capacity among five users, you would set this property to 20%.
- **Maximum Applications** – This setting enables you to override the Scheduler Maximum Applications setting (described in [Configuring Cluster Scheduler Settings](#)). The default setting is Inherited (no override).
- **Maximum AM Resource** – This setting enables you to override the Scheduler Maximum AM Resource setting (described in [Configuring Cluster Scheduler Settings](#)). The default setting is Inherited (no override).
- **Ordering Policy** – You can specify FIFO (First In, First Out) or fair (Fair Scheduler: applications get a fair share of capacity regardless of the order in which they were submitted).

The following image shows the example "Engineering" queue with these settings specified:

The screenshot displays the Ambari web interface for configuring the 'Engineering' queue. On the left, a list of queues shows 'Engineering (80%)' selected. The 'Scheduler' box is highlighted with a red border, containing settings for Maximum Applications (10000), Maximum AM Resource (20%), Node Locality Delay (40), and Calculator (org.apache.hadoop.yarn). The 'Capacity' section shows 'Level Total' at 100%. The 'Access Control and Status' section shows 'State' as 'Running'. The 'Resources' section shows 'User Limit Factor' as 1, 'Minimum User Limit' as 20, 'Maximum Applications' as 'Inherited', 'Maximum AM Resource' as 'Infinite', and 'Ordering policy' as 'fifo'.

7.3.3. Configuring Cluster Scheduler Settings

You can use the Scheduler box to set global capacity scheduler settings that apply to all queues.

This screenshot is similar to the one above, showing the 'Engineering' queue configuration in Ambari. The 'Scheduler' box is highlighted with a red border. The 'Capacity' section shows 'Level Total' at 100%. The 'Access Control and Status' section shows 'State' as 'Running'. The 'Resources' section shows 'User Limit Factor' as 1, 'Minimum User Limit' as 20, 'Maximum Applications' as 'Inherited', 'Maximum AM Resource' as 'Infinite', and 'Ordering policy' as 'fifo'.

The following Scheduler global parameters are available:


- **Maximum Applications** – To avoid system-thrash due to an unmanageable load – caused either by malicious users, or accidentally – the Capacity Scheduler enables you to place a static, configurable limit on the total number of concurrently active (both running and pending) applications at any one time. This property is used to set this limit, with a default value of 10,000.
- **Maximum AM Resource** – The limit for running applications in any specific queue is a fraction of this total limit, proportional to its capacity. This is a hard limit, which means that once this limit is reached for a queue, any new applications submitted to that queue will be rejected, and clients will have to wait and retry later.
- **Node Locality Delay** – The number of missed scheduling cycles after which the scheduler attempts to schedule rack-local containers.
- **Calculator** – The method by which the scheduler calculates resource capacity across resource types.

7.3.4. Applying the Configuration Changes


You can use the Actions menu to apply configuration changes made to the queue hierarchy.

Depending on the configuration changes made, the Actions menu will guide you to the options available to apply the changes.


For changes that are not valid and cannot be applied, the **Actions** button will turn red, and the menu will not appear.

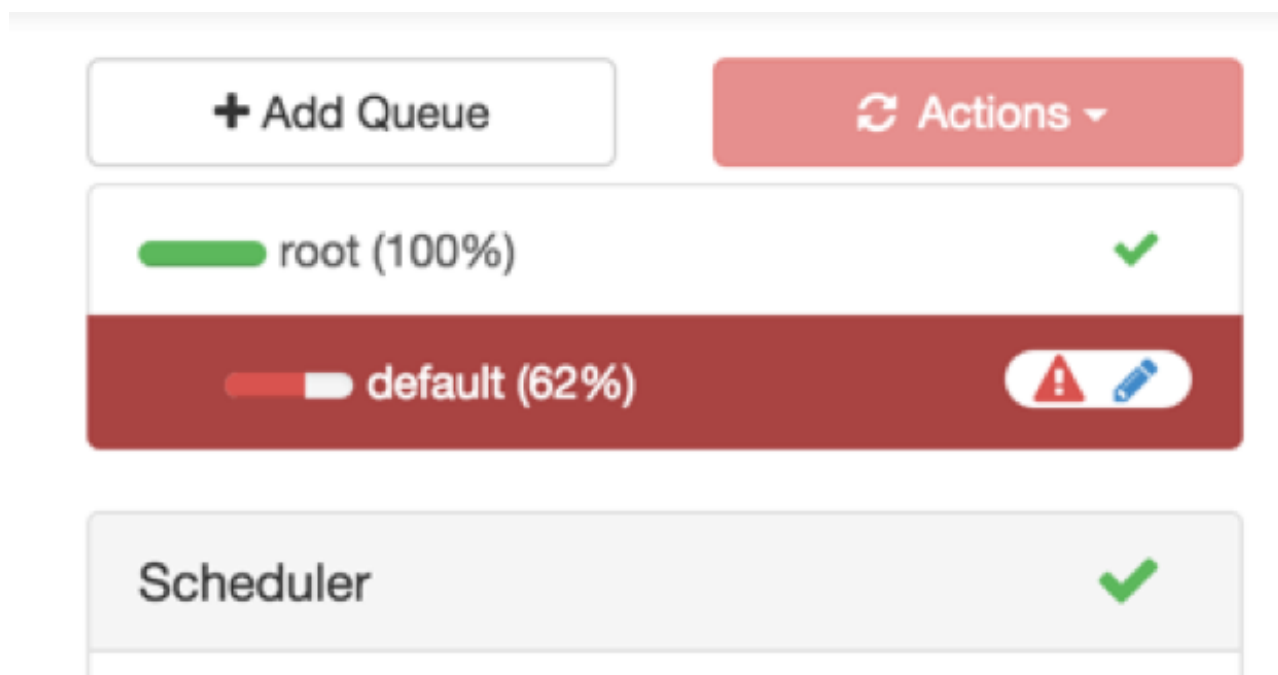

For configuration changes that can be applied dynamically (without restarting the YARN ResourceManager), the Actions Menu will guide you to **Save and Refresh Queues**.

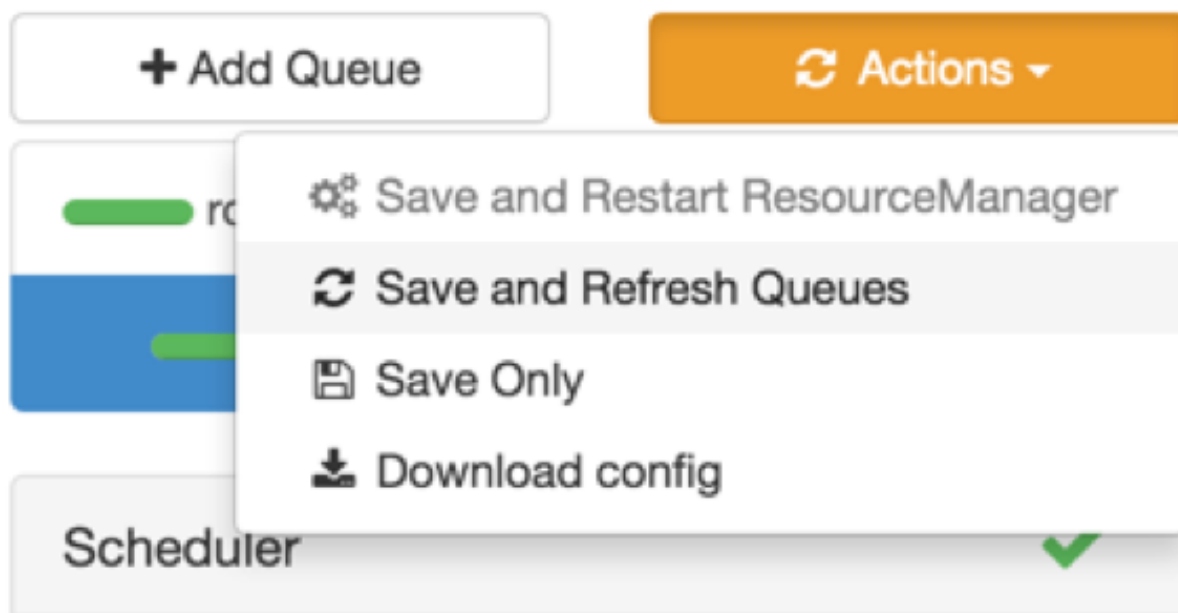

For configuration changes that require a restart of the YARN ResourceManager, the Actions Menu will guide you to **Save and Restart ResourceManager**.

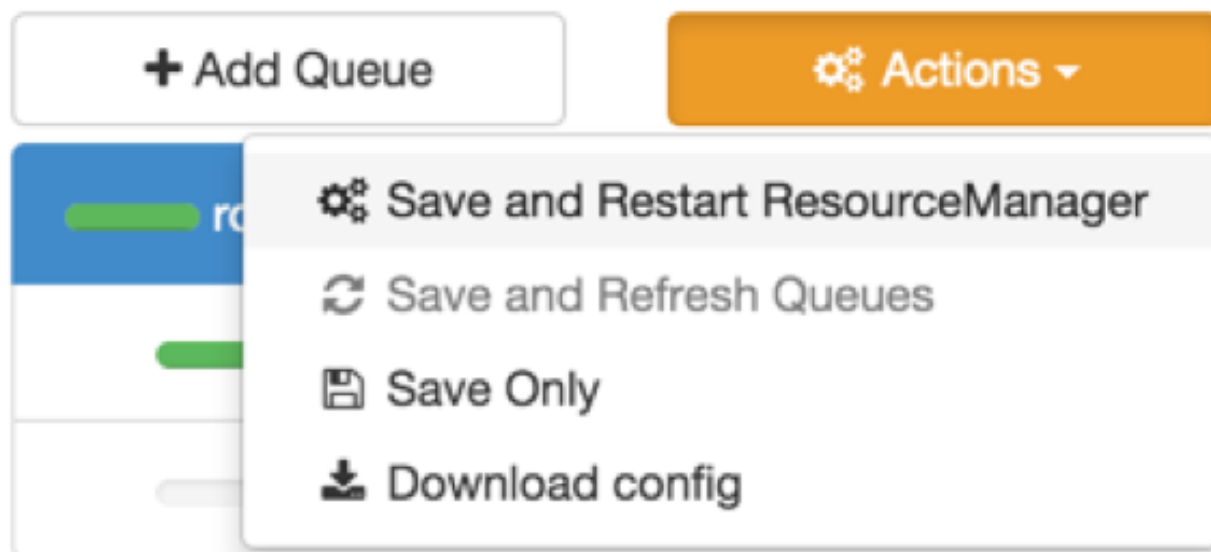

7.4. Troubleshooting

If you encounter an issue where the configurations cannot be applied from the View, you should go to the local Ambari Server instance managing the cluster and directly edit the Capacity Scheduler configuration from the YARN configuration page.

In the local Ambari instance, navigate to **Services > YARN**, then select the **Configs** tab. On the **Advanced** tab, expand the Scheduler section.

Scheduler

yarn.resourcemanager.scheduler.class

org.apache.hadoop.yarn.server.resourcemanager.scheduler.capacity.CapacityScheduler

Capacity Scheduler

```
yarn.scheduler.capacity.maximum-am-resource-percent=0.2
yarn.scheduler.capacity.maximum-applications=10000
yarn.scheduler.capacity.node-locality-delay=40
yarn.scheduler.capacity.queue-mappings-override.enable=false
yarn.scheduler.capacity.root.accessible-node-labels=*
yarn.scheduler.capacity.root.acl_administer_queue=*
yarn.scheduler.capacity.root.capacity=100
yarn.scheduler.capacity.root.default.acl_submit_applications=*
yarn.scheduler.capacity.root.default.capacity=100
yarn.scheduler.capacity.root.default.maximum-capacity=100
```

Here you will be able to edit the underlying configurations for the Capacity Scheduler and fix any issues you may encounter.

8. Using the Hive View

Hive is a data warehouse infrastructure built on top of Hadoop. It provides tools to enable data ETL, a mechanism to put structures on the data, and the capability to query and analyze large data sets that are stored in Hadoop. The **Hive View** is designed to help you author, execute, understand, and debug Hive queries.

This chapter explains:

- [Configuring Your Cluster](#)
- [Creating the Hive View Instance](#)
- [Using the Hive View](#)
- [Troubleshooting](#)



Important

The Tez View integrates with the Hive View. Please install the Tez View when you install the Hive View. See [Using the Tez View](#) for more information.



Important

It is critical that you prepare your Ambari Server for hosting views. It is strongly recommended you increase the amount of memory available to your Ambari Server, and that you run additional “standalone” Ambari Servers to host the views. See [Preparing Ambari Server for Views](#) and [Running Ambari Server Standalone](#) for more information.

8.1. Configuring Your Cluster

For the Hive View to access HDFS, the Ambari Server daemon hosting the view needs to act as the proxy user for HDFS. This allows Ambari to submit requests to HDFS on behalf of the users using the Hive View. This is critical since the Hive View will store metadata about their user Hive queries in HDFS. This also means users that will access the Hive View must have a user directory setup in HDFS.

- [Setup HDFS Proxy User](#)
- [Setup HDFS User Directory](#)

8.1.1. Setup HDFS Proxy User

To set up an HDFS proxy user for the Ambari Server daemon account, you need to configure the proxy user in the HDFS configuration. This configuration is determined by the account name the **ambari-server** daemon is running as. For example, if your ambari-server is running as **root**, you set up an HDFS proxy user for **root** with the following:

1. In Ambari Web, browse to **Services > HDFS > Configs**.

2. Under the **Advanced** tab, navigate to the **Custom core-site** section.
3. Click **Add Property...** to add the following custom properties:

```
hadoop.proxyuser.root.groups=*  
hadoop.proxyuser.root.hosts=*
```

Notice the **ambari-server** daemon account name **root** is part of the property name. Be sure to modify this property name for the account name you are running the **ambari-server** as. For example, if you were running **ambari-server** daemon under an account name of **ambariusr**, you would use the following properties instead:

```
hadoop.proxyuser.ambariusr.groups=*  
hadoop.proxyuser.ambariusr.hosts=*
```

Similarly, if you have configured [Ambari Server for Kerberos](#), be sure to modify this property name for the **primary Kerberos principal** user. For example, if **ambari-server** is setup for Kerberos using principal **ambari-server@EXAMPLE.COM**, you would use the following properties instead:

```
hadoop.proxyuser.ambari-server.groups=*  
hadoop.proxyuser.ambari-server.hosts=*
```

4. Save the configuration change and restart the required components as indicated by Ambari.

8.1.2. Setup HDFS User Directory

The Hive View stores user metadata in HDFS. By default, the location in HDFS for this metadata is `/user/${username}` where `${username}` is the username of the currently logged in user that is accessing the Hive View.



Important

Since many users leverage the default Ambari admin user for getting started with Ambari, the `/user/admin` folder needs to be created in HDFS. Therefore, be sure to create the admin user directory in HDFS using these instructions prior to using the view.

To create user directories in HDFS, do the following for each user you plan to have use the Hive View.

1. Connect to a host in the cluster that includes the HDFS client.
2. Switch to the `hdfs` system account user.

```
su - hdfs
```

3. Using the HDFS client, make an HDFS directory for the user. For example, if your username is `admin`, you would create the following directory.

```
hadoop fs -mkdir /user/admin
```

4. Set the ownership on the newly created directory. For example, if your username is `admin`, you would make that user the directory owner.

```
hadoop fs -chown admin:hadoop /user/admin
```

8.2. Creating the Hive View Instance

1. Browse to the Ambari Administration interface.
2. Click **Views**, expand the **Hive View**, and click **Create Instance**.
3. On the Create Instance page, select the **Version**. If multiple Hive View jars are present, choose one.
4. Enter the following view instance Details:

Table 8.1. Hive View Instance Details

Property	Description	Example Value
Instance Name	This is the Hive view instance name. This value should be unique for all Hive view instances you create. This value cannot contain spaces and is required.	HIVE_1
Display Name	This is the name of the view link displayed to the user in Ambari Web.	Hive
Description	This is the description of the view displayed to the user in Ambari Web.	Author and execute Hive queries.
Visible	This checkbox determines whether the view is displayed to users in Ambari Web.	Visible or Not Visible

5. The **Settings** and **Cluster Configuration** options depend on a few cluster and deployment factors in your environment. You can typically leave the default **Settings** unless you are using the Hive View with a Kerberos enabled cluster. Refer to [Settings](#) and [Cluster Configuration](#) for more information.
6. Click **Save**.

8.2.1. Settings and Cluster Configuration

If you have manually deployed your cluster, you must enter cluster configuration values in the Hive View Create Instance page. The following table explains where you can find cluster configuration settings in Ambari.

Table 8.2. Finding Cluster Configuration Values for the Hive View in Ambari

Property	Value
Hive Authentication	auth=NONE;user=\${username}
Scripts HDFS Directory*	/user/\${username}/hive/scripts
Jobs HDFS Directory*	/user/\${username}/hive/jobs
HiveServer2 Host*	Click Hive > Summary > HiveServer2 to view the host name. For example, c6401.ambari.apache.org
HiveServer2 Thrift port*	Click Hive > Configs > Advanced > General > HiveServer2 Port . For example, 10000

Property	Value
WebHDFS FileSystem URI*	Click HDFS > Configs > Advanced > Advanced hdfs-site > dfs.namenode.http-address . When you enter the value in the view definition, pre-pend "webhdfs://" to the value you find in the advanced HDFS configuration settings. For example, webhdfs://c6401.ambari.apache.org:50070
YARN Application Timeline Server URL*	Click YARN > Configs > Advanced > Application Timeline Server > yarn.timeline-service.webapp.address . When you enter the value in the view definition, pre-pend "http://" to the value you find in the YARN advanced configuration settings. For example, http://c6401.ambari.apache.org:8188
YARN ResourceManager URL*	Click YARN > Configs > Advanced > Advanced yarn-site > yarn.resourcemanager.webapp.address . When you enter the value in the view definition, pre-pend "http://" to the value you find in the YARN advanced configuration settings. For example, http://c6401.ambari.apache.org:8088

For NameNode High Availability

The following values must be entered for primary and secondary NameNodes:


Table 8.3. Hive View Settings for NameNode High Availability

Property	Value
First NameNode RPC Address or Second NameNode RPC Address	Select the primary or secondary NameNode to view settings from that host in the cluster. See how to get the NameNode RPC address [46] . When you enter the value in the view definition, pre-pend "http://" to the value you find in the advanced hdfs-site settings. For example, http://c6401.ambari.apache.org:8020
First NameNode HTTP (WebHDFS) Address or Second NameNode HTTP (WebHDFS) Address	Click HDFS > Configs > Advanced > Advanced hdfs-site > dfs.namenode.http-address . When you enter the value in the view definition, pre-pend "http://" to the value you find in the advanced hdfs-site settings. For example, http://c6401.ambari.apache.org:50070

To get First NameNode RPC Address values:

1. Navigate to the HDFS service page in Ambari that contains links to individual NameNodes. Click **NameNode** (primary) or **SNameNode** (secondary) to view the host page:


Figure 8.1. HDFS Service Page in Ambari

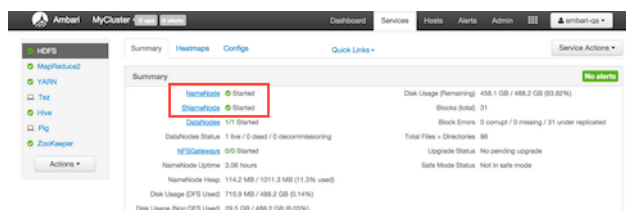

2. On the host page, click **Configs > Advanced**.
3. Enter "rpc" in the Filter search well at the top right corner of the page or navigate to the **Advanced hdfs-site** settings to find the `dfs.namenode.rpc-address` value that you

can enter into the Hive View definition. Here is an example of using the Filter to locate a value:


Figure 8.2. Using the Filter to Search Advanced hdfs-site Settings

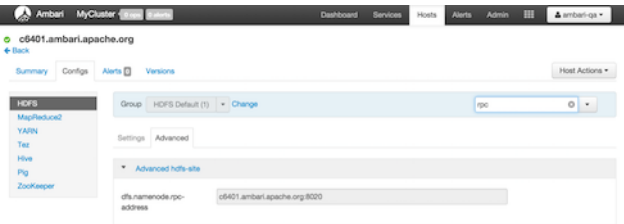

8.2.2. User Permissions for Hive Views

After saving the Hive View instance definition, grant permission on the view for the set of users who can use the view:

Figure 8.3. Granting User Permissions to Hive Views

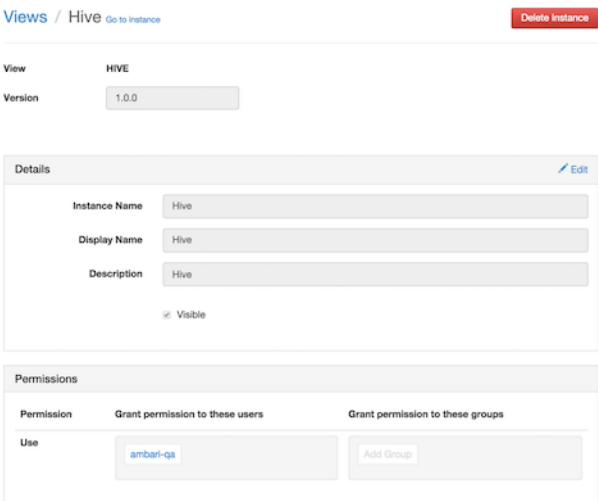

8.2.3. Kerberos Setup for Hive Views

To set up basic Kerberos for views, see "Set Up Kerberos for Ambari Server" in the [Ambari Security Guide](#). After you have set up basic Kerberos for the Hive View, Hive requires the following additional settings:

Table 8.4. Kerberos Settings for Hive Views

Property	Value
WebHDFS Authentication	auth=KERBEROS;proxyuser=<ambari-principal>
Hive Authentication	KERBEROS and the principal is set to the same principal that is specified in hive-site.xml for hive.server2.authentication.kerberos.principal. For example, see the following figure.

Figure 8.4. Hive View Kerberos Configuration Example

The screenshot displays the configuration interface for Hive View, divided into two main sections: Settings and Cluster Configuration. In the Settings section, the 'Hive Authentication' field is highlighted with a red box and contains the value 'auth=KERBEROS:principal=hive-kerb-2.c.pramod-thangali.internal@EXAMPLE.COM'. Other settings include 'WebHDFS Username' (set to '\$username'), 'WebHDFS Authentication' (set to 'auth=KERBEROS:proxyuser=ambariuser'), 'Instance name of Tez view' (set to 'TEZ_CLUSTER_INSTANCE'), 'Scripts HDFS Directory*' (set to '/user/\$username/hive/scripts'), 'Jobs HDFS Directory*' (set to '/user/\$username/hive/jobs'), and 'Default script settings file*' (set to '/user/\$username/\$instanceName/defaultSettings'). The Cluster Configuration section shows 'Local Ambari Managed Cluster' selected with 'Cluster Name' set to 'views'. The 'Custom' section is expanded, and the 'HiveServer2 Host*' field is highlighted with a red box, containing the value 'erik-bb2-2.c.pramod-thangali.internal'. Other fields in this section include 'HiveServer2 Thrift port*' (10000), 'WebHDFS FileSystem URI*' (webhdfs://erik-bb2-1.c.pramod-thangali.internal:50070), and various NameNode and YARN URLs.

8.3. Using the Hive View

Use the Hive View to:

- Browse databases
- Write and execute queries
- Manage query execution jobs and history


8.3.1. Query Tab

Click the **Query** tab to browse database tables and columns and to build, execute, and debug queries.

Database Explorer

The Database Explorer enables you to view all databases and tables in Hive that you have permissions to view. It is designed to navigate a large number of databases, tables, and columns:

Figure 8.5. Hive View Database Explorer

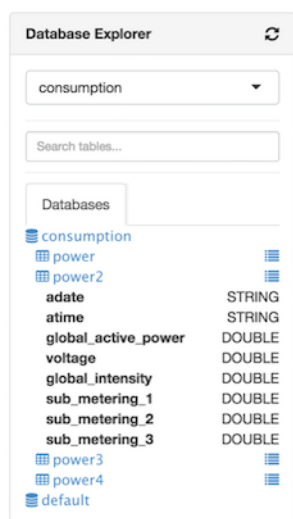


Features of Database Explorer:

- Click the refresh icon in the top right to view tables that were created since the Hive View session began.
- Select a database from the drop-down list. All queries in the current tab are then run against the selected database. You can also edit the drop-down list to enable substring searches over a large number of databases.
- Use the Search tables and Search columns fields to search when you have a large number of tables and columns.
- Browse the Databases tab to view all of the databases, tables, and columns. This is useful when you are authoring queries. The icon to the right of a table enables you to see sample data within that table.

Query Editor

You can author and execute queries in the Query Editor:


Figure 8.6. Query Editor

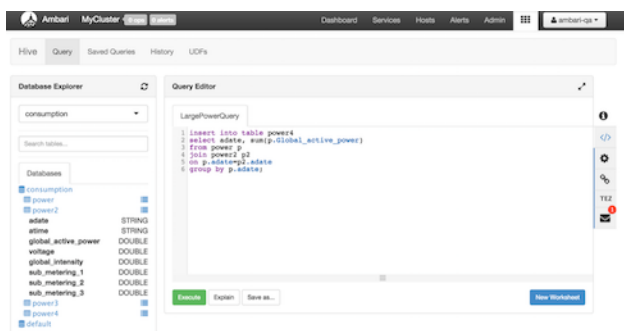

Features and Behavior of Query Editor

- All queries contained in a Worksheet tab execute sequentially, and they run in the same session. Running all queries in one pass requires handling the output of multiple select statements and is not supported in the 1.0 version.
- To run a specific query, highlight it, and click **Execute**.
- When the first query is executed in a Worksheet, a Tez session is opened.
- Click **Save as** to save your query.
- Double-click the **Worksheet** tab to rename the query, click **OK**, and then **Save as** to save the query with the new name.
- Click **New Worksheet** to open a new worksheet tab. Queries executed from the new worksheet tab will execute in a different session. Queries from different worksheets can execute in parallel.
- Press **CTRL + space** to autocomplete query statements.
- Click the double arrow icon in the upper right corner of the Query Editor to expand the Worksheet area and cover Database Explorer. Click the icon again to collapse the Worksheet and make Database Explorer available again.
- Click the icon at the bottom of the Worksheet window and drag it down to expand the authoring space.
- Query results and logs display below the query when it is executed.

Figure 8.7. Query Results and Logs in Hive View Query Editor

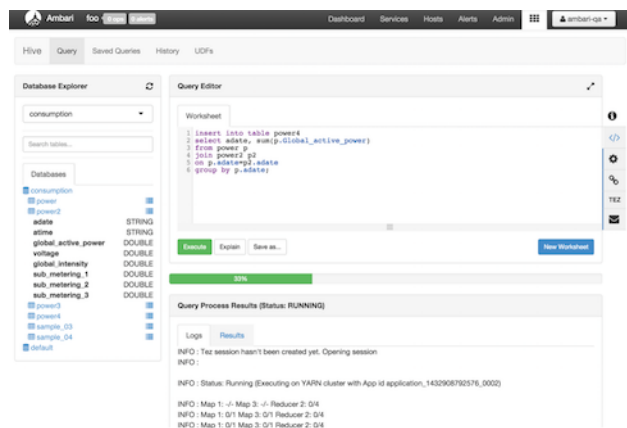

Query Editor Settings

Click the gear icon on the right margin of the worksheet to access settings for the Query Editor. Then click **Add**, select a setting parameter from the drop-down list, and then select a value for the parameter. Query Editor settings are configured per worksheet.

To save settings as default settings so they are applied each time that a new worksheet is opened, click **Save Default Settings** in the upper right corner of the settings window.


Click **SQL** to the right of the Worksheet window to exit settings and return to the Query Editor authoring pane.

Text Explain and Visual Explain

There are two options that help you understand how your queries are executed. One is a textual explanation of your query and the other form explains the query visually as a diagram. In future releases, column lineage will be added.


The **Explain** button in the lower left corner of the Worksheet window launches a textual explanation:

Figure 8.8. Query Editor Textual Explain Feature

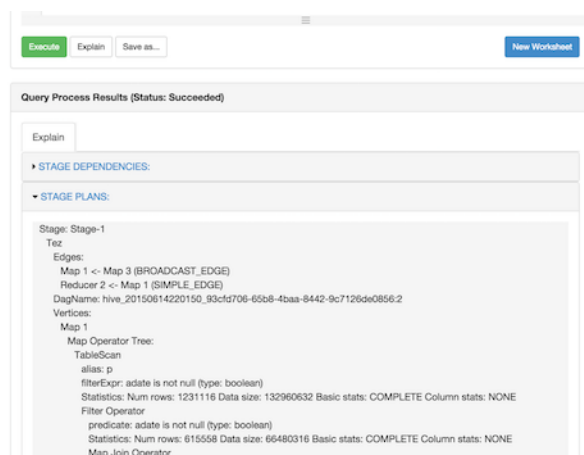

To launch the Visual Explain diagram, click the link icon to the right of the Worksheet window. If the query is running, Visual Explain shows the query execution progress per vertex:


Figure 8.9. Query Editor Visual Explain Feature

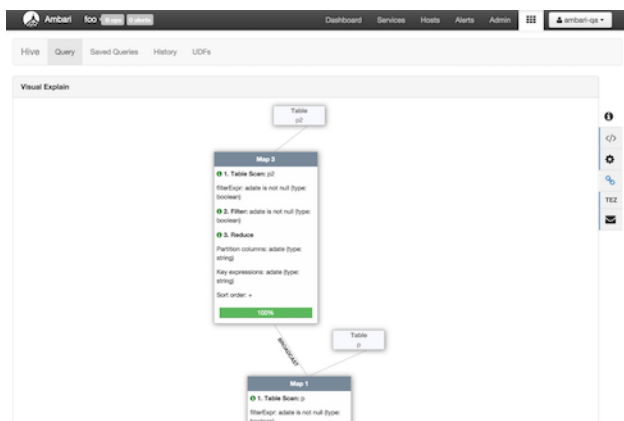

Using the Tez View to Debug Query Execution

Query execution can be debugged using the embedded Tez view. To access the Tez view, click **TEZ** in the toolbar on the right of the Worksheet window:

Figure 8.10. Tez View Query Debugging Option

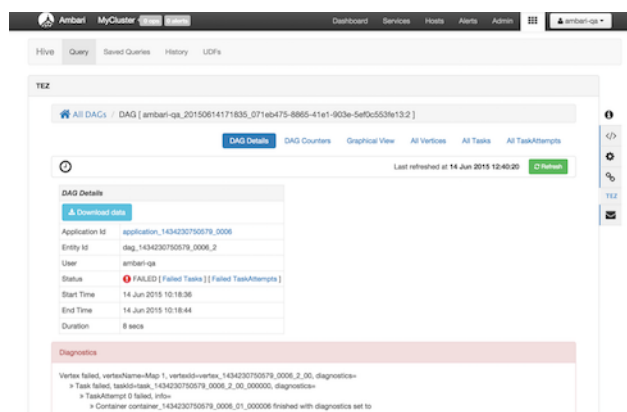


When a query fails, the Status field displays **FAILED** and there is a link to Failed Tasks and the error displays on the first page. Click **Download data** to get the data for the task. For further details on debugging, see the Tez View.

Errors and Alerts


Errors and alerts can be viewed by clicking the envelope icon in the toolbar to the right of the Worksheet window. When the icon is clicked, all the messages are shown with a one-line summary per message:

Figure 8.11. Query Editor Error Message Summary Window

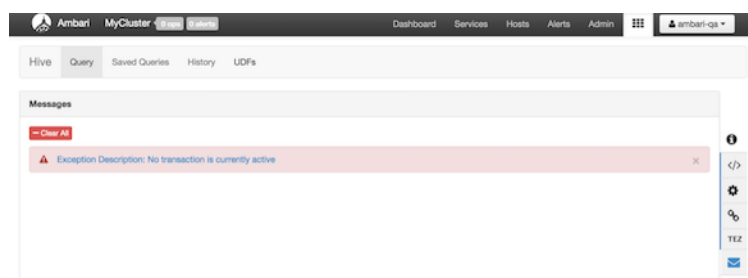


If you want to view details of the errors, expand the summary by clicking it. The details text can be copied into a bug report:

Figure 8.12. Query Editor Error Message Details Window

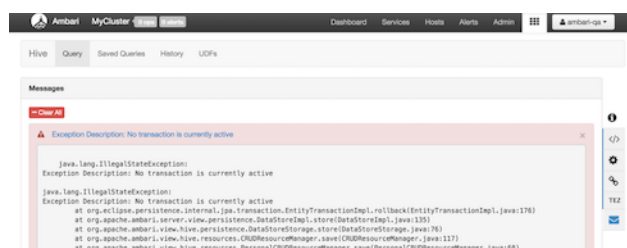


8.3.2. Saved Queries Tab

The Saved Queries tab shows all the queries that have been saved by the current user. Click the gear icon to the right of the query list to view the history of a query or to delete it:

Figure 8.13. Saved Queries Tab

8.3.3. History Tab


You can view the history of all jobs run by the current user in the History tab. It pulls history from the Application Timeline Server database. All queries for which logs are present in that database are displayed here. This means that regardless of the source of the query, (CLI, JDBC/ODBC, Hive View) it will appear here on the History tab. Queries that have not been assigned a name, such as those created in the Hive View, appear as query text. For example, see the insert statement that was submitted by CLI in the following image:

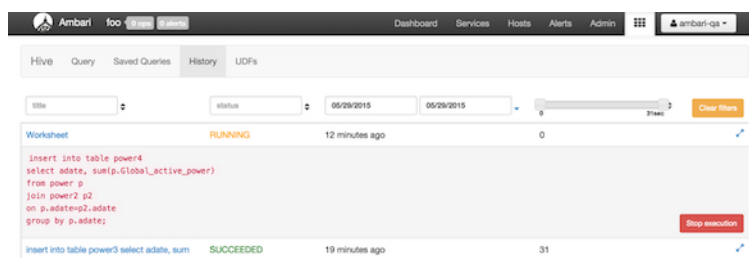Figure 8.14. History Tab

For queries that are submitted from the Hive View, a Stop Execution button is available to enable you to end a currently running query. When you select a query by clicking the title in the first column, that query appears on a new sub-tab in the Query tab where it can be analyzed and debugged.

8.3.4. UDF Tab

User-defined functions (UDFs) can be added to queries by pointing to a JAR file on HDFS, which contains the UDF definition. After the UDF is added here, an Insert UDF button appears in the Query Editor that enables you to add the UDF to your query:

Figure 8.15. UDF Tab

8.4. Troubleshooting

Table 8.5. Troubleshooting Hive Views Errors

Error	Solution
User: root is not allowed to impersonate admin	HDFS has not been configured for Ambari as a proxy user. Refer to Setup HDFS Proxy User .
E090 HDFS020 Could not write file /user/admin/hive/jobs/hive-job-1-2015-10-30_02-12/query.hql [HdfsApiException]	The user does not have a user directory in HDFS for the view to store metadata about the view. Refer to Setup HDFS User Directory .

9. Using the Slider View

Slider is a framework for deploying and managing long-running applications on YARN. When applications are packaged using Slider for YARN, the **Slider View** can be used to help deploy and manage those applications from Ambari.

9.1. Deploying the Slider View

Refer to the Ambari Administration guide for general information about [Managing Views](#).

1. From the Ambari Administration interface, browse to the Views section.
2. Click to expand the **Slider** view and click **Create Instance**.
3. Enter the instance name, the display name and description.
4. Enter the configuration properties for your cluster.

Property	Description	Example
Ambari Server URL (required)	The Ambari REST URL to the cluster resource.	http://ambari.server:8080/api/v1/clusters/MyCluster
Ambari Server Username (required)	The username to connect to Ambari. Must be an Ambari Admin user.	admin
Ambari Server Password (required)	The password for the Ambari user.	password
Slider User	The user to deploy slider applications as. By default, the applications will be deployed as the “yarn” service account user. To use the current logged-in Ambari user, enter <code>\${username}</code> .	joe.user or <code>\${username}</code>
Kerberos Principal	The Kerberos principal for Ambari views. This principal identifies the process in which the view runs. Only required if your cluster is configured for Kerberos. Be sure to configure the view principal as a proxy user in core-site.	view-principal@EXAMPLE.CO
Kerberos Keytab	The Kerberos keytab for Ambari views. Only required if your cluster is configured for Kerberos.	/path/to/keytab/view-principal.headless.keytab

5. Save the view.

10. Using the Files View

The **Files View** provides a convenient way to access HDFS through a web-based interface. This document provides information on how to configure a view instance and your cluster for browsing HDFS via the **Files View**.

- [Configuring Your Cluster](#)
- [Creating and Configuring a Files View Instance](#)
- [Troubleshooting](#)



Important

It is critical that you prepare your Ambari Server for hosting views. It is strongly recommended you increase the amount of memory available to your Ambari Server, and that you run additional “standalone” Ambari Servers to host the views. See [Preparing Ambari Server for Views](#) and [Running Ambari Server Standalone](#) for more information.

10.1. Configuring Your Cluster

For the Files View to access HDFS, the Ambari Server daemon hosting the view needs to act as the proxy user for HDFS. This allows Ambari to submit requests to HDFS on behalf of the users using the Files View.

To set up an HDFS proxy user for the Ambari Server daemon account, you need to configure the proxy user in the HDFS configuration. This configuration is determined by the account name the **ambari-server** daemon is running as. For example, if your **ambari-server** is running as **root**, you set up an HDFS proxy user for **root** with the following:

1. In Ambari Web, browse to **Services > HDFS > Configs**.
2. Under the **Advanced** tab, navigate to the **Custom core-site** section.
3. Click **Add Property...** to add the following custom properties:

```
hadoop.proxyuser.root.groups=*  
hadoop.proxyuser.root.hosts=*
```

Notice the **ambari-server** daemon account name **root** is part of the property name. Be sure to modify this property name for the account name you are running the **ambari-server** as. For example, if you were running **ambari-server** daemon under an account name of **ambariusr**, you would use the following properties instead:

```
hadoop.proxyuser.ambariusr.groups=*  
hadoop.proxyuser.ambariusr.hosts=*
```

Similarly, if you have configured [Ambari Server for Kerberos](#), be sure to modify this property name for the primary Kerberos principal user. For example, if **ambari-server** is setup for Kerberos using principal **ambari-server@EXAMPLE.COM**, you would use the following properties instead:

```
hadoop.proxyuser.ambari-server.groups=*
hadoop.proxyuser.ambari-server.hosts=*
```

4. Save the configuration change and restart the required components as indicated by Ambari.

10.2. Creating and Configuring a Files View Instance

1. Browse to the Ambari Administration interface.
2. Click Views, expand the **Files View**, and click **Create Instance**.
3. Enter the following View instance **Details**:

Property	Description	Value
Instance Name	This is the Files view instance name. This value should be unique for all Files view instances you create. This value cannot contain spaces and is required.	FILES_1
Display Name	This is the name of the view link displayed to the user in Ambari Web.	MyFiles
Description	This is the description of the view displayed to the user in Ambari Web.	Browse HDFS files and directories.
Visible	This checkbox determines whether the view is displayed to users in Ambari Web.	Visible or Not Visible

4. The **Settings** and **Cluster Configuration** options depend on a few cluster & deployment factors in your environment:
 - Is your cluster Kerberos-enabled?
 - Is NameNode HA configured?
 - Is your **Files View** instance being configured in an **Operational** Ambari Server or a **Standalone** Ambari Server?

Refer to the following table on the instructions to complete the **Files View** configuration:

Kerberos Enabled	NameNode HA Enabled	Operational Ambari Server see note #1:	Standalone Ambari Server see note #2:
No	No	Settings: defaults	Settings: defaults
No	Yes	Cluster Configuration: Local	Cluster Configuration: Custom
Yes	No	Settings : Kerberos Cluster Configuration : Custom	
Yes	Yes	Settings: Kerberos Cluster Configuration: Custom	



Note

#1: The Local Ambari Managed Cluster Configuration option is enabled in the Ambari Administration Interface only if you are managing a cluster in an Operational Ambari Server.



Note

#2: See [Running Ambari Standalone](#) for more information.

10.2.1. Kerberos Settings

You must first set up Kerberos for Ambari by configuring the Ambari Server daemon with a Kerberos principal and keytab. Refer to [Configuring Views for Kerberos](#) for instructions. After you have set up Kerberos for Ambari, in the Settings section of the Files View, enter the following:

Property	Description	Example Value
WebHDFS Username	This is the username the view will access HDFS as. Leave this default value intact to represent the authenticated view user.	\${username}
WebHDFS Authorization	This is the semicolon-separated authentication configuration for WebHDFS access.	auth=KERBEROS; proxyuser=ambari-server



Note

With a Kerberos setup, the proxy user setting should be the primary value of the Kerberos principal for Ambari Server. For example, if you configured Ambari Server for Kerberos principal **ambari-server@EXAMPLE.COM**, this value would be **ambari-server**. Refer to [Configuring Views for Kerberos](#) for more information..

10.2.2. Cluster Configuration: Local

The **Local Ambari Managed Cluster Configuration** option is enabled in the Ambari Administration Interface if you are managing a cluster with Ambari. When enabled, you can choose this option and Ambari will automatically configure the view based on how the cluster is configured.

When you configure the view using the Local option, the Files View will communicate with HDFS based on the **fs.defaultFS** property (for example: `hdfs://namenode:8020`). The View will also determine if NameNode HA is configured and adjust accordingly.

10.2.3. Cluster Configuration: Custom

These properties are required if using Custom configuration.

Required Properties	Description	Example Value
WebHDFS FileSystem URI	The WebHDFS FileSystem URI in the format <code>webhdfs://<HOST>:<HTTP_PORT></code>	<code>webhdfs://namenode:50070</code>

These properties are required if your cluster is configured for NameNode HA.

Property	Description	Example Value
Logical name of the NameNode cluster	Comma-separated list of nameservices.	hdfs-site/dfs.nameservices For example: nameservice
List of NameNodes	Comma-separated list of NameNodes for a given nameservice.	hdfs-site/dfs.ha.namenodes For example: namenode1,namenode2
First NameNode RPC Address	RPC address for first name node.	hdfs-site/dfs.namenode.rpc-address. [nameservice].[namenode1]
Second NameNode RPC Address	RPC address for second NameNode.	hdfs-site/dfs.namenode.rpc-address. [nameservice].[namenode2]
First NameNode HTTP (WebHDFS) Address	WebHDFS address for first NameNode.	hdfs-site/dfs.namenode.http-address. [nameservice].[namenode1]
Second NameNode HTTP (WebHDFS) Address	WebHDFS address for second NameNode.	hdfs-site/dfs.namenode.http-address. [nameservice].[namenode2]
Failover Proxy Provider	The Java class that HDFS clients use to contact the Active NameNode.	hdfs-site/ dfs.client.failover.proxy.provider. [nameservice]

10.2.4. Troubleshooting

Error	Solution
500 Usernames not matched: name=root != expected=ambari-server	<p>If your cluster is configured for Kerberos, double-check WebHDFS Authorization setting and confirm the “proxyuser=” part of the string is set to the Ambari Server principal name.</p> <p>For example:</p> <pre>auth=KERBEROS;proxyuser=ambari-server</pre> <p>Refer to Kerberos Settings.</p>
500 User: ambari-server is not allowed to impersonate admin	<p>HDFS has not been configured for Ambari as a proxy user.</p> <p>Refer to Configuring Your Cluster.</p>
500 SIMPLE authentication is not enabled. Available:[TOKEN, KERBEROS]	<p>If your cluster is configured for Kerberos, you cannot use the Local Cluster Configuration option. You must use the Custom Cluster Configuration option and enter the WebHDFS FileSystem URI.</p> <p>For example:</p> <pre>webhdfs://namenode:50070</pre> <p>Refer to Cluster Configuration: Custom</p>