Análise das variáveis Saresp Questionário - moda por escola Série 5EF


Livia Kobayashi

10 junho 2021

```
library(tidyverse)
library(DataExplorer)
library(gridExtra)
library(grid)
library(caret)
library(ggcorrplot)
library(vcd)
df_publico <- read.csv2("../books/df_publico.csv")
#book <- read.csv2("../books/saresp3em_mode.csv")
book <- read.csv2(params$book)</pre>
## id_serie
## 1 5EF
```


Missing

```
plot_missing(df)
```

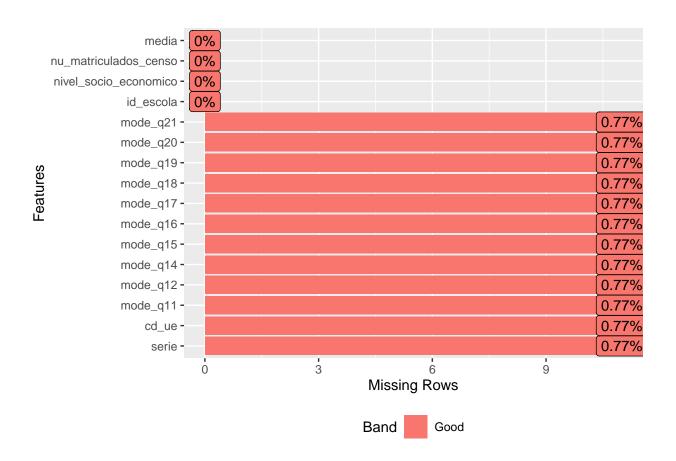


Volume

plot_bar(final_data)

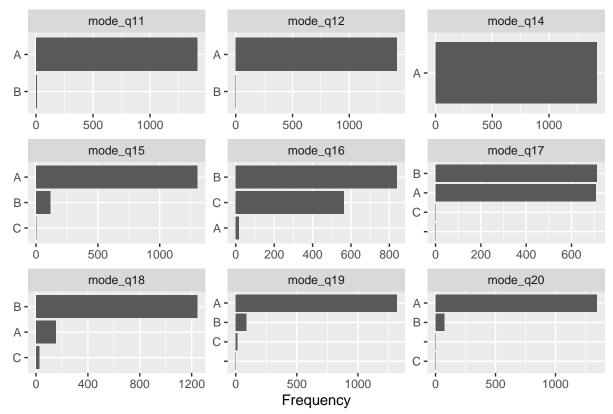

Page 1

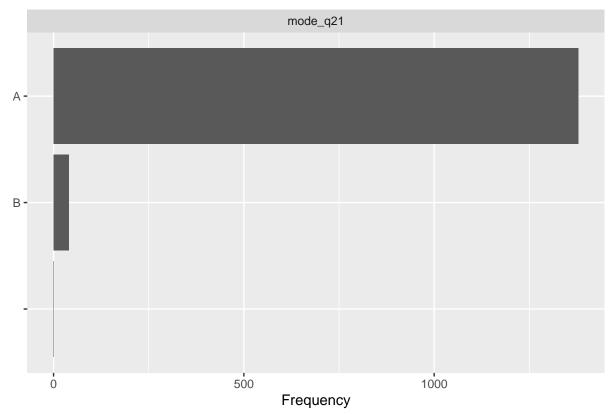


Page 2


Boxplot

```
vars <- colnames(final_data)
vars <- vars[-c(1,2)]
plots <- list()
i <- 1
for (variable in vars) {
    #plots[[i]] <- plot_boxplot(final_data, by = variable)
    plots[[i]] <- ggplot(final_data, aes_string(variable, "media")) + geom_boxplot()
    i <- i + 1
}

n <- length(plots)

i <- 1
while (i <= n) {
    do.call("grid.arrange", c(plots[i:(min(i+5, n))], ncol=3, nrow = 2))
    i <- i + 6
}</pre>
```

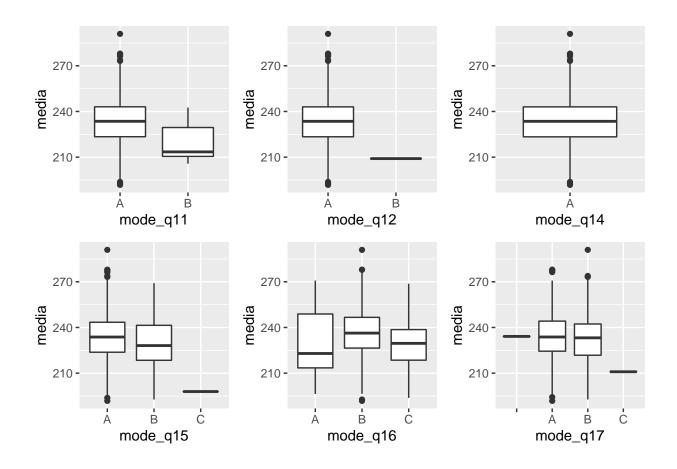

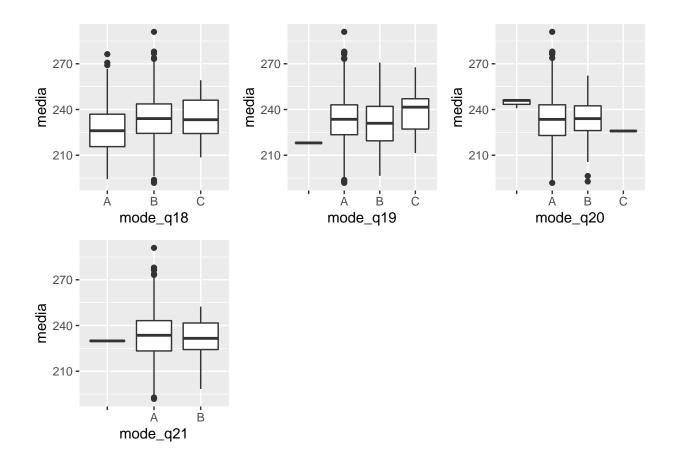

Análise Univariada

```
vars <- colnames(final_data)</pre>
vars \leftarrow vars [-c(1,2)]
y_resp <- "media"</pre>
remove_cols <- nearZeroVar(df, names = TRUE)</pre>
final_cols <- setdiff(vars, remove_cols)</pre>
final_cols
\verb| ## [1] "mode_q15" "mode_q16" "mode_q17" "mode_q18" "mode_q19" "mode_q20" \\
tb_r2 <- data.frame(var = final_cols)</pre>
rsquared <- c()
for (variable in final_cols) {
  lm_formula <- as.formula(str_glue("{y_resp} ~ {variable}"))</pre>
  model_lm <- lm(lm_formula, df)</pre>
  rsquared <- append(rsquared, summary(model_lm)$r.squared)</pre>
}
tb_r2$rsquared <- rsquared</pre>
tb_r2 %>% head(nrow(tb_r2))
```

```
## var rsquared
## 1 mode_q15 0.008315682
## 2 mode_q16 0.058343659
## 3 mode_q17 0.003726392
## 4 mode_q18 0.021209026
## 5 mode_q19 0.003184530
## 6 mode_q20 0.001345236
```

```
catcorrm <- function(vars, dat) sapply(vars, function(y) sapply(vars, function(x) assocstats(table(dat[
matriz <- catcorrm(final_cols, data_corr)

ggcorrplot(matriz, show.diag = F, type="lower", lab=TRUE, lab_size=14, show.legend = F)</pre>
```

