# Theming with bslib and thematic

### R Markdown

This is an R Markdown document themed with {bslib} package. {bslib} makes it easy to customize the main colors and fonts of a html\_document, flexdashboard::flex\_dashboard, shiny::fluidPage(), or more generally any website that uses Bootstrap for styling. The theme parameter in the yaml front-matter of this Rmd document describes a bslib::bs\_theme() object, which provides access to 100s of theming options (via its ... argument) in addition to the main options demonstrated here (e.g., bg, fg, primary, etc).

This particular example uses {bslib}'s default Bootstrap version (which, at the time of writing, is Bootstrap 5). However, if reproducibility is important, it's recommended that you "lock-in" the version by adding version: 5 to the theme definition.

#### Themed Plots


When running this document with {thematic} installed, the thematic::thematic\_rmd(font = "auto") effectively translates theme (CSS) settings to new global theming defaults for {ggplot2}, {lattice}, and {base} R graphics:

#### ggplot2

```
library(ggplot2)
ggplot(mpg, aes(displ, hwy)) +
   geom_point() + geom_smooth()

## Error : The fig.showtext code chunk option must be TRUE


## `geom_smooth()` using method = 'loess' and formula 'y ~ x'
```

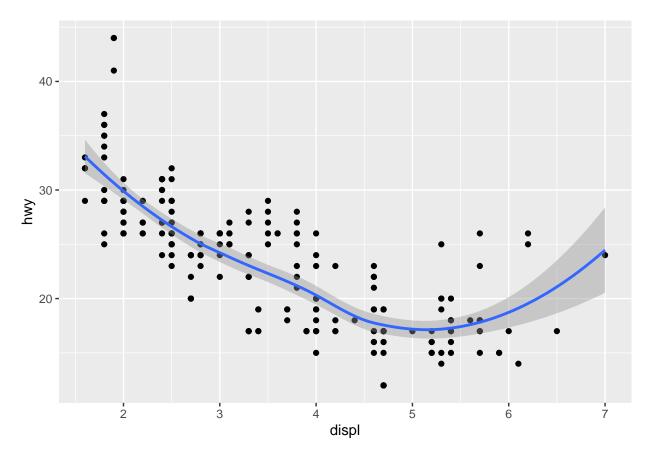

## lattice

lattice::show.settings()

 $\ensuremath{\mbox{\#\#}}$  Error : The fig.showtext code chunk option must be TRUE

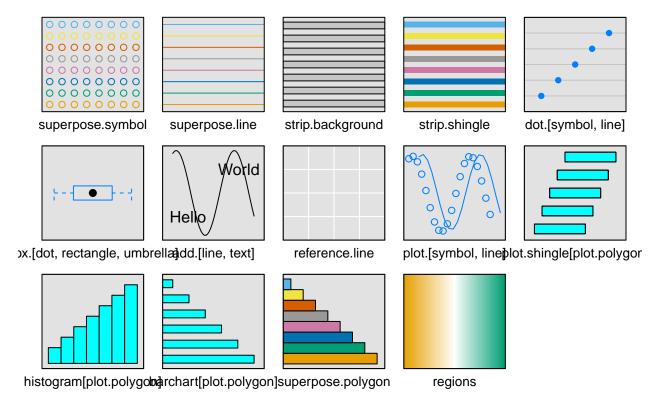

### base

plot(pressure, col = thematic::thematic\_get\_option("accent"))

## Error : The fig.showtext code chunk option must be TRUE

