

0. MySQL的安装 - Linux

1. 本节目标

- 掌握在CentOS下安装MySQL数据库
- 掌握在ubuntu下安装MySQL数据库

MySQL版本：8.0.x

安装之前先确保没有MySQL服务正在运行，建议在没有安装过MySQL的机器上进行全新的安装。

1. 在CentOS下安装MySQL数据库

操作系统版本为CentOS 7

使用 MySQL Yum仓库在 Linux 上安装 MySQL

1.1 确认当前的系统版本

- 登录系统并切换至root账号，否则执行命令时需要用sudo命令，并按提示输入密码
- 在终端中运行以下命令，查看系统版本。如下所示，当前系统版本为CentOS Linux release 7.9.2009

```
1 [root@mini-001 ~]# cat /etc/redhat-release
2 CentOS Linux release 7.9.2009 (Core)
```

1.2 添加 MySQL Yum 源

1.2.1 访问MySQL开发者专区

<https://dev.mysql.com/downloads/repo/yum>

1.2.2 根据当前系统选择对应的发布包

MySQL Community Downloads

MySQL Yum Repository

Repository Setup Packages

Red Hat Enterprise Linux 9 / Oracle Linux 9 (Architecture Independent), RPM Package

(mysql80-community-release-el9-4.noarch.rpm)

10.5K

Download

MD5: 9899e99d4b6680f344035f4939fbfb47

Red Hat Enterprise Linux 8 / Oracle Linux 8 (Architecture Independent), RPM Package

(mysql80-community-release-el8-8.noarch.rpm)

14.9K

Download

MD5: 804ec78579d55a9e0e744c291d2170a7

Red Hat Enterprise Linux 7 / Oracle Linux 7 (Architecture Independent), RPM Package

(mysql80-community-release-el7-10.noarch.rpm)

11.2K

Download

MD5: 357f12685e42e40e354b0fcd198e61c8

Red Hat Enterprise Linux 6 / Oracle Linux 6 (Architecture Independent), RPM Package

(mysql80-community-release-el6-9.noarch.rpm)

10.7K

Download

MD5: 31ab41d5afcfb9859b3f841a47f8

Fedora 38 (Architecture Independent), RPM Package

(mysql80-community-release-fc38-2.noarch.rpm)

10.3K

Download

MD5: 82c81bbdd522ff81ce247f9aa74e0c97

Fedora 37 (Architecture Independent), RPM Package

(mysql80-community-release-fc37-2.noarch.rpm)

10.3K

Download

MD5: e395b56026a91db2a26853c43b5fb2ce

We suggest that you use the MD5 checksums and GnuPG signatures to verify the integrity of the packages you download.

TIPS:

1. 发布包命名规则:

{mysql80}-community-release-{platform}-{version-number}.noarch.rpm

{mysql80}: MySQL版本号

{platform}: 平台(系统)号, 用来描述系统的版本

{version-number}: MySQL仓库配置RPM包的版本号

2. 如下所示:

mysql80-community-release-el7-10.noarch.rpm

mysql80: MySQL版本号, 默认是MySQL8.0版本

el7: 其中**el** 是 Enterprise Linux的缩写, 7表示 Linux大版本号, 比如el6 表示 Linux6, el7表示 Linux7, e8表示Linux8, el9表示Linux9, '**fc**' 则表示 Fedora

el7-10: 表示MySQL仓库配置RPM包的第10次更新

3. 选择方式:

针对当前演示系统版本Linux7，以及我们要安装的MySQL数据库版本8.0，选择对应RPM包的最近一次更新，所以下载mysql80-community-release-el7-10.noarch.rpm即可

4. 其他版本

如果默认下载页面没有你所需要的RPM包，可以通过<http://repo.mysql.com/>查找

1.2.3 下载后上传到Linux服务器

TIPS: 安装 rz 插件以支持拖拽上传

```
[root@mini-001 ~]# yum -y install lrzsz
```

- 上传完成后查看是否成功

```
1 [root@centos-001 ~]# ll
2 -rwxrw-rw-. 1 root root 11472 Aug 25 01:12 mysql80-community-release-el7-
3 10.noarch.rpm
```

1.2.4 安装发布包

- 在终端执行：`yum -y install mysql80-community-release-el7-10.noarch.rpm`

```
1 [root@centos-001 ~]# yum -y install mysql80-community-release-el7-10.noarch.rpm
2 Loaded plugins: fastestmirror, langpacks
3 Examining mysql80-community-release-el7-10.noarch.rpm: mysql80-community-
4 release-el7-10.noarch
5 Marking mysql80-community-release-el7-10.noarch.rpm to be installed
6 Resolving Dependencies
7 --> Running transaction check
8 --> Package mysql80-community-release.noarch 0:el7-10 will be installed
9 --> Finished Dependency Resolution
10
11 Dependencies Resolved
12
13 =====
14 =====
15 =====
16
17 Package                               Arch
18 Version                               Size
19 Repository
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
```

```

16  mysql80-community-release                               noarch
    el7-10                                                  /mysql80-community-release-el7-10.noarch
                                12 k

17
18 Transaction Summary
19 =====
    =====
    =====
20 Install 1 Package
21
22 Total size: 12 k
23 Installed size: 12 k
24 Downloading packages:
25 Running transaction check
26 Running transaction test
27 Transaction test succeeded
28 Running transaction
29   Installing : mysql80-community-release-el7-10.noarch
                                1/1
30   Verifying   : mysql80-community-release-el7-10.noarch
                                1/1
31
32 Installed:
33   mysql80-community-release.noarch 0:el7-10
34
35 Complete!

```

- 通过以下命令检查是否已成功添加 MySQL Yum 源

在终端执行：**yum repolist enabled | grep mysql.*-community**

```

1 [root@centos-001 ~]# yum repolist enabled | grep mysql.*-community
2 mysql-connectors-community/x86_64           MySQL Connectors Community
    227
3 mysql-tools-community/x86_64             MySQL Tools Community
    100
4 mysql80-community/x86_64                 MySQL 8.0 Community Server
    426 # 说明已安装

```

1.3 选择发布系列

- 在终端执行 **yum repolist all | grep mysql**
- **mysql80-community/x86_64、mysql-connectors-community/x86_64、mysql-tools-community/x86_64** 为启用状态

```

1 [root@centos-001 ~]# yum repolist all | grep mysql
2 mysql-cluster-7.5-community/x86_64           MySQL Cluste disabled
3 mysql-cluster-7.5-community-source           MySQL Cluste disabled
4 mysql-cluster-7.6-community/x86_64           MySQL Cluste disabled
5 mysql-cluster-7.6-community-source           MySQL Cluste disabled
6 mysql-cluster-8.0-community/x86_64           MySQL Cluste disabled
7 mysql-cluster-8.0-community-debuginfo/x86_64 MySQL Cluste disabled
8 mysql-cluster-8.0-community-source           MySQL Cluste disabled
9 mysql-cluster-innovation-community/x86_64    MySQL Cluste disabled
10 mysql-cluster-innovation-community-debuginfo/x86_64 MySQL Cluste disabled
11 mysql-cluster-innovation-community-source    MySQL Cluste disabled
12 mysql-connectors-community/x86_64           MySQL Connec enabled:
    227 #启用
13 mysql-connectors-community-debuginfo/x86_64 MySQL Connec disabled
14 mysql-connectors-community-source           MySQL Connec disabled
15 mysql-innovation-community/x86_64           MySQL Innova disabled
16 mysql-innovation-community-debuginfo/x86_64 MySQL Innova disabled
17 mysql-innovation-community-source           MySQL Innova disabled
18 mysql-tools-community/x86_64               MySQL Tools enabled:
    100 #启用
19 mysql-tools-community-debuginfo/x86_64      MySQL Tools disabled
20 mysql-tools-community-source                 MySQL Tools disabled
21 mysql-tools-innovation-community/x86_64     MySQL Tools disabled
22 mysql-tools-innovation-community-debuginfo/x86_64 MySQL Tools disabled
23 mysql-tools-innovation-community-source     MySQL Tools disabled
24 mysql-tools-preview/x86_64                  MySQL Tools disabled
25 mysql-tools-preview-source                   MySQL Tools disabled
26 mysql57-community/x86_64                    MySQL 5.7 Co disabled
27 mysql57-community-source                     MySQL 5.7 Co disabled
28 mysql80-community/x86_64                   MySQL 8.0 Co enabled:
    426 #启用
29 mysql80-community-debuginfo/x86_64          MySQL 8.0 Co disabled
30 mysql80-community-source                     MySQL 8.0 Co disabled
31

```

1.4 安装 MySQL

- 在终端执行：**yum install mysql-community-server**

安装过程提示是否继续，选y即可

将安装 MySQL 服务器包 (`mysql-community-server`) 以及运行服务器所需的组件, 包括:

客户端包 (`mysql-community-client`)

客户端和服务端常见错误消息和字符集 (`mysql-community-common`)

共享客户端库 (`mysql-community-libs`).

```
1 [root@centos-001 ~]# yum install mysql-community-server
2
3 # ....省略
4
5
6 Installed: # 服务器程序
7  mysql-community-server.x86_64 0:8.0.34-1.el7
8
9 Dependency Installed: # 相关依赖
10  mysql-community-client.x86_64 0:8.0.34-1.el7
11  mysql-community-client-plugins.x86_64 0:8.0.34-1.el7
12  mysql-community-common.x86_64 0:8.0.34-1.el7
13  mysql-community-icu-data-files.x86_64 0:8.0.34-1.el7
14  mysql-community-libs.x86_64 0:8.0.34-1.el7
15
16 Complete!
17
```

6/6

1.5 启动 MySQL 服务器

- 在终端执行: `systemctl start mysqld`

```
1 [root@centos-001 ~]# systemctl start mysqld
```

1.6 查看MySQL 服务状态

- 在终端执行: `systemctl status mysqld`

```
1 [root@centos-001 ~]# systemctl status mysqld
2 • mysqld.service - MySQL Server
3    Loaded: loaded (/usr/lib/systemd/system/mysqld.service; enabled; vendor
           preset: disabled)
```

```
4 Active: active (running) since Tue 2023-08-29 00:39:04 PDT; 2min 6s ago
5 Docs: man:mysql(8)
6 http://dev.mysql.com/doc/refman/en/using-systemd.html
7 Process: 4080 ExecStartPre=/usr/bin/mysql_pre_systemd (code=exited,
status=0/SUCCESS)
8 Main PID: 4107 (mysqld)
9 Status: "Server is operational"
10 Tasks: 37
11 CGroup: /system.slice/mysqld.service
12 └─4107 /usr/sbin/mysqld
13
14 Aug 29 00:39:00 centos-001 systemd[1]: Starting MySQL Server...
15 Aug 29 00:39:04 centos-001 systemd[1]: Started MySQL Server.
```

- 可以使用 **systemctl [stop| start| restart| status] mysqld**, 命令对MySQL服务进行[停止| 启动|重启|查看服务状态]操作

1.7 开启自启动

- 在终端执行: **systemctl enable mysqld**

```
1 [root@centos-001 ~]# systemctl enable mysqld #设置自启动
2 [root@centos-001 ~]# systemctl list-unit-files|grep mysqld #查看状态
3 mysqld.service enabled
4
```

1.8 登录MySQL

首次安装成功, MySQL把root用户的默认密码保存在错误日志中

- 可以通过在终端执行: **grep 'temporary password' /var/log/mysqld.log** 进行查看

```
1 [root@centos-001 log]# grep 'temporary password' /var/log/mysqld.log
2 2023-08-25T08:32:10.905479Z 6 [Note] [MY-010454] [Server] A temporary password
is generated for root@localhost: IRDMJQ_.v566 #这个就是默认生成的密码
```

- 使用密码进行登录

```
1 [root@centos-001 log]# mysql -uroot -p
2 Enter password:
3 Welcome to the MySQL monitor. Commands end with ; or \g.
4 Your MySQL connection id is 10
```

```
5 Server version: 8.0.34 MySQL Community Server - GPL
6
7 Copyright (c) 2000, 2023, Oracle and/or its affiliates.
8
9 Oracle is a registered trademark of Oracle Corporation and/or its
10 affiliates. Other names may be trademarks of their respective
11 owners.
12
13 Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.
14
15 mysql>
16
```

1.9 修改密码

TIPS:

`validate_password` 组件是默认安装的，实现的默认密码策略，要求密码至少包含1个大写字母、1个小写字母、1个数字和1个特殊字符，密码总长度至少为8个字符。

1.9.1 默认密码策略

密码策略分为 `LOW`、`MEDIUM` (默认)和 `STRONG`，分别用0, 1(默认), 2表示。

0表示只校验密码长度，长度最小为8，所以以后要设置简单密码时还需要修改密码的长度限制。

他们分别用两个系统变量`validate_password.policy`和`validate_password.length`表示

在MySQL 客户端运行以下命令查看当前设置

```
1 mysql> show variables like 'validate_password.policy'; #查看当前密码策略
2 +-----+-----+
3 | Variable_name | Value |
4 +-----+-----+
5 | validate_password.policy | MEDIUM | # 中等
6 +-----+-----+
7 1 row in set (0.00 sec)
8
9 mysql> show variables like 'validate_password.length'; #查看当前密码长度限制
10 +-----+-----+
11 | Variable_name | Value |
12 +-----+-----+
13 | validate_password.length | 8 | # 最小为8个字符
14 +-----+-----+
15 1 row in set (0.00 sec)
16
```


1.9.2 设置简单密码

如果我们要在开发环境设置如123456的简单密码那么就要修改默认密码策略，我们只需要设置`validate-password.policy`和`validate_password.length`对应的值即可。

- 在终端执行以下命令：

```
1 mysql> set global validate_password.policy=0; #策略设置为LOW
2 Query OK, 0 rows affected (0.00 sec)
3
4 mysql> set global validate_password.length=4; #密码长度最少为4位(系统限制不能小于4
  位)
5 Query OK, 0 rows affected (0.00 sec)
```

- 重新查看系统变量的值：

```
1 mysql> show variables like 'validate_password.policy';
2 +-----+-----+
3 | Variable_name | Value |
4 +-----+-----+
5 | validate_password.policy | LOW | # LOW级
6 +-----+-----+
7 1 row in set (0.00 sec)
8
9 mysql> show variables like 'validate_password.length';
10 +-----+-----+
11 | Variable_name | Value |
12 +-----+-----+
13 | validate_password.length | 4 | # 最小长度为4
14 +-----+-----+
15 1 row in set (0.00 sec)
```

- 设置新密码

```
1 mysql> ALTER USER 'root'@'localhost' IDENTIFIED BY '123456';
2 Query OK, 0 rows affected (0.03 sec)
```

- 恢复密码策略与密码长度限制并检查

```
1 # 恢复密码策略
```

```
2 mysql> set global validate_password.policy=1;
3 mysql> set global validate_password.length=8;
4
5 # 查看设置是否成功
6 mysql> show variables like 'validate_password.policy';
7 mysql> show variables like 'validate_password.length';
```

- 用新密码重新登录MySQL

2. 在Ubuntu下安装MySQL数据库

操作系统版本为Ubuntu 22.04.3 LTS

2.1 添加 MySQL APT 源

2.1.1 访问下载页面并下载发布包

- 下载地址: <https://dev.mysql.com/downloads/repo/apt>

dev.mysql.com/downloads/repo/apt/

MySQL Community Downloads

MySQL APT Repository

Repository Setup Packages

Ubuntu / Debian (Architecture Independent), DEB Package

17.7K

Download

(mysql-apt-config_0.8.26-1_all.deb)

MD5: c03ee48d5fda09fcd9e395963efcd907 | Signature



We suggest that you use the MD5 checksums and GnuPG signatures to verify the integrity of the packages you download.

- 课堂演示版本为mysql-apt-config_0.8.26-1_all.deb, 也可以通过<http://repo.mysql.com/>查找并下载

2.1.2 安装发布包

发布包的命名格式: mysql-apt-config_*w.x.y-z*_all.deb

可以在支持APT打包工具的Debian和Ubuntu 系统中使用相同的发布包

- 使用切换到root用户

```
1 guangchen@guangchen-vm:~$ sudo su
```

```
# 切换到root用户
```

```
2 root@guangchen-vm:/home/guangchen# cd ~ # 进行root的home目录
3 root@guangchen-vm:~# ll # 列出目录内容
```

• 安装 rz 工具

```
1 root@guangchen-vm:~# apt install lrzsz #安装rz工具
```

• 拖拽上传发布包并查看

```
1 root@guangchen-vm:~# ll #列出目录内容
2 -rw-r--r-- 1 root root 18088 8月 29 18:05 mysql-apt-config_0.8.26-1_all.deb
```

2.1.3 安装发布包

• 执行安装命令

```
1 root@guangchen-vm:~# dpkg -i mysql-apt-config_0.8.26-1_all.deb
2 Selecting previously unselected package mysql-apt-config.
3 (Reading database ... 143288 files and directories currently installed.)
4 Preparing to unpack mysql-apt-config_0.8.26-1_all.deb ...
5 Unpacking mysql-apt-config (0.8.26-1) ...
6 Setting up mysql-apt-config (0.8.26-1) ... # 发布包安装完成
```

• 从MySQL APT 源更新包信息

```
1 root@guangchen-vm:~# apt-get update
2 Get:1 http://security.ubuntu.com/ubuntu jammy-security InRelease [110 kB]
3 Get:2 http://repo.mysql.com/apt/ubuntu jammy InRelease [20.3 kB]
4 Get:3 http://repo.mysql.com/apt/ubuntu jammy/mysql-8.0 Sources [963 B]
5 Hit:4 http://cn.archive.ubuntu.com/ubuntu jammy InRelease
6 Get:5 http://repo.mysql.com/apt/ubuntu jammy/mysql-apt-config amd64 Packages [565 B]
7 Get:6 http://cn.archive.ubuntu.com/ubuntu jammy-updates InRelease [119 kB]
8 Get:7 http://repo.mysql.com/apt/ubuntu jammy/mysql-apt-config i386 Packages [565 B]
9 Get:8 http://repo.mysql.com/apt/ubuntu jammy/mysql-8.0 amd64 Packages [12.7 kB]
```

```
10 Get:9 http://repo.mysql.com/apt/ubuntu jammy/mysql-tools amd64 Packages [8,011 B]
11 Get:10 http://repo.mysql.com/apt/ubuntu jammy/mysql-tools i386 Packages [457 B]
12 Get:11 http://cn.archive.ubuntu.com/ubuntu jammy-backports InRelease [109 kB]
13 Fetched 381 kB in 6s (62.6 kB/s)

14 Reading package lists... Done # 更新完成
```


2.2 安装MySQL

- 执行安装命令


```
1 root@guangchen-vm:~# apt-get install mysql-server #输入安装命令
2 Reading package lists... Done
3 Building dependency tree... Done
4 Reading state information... Done
5 The following additional packages will be installed:
6  libmecab2 mecab-ipadic mecab-ipadic-utf8 mecab-utils mysql-client mysql-
   common mysql-community-client
7  mysql-community-client-core mysql-community-client-plugins mysql-community-
   server mysql-community-server-core
8 The following NEW packages will be installed:
9  libmecab2 mecab-ipadic mecab-ipadic-utf8 mecab-utils mysql-client mysql-
   common mysql-community-client
10 mysql-community-client-core mysql-community-client-plugins mysql-community-
   server mysql-community-server-core
11 mysql-server
12 0 upgraded, 12 newly installed, 0 to remove and 6 not upgraded.
13 Need to get 37.6 MB of archives.
14 After this operation, 273 MB of additional disk space will be used.
15 Do you want to continue? [Y/n] y # 输入y确认
16
17 emitting matrix      : 100% |#####|
18
19 done! #成功
20 update-alternatives: using /var/lib/mecab/dic/ipadic-utf8 to provide
   /var/lib/mecab/dic/debian (mecab-dictionary) in auto mode
21 Setting up mysql-community-client (8.0.34-1ubuntu22.04) ...
22 Setting up mysql-client (8.0.34-1ubuntu22.04) ...
23 Setting up mysql-community-server (8.0.34-1ubuntu22.04) ...
24 update-alternatives: using /etc/mysql/mysql.cnf to provide /etc/mysql/my.cnf
   (my.cnf) in auto mode
25 Created symlink /etc/systemd/system/multi-user.target.wants/mysql.service →
   /lib/systemd/system/mysql.service.
26 Setting up mysql-server (8.0.34-1ubuntu22.04) ...
```

- 27 Processing triggers for man-db (2.10.2-1) ...
- 28 Processing triggers for libc-bin (2.35-0ubuntu3.1) ...


- 确认安装的MySQL版本为8.0

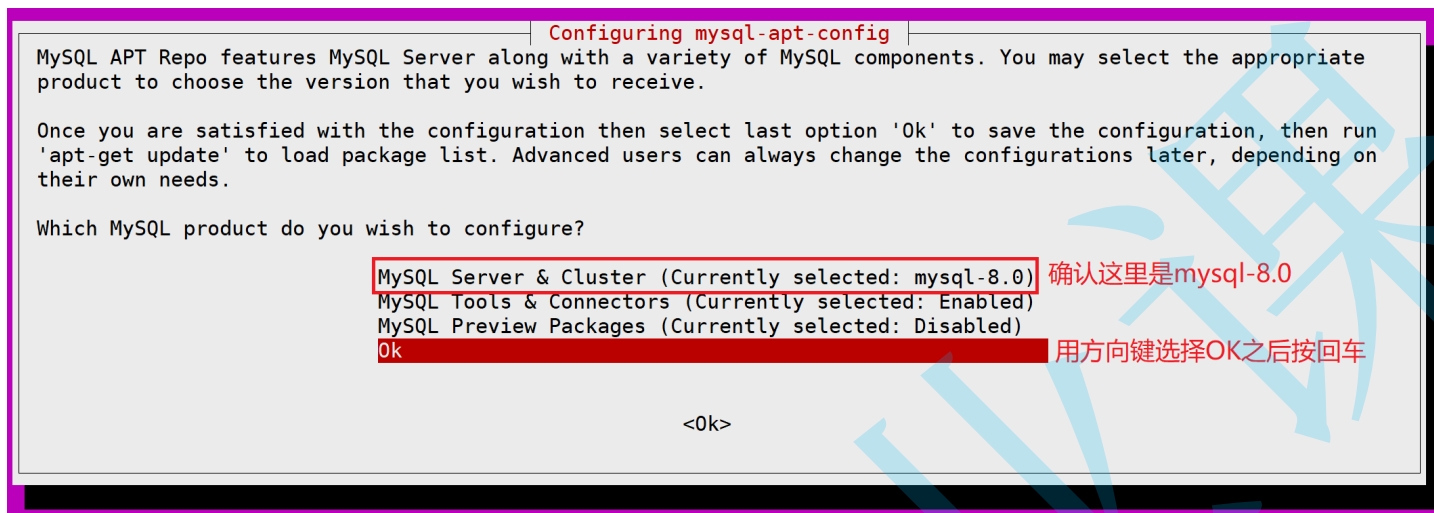

- 在安装过程中要求输入root用户的密码和确认密码，可以输入类似123456的简单密码

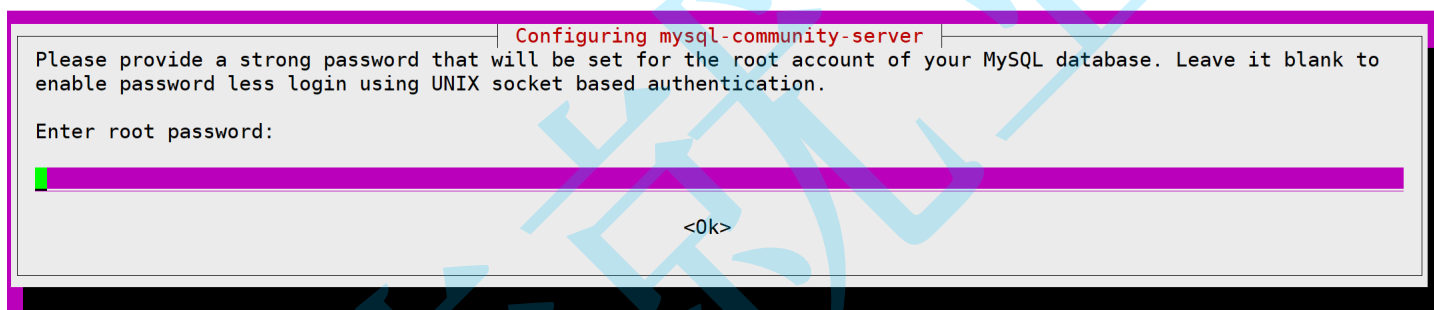

- 选择密码策略

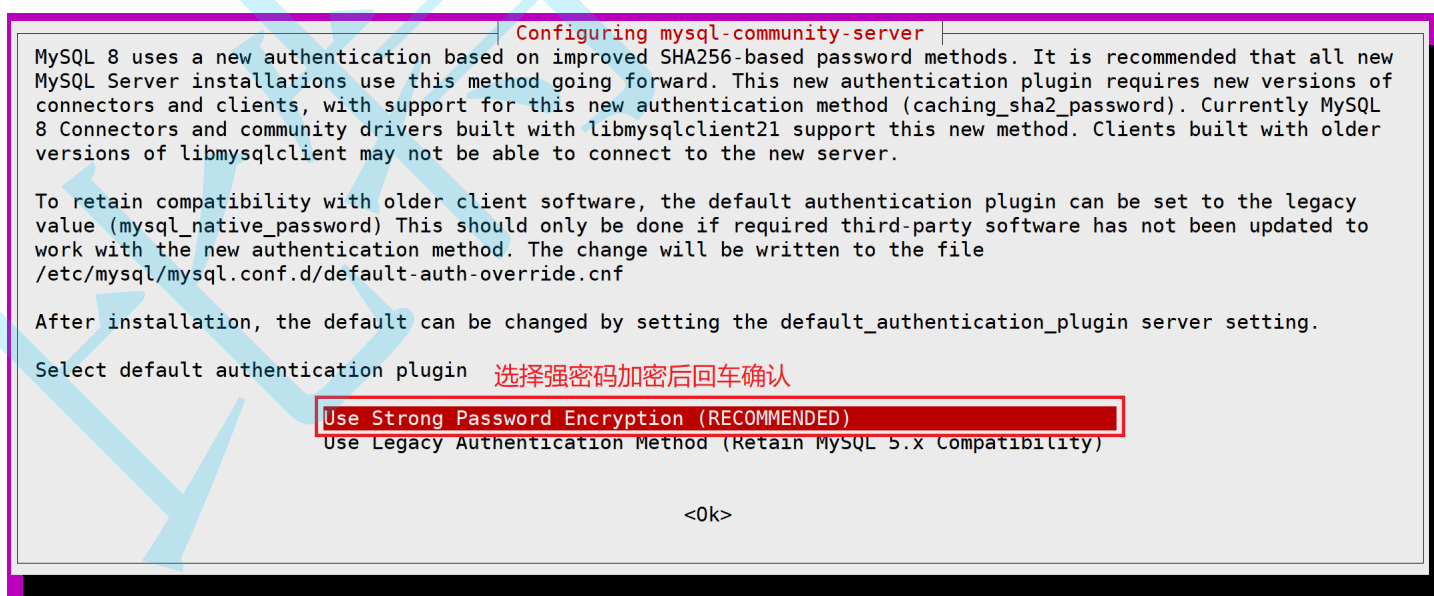

- 安装完成后，将会在服务器上安装MySQL服务、客户端工具和其他公共组件

2.3 查看MySQL状态

安装完成后MySQL服务会自动启动

```
1 root@guangchen-vm:~# systemctl status mysql #查看mysql服务状态
2 • mysql.service - MySQL Community Server
3     Loaded: loaded (/lib/systemd/system/mysql.service; enabled; vendor
4           preset: enabled)
5     Active: active (running) since Tue 2023-08-29 18:46:42 CST; 8min ago
6     Docs: man:mysqlld(8)
7           http://dev.mysql.com/doc/refman/en/using-systemd.html
8     Main PID: 5097 (mysqlld)
9     Status: "Server is operational"
10    Tasks: 37 (limit: 4542)
11    Memory: 361.5M
12    CPU: 2.581s
13    CGroup: /system.slice/mysql.service
14            └─5097 /usr/sbin/mysqlld
15 8月 29 18:46:41 guangchen-vm systemd[1]: Starting MySQL Community Server...
16 8月 29 18:46:42 guangchen-vm systemd[1]: Started MySQL Community Server.
```

- 可以使用 **systemctl [stop| start| restart| status] mysql**, 命令对MySQL服务进行[停止| 启动|重启|查看服务状态]操作

2.4 开启自启动

```
1 root@guangchen-vm:~# systemctl enable mysql #设置自启动
2 root@guangchen-vm:~# systemctl list-unit-files|grep mysql #查看状态
3 mysql.service                                enabled          enabled
4 mysql@.service                               disabled         enabled
```

2.5 登录MySQL

```
1 root@guangchen-vm:~# mysql -uroot -p
2 Enter password:
3 Welcome to the MySQL monitor.  Commands end with ; or \g.
4 Your MySQL connection id is 8
5 Server version: 8.0.34 MySQL Community Server - GPL
6
7 Copyright (c) 2000, 2023, Oracle and/or its affiliates.
8
9 Oracle is a registered trademark of Oracle Corporation and/or its
```

10 affiliates. Other names may be trademarks of their respective
11 owners.
12
13 Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.
14
15 mysql> show databases;
16 +-----+
17 | Database |
18 +-----+
19 | information_schema |
20 | mysql |
21 | performance_schema |
22 | sys |
23 +-----+
24 4 rows in set (0.01 sec)