


打开文件夹

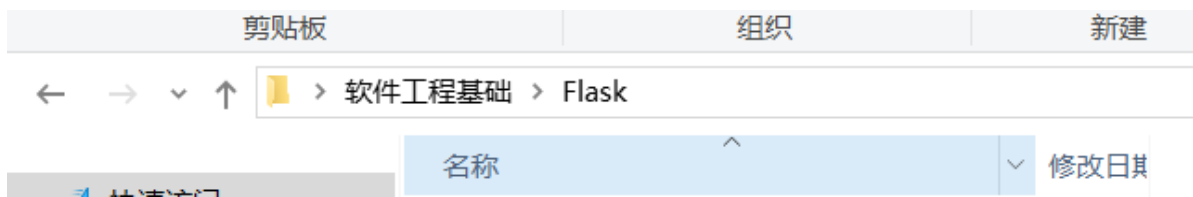

在文件夹下打开git bash

进行初始化 `git init`

然后将项目地址克隆到 当前文件夹下

`git@github.com:liangqianxing/Flask.git`

进入文件夹 `cd Flask`

进行更新前先将所有文件 添加到仓库 `git add .`

然后进行提交 `git commit -m "注释"`

最后进行 `git push`

```
liangqianxing@SDUST-slient MINGW64 ~/Desktop/软件工程基础 (master)
$ git init
Initialized empty Git repository in
C:/Users/liangqianxing/Desktop/软件工程基础/.git/
```

```
liangqianxing@SDUST-slient MINGW64 ~/Desktop/软件工程基础 (master)
$ git clone \git@github.com:liangqianxing/Flask.git
Cloning into 'Flask'...
remote: Enumerating objects: 4, done.
remote: Counting objects: 100% (4/4), done.
```

```
remote: Compressing objects: 100% (3/3), done.  
remote: Total 4 (delta 0), reused 0 (delta 0), pack-  
reused 0  
Receiving objects: 100% (4/4), done.
```

```
liangqianxing@SDUST-slient MINGW64 ~/Desktop/软件工程  
基础 (master)  
$ cd Flask
```

```
liangqianxing@SDUST-slient MINGW64 ~/Desktop/软件工程  
基础/Flask (main)  
$ git pull  
Already up to date.
```

```
liangqianxing@SDUST-slient MINGW64 ~/Desktop/软件工程  
基础/Flask (main)  
$ git add .
```

```
liangqianxing@SDUST-slient MINGW64 ~/Desktop/软件工程  
基础/Flask (main)  
$ git commit -m "test"  
[main e8e4881] test  
1 file changed, 364 insertions(+)  
create mode 100644 code.md
```

```
liangqianxing@SDUST-slient MINGW64 ~/Desktop/软件工程  
基础/Flask (main)  
$ git push  
Enumerating objects: 4, done.  
Counting objects: 100% (4/4), done.  
Delta compression using up to 16 threads  
Compressing objects: 100% (3/3), done.  
Writing objects: 100% (3/3), 2.70 KiB | 2.70 MiB/s,  
done.  
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0  
To github.com:liangqianxing/Flask.git  
a11ad84..e8e4881 main -> main
```

