A Monero data model and C ABI specification

implemented by monero-c, a C ABI over monero-cpp
using monero v0.18.5.4 'Fluorine Fermi'

Last updated November 1, 2026



C implementation: https://github.com/libmonero/monero-c

C# binding: https://github.com/libmonero/monero-csharp
Kotlin binding: https://github.com/libmonero/monero-kotlin
C++ implementation: https://github.com/woodser/monero-cpp
Python implementation: https://github.com/libmonero/monero-python
Java implementation: https://github.com/woodser/monero-java
TypeScript implementation: https://github.com/woodser/monero-ts

Document source: https://github.com/libmonero/monero-c/blob/main/docs/monero-spec.drawio

Document created and revisable using: https://www.draw.io/

How to read the C tables
Every function returns monero_result: MONERO_OK, or MONERO_ERROR with the message in monero_last_error(), the kind in monero_last_error_code() and the code of an RPC error in monero_last_error_rpc_code().
The first parameter of a daemon or wallet function is its handle, monero_daemon* or monero_wallet*, and the rows leave it out. A result comes back in an out_* parameter, and the row gives its type after the colon. A model is JSON text with the field names of the types below, which the caller frees with monero_utils_free(), and a secret is freed with monero_utils_free_secret(). A parameter with =null is a pointer, and NULL means none.

Monero Daemon Interface 1/3 - monero_c_daemon.h

monero_daemon_connect(string uri, string username, string password, string proxy_uri,
    string zmq_uri, uint timeout_ms): MoneroDaemon

monero_daemon_connect_with(MoneroRpcConnection connection): MoneroDaemon

monero_daemon_free(): void

monero_daemon_get_rpc_connection(): MoneroRpcConnection

monero_daemon_set_poll_period(ulong period_ms): void

monero_daemon_listener_create(MoneroDaemonListenerCallbacks callbacks): MoneroDaemonListener

monero_daemon_listener_free(MoneroDaemonListener listener): void

monero_daemon_add_listener(MoneroDaemonListener listener): void

monero_daemon_remove_listener(MoneroDaemonListener listener): void

monero_daemon_get_listeners(): MoneroDaemonListener[]

monero_daemon_remove_listeners(): void

monero_daemon_get_version(): MoneroVersion

monero_daemon_is_connected(): bool

monero_daemon_is_trusted(): bool

monero_daemon_get_height(): ulong

monero_daemon_get_block_hash(ulong height): string

monero_daemon_get_info(): MoneroDaemonInfo

monero_daemon_get_sync_info(): MoneroDaemonSyncInfo

monero_daemon_get_network_stats(): MoneroDaemonNetworkStats

monero_daemon_get_hard_fork_info(): MoneroHardForkInfo

monero_daemon_get_alt_chains(): MoneroAltChain[]

monero_daemon_get_alt_block_hashes(): string[]

monero_daemon_get_block_template(string wallet_address, int reserve_size=null): MoneroBlockTemplate

monero_daemon_get_miner_data(): MoneroMinerData

monero_daemon_calculate_pow(uint major_version, ulong height, string block_blob, string seed_hash): string

monero_daemon_add_auxiliary_pow(string block_template_blob, string aux_pow_json): MoneroAddAuxiliaryPowResult

monero_daemon_get_mining_status(): MoneroMiningStatus

monero_daemon_start_mining(string address, ulong num_threads=null, bool is_background=null,
    bool ignore_battery=null): void

monero_daemon_stop_mining(): void

monero_daemon_generate_blocks(string wallet_address, ulong num_blocks, string prev_block_hash=null,
    uint starting_nonce=null): MoneroGenerateBlocksResult

monero_daemon_submit_block(string block_blob): void

monero_daemon_submit_blocks(string[] block_blobs): void

Monero Daemon Interface 2/3 - monero_c_daemon.h

monero_daemon_get_last_block_header(): MoneroBlockHeader

monero_daemon_get_block_header_by_hash(string block_hash): MoneroBlockHeader

monero_daemon_get_block_header_by_height(ulong height): MoneroBlockHeader

monero_daemon_get_block_headers_by_range(ulong start_height, ulong end_height): MoneroBlockHeader[]

monero_daemon_get_block_by_hash(string block_hash): MoneroBlock

monero_daemon_get_blocks_by_hash(string[] block_hashes, ulong start_height, bool prune,
ulong max_block_count): MoneroGetBlocksByHashResult

monero_daemon_get_block_by_height(ulong height): MoneroBlock

monero_daemon_get_blocks_by_height(ulong[] heights): MoneroBlock[]

monero_daemon_get_blocks_by_range(ulong start_height=null, ulong end_height=null): MoneroBlock[]

monero_daemon_get_blocks_by_range_chunked(ulong start_height=null, ulong end_height=null,
ulong max_chunk_size=null): MoneroBlock[]

monero_daemon_get_block_hashes(string[] block_hashes): MoneroGetBlockHashesResult

monero_daemon_wait_for_next_block_header(): MoneroBlockHeader

monero_daemon_wait_for_next_block_header_timeout(uint timeout_ms): (MoneroBlockHeader, bool timed_out)

monero_daemon_get_tx(string tx_hash, bool prune): {blocks: MoneroBlock[]}

monero_daemon_get_txs(string[] tx_hashes, bool prune): {blocks: MoneroBlock[]}

monero_daemon_get_tx_hex(string tx_hash, bool prune): string

monero_daemon_get_tx_hexes(string[] tx_hashes, bool prune): string[]

monero_daemon_get_miner_tx_sum(ulong height, ulong num_blocks): MoneroMinerTxSum

monero_daemon_get_fee_estimate(ulong grace_blocks): MoneroFeeEstimate

monero_daemon_submit_tx_hex(string tx_hex, bool do_not_relay): MoneroSubmitTxResult

monero_daemon_relay_tx_by_hash(string tx_hash): void

monero_daemon_relay_txs_by_hash(string[] tx_hashes): void

monero_daemon_get_tx_pool(): {blocks: MoneroBlock[]}

monero_daemon_get_tx_pool_hashes(): string[]

monero_daemon_get_tx_pool_backlog(): MoneroTxBacklogEntry[]

monero_daemon_get_tx_pool_stats(): MoneroTxPoolStats

monero_daemon_flush_tx_pool(): void

monero_daemon_flush_tx_pool_hashes(string[] tx_hashes): void

monero_daemon_flush_tx_pool_hash(string tx_hash): void

Monero Daemon Interface 3/3 - monero_c_daemon.h

monero_daemon_get_key_image_spent_status(string key_image): MoneroKeyImageSpentStatus

monero_daemon_get_key_image_spent_statuses(string[] key_images): MoneroKeyImageSpentStatus

monero_daemon_get_output_indices(string tx_hash): ulong

monero_daemon_get_outputs(string outputs_json): {blocks: MoneroBlock[]}

monero_daemon_get_output_histogram(ulong[] amounts, int min_count=null, int max_count=null, bool is_unlocked=null,
int recent_cutoff=null): MoneroOutputHistogramEntry[]

monero_daemon_get_output_distribution(ulong[] amounts, bool is_cumulative=null, ulong start_height=null,
ulong end_height=null): MoneroOutputDistributionEntry[]

monero_daemon_get_download_limit(): int

monero_daemon_set_download_limit(int limit): int

monero_daemon_reset_download_limit(): int

monero_daemon_get_upload_limit(): int

monero_daemon_set_upload_limit(int limit): int

monero_daemon_reset_upload_limit(): int

monero_daemon_get_peers(): MoneroPeer[]

monero_daemon_get_known_peers(): MoneroPeer[]

monero_daemon_get_public_peers(bool include_offline): MoneroPeer[]

monero_daemon_set_outgoing_peer_limit(int limit): void

monero_daemon_set_incoming_peer_limit(int limit): void

monero_daemon_get_peer_bans(): MoneroBan[]

monero_daemon_set_peer_bans(string bans_json): void

monero_daemon_set_peer_ban(string ban_json): void

monero_daemon_get_peer_ban(string address): MoneroBan

monero_daemon_prune_blockchain(bool check): MoneroPruneResult

monero_daemon_save_blockchain(): void

monero_daemon_pop_blocks(ulong num_blocks): ulong

monero_daemon_flush_cache(bool bad_blocks): void

monero_daemon_set_bootstrap_daemon(string address, string username, string password, string proxy): void

monero_daemon_remove_bootstrap_daemon(): void

monero_daemon_set_log_hash_rate(bool is_visible): void

monero_daemon_set_log_level(int level): void


monero_daemon_set_log_categories(string categories): string

monero_daemon_check_for_update(): MoneroDaemonUpdateCheckResult

monero_daemon_download_update(string path): MoneroDaemonUpdateDownloadResult

monero_daemon_stop(): void

Monero Daemon Types 1/3

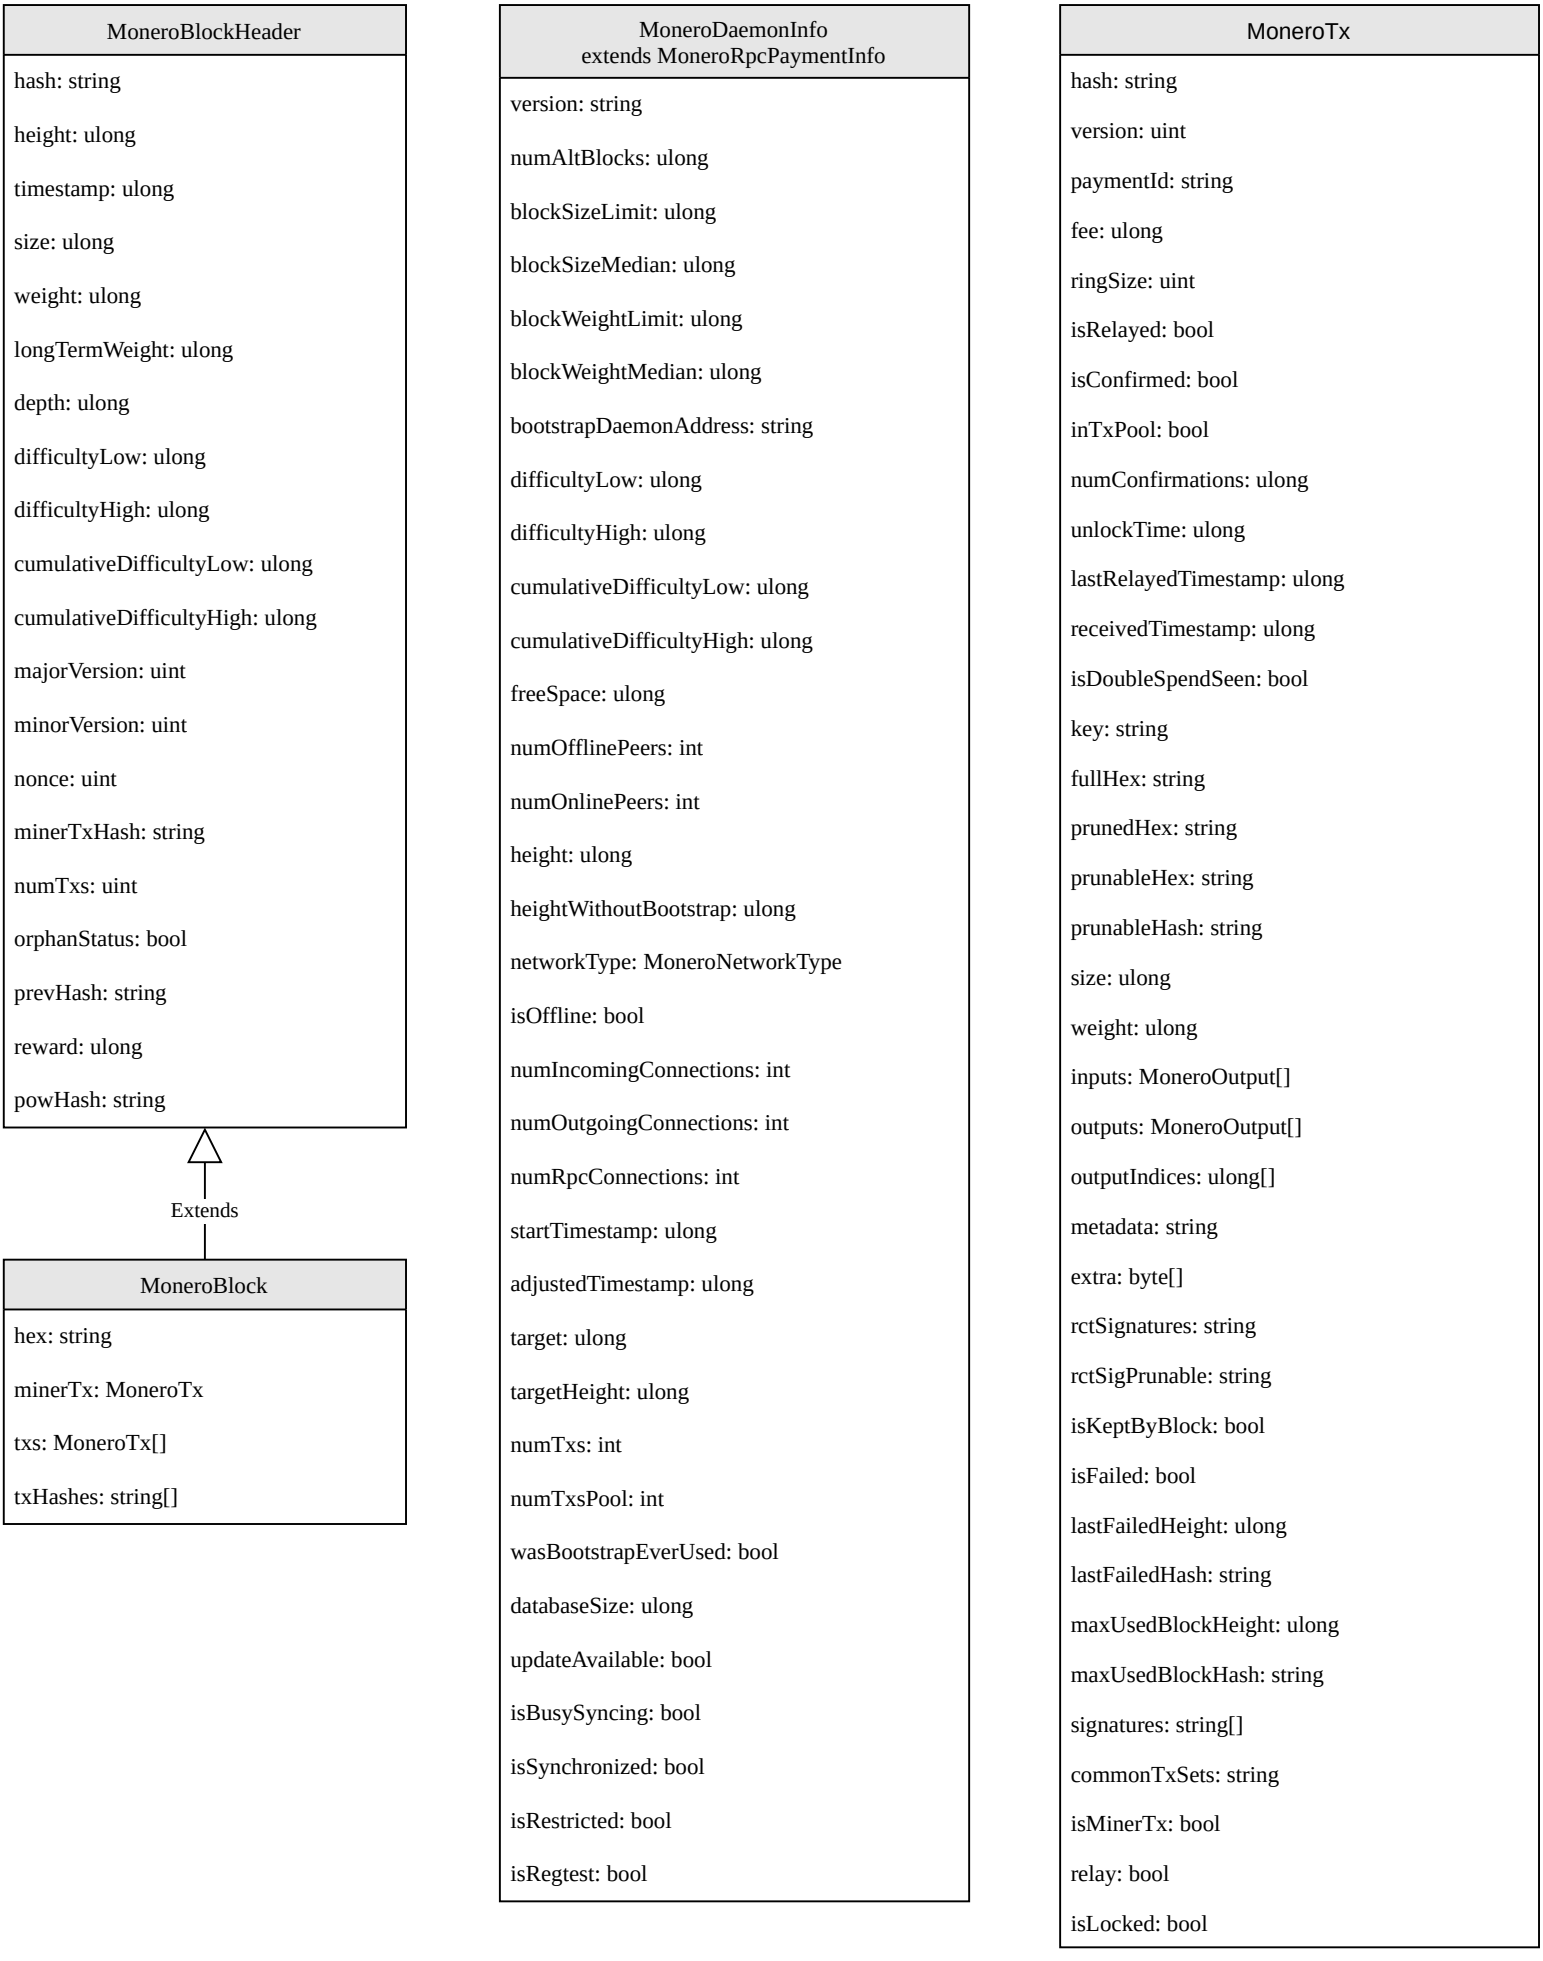

Monero Daemon Types 1/3 (continued)

MoneroOutput
keyImage: MoneroKeyImage
amount: ulong
index: ulong
ringOutputIndices: ulong[]
stealthPublicKey: string
mask: string

MoneroGetBlockHashesResult
startHeight: ulong
currentHeight: ulong
hashes: string[]

MoneroGetBlocksByHashResult
currentHeight: ulong
blocks: MoneroBlock[]

MoneroRpcPaymentInfo
credits: ulong
topBlockHash: string

Monero Daemon Types 2/3

MoneroDaemonSyncInfo extends MoneroRpcPaymentInfo
height: ulong
spans: MoneroConnectionSpan[]
targetHeight: ulong
nextNeededPruningSeed: int
overview: string
peers: MoneroPeer[]

MoneroDaemonListener
monero_daemon_listener_callbacks
struct_size: uint
user_data: void*
on_block_header(void* user_data, string header_json): void

MoneroBan
host: string
ip: uint
isBanned: bool
seconds: ulong

MoneroNetworkType
monero_utils_network_type
prefix MONERO_UTILS_NETWORK_
MAINNET: 0
TESTNET: 1
STAGENET: 2
REGTEST: 3

MoneroBlockTemplate
blockTemplateBlob: string
blockHashingBlob: string
difficultyLow: ulong
difficultyHigh: ulong
expectedReward: ulong
height: ulong
prevHash: string
reservedOffset: ulong
seedHeight: ulong
seedHash: string
nextSeedHash: string

MoneroKeyImage
hex: string
signature: string

MoneroKeyImageSpentStatus
monero_key_image_spent_status
prefix MONERO_KEY_IMAGE_
NOT_SPENT: 0
CONFIRMED: 1
TX_POOL: 2

MoneroPeer
id: string
address: string
host: string
port: int
isOnline: bool
lastSeenTimestamp: ulong
pruningSeed: int
rpcPort: int
rpcCreditsPerHash: ulong
numSupportFlags: int
state: string
sendIdleTime: ulong
receiveIdleTime: ulong
numSends: ulong
numReceives: ulong
isLocalHost: bool
isLocalIp: bool
liveTime: ulong
isIncoming: bool
height: ulong
currentUpload: ulong
currentDownload: ulong
avgUpload: ulong
avgDownload: ulong
hash: string
addressType: MoneroConnectionType

Monero Daemon Types 2/3 (continued)

MoneroConnectionSpan
connectionId: string
numBlocks: ulong
remoteAddress: string
rate: ulong
speed: ulong
size: ulong
startHeight: ulong

MoneroAddAuxiliaryPowResult extends MoneroRpcPaymentInfo
blockTemplateBlob: string
blockHashingBlob: string
merkleRoot: string
merkleTreeDepth: uint
auxPow: MoneroAuxiliaryPow[]

MoneroAuxiliaryPow
id: string
hash: string

MoneroGenerateBlocksResult
height: ulong
blockHashes: string[]


MoneroMinerData extends MoneroRpcPaymentInfo
majorVersion: uint
height: ulong
prevHash: string
seedHash: string
difficulty: string
medianWeight: ulong
alreadyGeneratedCoins: ulong
txPoolBacklog: MoneroTx[]

MoneroSubmitTxResult extends MoneroRpcPaymentInfo
isGood: bool
isRelayed: bool
isFeeTooLow: bool
isMixinTooLow: bool
hasInvalidInput: bool
hasInvalidOutput: bool
hasTooFewOutputs: bool
isOverspend: bool
isTooBig: bool
sanityCheckFailed: bool
reason: string
isDoubleSpend: bool
isTxExtraTooBig: bool
isNonZeroUnlockTime: bool

MoneroDaemonNetworkStats extends MoneroRpcPaymentInfo
startTime: ulong
totalPacketsIn: ulong
totalBytesIn: ulong
totalPacketsOut: ulong
totalBytesOut: ulong

MoneroRpcConnection
uri: string
username: string
password: string
proxyUri: string
zmqUri: string
priority: int
timeoutMs: uint
responseTime: ulong
sslVerify: bool
isOnline: bool
isAuthenticated: bool

Monero Daemon Types 3/3

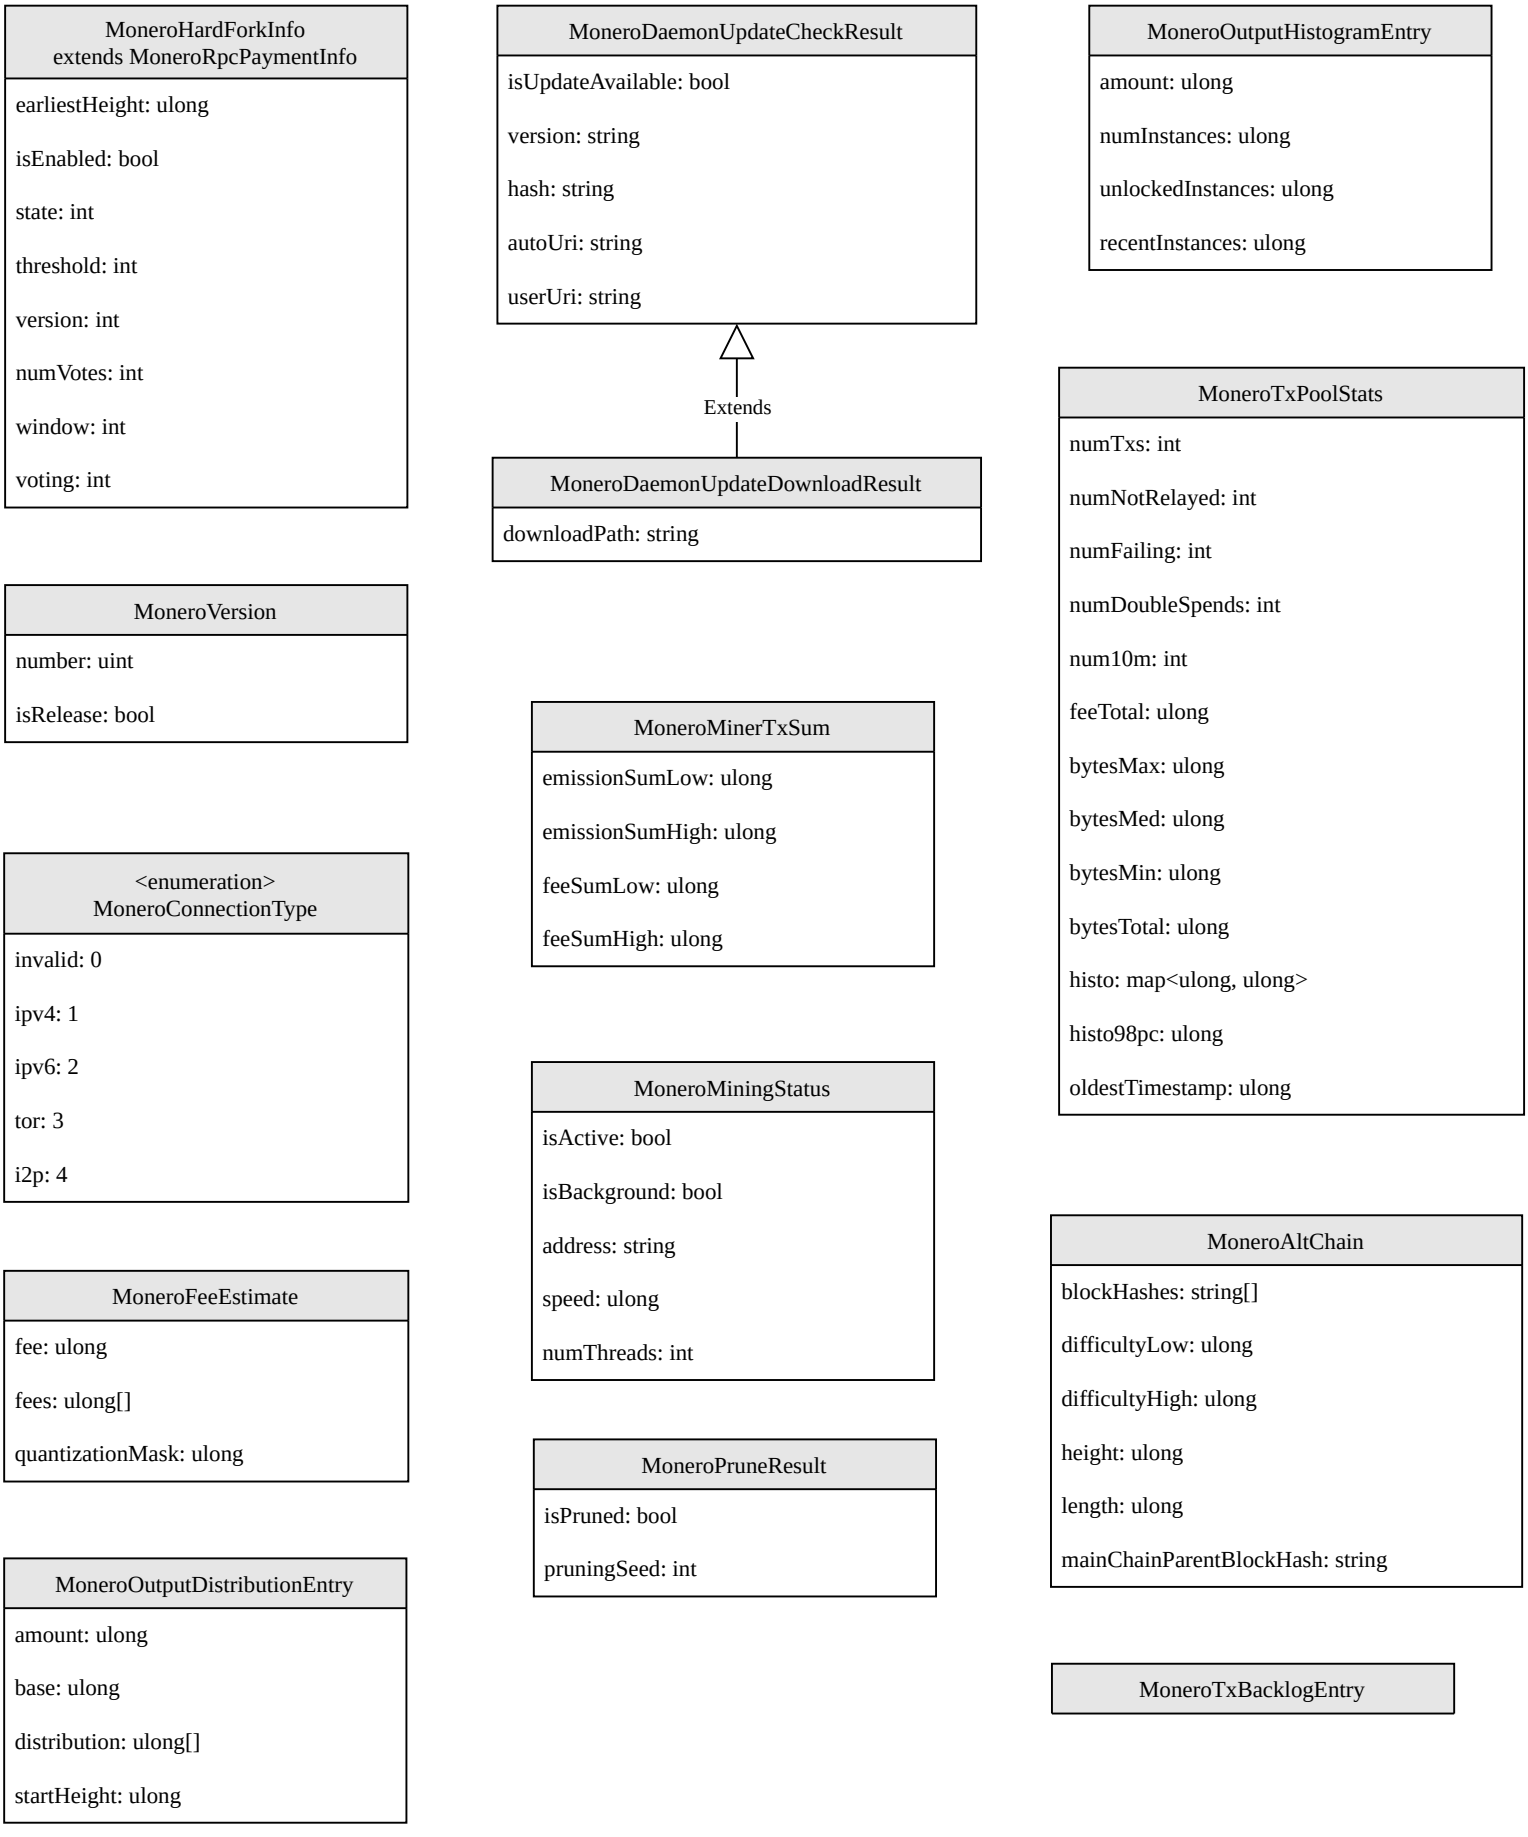

Monero Wallet Interface 1/5 - monero_c_wallet.h

monero_wallet_create_random(string path, string password=null, MoneroNetworkType network_type,
    string language=null): MoneroWallet

monero_wallet_create_from_seed(string path, string password=null, MoneroNetworkType network_type, string seed,
    string seed_offset=null, ulong restore_height, string language=null): MoneroWallet

monero_wallet_create_from_keys(string path, string password=null, MoneroNetworkType network_type, string address,
    string private_view_key, string private_spend_key=null, ulong restore_height, string language=null): MoneroWallet

monero_wallet_create(string config_json): MoneroWallet

monero_wallet_open(string path, string password=null, MoneroNetworkType network_type): MoneroWallet

monero_wallet_open_data(string password=null, MoneroNetworkType network_type,
    byte[] keys_data, byte[] cache_data=null): MoneroWallet

monero_wallet_exists(string path): bool

monero_wallet_get_seed_languages(): string[]

monero_wallet_keys_create_random(MoneroNetworkType network_type, string language=null): MoneroWallet

monero_wallet_keys_create_from_seed(MoneroNetworkType network_type, string seed, string seed_offset=null,
    string language=null): MoneroWallet

monero_wallet_keys_create_from_keys(MoneroNetworkType network_type, string address, string private_view_key,
    string private_spend_key=null, string language=null): MoneroWallet

monero_wallet_save(): void

monero_wallet_get_keys_file_buffer(string password=null, bool view_only): byte[]

monero_wallet_get_cache_file_buffer(): byte[]

monero_wallet_close(bool save): void

monero_wallet_request_shutdown(): void

monero_wallet_free(): void

monero_wallet_get_network_type(): MoneroNetworkType

monero_wallet_is_view_only(): bool

monero_wallet_is_multisig(): bool

monero_wallet_get_seed(): string

monero_wallet_get_seed_language(): string

monero_wallet_get_primary_address(): string

monero_wallet_get_private_view_key(): string

monero_wallet_get_private_spend_key(): string

monero_wallet_get_height(): ulong

monero_wallet_get_balance(): ulong

monero_wallet_get_unlocked_balance(): ulong

monero_wallet_get_account_balance(uint account_idx): ulong

monero_wallet_get_subaddress_balance(uint account_idx, uint subaddress_idx): ulong

monero_wallet_get_account_unlocked_balance(uint account_idx): ulong

monero_wallet_get_subaddress_unlocked_balance(uint account_idx, uint subaddress_idx): ulong

monero_wallet_get_address(uint account_idx, uint subaddress_idx): string

monero_wallet_get_integrated_address(string standard_address=null, string payment_id=null): MoneroIntegratedAddress

monero_wallet_decode_integrated_address(string integrated_address): MoneroIntegratedAddress

Monero Wallet Interface 2/5 - monero_c_wallet.h

monero_wallet_get_account(uint account_idx, bool include_subaddresses, bool skip_balances): MoneroAccount

monero_wallet_get_subaddresses(uint account_idx, uint[] subaddress_indices=null,
bool skip_balances): {subaddresses: MoneroSubaddress[]}

monero_wallet_sign_message(string message, MoneroMessageSignatureType signature_type, uint account_idx,
uint subaddress_idx): string

monero_wallet_verify_message(string message, string address, string signature): MoneroMessageSignatureResult

monero_wallet_add_address_book_entry(string address, string description=null): ulong

monero_wallet_edit_address_book_entry(ulong index, string address=null, string description=null): void

monero_wallet_delete_address_book_entry(ulong index): void

monero_wallet_get_address_book_entries(ulong[] indices): {entries: MoneroAddressBookEntry[]}

monero_wallet_change_password(string old_password, string new_password): void

monero_wallet_create_account(string label=null): MoneroAccount

monero_wallet_create_subaddress(uint account_idx, string label=null): MoneroSubaddress

monero_wallet_get_accounts(bool include_subaddresses, string tag=null, bool skip_balances): {accounts: MoneroAccount[]}

monero_wallet_get_address_index(string address): MoneroSubaddress

monero_wallet_get_subaddress(uint account_idx, uint subaddress_idx): MoneroSubaddress

monero_wallet_set_account_label(uint account_idx, string label=null): void

monero_wallet_set_subaddress_label(uint account_idx, uint subaddress_idx, string label=null): void

monero_wallet_set_account_tag_label(string tag, string label): void

monero_wallet_get_account_tags(): MoneroAccountTag[]

monero_wallet_tag_accounts(string tag, uint[] account_indices): void

monero_wallet_untag_accounts(uint[] account_indices): void

monero_wallet_get_attribute(string key): (bool found, string)

monero_wallet_set_attribute(string key, string value): void

monero_wallet_get_default_fee_priority(): MoneroTxPriority

monero_wallet_get_path(): string

monero_wallet_get_public_view_key(): string

monero_wallet_get_public_spend_key(): string

monero_wallet_get_version(): MoneroVersion

monero_wallet_get_restore_height(): ulong

monero_wallet_set_restore_height(ulong restore_height): void

monero_wallet_is_closed(): bool

monero_wallet_export_key_images(bool all): MoneroKeyImageExportResult

monero_wallet_get_new_key_images_from_last_import(): MoneroKeyImage[]

monero_wallet_import_key_images(string key_images_json, ulong offset): MoneroKeyImageImportResult

monero_wallet_export_outputs(bool all): string

monero_wallet_import_outputs(string outputs_hex): int

monero_wallet_freeze_output(string key_image): void

monero_wallet_thaw_output(string key_image): void

monero_wallet_is_output_frozen(string key_image): bool

Monero Wallet Interface 3/5 - monero_c_wallet.h

monero_wallet_get_tx_note(string tx_hash): string

monero_wallet_set_tx_note(string tx_hash, string note): void

monero_wallet_get_tx_notes(string[] tx_hashes): string[]

monero_wallet_set_tx_notes(string[] tx_hashes, string[] notes): void

monero_wallet_set_daemon_connection(string uri, string username=null, string password=null, string proxy_uri=null,
    bool is_trusted=null, bool ssl_verify): void

monero_wallet_get_daemon_connection(): MoneroRpcConnection

monero_wallet_is_daemon_trusted(): bool

monero_wallet_listener_create(MoneroWalletListenerCallbacks callbacks): MoneroWalletListener

monero_wallet_listener_free(MoneroWalletListener listener): void

monero_wallet_add_listener(MoneroWalletListener listener): void

monero_wallet_remove_listener(MoneroWalletListener listener): void

monero_wallet_remove_listeners(): void

monero_wallet_sync(ulong start_height=null, MoneroWalletListener listener): MoneroSyncResult

monero_wallet_start_syncing(ulong sync_period_ms): void

monero_wallet_stop_syncing(): void

monero_wallet_is_connected_to_daemon(): bool

monero_wallet_is_daemon_synced(): bool

monero_wallet_is_synced(): bool

monero_wallet_get_daemon_height(): ulong

monero_wallet_get_daemon_max_peer_height(): ulong

monero_wallet_wait_for_next_block(): ulong

monero_wallet_wait_for_next_block_timeout(uint timeout_ms): (ulong height, bool timed_out)

monero_wallet_scan_txs(string[] tx_hashes): void

monero_wallet_rescan_blockchain(): void

monero_wallet_rescan_spent(): void

monero_wallet_get_height_by_date(ushort year, byte month, byte day): ulong

monero_wallet_start_mining(ulong num_threads=null, bool background_mining=null, bool ignore_battery=null): void

monero_wallet_stop_mining(): void

monero_wallet_get_listeners(): MoneroWalletListener[]

Monero Wallet Interface 4/5 - monero_c_wallet.h

monero_wallet_get_txs(string query_json=null): json

monero_wallet_get_tx(string tx_hash): {blocks: MoneroBlock[]}

monero_wallet_get_transfers(string query_json=null): json

monero_wallet_get_outputs(string query_json=null): json

monero_wallet_create_tx(string config_json): MoneroTxSet

monero_wallet_create_txs(string config_json): MoneroTxSet

monero_wallet_relay_tx(string tx_metadata): string

monero_wallet_relay_tx_json(string tx_json): string

monero_wallet_relay_txs(string[] tx_metadatas): string[]

monero_wallet_relay_txs_json(string txs_json): string[]

monero_wallet_submit_txs(string signed_tx_hex): string[]

monero_wallet_sign_txs(string unsigned_tx_hex): MoneroTxSet

monero_wallet_describe_tx_set(string tx_set_json): MoneroTxSet

monero_wallet_describe_unsigned_tx_set(string unsigned_tx_hex): MoneroTxSet

monero_wallet_describe_multisig_tx_set(string multisig_tx_hex): MoneroTxSet

monero_wallet_sweep_output(string config_json): MoneroTxSet

monero_wallet_sweep_dust(bool relay): MoneroTxSet

monero_wallet_sweep_unlocked(string config_json): {txSets: MoneroTxSet[]}

monero_wallet_move_to(string path, string password): void

monero_wallet_get_payment_uri(string config_json): string

monero_wallet_parse_payment_uri(string uri): MoneroTxConfig

monero_wallet_get_tx_key(string tx_hash): string

monero_wallet_check_tx_key(string tx_hash, string tx_key, string address): MoneroCheckTx

monero_wallet_get_tx_proof(string tx_hash, string address, string message=null): string

monero_wallet_check_tx_proof(string tx_hash, string address, string message=null, string signature): MoneroCheckTx

monero_wallet_get_spend_proof(string tx_hash, string message=null): string

monero_wallet_check_spend_proof(string tx_hash, string message=null, string signature): bool

monero_wallet_get_reserve_proof_wallet(string message=null): string

monero_wallet_get_reserve_proof_account(uint account_idx, ulong amount, string message=null): string

monero_wallet_check_reserve_proof(string address, string message=null, string signature): MoneroCheckReserve

monero_wallet_is_multisig_import_needed(): bool

monero_wallet_get_multisig_info(): MoneroMultisigInfo

monero_wallet_prepare_multisig(): string

monero_wallet_make_multisig(string[] multisig_hexes, int threshold, string password): string

monero_wallet_exchange_multisig_keys(string[] multisig_hexes, string password): MoneroMultisigInitResult

monero_wallet_export_multisig_hex(): string

monero_wallet_import_multisig_hex(string[] multisig_hexes, bool refresh_after_import): int

monero_wallet_sign_multisig_tx_hex(string multisig_tx_hex): MoneroMultisigSignResult

monero_wallet_submit_multisig_tx_hex(string signed_multisig_tx_hex): string[]

Monero Wallet Interface 5/5 - monero_c_wallet.h

monero_wallet_rpc_connect(MoneroRpcConnection connection): MoneroWallet

monero_wallet_rpc_open_wallet(string name, string wallet_password=null): void

monero_wallet_rpc_create_wallet(string config_json): void

monero_wallet_rpc_open(string uri, string username=null, string password=null, string name,
    string wallet_password=null): MoneroWallet

monero_wallet_rpc_create_random(string uri, string username=null, string password=null, string name,
    string wallet_password=null, string language=null): MoneroWallet

monero_wallet_rpc_create_from_seed(string uri, string username=null, string password=null, string name,
    string wallet_password=null, string seed, string seed_offset=null, ulong restore_height,
    string language=null): MoneroWallet

monero_wallet_rpc_create_from_keys(string uri, string username=null, string password=null, string name,
    string wallet_password=null, string address, string private_view_key, string private_spend_key=null,
    ulong restore_height, string language=null): MoneroWallet

monero_wallet_rpc_stop(): void

monero_wallet_rpc_get_seed_languages(): string[]


monero_wallet_rpc_get_connection(): MoneroRpcConnection

monero_wallet_rpc_set_poll_period(ulong period_ms): void

monero_wallet_rpc_get_balances(uint account_idx=null, uint subaddress_idx=null): MoneroSubaddress

monero_wallet_rpc_set_daemon_connection(string connection_json, bool is_trusted, string ssl_options_json=null): void

Monero Wallet Types 1/4 - Transactions, Transfers, and Outputs

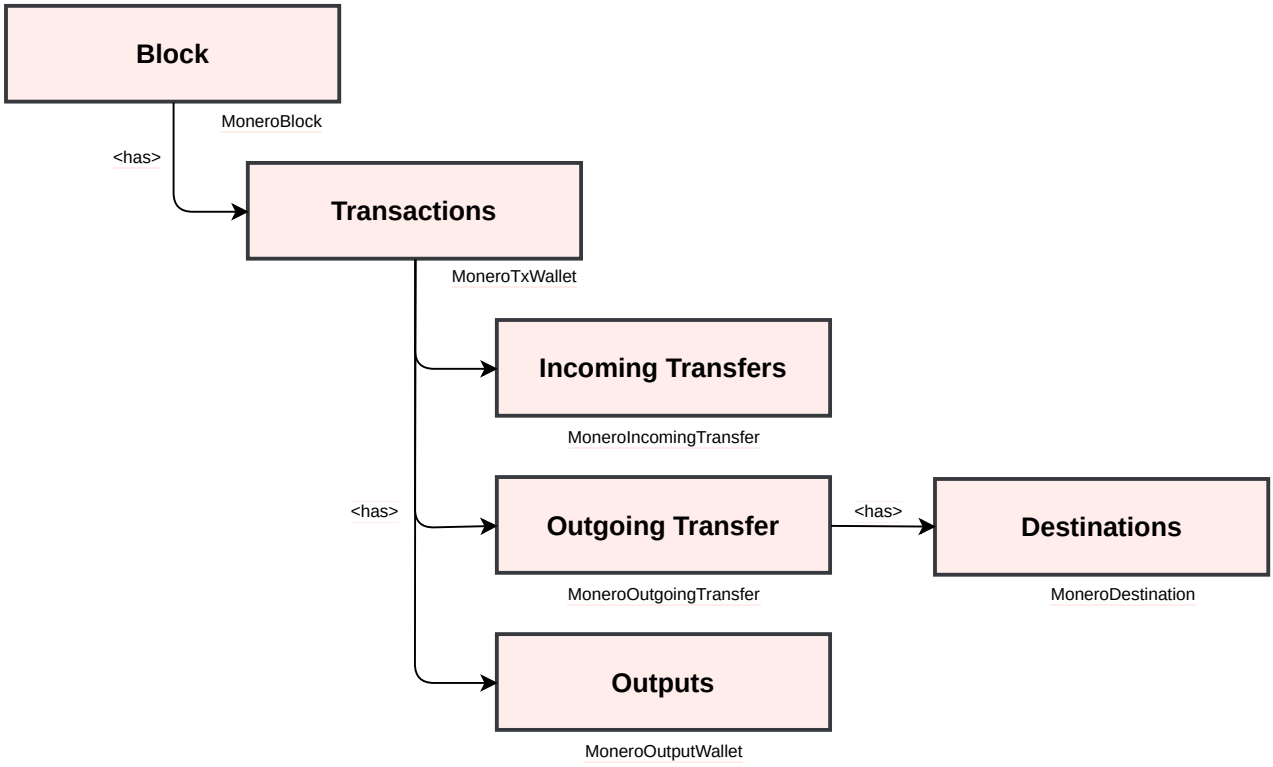

Transactions are part of a block and have incoming transfers and/or an outgoing transfer.

The outgoing transfer may have destination amounts and addresses which are saved locally with the wallet and are not recoverable from the blockchain.


Transactions may also have outputs received by the wallet when requested.

In the JSON of monero-c these parents are not fields. A tx comes in the txs of its block, {"blocks":[...]}, a transfer and an output in the tx that has them, and a tx that the wallet made in the txs of its tx set, {"txSets":[...]}.

Monero Wallet Types 2/4 - Send Request and Queries for Transactions, Transfers, and Outputs




Monero Wallet Types 3/4

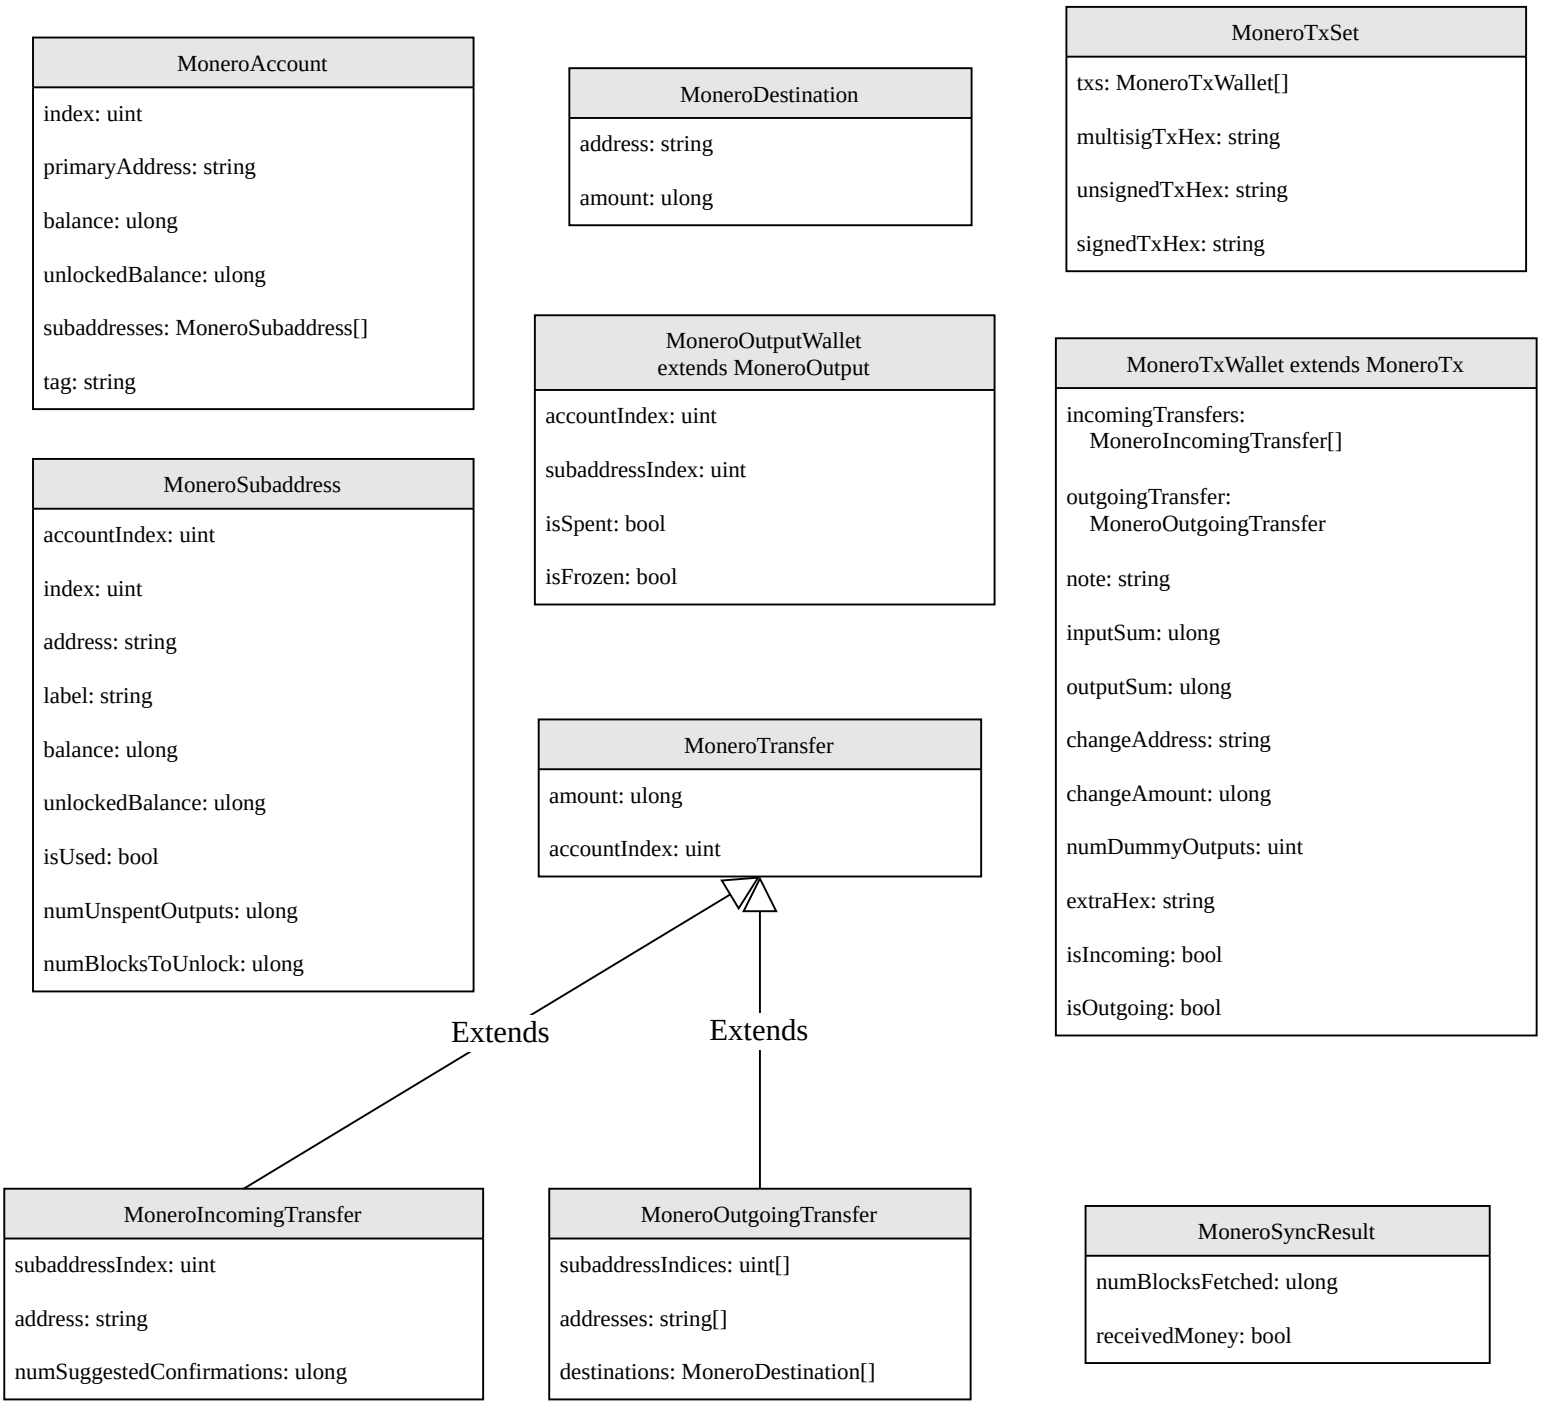

Monero Wallet Types 3/4 (continued)

MoneroWalletListener
monero_wallet_listener_callbacks struct_size: uint user_data: void* on_sync_progress(void* user_data, ulong height, ulong start_height, ulong end_height, double percent_done, string message): void on_new_block(void* user_data, ulong height): void on_balances_changed(void* user_data, ulong new_balance, ulong new_unlocked_balance): void on_output_received(void* user_data, string output_json): void on_output_spent(void* user_data, string output_json): void

Monero Wallet Types 4/4

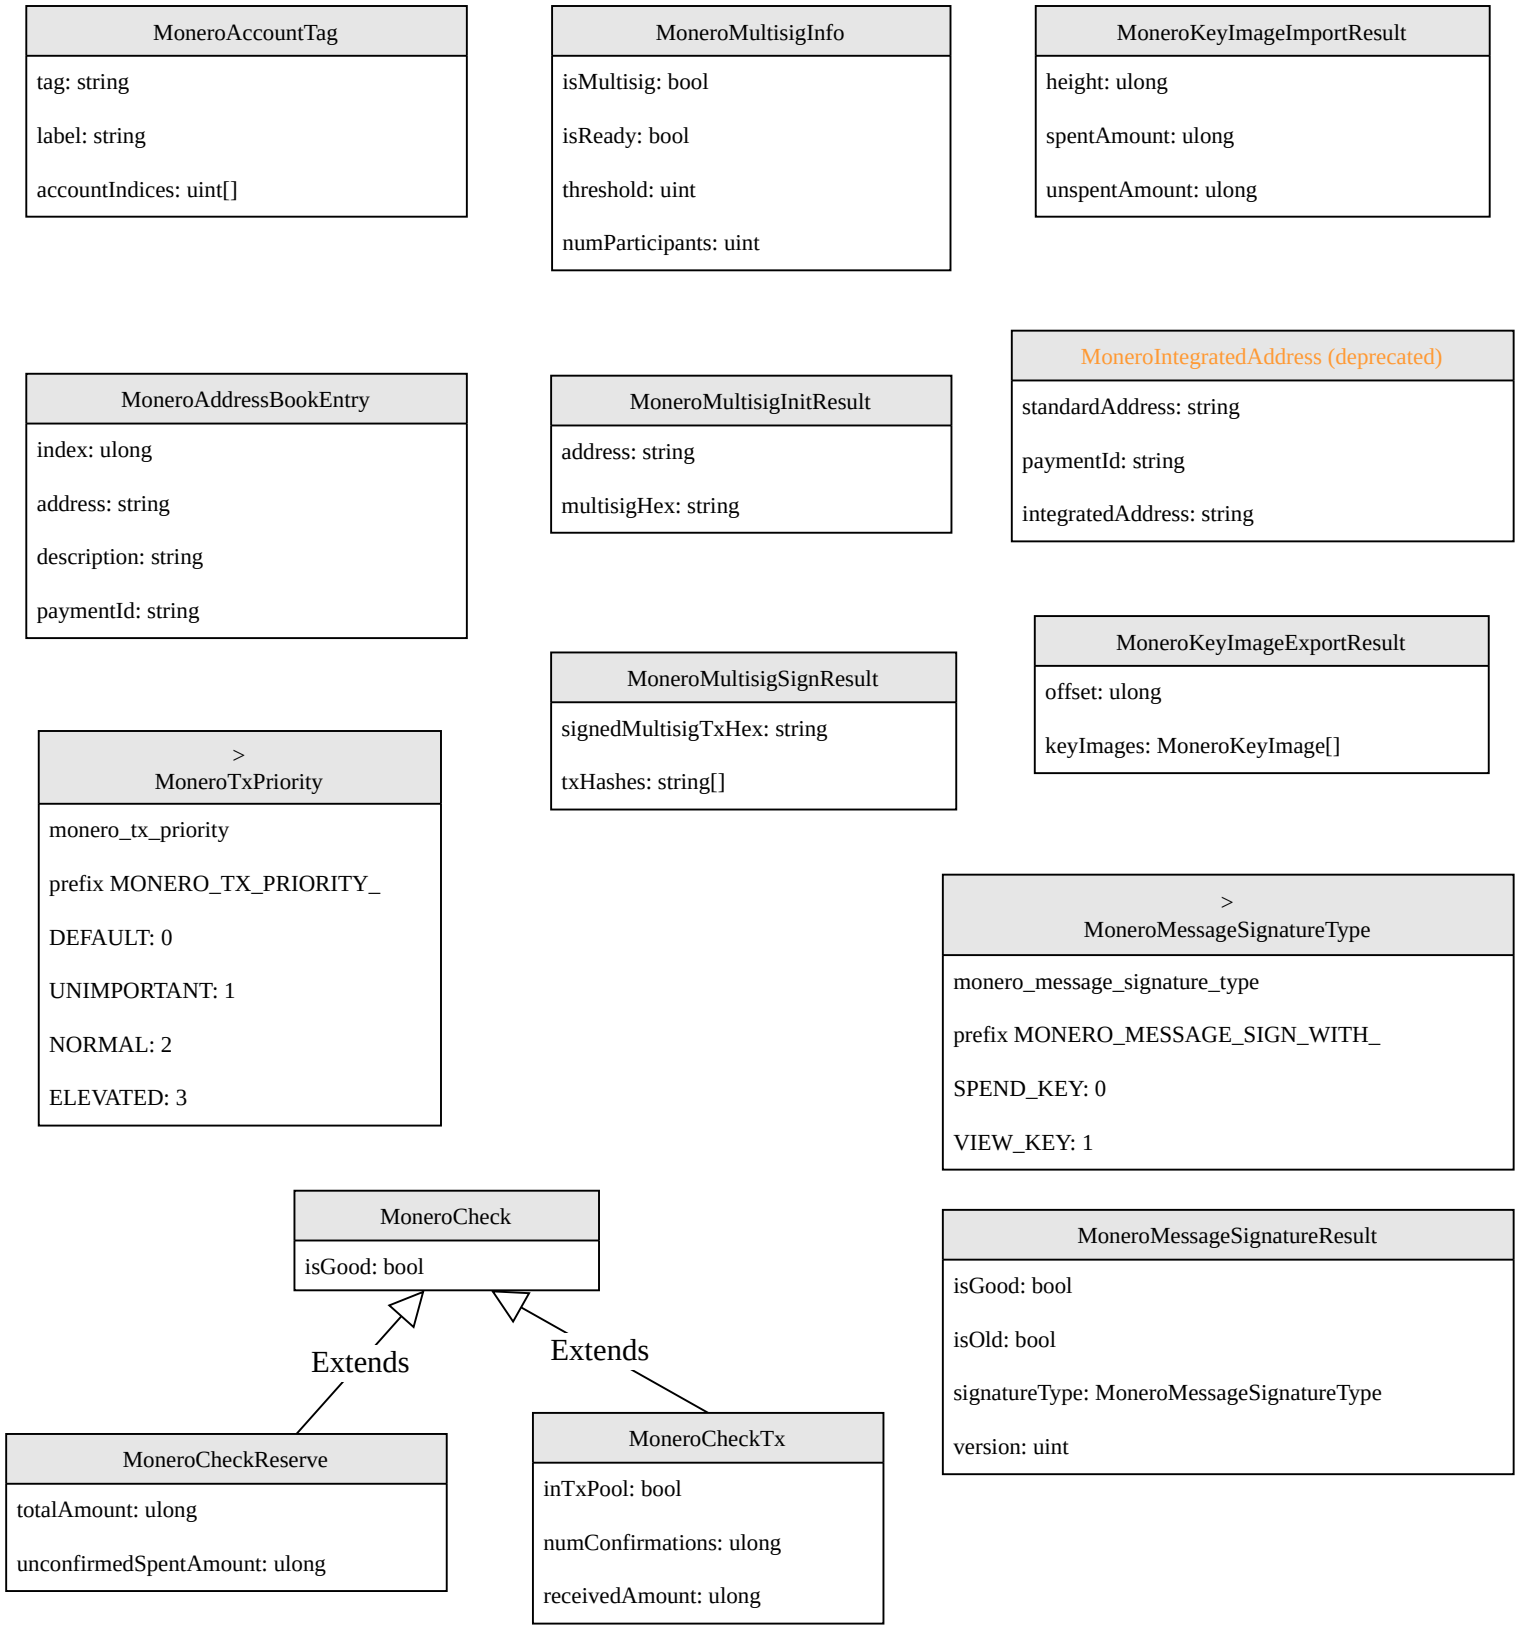

Monero Utils 1/2 - monero_c_utils.h

monero_last_error(): void

monero_last_error_code(): void

monero_last_error_rpc_code(): int

monero_utils_free(void* ptr): void

monero_utils_free_secret(string secret=null): void

monero_utils_get_abi_version(): (uint major, uint minor, uint patch)

monero_utils_set_log_level(int level): void

monero_utils_set_log_categories(string categories): void

monero_utils_configure_logging(string path, bool console): void

monero_utils_is_valid_address(string address, MoneroNetworkType network_type): void

monero_utils_is_valid_private_view_key(string private_view_key): void

monero_utils_is_valid_private_spend_key(string private_spend_key): void

monero_utils_is_valid_public_view_key(string public_view_key): void

monero_utils_is_valid_public_spend_key(string public_spend_key): void

monero_utils_is_valid_payment_id(string payment_id): void

monero_utils_is_valid_mnemonic(string mnemonic, string language): void

monero_utils_is_valid_language(string language): void

monero_utils_validate_address(string address, MoneroNetworkType network_type): void

monero_utils_validate_private_view_key(string private_view_key): void

monero_utils_validate_private_spend_key(string private_spend_key): void

monero_utils_validate_public_view_key(string public_view_key): void

monero_utils_validate_public_spend_key(string public_spend_key): void

monero_utils_validate_payment_id(string payment_id): void

monero_utils_validate_mnemonic(string mnemonic, string language): void

monero_utils_get_integrated_address(MoneroNetworkType network_type, string standard_address,
string payment_id): MoneroIntegratedAddress

monero_utils_get_payment_uri(string tx_config_json, MoneroNetworkType network_type): string

monero_utils_parse_payment_uri(string uri, MoneroNetworkType network_type): MoneroTxConfig

monero_utils_json_to_binary(string json): byte[]

monero_utils_binary_to_json(byte[] data): string

monero_utils_binary_blocks_to_json(byte[] data): string

monero_utils_binary_blocks_fast_to_json(byte[] data): string

Monero Utils 2/2 - monero_c_utils.h

monero_utils_xmr_to_atomic_units(double amount_xmr): ulong

monero_utils_atomic_units_to_xmr(ulong amount_atomic_units): void

monero_utils_parse_payment_id_long(string payment_id_str): uint8_t[]

monero_utils_parse_payment_id_short(string payment_id_str): uint8_t[]

monero_utils_is_valid_payment_id_long(string payment_id_str): void

monero_utils_is_valid_payment_id_short(string payment_id_str): void

monero_utils_validate_payment_id_long(string payment_id_str): void

monero_utils_validate_payment_id_short(string payment_id_str): void

monero_utils_get_ring_size(): void

monero_utils_get_default_ringdb_path(MoneroNetworkType network_type): string

Monero RPC Connection 1/1 - monero_c_rpc_connection.h

monero_rpc_connection_create(string connection_json): MoneroRpcConnection

monero_rpc_connection_free(MoneroRpcConnection connection): void

monero_rpc_connection_serialize(MoneroRpcConnection connection): MoneroRpcConnection

monero_rpc_connection_set_credentials(MoneroRpcConnection connection, string username, string password): void

monero_rpc_connection_set_attribute(MoneroRpcConnection connection, string key, string value): void

monero_rpc_connection_get_attribute(MoneroRpcConnection connection, string key): string

monero_rpc_connection_is_onion(MoneroRpcConnection connection): bool

monero_rpc_connection_is_i2p(MoneroRpcConnection connection): bool

monero_rpc_connection_is_online(MoneroRpcConnection connection): bool?

monero_rpc_connection_is_authenticated(MoneroRpcConnection connection): bool?

monero_rpc_connection_is_connected(MoneroRpcConnection connection): bool?

monero_rpc_connection_check_connection(MoneroRpcConnection connection, uint timeout_ms=null): bool


monero_rpc_connection_send_json_request(MoneroRpcConnection connection, string method, string params_json=null,
uint timeout_ms=null): string

monero_rpc_connection_send_path_request(MoneroRpcConnection connection, string path, string params_json=null,
uint timeout_ms=null): string

monero_rpc_connection_send_binary_request(MoneroRpcConnection connection, string path, string params_json=null,
uint timeout_ms=null): byte[]



852punAC8Ub7tLqrA2L72p3VVL9ZdjSAxUgryqcoiFSmLZnE7UJiHENCRYZboz6bETEmznh9tBSkGGWiPLWdigVm8AYgFcJ

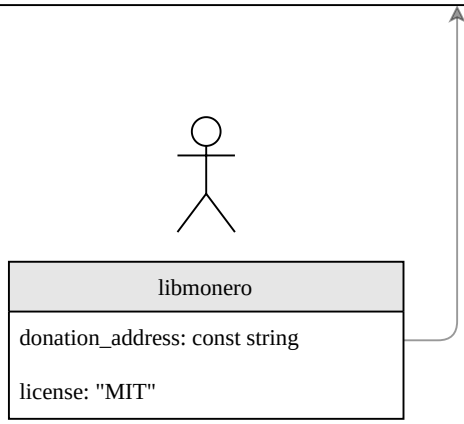

If this library has been valuable to you, please consider donating to support its continued development.