

Improving Image Understanding with Concept Graph

Libo Yin

The Australian National University

October 21, 2015

1 Introduction

2 Background

3 The Original HEX Model

3.1 Structure

The original HEX model [2] is an extension of the baseline flat multiclass classification model. There are two types of multiclass classification: exclusive, where the classifier predicts exactly one out of all possible states to be true; and independent, where each state is predicted true or false independently. HEX finds a balance between these two ends of the spectrum. It models the Hierarchical and EXclusive relationship within the concept space of dataset, extended by their hypernyms, with a semantic graphical model. Each node in the HEX graph corresponds to a concept in the extended concept space being true or false. States of neighbouring nodes are constrained in that if a is a hypernym of b , then is not allowed that $a = 0$, $b = 1$; and if a and b are exclusive, then they cannot both be true. HEX model classifies an image into a joint assignment of the states of nodes, corresponding to a hierarchy in the graphical model, that satisfies the above semantic consistency. A simple HEX graph is shown in [figure 1](#).

Denoting the set of vertices by V , the set of hierarchical edges by E_h , and the set of exclusive edges by E_e , the joint assignment $y \in \{0, 1\}^V$ can be defined as a conditional random field:

$$\tilde{p}(y|x) = \prod_{i \in V} \exp\{f_i(x; w)I[y_i = 1]\}I[y \text{ legal}] \quad (1)$$

where unary input $f_i(x; w)$ is the confidence on concept i , predicted by an arbitrary underlying classifier¹. Local semantic constraints on hierarchical and exclusive edges is formalised by:

$$I[y \text{ legal}] = \prod_{(v_i, v_j) \in E_h} I[(y_i, y_j) \neq (0, 1)] \prod_{(v_i, v_j) \in E_e} I[(y_i, y_j) \neq (1, 1)] \quad (2)$$

Thanks to these semantic constraints, the state space of a HEX graph, i.e. the set of all legal joint assignments, is significantly smaller than the state space of independent multiclass classification on the same concept space. For example, with local confidence given beside each node in [figure 1](#), the valid assignments of the HEX graph and their respective potentials are listed as follows:

¹According to [2]. It shall be explained in [section 3.2](#) that the choice of underlying unary classifier is actually not arbitrary.

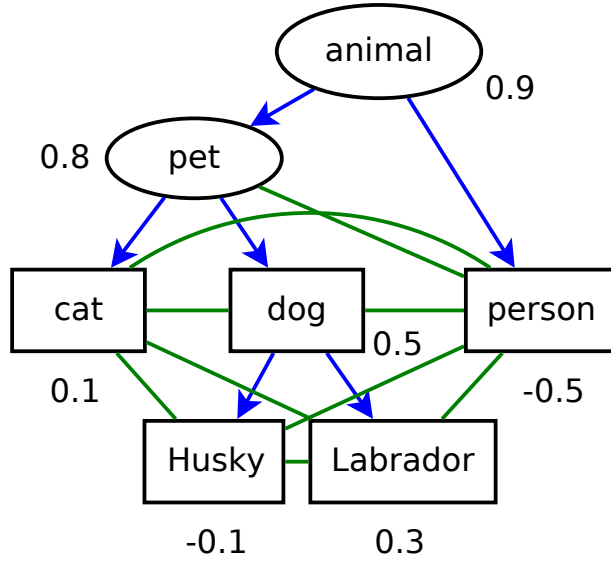


Figure 1: A simple HEX graph with three nodes in the original concept space (in rectangles) and their hypernyms (in ellipsoids). Directed edges denote semantical subsumption: $(a \rightarrow b)$ if a is a hypernym of b according to WordNet; and undirected edges denote exclusion. Since exclusive relationship is not covered by WordNet, the exclusive subgraph is initialized greedily: two concepts are exclusive unless they share a common descendant in the hierarchical subgraph. Note that the hierarchical subgraph is in general a DAG rather than a tree; and it is not necessarily the case that all concepts in the original concept space are bottom-level nodes in the hierarchical subgraph. Values beside each nodes are to be used in [table 1](#).

assignment	$\tilde{p}(y x)$
\emptyset	$\exp(0)$
{animal}	$\exp(0.9)$
{animal, pet}	$\exp(0.9 + 0.8)$
{animal, person}	$\exp(0.9 - 0.5)$
{animal, pet, cat}	$\exp(0.9 + 0.8 + 0.1)$
{animal, pet, dog}	$\exp(0.9 + 0.8 + 0.5)$
{animal, pet, dog, Husky}	$\exp(0.9 + 0.8 + 0.5 - 0.1)$
{animal, pet, dog, Labrador}	$\exp(0.9 + 0.8 + 0.5 + 0.3)$

Table 1: The extended state space, i.e. all valid assignments of the HEX graph in [figure 1](#), and their respective potentials. In this example, the most likely joint assignment is {animal, pet, dog, Labrador}. The softmax baseline classifier, in the language of HEX, classifies to the original state space: {animal, pet, cat}, {animal, pet, dog}, {animal, pet, dog, Husky}, {animal, pet, dog, Labrador}, and {animal, person}.

Finally, an important assumption of [2] is that mechanical Turks tend to label an image to more abstract concepts. For example, an image of a yellow Labrador is more likely to be labelled to “dog” than “Labrador”. Such behaviour is modelled by randomly relabelling images to their immediate parents. As will be shown in section 4.3, the higher the relabelling rate is, the larger is the advantage of the HEX model compared to the softmax baseline.

3.2 Observations

Note that a valid assignment does not have to have an active node in the original concept space. (Actually, it does not have to have an active node at all, as \emptyset is a valid joint assignment according to (2).) This allows an image to be classified to a joint assignment in which all active concepts are abstract. For example, in figure 1, $\{\emptyset\}$, $\{\text{animal}\}$, or $\{\text{animal}, \text{pet}\}$. This is by no doubt a desirable feature for deployment. However, since all images are labelled in the original concept space, classifying to the extended concept space makes performance evaluation troublesome. While this issue is not addressed in [2], the evaluation strategy used for this work will be discussed in section 4.3.

Also note that in table 1, the competition between assignment $\{\text{animal}, \text{pet}, \text{dog}, \text{Husky}\}$ and $\{\text{animal}, \text{pet}, \text{dog}, \text{Labrador}\}$ depends entirely on the confidence of node “Husky” and “Labrador”. However, to discriminate between $\{\text{animal}, \text{pet}, \text{dog}, \text{Husky}\}$ and $\{\text{animal}, \text{person}\}$ requires examining the confidence along different paths. From this example it is clear that, in the testing stage, confidence is passed down the hierarchy from more abstract concepts to more concrete ones. The other side of the same coin is that, during the training stage of the underlying unary classifier, a node corresponding to abstract concepts receive all training data of its children. This can be seen as confidence being passed up in the hierarchy, from more concrete concepts to more abstract ones. Such bidirectional propagation of confidence explains the advantage of the HEX model under the realistic labelling assumption. Note that the exclusive subgraph does not take part in the propagation of confidence.

The third observation is a combined consequence of the greedy exclusion setup, as discussed under table 1, and the greedy nature of the potential function (1). The prerequisite for the original HEX model is that the decision boundary of $f_i(x; w)$ is zero for all i : A unary prediction above zero gives support to a node being active (true), whereas a unary prediction below zero gives support to that node being inactive (false). In [2] this is not a problem, as a convolutional neural network [8] is used as the underlying unary classifier; and that the a neural network can learn its decision boundary from training data. However, if a probabilistic classifier is used, in which case $f_i(x; w) \in [0, 1]$ and the decision boundary is 0.5, then it is guaranteed that a bottom-level node will be activated (see appendix A for proof). This means that the effective state space size of the HEX graph is reduced to the number of bottom-level nodes, which is no larger than the original state space size. This defeats the purpose of HEX, although a smaller state space means faster inference and higher accuracy.

Finally, listed below are two less important observations:

1. There are no learnable variables in this CRF. In other words, all learning is performed in the underlying unary classifier.
2. Mathematically, CRF requires $\forall y : \tilde{p}(y|x) > 0$. However, computationally, assigning zero to $\tilde{p}(y|x)$ can be interpreted as assigning an infinitesimal value. Therefore, the above definition is computationally a legitimate CRF.

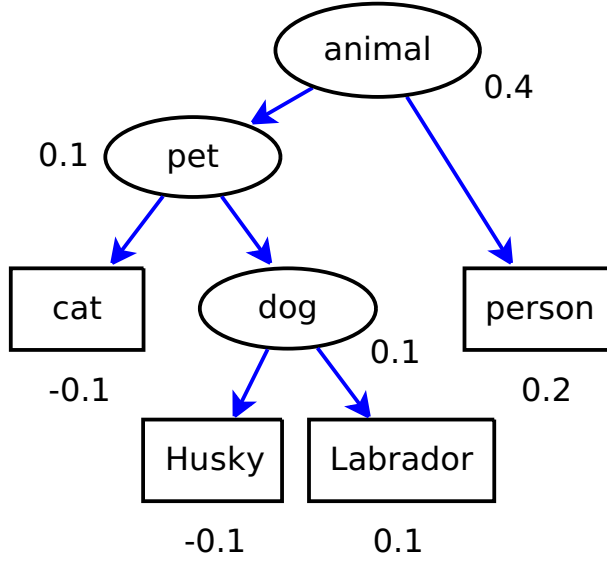


Figure 2: Where an assignment with more active nodes of lower confidence wins over an assignment with fewer active nodes of higher confidence. Exclusive edges are not drawn, as they do not carry further information once the state space has been calculated.

3.3 Problems

Consider the situation illustrated in figure 2. Following the same logic as table 1, the original HEX model predicts {animal, pet, dog, Labrador}. However, this is a result of more active nodes rather than active nodes of higher confidence. Intuitively, {animal, person} seems a more reasonable prediction. In addition, the two aforementioned assignments are only separated by 0.1 in log unnormalised potential. It will be desirable if the model can make a prediction that is further from the decision boundary by taking into account the confidence of other nodes, especially those with unary predictions far from the decision boundary.

The second problem is a combined consequence of the realistic labelling assumption and using an independent classifier as the underlying unary classifier. When the relabelling rate is high, most images are relabelled to their immediate parents. This means that for each concept X , most instances of X are correctly labelled to all its ancestors, but incorrectly labelled “NOT X ”. This creates a highly unbalanced and internally inconsistent dataset. In such case, for images of X , the unary predictions will highly likely be “NOT X ”. (This hypothesis will be confirmed in section 4.3.) This problem is more serious when the training dataset is small [6]. The original HEX model does not cope with such situation, as the potential function (1) deactivates a bottom-level node as long as its unary confidence is below the decision boundary.

4 Reimplementation

4.1 Dataset

The original HEX model is reimplemented as the baseline of this work. While [2] used ILSVRC 2012 dataset for its rich structure in the label space, this work employs PASCAL VOC 2012 [4] for its simplicity. The complete hierarchical subgraph of HEX is shown in figure 4. Note that the two datasets are designed for different tasks: ILSVRC is an exclusive multiclass classification problem, whereas PASCAL is an independent multiclass classification problem. To adapt to ILSVRC task 1, the train+val dataset of PASCAL is filtered through the following criteria:

1. If there is only one annotated object in the image, the image is labelled to that object.
2. If the largest annotated object in the image is more than twice as large as the second largest one, the image is labelled to its dominating object.

Another major difference between ImageNet and PASCAL is that the former one is a balanced dataset, while the latter is highly unbalanced. For example, after filtering, there are 5,324 images labelled as “person”, whereas the second most frequent label “dog” has only 817 instances. To rebalance the dataset, 950 images of “person” are subsampled from the filtered dataset. After preprocessing, the dataset contains 8,473 images in total. These images are then split 3:1:1 into train/validation/test set. The distribution of images across labels is illustrated in figure 3.

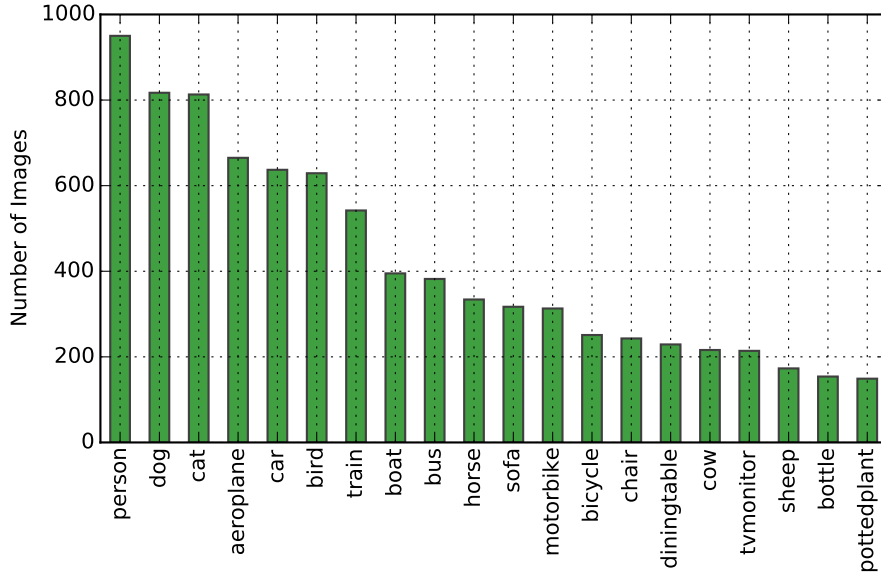


Figure 3: Distribution of images according to labels, after preprocessing.

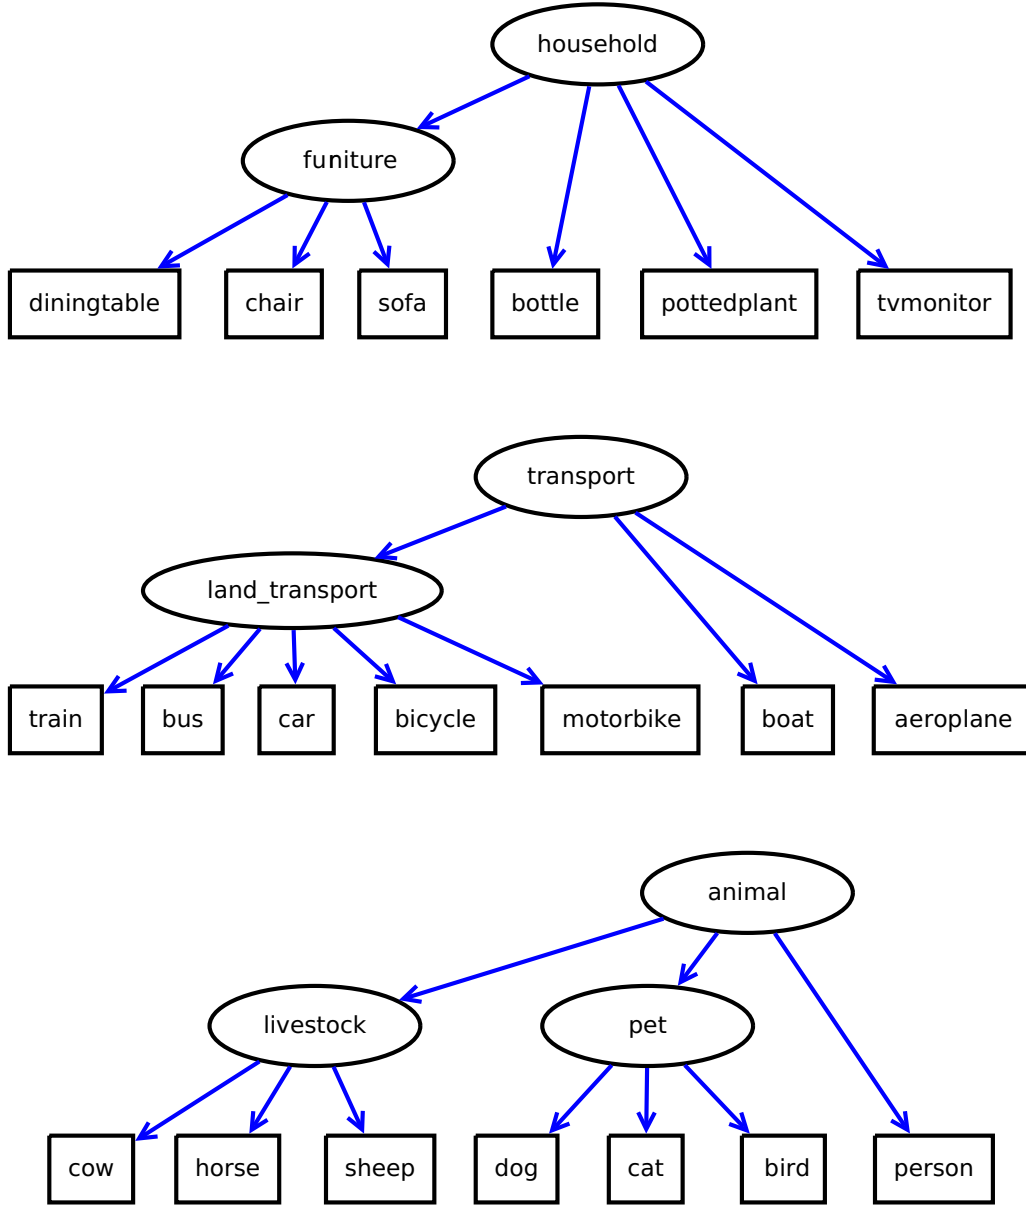


Figure 4: The PASCAL dataset has 20 concepts, as shown in rectangles. In this work, these concepts are extended by 7 of their hypernyms, creating a forest of three trees with 27 nodes and 24 hierarchical edges. Exclusive edges are not drawn since they can be implied by the hierarchical subgraph. The state space of this HEX graph has size 28. In comparison, the HEX graph in [2] contains 1000 nodes corresponding to the original concept space, and 820 nodes corresponding to their hypernyms. Note that there is no hierarchical relationship within the original concept space.

4.2 Algorithms

For consistency with [2], the underlying unary classifier is based on [8] instead of the current state-of-the-art [10]. The CNN, originally trained on ImageNet, is fine-tuned as an independent multiclass classifier on PASCAL, where each image is projected to a 27-dimensional vector. Note that since the original HEX model has no learning part, it was built as a layer into the CNN, achieving end-to-end learning. In this work, CNN and CRF are implemented separately, such that multiple variants of the HEX model can be tested with the same CNN as underlying unary classifier. For details of CNN setup, refer to [appendix B](#).

A simpler concept space also lead to the change of inference algorithm. In [2], inference is performed by MAP loopy belief propagation on the HEX graph, where the local state space of each clique is constrained by semantic restrictions (see [section 5.3](#) for details). In this work, due to the small concept space of dataset, the inference is performed by calculating the potential function directly for each state in the global state space.

Finally, to guarantee that the benefit of the HEX model is consistent regardless of the underlying unary classifier, different variants of the HEX model are also paired with SVM as the underlying unary classifier. An array of 27 SVMs is trained, each corresponding to a node in the HEX graph. The SVM array accepts the output of the last-but-one layer of [8] as input, assuming that 4,096 neurons provide sufficiently diverse and accurate feature responses *without* fine-tuning on the PASCAL dataset. The SVM array predicts distance to decision boundaries (corresponding to raw CNN output). For the detail of SVM setup, refer to [appendix B](#).

4.3 Experiments

In this work, accuracy is tested both in the extended state space and in the original one, emphasizing on the former one. Testing in the original state space is achieved by limiting the legal state space to assignments with an active bottom-level node in the hierarchical subgraph; or in case of flat classification baseline, to the original concept space. Note that this is only valid for datasets where all concepts in the original concept space are bottom-level nodes in the hierarchical subgraph.

The empirical test result of [2] and the reimplemented system are compared in [table 2](#). Due to the size of PASCAL dataset, relabelling rate of 95% is not attempted in this work. Observations on the experimental results are listed as follows:

1. Regardless of implementation and inference algorithm, the accuracy drops as the relabelling rate grows. This is within expectation.
2. In the extended state space, independent classification baseline by itself tend to have the lowest accuracy. However, in the original state space, the accuracy of independent classification can sometimes beat the softmax baseline. This is a clear sign that nodes corresponding to abstract concepts in the HEX graph receive higher confidence than bottom-level nodes. With the propagation of confidence discussed in [section 3.2](#), the HEX model is able to recover classification information on bottom-level nodes to a similar level as the softmax baseline.
3. In [2], the original HEX model managed to beat the softmax baseline under all relabelling rates (except for 0%, on which only the accuracy of softmax baseline is provided). However, with the reimplemented system and the extended state space, the accuracy of HEX falls below the softmax baseline. In addition, as the relabelling rate grows, the accuracy of the reimplemented system drops much faster than in [2]. This is a clear sign of insufficient confidence on bottom-level concepts, as discussed in [section 3.3](#). This problem is also inspected in [table 3](#).

	0%	50%	90%	95%
Softmax	0.626(0.843)	0.564(0.796)	0.529(0.772)	0.508(0.760)
Independent	N/A	0.210(0.452)	0.093(0.272)	0.056(0.172)
HEX	N/A	0.582(0.808)	0.553(0.794)	0.524(0.772)
Softmax	0.669(0.906)	0.332(0.816)	0.007(0.738)	N/A
Independent	0.171(0.863)	0.004(0.811)	0.000(0.407)	N/A
HEX	0.657(0.893)	0.318(0.869)	0.000(0.838)	N/A
Softmax	0.673(0.906)	0.622(0.896)	0.561(0.871)	N/A
Independent	0.726(0.937)	0.673(0.930)	0.323(0.640)	N/A
HEX	0.720(0.894)	0.685(0.888)	0.502(0.872)	N/A

Table 2: Comparison of empirical test result in [2] (top) with the reimplemented system (middle: using extended concept space; bottom: using original concept space). Performance is reported in accuracy, with top-5 accuracy in the bracket. The softmax baseline is obtained by training a CNN that maps an image to exactly one node in the HEX graph, discarding all hierarchical information. The independent classification baseline is obtained by classifying to the concept with the highest confidence.

	0%	50%	90%
diningtable	0.4285 ± 0.3011	0.2490 ± 0.2288	0.0108 ± 0.0116
furniture	0.6976 ± 0.3298	0.7524 ± 0.2784	0.7330 ± 0.3065
household	0.8431 ± 0.2729	0.8598 ± 0.2490	0.8590 ± 0.2494
dog	0.7517 ± 0.3424	0.4533 ± 0.2970	0.0222 ± 0.0209
pet	0.7971 ± 0.3271	0.7828 ± 0.3327	0.7832 ± 0.3287
animal	0.9004 ± 0.2301	0.9005 ± 0.2290	0.8999 ± 0.2322

Table 3: Under different relabelling rates, with fully trained CNN, the mean and standard deviation of sigmoid-transformed response on validation images labelled “diningtable” (upper) and “dog” (lower). Note that “household” is a hypernym of “furniture”, which is further a hypernym of “diningtable”; and “animal” is a hypernym of “pet”, which is further a hypernym of “dog”. With 490 instances in the training set, label “dog” is a frequent concept, whereas rare concept “diningtable” has 137 instances. Clearly, the unary response on non-bottom-level concepts are not affected by the relabelling rate, yet on bottom-level concepts, the confidence drops to below the decision boundary. This experiment also shows that CNN learns highly abstract concepts (such as “household”) accurately, even for concepts without visual clues.

5 Improvements

5.1 Algorithms

Based on the original HEX model, this work delivers improvements in three stages, where each stage is built on top of the previous one. The high-level goal of improvements is stated as follows: With little confidence on bottom-level nodes, the classifier should attempt to classify to an assignment with an active bottom-level concept. However, in case the classifier is not confident enough to do so, it should be allowed to predict to a joint assignment in the extended state space.

In the first stage, the confidence on inactive nodes are taken into consideration, in addition to active ones. The resulting unnormalised potential function is shown as follows:

$$\tilde{p}(y|x) = \prod_{i \in V} \exp\{f_i(x; w)I[y_i = 1] + (1 - f_i(x; w))I[y_i = 0]\}I[y \text{ legal}] \quad (3)$$

where $f_i(x; w)$ denotes the confidence of node i being true, and $1 - f_i(x; w)$ for being false. This requires the range of the unary prediction to be within $[0, 1]$, and the decision boundary to be 0.5. To achieve this, unary predictions from the underlying classifier are normalised with the sigmoid function.

Theoretically, stage 1 fix should benefit in two aspects: First, the potential function considers the same number of nodes for every legal joint assignment, therefore fixing the unnormalised depth problem discussed in [section 3.3](#). Second, the potential function is able to refer to the confidence of inactive nodes, hence benefiting from those that are far from the decision boundary. However, a message on [\(3\)](#) shows that it is not far from the original potential function [\(1\)](#):

$$\begin{aligned} \tilde{p}(y|x) &= \prod_{i \in V} \exp\{f_i(x; w)I[y_i = 1] + (1 - f_i(x; w))(1 - I[y_i = 1])\}I[y \text{ legal}] \\ &= \prod_{i \in V} \exp\{(2f_i(x; w) - 1)I[y_i = 1] + (1 - f_i(x; w))\}I[y \text{ legal}] \\ &= \tilde{p}(\emptyset|x) \prod_{i \in V} \exp\{(2f_i(x; w) - 1)I[y_i = 1]\}I[y \text{ legal}] \end{aligned} \quad (4)$$

where $\tilde{p}(\emptyset|x)$ denotes the unnormalised potential of assignment \emptyset . Since $\tilde{p}(\emptyset|x)$ only depends on x , it can be absorbed into $\frac{1}{Z(x)}$. Also, the transformation on $\exp\{(2f_i(x; w) - 1)I[y_i = 1]\}$ does not affect the rank of $\tilde{p}(y|x)$ for all y . Therefore, the difference between [\(1\)](#) and [\(3\)](#) is no more than the sigmoid transformation.

In the second stage, pairwise terms are added to the potential function. This fix is a remedy to the low confidence problem on bottom-level nodes when the relabelling rate is high, by exploiting the fact that the confidence on the immediate parents of bottom-level nodes are not affected by the relabelling rate. In addition, two regularisation constants are added to the potential function, such that the contributions from unary and pairwise terms are balanced. The resulting unnormalised potential function is shown as follows:

$$\begin{aligned} p(y|x) &= \frac{1}{Z(x)} \exp \left\{ \frac{1}{|V|} \sum_{i \in V} x_i \cdot I[y_i = 1] + (1 - x_i) \cdot I[y_i = 0] \right\} \\ &\quad \cdot \exp \left\{ \frac{1}{|E_h|} \sum_{(i,j) \in E_h} x_i x_j \cdot I[y_i = y_j = 1] \right\} \cdot I[y \text{ legal}] \end{aligned} \quad (5)$$

In the third stage, a weighting factor is added to each unary and pairwise term. This weighting factor is learned from all images labelled to bottom-level concepts in the dataset. Note that such training scheme cannot cover concepts from the original concept space that are not bottom-level nodes in the HEX graph, as it is not possible to distinguish between images that are correctly labelled to that concept, or images that are relabelled to its immediate parents. For example, in [figure 1](#), only images labelled to “cat”, “Husky”, “Labrador”, and “person” are used to train the CRF, while images labelled to “dog” are discarded, even though “dog” is within the original concept space. The resulting normalised potential function is shown as follows:

$$p_{\theta}(y|x) = \frac{1}{Z(x)} \exp \left\{ \frac{1}{|V|} \sum_{i \in V} w_i (x_i \cdot I[y_i = 1] + (1 - x_i) \cdot I[y_i = 0]) \right\} \\ \cdot \exp \left\{ \frac{1}{|E_h|} \sum_{(i,j) \in E_h} t_{ij} \cdot x_i x_j \cdot I[y_i = y_j = 1] \right\} \cdot I[y \text{ legal}] \quad (6)$$

where θ is the concatenation of $\{\forall i \in V : w_i\}$ and $\{\forall (i,j) \in E_h : t_{ij}\}$. θ is selected by optimising for log-likelihood:

$$\theta = \arg \min_{\theta} \left\{ -\frac{C}{N} \log \prod_{(x,y) \in D} p_{\theta}(y|x) + \frac{1}{2} \|\theta\|^2 \right\} \quad (7)$$

where the weighting of regularisation term $\frac{1}{2} \|\theta\|^2$ is controlled by C , a constant chosen by cross-validation. In this work, $C = 1000$. The gradient is calculated piecewisely:

$$\nabla_{\theta} \log \prod_{(x,y) \in D} p_{\theta}(y|x) = \begin{bmatrix} \nabla_w \log \prod_{(x,y) \in D} p_{\theta}(y|x) \\ \nabla_t \log \prod_{(x,y) \in D} p_{\theta}(y|x) \end{bmatrix} \\ = \begin{bmatrix} \sum_{(x,y) \in D} \nabla_w \log p_{\theta}(y|x) \\ \sum_{(x,y) \in D} \nabla_t \log p_{\theta}(y|x) \end{bmatrix} \quad (8)$$

The log-likelihood in (8) is expanded as follows:

$$\log p_{\theta}(y|x) = \frac{1}{|V|} \sum_{i \in V} w_i (x_i \cdot I[y_i = 1] + (1 - x_i) \cdot I[y_i = 0]) \\ + \frac{1}{|E_h|} \sum_{(i,j) \in E_h} t_{ij} \cdot x_i x_j \cdot I[y_i = y_j = 1] - \log \sum_{\hat{y}} \tilde{p}_{\theta}(\hat{y}|x) \quad (9)$$

Therefore, the gradient in the first line of (8) is calculated as:

$$\nabla_w \log p_{\theta}(y|x) = \frac{1}{|V|} \left[x_i \cdot I[y_i = 1] + (1 - x_i) \cdot I[y_i = 0] \right]_{i \in V} - \nabla_w \log \sum_{\hat{y}} \tilde{p}_{\theta}(\hat{y}|x) \\ \text{define } \phi_u(x, y) = \frac{1}{|V|} \left[x_i \cdot I[y_i = 1] + (1 - x_i) \cdot I[y_i = 0] \right]_{i \in V} \\ = \phi_u(x, y) - \sum_{\hat{y}} p_{\theta}(\hat{y}|x) \cdot \phi_u(x, \hat{y}) \quad (10)$$

where the gradient of the partition function in (10) is calculated as:

$$\begin{aligned}
\nabla_w \log \sum_{\hat{y}} \tilde{p}_{\theta}(\hat{y}|x) &= \frac{1}{\sum_{\hat{y}} \tilde{p}_{\theta}(\hat{y}|x)} \nabla_w \sum_{\hat{y}} \tilde{p}_{\theta}(\hat{y}|x) \\
&= \frac{1}{Z(x)} \sum_{\hat{y}} \nabla_w \exp \left\{ \frac{1}{|V|} \sum_{i \in V} w_i (x_i \cdot I[y_i = 1] + (1 - x_i) \cdot I[y_i = 0]) \right\} \\
&\quad \cdot \exp \left\{ \frac{1}{|E_h|} \sum_{(i,j) \in E_h} t_{ij} \cdot x_i x_j \cdot I[y_i = y_j = 1] \right\} \\
&= \frac{1}{Z(x)} \sum_{\hat{y}} \tilde{p}_{\theta}(\hat{y}|x) \cdot \frac{1}{|V|} \left[x_i \cdot I[\hat{y}_i = 1] + (1 - x_i) \cdot I[\hat{y}_i = 0] \right]_{i \in V} \\
&= \sum_{\hat{y}} p_{\theta}(\hat{y}|x) \cdot \phi_u(x, \hat{y})
\end{aligned} \tag{11}$$

Similarly, the gradient in the second line of (8) is calculated as:

$$\begin{aligned}
\nabla_t \log p_{\theta}(y|x) &= \underbrace{\frac{1}{|E_h|} \left[t_{ij} \cdot x_i x_j \cdot I[y_i = y_j = 1] \right]_{(i,j) \in E_h}}_{\phi_t(x,y)} - \nabla_t \log \sum_{\hat{y}} \tilde{p}_{\theta}(\hat{y}|x) \\
&= \phi_t(x, y) - \sum_{\hat{y}} p_{\theta}(\hat{y}|x) \cdot \phi_t(x, \hat{y})
\end{aligned} \tag{12}$$

where the gradient of the partition function in (12) is calculated as:

$$\begin{aligned}
\nabla_t \log \sum_{\hat{y}} \tilde{p}_{\theta}(\hat{y}|x) &= \frac{1}{\sum_{\hat{y}} \tilde{p}_{\theta}(\hat{y}|x)} \nabla_t \sum_{\hat{y}} \tilde{p}_{\theta}(\hat{y}|x) \\
&= \frac{1}{Z(x)} \sum_{\hat{y}} \nabla_t \exp \left\{ \frac{1}{|V|} \sum_{i \in V} w_i (x_i \cdot I[y_i = 1] + (1 - x_i) \cdot I[y_i = 0]) \right\} \\
&\quad \cdot \exp \left\{ \frac{1}{|E_h|} \sum_{(i,j) \in E_h} t_{ij} \cdot x_i x_j \cdot I[y_i = y_j = 1] \right\} \\
&= \frac{1}{Z(x)} \sum_{\hat{y}} \tilde{p}_{\theta}(\hat{y}|x) \cdot \frac{1}{|E_h|} \left[t_{ij} \cdot x_i x_j \cdot I[\hat{y}_i = \hat{y}_j = 1] \right]_{(i,j) \in E_h} \\
&= \sum_{\hat{y}} p_{\theta}(\hat{y}|x) \cdot \phi_t(x, \hat{y})
\end{aligned} \tag{13}$$

The derivation above agrees with the general property that the gradient of the log potential of a CRF is the expectation of a feature function. Note that since weights represent the credibility of unary and pairwise confidence, all entries of θ are non-negative.

5.2 Experiments

With CNN as the underlying unary classifier, the overall performance of different variants of the HEX model are compared in table 4. These performances are broken down to concepts in table 5, 6, and 7. Table 8 contains a summary of the response of CNN on validation images, broken down to concepts. The unary and pairwise weightings learned in stage 3 are shown in table 9 and 10. Observations on these results are listed as follows:

1. As a confirmation to (4), the difference between the accuracy of stage 1 and the original HEX model is minor.
2. In the extended state space, stage 2 brings a significant accuracy enhancement under all relabelling rates. For example, under 50% relabelling rate, the accuracy of stage 2 leads the original HEX model by 14.49 percentage points. In addition, such improvement is consistent over all concepts, as shown in the breakdown of accuracy in [table 5](#), [6](#), and [7](#). This is a clear sign that the relationships considered in the original HEX model are too weak. Hence, a potential direction for further improvement is to incorporate more relationships. In the original state space, however, the accuracy of stage 2 falls below the original HEX model under 50% and 90% relabelling rate.
3. Under 50% relabelling rate, the overall accuracy of stage 2 and 3 are very close. However, as shown in [table 6](#), broken down to concepts, their accuracy are very different. Compared to stage 2, stage 3 is slightly inferior on most bottom-level concepts; but has an advantage of over 10 percentage points on concept “bus”, “bicycle”, “horse”, and “sheep”. The learned unary weight on nodes corresponding to these concepts are zero, as shown in [table 9](#). Note that in such case, the confidence of a node is still considered in the pairwise term of the potential function.
4. Under 90% relabelling rate, stage 3 is the only system to achieve accuracy higher than 10% in the extended state space. Such enhancement of overall accuracy is entirely the result of concept “bus”, “bicycle”, “horse”, “sheep”, and “bird”, on which the unary weight are zero. Classification on images of other concepts have zero accuracy. No trend has been found regarding why these nodes receive zero unary weights.
5. Similar trend is also observed with SVM as the underlying unary classifier. For experimental results, refer to [appendix E](#).

	0%	50%	90%
Softmax	0.6698(0.8580)	0.3325(0.7161)	0.0112(0.5635)
Independent	0.1716(0.7339)	0.0047(0.6258)	0.0000(0.1728)
Original HEX	0.6573(0.7779)	0.3182(0.7193)	0.0000(0.4774)
Stage 1	0.6579(0.7790)	0.3182(0.7197)	0.0000(0.5154)
Stage 2	0.6923(0.7969)	0.4631(0.7470)	0.0005(0.5908)
Stage 3	0.6882(0.7802)	0.4643(0.6496)	0.1454(0.3646)
Softmax	0.6739(0.8580)	0.6223(0.8301)	0.5617(0.7909)
Independent	0.7268(0.8889)	0.6739(0.8705)	0.3230(0.5385)
Original HEX	0.7209(0.8788)	0.6852(0.8574)	0.5029(0.7838)
Stage 1	0.7214(0.8622)	0.6799(0.8337)	0.5000(0.7850)
Stage 2	0.7238(0.7957)	0.6252(0.7470)	0.3129(0.5908)

Table 4: Comparison of empirical test result of different variants of the HEX model (rows) under different relabelling rates (columns), in the extended state space (upper) and the original one (lower). Performance is reported in accuracy, with top-3 accuracy in the bracket (in contrast to top-5 accuracy in [table 2](#)). Note that stage 3 improvement only applies to the extended state space.

Concept	Softmax	Original HEX	Stage 2	Stage 3	Stage 2– Original	Stage 3– Stage 2
diningtable	0.4821	0.5357	0.5535	0.5535	0.0178	0.0000
chair	0.4666	0.3111	0.3777	0.3555	0.0666	-0.0222
sofa	0.4310	0.3275	0.3793	0.3620	0.0518	-0.0173
bottle	0.6000	0.5666	0.6333	0.5333	0.0667	-0.1000
pottedplant	0.3928	0.3928	0.4642	0.4642	0.0714	0.0000
tvmonitor	0.8500	0.6250	0.6250	0.5500	0.0000	-0.0750
train	0.8166	0.8666	0.8916	0.8750	0.0250	-0.0166
bus	0.6764	0.6764	0.7058	0.7647	0.0294	0.0589
car	0.8281	0.7343	0.7656	0.7500	0.0313	-0.0156
bicycle	0.8148	0.8148	0.8148	0.7962	0.0000	-0.0186
motorbike	0.8035	0.6785	0.7142	0.6964	0.0357	-0.0178
aeroplane	0.8137	0.7724	0.8000	0.7931	0.0276	-0.0069
boat	0.6301	0.6986	0.6986	0.6986	0.0000	0.0000
cow	0.3269	0.3846	0.4615	0.4423	0.0769	-0.0192
horse	0.4057	0.3768	0.4492	0.5072	0.0724	0.0580
sheep	0.3529	0.3529	0.4411	0.5588	0.0882	0.1177
dog	0.7272	0.7954	0.8181	0.8068	0.0227	-0.0113
cat	0.5793	0.5655	0.6000	0.5862	0.0345	-0.0138
bird	0.6886	0.7169	0.8018	0.7924	0.0849	-0.0094
person	0.7313	0.7213	0.7412	0.7363	0.0199	-0.0049
household	N/A	0.7859	0.7859	0.7548	0.0000	-0.0311
furniture	N/A	0.6477	0.6666	0.6603	0.0189	-0.0063
transport	N/A	0.9565	0.9565	0.9658	0.0000	0.0093
landtransport	N/A	0.9413	0.9483	0.9483	0.0070	0.0000
animal	N/A	0.8888	0.8876	0.8863	-0.0012	-0.0013
livestock	N/A	0.5741	0.6000	0.6000	0.0259	0.0000
pet	N/A	0.8594	0.8758	0.8735	0.0164	-0.0023

Table 5: With CNN as the underlying unary classifier, comparison of accuracy of variants of the HEX model (columns) broken down to concepts. The relabelling rate is 0%, and the classification is performed in the extended state space. The rightmost two columns contain the difference between the accuracy of stage 2 and original, and stage 3 and 2, respectively. Note that the accuracy of the softmax baseline is not available for abstract concepts (lower), as all images are labelled to bottom-level concepts in PASCAL.

Concept	Softmax	Original	Stage 2	Stage 3	Stage 2– Original	Stage 3– Stage 2
diningtable	0.2321	0.3571	0.4821	0.4642	0.1250	-0.0179
chair	0.0888	0.0666	0.1333	0.1111	0.0667	-0.0222
sofa	0.1206	0.0689	0.2068	0.1379	0.1379	-0.0689
bottle	0.3000	0.1666	0.2666	0.3000	0.1000	0.0334
pottedplant	0.1071	0.0357	0.0357	0.1071	0.0000	0.0714
tvmonitor	0.5250	0.4500	0.4750	0.4750	0.0250	0.0000
train	0.1583	0.5000	0.6583	0.5666	0.1583	-0.0917
bus	0.0294	0.5000	0.6911	0.8235	0.1911	0.1324
car	0.0703	0.3125	0.4921	0.4531	0.1796	-0.039
bicycle	0.1481	0.3333	0.4629	0.8518	0.1296	0.3889
motorbike	0.3214	0.3750	0.5000	0.4821	0.1250	-0.0179
aeroplane	0.5034	0.3586	0.6000	0.4551	0.2414	-0.1449
boat	0.2602	0.1780	0.3150	0.2739	0.1370	-0.0411
cow	0.1153	0.0384	0.1153	0.0576	0.0769	-0.0577
horse	0.1304	0.1304	0.2028	0.6956	0.0724	0.4928
sheep	0.2352	0.1470	0.2352	0.5000	0.0882	0.2648
dog	0.6363	0.3863	0.5738	0.5056	0.1875	-0.0682
cat	0.4137	0.2275	0.3724	0.3241	0.1449	-0.0483
bird	0.5000	0.4056	0.5660	0.5566	0.1604	-0.0094
person	0.5373	0.4328	0.5572	0.5373	0.1244	-0.0199
household	N/A	0.7859	0.7743	0.7626	-0.0116	-0.0117
furniture	N/A	0.6729	0.6981	0.6729	0.0252	-0.0252
transport	N/A	0.9534	0.9565	0.9549	0.0031	-0.0016
landtransport	N/A	0.9201	0.9413	0.9389	0.0212	-0.0024
animal	N/A	0.8825	0.8786	0.8735	-0.0039	-0.0051
livestock	N/A	0.5419	0.6129	0.6967	0.071	0.0838
pet	N/A	0.8337	0.8548	0.8548	0.0211	0.0000

Table 6: Comparison of accuracy broken down to concepts, under 50% relabelling rate, in the extended state space, with CNN as the underlying unary classifier. Note that the accuracy on abstract concepts are consistent for all models, a result of sufficiently high confidence on nodes corresponding to abstract concepts.

Concept	Softmax	Original	Stage 2	Stage 3	Stage 2– Original	Stage 3– Stage 2
diningtable	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
chair	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
sofa	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
bottle	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
pottedplant	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
tvmonitor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
train	0.0083	0.0000	0.0000	0.0000	0.0000	0.0000
bus	0.0147	0.0000	0.0000	0.8382	0.0000	0.8382
car	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
bicycle	0.0000	0.0000	0.0000	0.8148	0.0000	0.8148
motorbike	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
aeroplane	0.0137	0.0000	0.0000	0.0000	0.0000	0.0000
boat	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
cow	0.0192	0.0000	0.0000	0.0000	0.0000	0.0000
horse	0.0144	0.0000	0.0000	0.6521	0.0000	0.6521
sheep	0.0000	0.0000	0.0000	0.2352	0.0000	0.2352
dog	0.0397	0.0000	0.0000	0.0000	0.0000	0.0000
cat	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
bird	0.0188	0.0000	0.0094	0.8584	0.0094	0.849
person	0.0199	0.0000	0.0000	0.0000	0.0000	0.0000
household	N/A	0.8093	0.7548	0.7548	-0.0545	0.0000
furniture	N/A	0.6981	0.7044	0.6666	0.0063	-0.0378
transport	N/A	0.9580	0.9534	0.9534	-0.0046	0.0000
landtransport	N/A	0.9413	0.9342	0.9319	-0.0071	-0.0023
animal	N/A	0.8403	0.8799	0.8748	0.0396	-0.0051
livestock	N/A	0.6064	0.6451	0.7096	0.0387	0.0645
pet	N/A	0.8337	0.8665	0.8711	0.0328	0.0046

Table 7: Comparison of accuracy broken down to concepts, under 90% relabelling rate, in the extended state space, with CNN as the underlying unary classifier. Concepts that received accuracy boost in stage 3 have zero unary weights.

Concept	0%	50%	90%
diningtable	0.4285 ± 0.3011	0.2490 ± 0.2288	0.0108 ± 0.0116
chair	0.4238 ± 0.3035	0.1375 ± 0.1221	0.0068 ± 0.0052
sofa	0.4466 ± 0.3345	0.2191 ± 0.2027	0.0083 ± 0.0065
bottle	0.6116 ± 0.3785	0.3013 ± 0.3196	0.0097 ± 0.0076
pottedplant	0.4008 ± 0.3749	0.1218 ± 0.1016	0.0061 ± 0.0061
tvmonitor	0.7321 ± 0.3329	0.4790 ± 0.3238	0.0304 ± 0.0246
train	0.8513 ± 0.2687	0.5044 ± 0.2880	0.0046 ± 0.0044
bus	0.8517 ± 0.2642	0.5511 ± 0.2253	0.0094 ± 0.0083
car	0.7582 ± 0.3518	0.3866 ± 0.2717	0.0109 ± 0.0105
bicycle	0.6957 ± 0.3544	0.3214 ± 0.2975	0.0146 ± 0.0130
motorbike	0.7285 ± 0.3231	0.3698 ± 0.2470	0.0075 ± 0.0050
aeroplane	0.7812 ± 0.3220	0.4535 ± 0.2675	0.0062 ± 0.0082
boat	0.7689 ± 0.3253	0.3321 ± 0.2862	0.0072 ± 0.0067
cow	0.4174 ± 0.2945	0.0924 ± 0.0833	0.0047 ± 0.0053
horse	0.4890 ± 0.3544	0.2449 ± 0.2319	0.0055 ± 0.0042
sheep	0.4635 ± 0.3312	0.2753 ± 0.2502	0.0042 ± 0.0035
dog	0.7517 ± 0.3424	0.4533 ± 0.2970	0.0222 ± 0.0209
cat	0.6678 ± 0.3688	0.3223 ± 0.2397	0.0306 ± 0.0416
bird	0.7499 ± 0.3318	0.4043 ± 0.2510	0.0619 ± 0.1114
person	0.7056 ± 0.3563	0.4345 ± 0.2914	0.0312 ± 0.0243
household	0.7943 ± 0.3041	0.7989 ± 0.2895	0.7975 ± 0.2963
furniture	0.6460 ± 0.3546	0.6762 ± 0.3321	0.6709 ± 0.3380
transport	0.9402 ± 0.1713	0.9277 ± 0.1879	0.9324 ± 0.1844
landtransport	0.9274 ± 0.1925	0.9169 ± 0.1946	0.9185 ± 0.2047
animal	0.8442 ± 0.2787	0.8448 ± 0.2804	0.8467 ± 0.2775
livestock	0.6514 ± 0.3555	0.6260 ± 0.3626	0.6530 ± 0.3550
pet	0.8157 ± 0.3015	0.8047 ± 0.3065	0.8056 ± 0.3067

Table 8: Under different relabelling rates, with fully trained CNN, the mean and standard deviation of sigmoid-transformed response on validation images, broken down to concepts.

Node	0%	50%	90%	90%−0%
diningtable	2.1692	2.1832	2.2378	0.0686
chair	1.4113	1.3210	1.2302	-0.1811
sofa	2.1080	2.1596	2.2351	0.1271
bottle	0.6178	0.6195	0.9062	0.2884
pottedplant	0.8744	0.9273	0.8470	-0.0274
tvmonitor	0.4812	0.7008	0.5482	0.0670
train	2.0026	2.1006	2.2922	0.2896
bus	0.0000	0.0000	0.0000	0.0000
car	1.0358	1.1823	1.2010	0.1652
bicycle	0.0000	0.0000	0.0000	0.0000
motorbike	2.1447	2.1935	2.2931	0.1484
aeroplane	2.0975	2.1355	2.3083	0.2108
boat	1.5493	1.7257	1.7288	0.1795
cow	1.5618	1.5908	1.5191	-0.0427
horse	0.0000	0.0000	0.0000	0.0000
sheep	0.0000	0.0000	0.0000	0.0000
dog	1.8704	2.0003	2.2625	0.3921
cat	1.9724	2.0752	2.2553	0.2829
bird	3.7825	2.6603	0.0000	-3.7825
person	1.3138	1.3928	1.6450	0.3312
household	0.6735	0.7853	0.8827	0.2092
furniture	1.7698	1.6832	1.8698	0.1000
transport	0.1756	0.3454	0.9849	0.8093
landtransport	2.9717	2.9475	3.3086	0.3369
animal	2.6498	2.4981	3.0661	0.4163
livestock	0.0000	0.0000	0.0000	0.0000
pet	4.0644	3.9751	4.0960	0.0316

Table 9: Unary weights learned in stage 3, with CNN as the underlying classifier.

Edge	0%	50%	90%	90%–0%
(household, bottle)	0.9686	0.9846	0.9974	0.0288
(household, pottedplant)	1.0023	1.0215	1.0097	0.0074
(household, tvmonitor)	0.9444	0.9575	0.9947	0.0503
(household, furniture)	0.4723	0.5110	0.5250	0.0527
(furniture, diningtable)	0.9642	0.9699	0.9981	0.0339
(furniture, chair)	0.9579	0.9891	1.0003	0.0424
(furniture, sofa)	0.9367	0.9622	0.9981	0.0614
(transport, aeroplane)	0.8654	0.8935	0.9963	0.1309
(transport, boat)	0.9185	0.9540	0.9972	0.0787
(transport, landtransport)	2.2961	2.2119	2.4417	0.1456
(landtransport, train)	0.8297	0.8858	0.9977	0.1680
(landtransport, bus)	1.0487	1.1213	1.0210	-0.0277
(landtransport, car)	0.8752	0.9193	1.0055	0.1303
(landtransport, bicycle)	0.9760	0.9812	1.0009	0.0249
(landtransport, motorbike)	0.9074	0.9335	0.9972	0.0898
(animal, person)	0.8808	0.9133	0.9949	0.1141
(animal, livestock)	0.5204	0.5164	0.5153	-0.0051
(animal, pet)	1.8062	1.7930	1.9839	0.1777
(livestock, cow)	0.9623	0.9867	0.9993	0.0370
(livestock, horse)	0.9450	0.9645	0.9993	0.0543
(livestock, sheep)	0.9741	0.9828	0.9997	0.0256
(pet, dog)	0.7774	0.8477	0.9897	0.2123
(pet, cat)	0.8273	0.8884	0.9816	0.1543
(pet, bird)	3.2935	2.7109	1.3539	-1.9396

Table 10: Pairwise weights learned in stage 3, with CNN as the underlying classifier.

5.3 Scalability

Since this work is based on the PASCAL dataset instead of ImageNet, a natural question is how scalable this work is. In [2], the HEX graph is preprocessed in two directions: inference is performed by MAP loopy belief propagation on the sparsified HEX graph, where the local state space of each clique is constrained by semantic restrictions. The inference algorithm hence exploits both the small tree width of sparsified graph, and the small state space of the densified graph. Such inference algorithm is still applicable to the improved potential functions in this work. Unfortunately, due to the high-order term in (2), learning of unary and pairwise weights in stage 3 is not scalable.

6 Conclusion

This work is an extension to [2].

SVM can be optimised to parallel.

A Original HEX Fails with Positive Unary Inputs

Denote the set of active nodes in a state by \mathcal{S} . Then there are three cases:

1. Assume there exists exactly one node t , such that $\forall s \in \mathcal{S} : s \rightarrow t$. In other words, t is the only node among all active ones with no out-edges. If t has children, then labelling any of them as true improves (1).
2. Assume there exists two active nodes with no out-edges. Denote them by t_1 and t_2 . Then they must share a common descendant, as otherwise they would be connected by an exclusive edge.
 - (a) If they share a common immediate child c , then labelling c as true improves (1).
 - (b) If they only share a distant descendant, then the state of t_1 and t_2 are independent. The problem is thus equivalent to two case 1 in parallel.
3. There exists more than two active nodes with no out-edges. then each pair of them must have a common descendant, and the case is equivalent to pairwise case 2.

Hence, it is guaranteed that for positive unary inputs, the original HEX labels to a node in the original concept space.

B CNN and SVM Setup

The fine-tuning of the CNN from [8] is implemented using Caffe [7]. The final layer of the network is shrunk from 1000 neurons to 27, each corresponding to a node in figure 4. Since the CNN is fine-tuned as an independent multiclass classifier, the output from the last layer is transformed with the sigmoid function; and the loss is calculated as the Euclidean distance between prediction and ground truth.

The global learning rate is set to 5×10^{-5} . This is significantly lower than in [8], as all layers except the last are assumed well-trained. The global learning rate decreases linearly by 10^{-5} every 5,000 iterations; and the training process terminates after 50,000 iterations. The learning rate of the last layer is set to 5 times the global learning rate. A snapshot is taken

every 5,000 iterations, allowing 10 models for selection. With a GeForce GTX 470 graphical card, the fine-tuning process finished within 5 hours.

The SVM unary classifier is implemented using `LibSVM` [1]. Attempted kernels are linear, polynomial, and RBF. The training process for the SVM array finished within 6 hours *without* parallel training.

C Relationship to Probabilistic HEX

After the ECCV 14 paper, the original authors extended HEX to pHEX by relaxing 0/1 hard constraints to $u \in (0, 1)$, and turning the HEX graph into an Ising model [3]. pHEX managed to beat HEX by [TODO]. However, the crucial u is chosen by cross-validation, and it still applies to all constraints in the graph. In addition, pHEX requires a long time to train, although still much shorter than training the underlying CNN. Also, it uses the same potential function as original HEX. Compared to pHEX, this work focuses on using a more flexible potential function. In terms of running time, these two works are not directly comparable since this work is not scalable.

D Attributed HEX

In earlier stages of this project, one of the proposed directions was the joint analysis of concept and attributes. That is, for example, to classify an image of a yellow Labrador into “animal, pet, dog, yellow, furry”, etc. An example HEX graph is shown as follows:

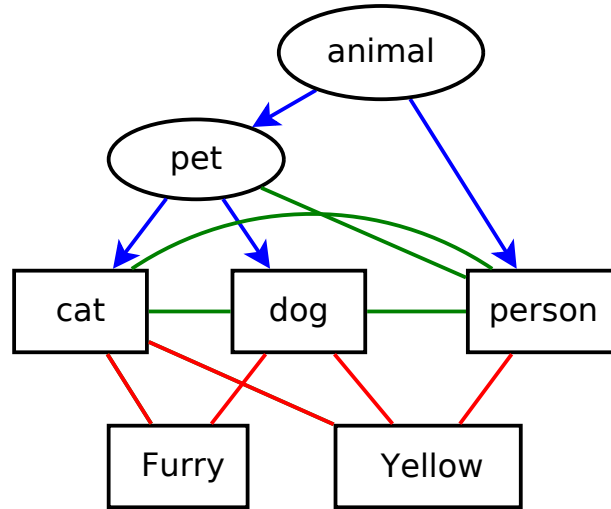


Figure 5: Attributed

While the training data is provided by aPascal & aYahoo dataset [5]. [TODO: discuss dataset properties] The possibility of using CNN as feature extractor has been confirmed in [9].

We only connected attributes to bottom-level concepts. In other words, the aHEX graph can be seen as a semantic part and an attribute part. Such design is for the sake of reducing loops in the aHEX graph. While junction-tree algorithm could potentially handle such a loopy graph during inference stage, the loops makes the graph very tricky to learn as a CRF. Similar design has been applied to pixel labelling problem such as [TODO: find references].

However, it was not the loops that caused such idea to be dropped. Under the same non-learning model, potential function is submodular, therefore such extension is trivial. Under

the learnable CRF model, the aHEX graph can be learned part-wise: the semantic subgraph can be learned in the same way as discussed in [TODO: cross-ref learnable CRF], whereas for the attributes part, all bottom-level concepts can be grouped into a super-concept with 20 states (corresponding to 20 PASCAL labels), then the attribute graph becomes a tree, which is learnable[TODO: find references]. With such model, the inference is the same as an non-learning system, as the potential function for the attributed part still has a submodular structure.

E Experiments with SVM as Underlying Unary Classifier

	0%	50%	90%
CNN Softmax	0.6698(0.8580)	0.3325(0.7161)	0.0112(0.5635)
Independent	0.1514(0.7226)	0.0142(0.5540)	0.0000(0.3147)
Original HEX	0.6300(0.7612)	0.2761(0.6846)	0.0083(0.5754)
Stage 1	0.6300(0.7612)	0.2761(0.6846)	0.0083(0.5813)
Stage 2	0.6947(0.8010)	0.4982(0.7523)	0.1235(0.6781)
Stage 3	0.6692(0.7678)	0.4530(0.6371)	0.1597(0.4691)
Independent	0.7523(0.8990)	0.6989(0.8711)	0.4946(0.6882)
Original HEX	0.7416(0.8812)	0.7096(0.8515)	0.5861(0.8117)
Stage 1	0.7399(0.8770)	0.7090(0.8456)	0.5855(0.8117)
Stage 2	0.6840(0.8491)	0.5671(0.8176)	0.4168(0.7553)

Table 11:

Concept	CNN Softmax	Original HEX	Stage 2	Stage 3	Stage 2— Original	Stage 3— Stage 2
diningtable	0.4821	0.6250	0.7142	0.6964	0.0892	-0.0178
chair	0.4666	0.2222	0.2666	0.2666	0.0444	0.0000
sofa	0.4310	0.3275	0.4137	0.3793	0.0862	-0.0344
bottle	0.6000	0.4333	0.4666	0.4666	0.0333	0.0000
pottedplant	0.3928	0.4285	0.4642	0.4285	0.0357	-0.0357
tvmonitor	0.8500	0.5500	0.5750	0.6000	0.0250	0.0250
train	0.8166	0.7333	0.8000	0.7583	0.0667	-0.0417
bus	0.6764	0.6470	0.6911	0.7794	0.0441	0.0883
car	0.8281	0.6640	0.7343	0.6953	0.0703	-0.0390
bicycle	0.8148	0.7037	0.7407	0.7962	0.0370	0.0555
motorbike	0.8035	0.6607	0.7500	0.6964	0.0893	-0.0536
aeroplane	0.8137	0.7862	0.8413	0.8000	0.0551	-0.0413
boat	0.6301	0.6712	0.6986	0.6575	0.0274	-0.0411
cow	0.3269	0.4230	0.5576	0.4230	0.1346	-0.1346
horse	0.4057	0.3188	0.4782	0.5072	0.1594	0.0290
sheep	0.3529	0.5588	0.5882	0.6176	0.0294	0.0294
dog	0.7272	0.6988	0.7272	0.7329	0.0284	0.0057
cat	0.5793	0.6896	0.7448	0.6896	0.0552	-0.0552
bird	0.6886	0.8113	0.8679	0.8679	0.0566	0.0000
person	0.7313	0.6119	0.7064	0.6268	0.0945	-0.0796
household	N/A	0.7431	0.7431	0.7237	0.0000	-0.0194
furniture	N/A	0.6226	0.6729	0.6415	0.0503	-0.0314
transport	N/A	0.9208	0.9223	0.9192	0.0015	-0.0031
landtransport	N/A	0.8591	0.8896	0.8920	0.0305	0.0024
animal	N/A	0.9195	0.9284	0.9208	0.0089	-0.0076
livestock	N/A	0.5677	0.6516	0.6451	0.0839	-0.0065
pet	N/A	0.8641	0.9039	0.9016	0.0398	-0.0023

Table 12: 0 relabel

Concept	CNN Softmax	Original HEX	Stage 2	Stage 3	Stage 2— Original	Stage 3— Stage 2
diningtable	0.2321	0.3214	0.6428	0.5357	0.3214	-0.1071
chair	0.0888	0.0222	0.1333	0.1333	0.1111	0.0000
sofa	0.1206	0.0689	0.1896	0.1379	0.1207	-0.0517
bottle	0.3000	0.1333	0.3333	0.3666	0.2000	0.0333
pottedplant	0.1071	0.1785	0.4285	0.3928	0.2500	-0.0357
tvmonitor	0.5250	0.3000	0.4750	0.5250	0.1750	0.0500
train	0.1583	0.3416	0.5583	0.4333	0.2167	-0.1250
bus	0.0294	0.3088	0.5441	0.7647	0.2353	0.2206
car	0.0703	0.2500	0.4687	0.3359	0.2187	-0.1328
bicycle	0.1481	0.2407	0.5370	0.8148	0.2963	0.2778
motorbike	0.3214	0.2857	0.4821	0.3571	0.1964	-0.1250
aeroplane	0.5034	0.3517	0.6137	0.5034	0.2620	-0.1103
boat	0.2602	0.2054	0.5068	0.4109	0.3014	-0.0959
cow	0.1153	0.1153	0.4038	0.2115	0.2885	-0.1923
horse	0.1304	0.1594	0.3333	0.5507	0.1739	0.2174
sheep	0.2352	0.2352	0.4705	0.5882	0.2353	0.1177
dog	0.6363	0.3181	0.5170	0.4147	0.1989	-0.1023
cat	0.4137	0.3241	0.5448	0.4620	0.2207	-0.0828
bird	0.5000	0.3584	0.6603	0.6603	0.3019	0.0000
person	0.5373	0.3283	0.4925	0.4129	0.1642	-0.0796
household	N/A	0.7548	0.7509	0.7237	-0.0039	-0.0272
furniture	N/A	0.6289	0.7106	0.6477	0.0817	-0.0629
transport	N/A	0.9177	0.9208	0.9192	0.0031	-0.0016
landtransport	N/A	0.8521	0.8943	0.8967	0.0422	0.0024
animal	N/A	0.9118	0.9195	0.9144	0.0077	-0.0051
livestock	N/A	0.5935	0.6838	0.6451	0.0903	-0.0387
pet	N/A	0.8477	0.8922	0.8969	0.0445	0.0047

Table 13: 50 relabel

Concept	CNN Softmax	Original HEX	Stage 2	Stage 3	Stage 2— Original	Stage 3— Stage 2
diningtable	0.0000	0.0000	0.2678	0.0892	0.2678	-0.1786
chair	0.0000	0.0000	0.0222	0.0222	0.0222	0.0000
sofa	0.0000	0.0000	0.0172	0.0000	0.0172	-0.0172
bottle	0.0000	0.0000	0.0333	0.0333	0.0333	0.0000
pottedplant	0.0000	0.0357	0.1428	0.2142	0.1071	0.0714
tvmonitor	0.0000	0.0250	0.0750	0.2000	0.0500	0.1250
train	0.0083	0.0083	0.1916	0.0250	0.1833	-0.1666
bus	0.0147	0.0147	0.1911	0.7647	0.1764	0.5736
car	0.0000	0.0000	0.1250	0.0312	0.1250	-0.0938
bicycle	0.0000	0.0000	0.1851	0.8518	0.1851	0.6667
motorbike	0.0000	0.0000	0.0714	0.0178	0.0714	-0.0536
aeroplane	0.0137	0.0068	0.1172	0.0344	0.1104	-0.0828
boat	0.0000	0.0000	0.1232	0.0684	0.1232	-0.0548
cow	0.0192	0.0000	0.0384	0.0000	0.0384	-0.0384
horse	0.0144	0.0000	0.0289	0.4637	0.0289	0.4348
sheep	0.0000	0.0000	0.0588	0.5294	0.0588	0.4706
dog	0.0397	0.0056	0.1477	0.0625	0.1421	-0.0852
cat	0.0000	0.0344	0.1517	0.0758	0.1173	-0.0759
bird	0.0188	0.0094	0.1792	0.1698	0.1698	-0.0094
person	0.0199	0.0099	0.0895	0.0447	0.0796	-0.0448
household	N/A	0.7509	0.7431	0.7081	-0.0078	-0.0350
furniture	N/A	0.6226	0.7044	0.6352	0.0818	-0.0692
transport	N/A	0.9177	0.9192	0.9192	0.0015	0.0000
landtransport	N/A	0.8521	0.8967	0.8896	0.0446	-0.0071
animal	N/A	0.9093	0.9080	0.9118	-0.0013	0.0038
livestock	N/A	0.5870	0.6838	0.6838	0.0968	0.0000
pet	N/A	0.8384	0.8922	0.8899	0.0538	-0.0023

Table 14: 90 relabel

Concept	0%	50%	90%
diningtable	0.4804 ± 0.1966	0.3840 ± 0.1581	0.2409 ± 0.0641
chair	0.3722 ± 0.1553	0.3001 ± 0.1167	0.2227 ± 0.0789
sofa	0.4534 ± 0.2143	0.3379 ± 0.1419	0.2337 ± 0.0793
bottle	0.5479 ± 0.2583	0.3764 ± 0.1434	0.2797 ± 0.1136
pottedplant	0.4661 ± 0.2345	0.3604 ± 0.1689	0.2582 ± 0.0950
tvmonitor	0.5667 ± 0.2350	0.4103 ± 0.1913	0.2304 ± 0.0936
train	0.7275 ± 0.2600	0.4189 ± 0.1779	0.2538 ± 0.0853
bus	0.7250 ± 0.1979	0.4219 ± 0.1837	0.2560 ± 0.0800
car	0.6404 ± 0.2816	0.3763 ± 0.1844	0.2469 ± 0.0846
bicycle	0.6018 ± 0.2739	0.4036 ± 0.1604	0.2349 ± 0.0751
motorbike	0.5953 ± 0.2172	0.4035 ± 0.1642	0.2171 ± 0.1010
aeroplane	0.7229 ± 0.2358	0.4251 ± 0.1835	0.2362 ± 0.1036
boat	0.6580 ± 0.2325	0.4247 ± 0.2081	0.2646 ± 0.0903
cow	0.4227 ± 0.1850	0.3146 ± 0.1479	0.2227 ± 0.0634
horse	0.5085 ± 0.2165	0.3735 ± 0.1467	0.2220 ± 0.0736
sheep	0.4951 ± 0.1858	0.3590 ± 0.1482	0.2332 ± 0.0900
dog	0.6190 ± 0.2490	0.4123 ± 0.1935	0.2568 ± 0.1072
cat	0.6688 ± 0.2459	0.4223 ± 0.1796	0.2707 ± 0.1041
bird	0.7018 ± 0.2342	0.4219 ± 0.1795	0.2703 ± 0.1179
person	0.5841 ± 0.2590	0.3971 ± 0.2080	0.2465 ± 0.1077
household	0.6598 ± 0.2280	0.6598 ± 0.2280	0.6598 ± 0.2280
furniture	0.5707 ± 0.2492	0.5707 ± 0.2492	0.5707 ± 0.2492
transport	0.8052 ± 0.1949	0.8052 ± 0.1949	0.8052 ± 0.1949
landtransport	0.7691 ± 0.2267	0.7691 ± 0.2267	0.7691 ± 0.2267
animal	0.7816 ± 0.2167	0.7816 ± 0.2167	0.7816 ± 0.2167
livestock	0.6098 ± 0.2389	0.6098 ± 0.2389	0.6098 ± 0.2389
pet	0.7394 ± 0.2151	0.7394 ± 0.2151	0.7394 ± 0.2151

Table 15: SVM responses with linear kernel, to decision boundary

Node	0%	50%	90%	90%−0%
diningtable	1.9265	1.9236	1.7988	-0.1277
chair	1.3386	1.2640	1.2966	-0.0420
sofa	1.8851	1.9036	1.8286	-0.0565
bottle	0.6659	0.6271	0.8228	0.1569
pottedplant	0.9247	0.8957	0.9201	-0.0046
tvmonitor	0.4994	0.7050	0.5832	0.0838
train	1.8813	1.9102	1.8070	-0.0743
bus	0.0450	0.0297	0.0224	-0.0226
car	0.9947	1.1058	0.9904	-0.0043
bicycle	0.0000	0.0000	0.0000	0.0000
motorbike	1.9338	1.9510	1.9340	0.0002
aeroplane	1.8529	1.9190	1.8513	-0.0016
boat	1.4451	1.5748	1.4387	-0.0064
cow	1.4513	1.4529	1.3184	-0.1329
horse	0.0000	0.0000	0.0220	0.0220
sheep	0.0000	0.0000	0.0000	0.0000
dog	1.7648	1.8041	1.7249	-0.0399
cat	1.7568	1.8101	1.7346	-0.0222
bird	3.5105	3.1755	3.2677	-0.2428
person	1.2342	1.2741	1.2668	0.0326
household	0.8339	0.9198	0.9864	0.1525
furniture	1.6695	1.6110	1.7586	0.0891
transport	0.4305	0.4510	1.0331	0.6026
landtransport	2.6186	2.5675	2.9159	0.2973
animal	2.5923	2.4176	2.6773	0.0850
livestock	0.0000	0.0000	0.0000	0.0000
pet	3.8558	3.8488	3.9997	0.1439

Table 16: Unary weights learned in stage 3, with SVM as the underlying classifier.

Edge	0%	50%	90%	90%–0%
(household, bottle)	0.9506	0.9503	0.9371	-0.0135
(household, pottedplant)	1.1450	1.1220	1.1862	0.0412
(household, tvmonitor)	0.9465	0.9477	0.9507	0.0042
(household, furniture)	0.6116	0.6318	0.6151	0.0035
(furniture, diningtable)	0.9365	0.9363	0.9276	-0.0089
(furniture, chair)	0.9657	0.9668	0.9777	0.0120
(furniture, sofa)	0.9170	0.9223	0.9177	0.0007
(transport, aeroplane)	0.8285	0.8477	0.8472	0.0187
(transport, boat)	0.8906	0.8989	0.8841	-0.0065
(transport, landtransport)	2.0117	1.9375	2.0144	0.0027
(landtransport, train)	0.8558	0.8691	0.8663	0.0105
(landtransport, bus)	1.2733	1.2454	1.2599	-0.0134
(landtransport, car)	0.9485	0.9586	1.0058	0.0573
(landtransport, bicycle)	1.0078	1.0127	1.0162	0.0084
(landtransport, motorbike)	0.8892	0.8977	0.9047	0.0155
(animal, person)	0.9056	0.9143	0.8878	-0.0178
(animal, livestock)	0.7380	0.7416	0.8540	0.1160
(animal, pet)	1.8121	1.8469	2.0426	0.2305
(livestock, cow)	0.9483	0.9517	0.9559	0.0076
(livestock, horse)	0.9648	0.9715	0.9677	0.0029
(livestock, sheep)	1.0186	1.0184	1.0406	0.0220
(pet, dog)	0.8137	0.8258	0.8076	-0.0061
(pet, cat)	0.8031	0.8261	0.8021	-0.0010
(pet, bird)	3.0280	2.8567	3.1028	0.0748

Table 17: Pairwise weights learned in stage 3, with SVM as the underlying classifier.

References

- [1] Chih-Chung Chang and Chih-Jen Lin. LIBSVM: A library for support vector machines. *ACM Transactions on Intelligent Systems and Technology*, 2:27:1–27:27, 2011. Software available at <http://www.csie.ntu.edu.tw/~cjlin/libsvm>.
- [2] Jia Deng, Nan Ding, Yangqing Jia, Andrea Frome, Kevin Murphy, Samy Bengio, Yuan Li, Hartmut Neven, and Hartwig Adam. Large-scale object classification using label relation graphs. In *Computer Vision–ECCV 2014*, pages 48–64. Springer, 2014.
- [3] Nan Ding, Jia Deng, Kevin Murphy, and Hartmut Neven. Probabilistic label relation graphs with ising models. *arXiv preprint arXiv:1503.01428*, 2015.
- [4] M. Everingham, L. Van Gool, C. K. I. Williams, J. Winn, and A. Zisserman. The PASCAL Visual Object Classes Challenge 2012 (VOC2012) Results. <http://www.pascal-network.org/challenges/VOC/voc2012/workshop/index.html>.
- [5] Alireza Farhadi, Ian Endres, Derek Hoiem, and David Forsyth. Describing objects by their attributes. In *Computer Vision and Pattern Recognition, 2009. CVPR 2009. IEEE Conference on*, pages 1778–1785. IEEE, 2009.
- [6] Haibo He, Eduardo Garcia, et al. Learning from imbalanced data. *Knowledge and Data Engineering, IEEE Transactions on*, 21(9):1263–1284, 2009.
- [7] Yangqing Jia, Evan Shelhamer, Jeff Donahue, Sergey Karayev, Jonathan Long, Ross Girshick, Sergio Guadarrama, and Trevor Darrell. Caffe: Convolutional architecture for fast feature embedding. *arXiv preprint arXiv:1408.5093*, 2014.
- [8] Alex Krizhevsky, Ilya Sutskever, and Geoffrey E Hinton. Imagenet classification with deep convolutional neural networks. In *Advances in neural information processing systems*, pages 1097–1105, 2012.
- [9] Ali S Razavian, Hossein Azizpour, Josephine Sullivan, and Stefan Carlsson. Cnn features off-the-shelf: an astounding baseline for recognition. In *Computer Vision and Pattern Recognition Workshops (CVPRW), 2014 IEEE Conference on*, pages 512–519. IEEE, 2014.
- [10] Karen Simonyan and Andrew Zisserman. Very deep convolutional networks for large-scale image recognition. *arXiv preprint arXiv:1409.1556*, 2014.