



Voyager[®] 6.5

Call Slip Dæmon User's Guide

June 2007

Ex Libris (USA) Inc.

This document contains proprietary information of
Ex Libris (USA) Inc. and is not to be disclosed or used
except in accordance with applicable agreements.

Copyright © 2007 Ex Libris (USA) Inc.
Unpublished and Not for Publication
All Rights Reserved

Copyright © 2007 Ex Libris (USA) Inc.

This material is protected by the copyright laws of the United States and other countries. It may not be reproduced, distributed, or altered in any fashion by any entity (either internal or external to Ex Libris (USA) Inc.), except in accordance with applicable agreements, contracts or licensing.

CONFIDENTIAL INFORMATION

The information herein is the property of Ex Libris (USA) Inc. or its affiliates and any misuse or abuse will result in economic loss.

This document is provided for limited and restricted purposes in accordance with a binding contract with Ex Libris (USA) Inc. or an affiliate. The information herein includes trade secrets and is confidential.

Notice

Every effort was made to ensure that the information in this document was complete and accurate at the time of printing. However, information is subject to change.

Trademarks

Voyager is a registered trademark of Ex Libris (USA) Inc.

WebVoyage is a trademark of Ex Libris (USA) Inc.

UNIX is a registered trademark in the United States and other countries, licensed exclusively through X/Open Company Ltd.

Microsoft, the Microsoft logo, MS, MS-DOS, Microsoft PowerPoint, Visual Basic, Visual C++, Win32, Microsoft Windows, the Windows logo, Microsoft Notepad, Microsoft Windows Explorer, Microsoft Internet Explorer, and Windows NT are registered trademarks and ActiveX is a trademark of the Microsoft corporation in the United States and/or other countries.

Sun, Sun Microsystems, the Sun logo, Solaris, ONC+, NFS, SunVTS, VIS, JumpStart, Sun Fire, StorEdge, Sun Fireplane Interconnect, WebNFS, Java, Solstice, Solstice AdminSuite, Sun Management Center, Sun Cluster, JVM, ShowMeHow, ShowMe TV, Solaris Webstart, Sun Remote Systems Control, Solaris PC Netlink, and Open Windows are trademarks or registered trademarks of Sun Microsystems, Inc. in the United States and other countries.

Unicode and the Unicode logo are registered trademarks of Unicode, Inc.

Contents

About This Document

• Purpose	xiii
• Intended Audience	xiii
• Reason for Reissue	xiii
• How to Use This Document	xiii
• Conventions Used in This Document	xiv
• Document Reproduction/Photocopying	xv
• Comment on This Document	xv
To Submit Comments by E-mail	xvi

1 Getting Started

• Introduction	1-1
• Purpose of this Chapter	1-1
• Prerequisite Skills and Knowledge	1-1
• Before You Begin	1-2
Checklist	1-2
Help	1-2
Log In	1-3
Login Information	1-4

2 Overview of Call Slip Dæmon

• What Is Voyager Call Slip Dæmon?	2-1
• Functional Overview	2-2
Menu Items	2-2
File Menu	2-2
Edit Menu	2-3
Help Menu	2-4
Tabbed Functions	2-5

Ex Libris (USA) Inc.
See notice on first page

Contents

3	Processing Call Slip Requests	
	• Call Slip Requests	3-1
	• Pending Tab	3-1
	Retrieving Current Requests	3-2
	Total Requests & Printed Requests	3-3
	• Printing Pending Requests	3-4
	• Filling a Call Slip Request	3-8
	• Link Item to Request	3-10
	• Select Another Item	3-16
	• Reassign Request	3-18
	• Call Slip Reassignment History	3-20
	• Displaying Processed Requests (History Tab)3-21	
	View the List of Processed Call Slip Requests	3-21

4	Customizing Your System	
	• Overview	4-1
	• Preferences	4-1
	New Request Options	4-2
	Update and Email Send Interval	4-3
	Use Alert Sound	4-3
	Automatically Print New Requests	4-3
	Sort Pending Requests by	4-3
	Default Find Method	4-4
	Process Options	4-4
	Force Item Search on Process	4-4
	Verify Create New Item or Add Barcode	4-5
	Printer Options	4-5
	Tab Width	4-5
	Standard Font	4-5
	Alternate Font	4-5
	Email Options	4-6
	Regular Requests	4-6
	Universal Borrowing Requests	4-6
	Save Preferences	4-7
	• Defining the Callslip.ini File	4-7

Ex Libris (USA) Inc.
See notice on first page

Contents

Callslip.ini File Example	4-8
General Stanza	4-15
LocationCode= Variable	4-15
NewItem= Variable	4-17
AddBarcode= Variable	4-18
Preferences Stanza	4-19
Print Options Stanza	4-19
Email Options Stanza	4-19
Template Stanzas	4-20
Action Codes	4-20
Field Codes	4-21
MARC Variable Data	4-23
Formatting the Data	4-25
Error Handling	4-26
Call Slip Reassignment History	4-26
Call Slip Promote History	4-27
Initiating and Ending Action Codes	4-27
Printing Field Information	4-27
Printing in the Alternate Font	4-28
Changing Font Size	4-29
Inserting a Blank Line	4-29
Inserting a Tab	4-29
Example	4-29

IN

Index

IN-1

Contents

Ex Libris (USA) Inc.
See notice on first page

Figures

1 Getting Started

1-1.	Help menu	1-2
1-2.	Call Slip Dæmon log-in window	1-3
1-3.	Select Call Slip Group	1-4
1-4.	Call Slip Dæmon Login Information dialog box	1-4

2 Overview of Call Slip Dæmon

2-1.	File menu	2-2
2-2.	Edit Menu	2-3
2-3.	Help menu	2-4
2-4.	Call Slip Dæmon tabs	2-5

3 Processing Call Slip Requests

3-1.	Call Slip Dæmon Pending tab	3-2
3-2.	Get Requests	3-3
3-3.	Number of call slips pending (total) and number of new call slips (not printed)	3-3
3-4.	Print Setup option	3-5
3-5.	Call Slip Dæmon/Windows Print dialog box	3-6
3-6.	Call Slip Dæmon Link Item Dialog Box	3-11
3-7.	Call Slip Dæmon Link Item Dialog Box Expanded	3-11
3-8.	Verification Message for Create New Item	3-14
3-9.	Call Slip Dæmon Link Item Dialog Box - Expanded	3-15
3-10.	Select another item (Edit menu)	3-16
3-11.	Link Item dialog box for Select another item from this Bib	3-17
3-12.	No Other Items for Bib informational message	3-18
3-13.	Call Slip Reassigned Status Message	3-19
3-14.	View Reassignment History dialog box	3-21
3-15.	Call Slip Dæmon History tab	3-22

Figures

4

Customizing Your System

4-1.	Call Slip Dæmon Preferences dialog box	4-2
4-2.	Callslip.ini file example	4-9
4-3.	callslip.ini Properties dialog box	4-17
4-4.	Link Item dialog box - Create New Item command displayed	4-18
4-5.	Link Item dialog box - Add Barcode command displayed	4-18
4-6.	Example of [Call Slip Print Template] stanza in the Callslip.ini file	4-30
4-7.	Example of a call slip printout	4-31

Tables

2	Overview of Call Slip Dæmon	
	2-1. File Menu	2-2
	2-2. Edit Menu	2-3
	2-3. Help Menu	2-4

4	Customizing Your System	
	4-1. Action Codes	4-20
	4-2. Predefined Field Codes	4-21
	4-3. Syntax for MARC variable data	4-24

Tables

Ex Libris (USA) Inc.
See notice on first page

Procedures

1 Getting Started

1-1. Logging In	1-3
-----------------	-----

3 Processing Call Slip Requests

3-1. Searching for a Pending Request	3-4
3-2. Setting Up and Selecting Your Printer	3-5
3-3. Printing Highlighted Call Slip Request(s)	3-6
3-4. Printing All New Call Slip Requests	3-7
3-5. Printing All Call Slip Requests	3-8
3-6. Processing a Pending Request Using Fill / No Fill Options	3-8
3-7. Linking Existing Item to Call Slip Request	3-10
3-8. Creating a New Item to Link to a Call Slip Request	3-12
3-9. Adding a Barcode to a Requested Item	3-14
3-10. Select Another Item	3-17
3-11. Call Slip Request Reassignment	3-19
3-12. View Call Slip Reassignment History	3-20
3-13. Unprocessing a Processed Call Slip Request	3-22

4 Customizing Your System

4-1. Saving Callslip.ini As Read-Only	4-16
---------------------------------------	------

Procedures

Ex Libris (USA) Inc.
See notice on first page

About This Document

Purpose

This document provides instructions for customizing Voyager Call Slip Dæmon, and steps for processing call slip requests.

Intended Audience

This document is intended for Voyager customers who process call slip requests and/or need to tailor the call slip function for the institution's use.

Reason for Reissue

This user's guide is being reissued for the following reason.

- Changes to the About chapter.

How to Use This Document

This document consists of the following:

Chapter [1](#) [“Getting Started”](#)
Chapter [1](#) provides the prerequisites for using Voyager Call Slip Dæmon and other considerations for getting started.

Chapter 2	Overview of Call Slip Dæmon Chapter 2 provides a brief functional overview of Voyager Call Slip Dæmon.
Chapter 3	Processing Call Slip Requests Chapter 3 provides the steps for processing call slip requests.
Chapter 4	Customizing Your System Chapter 4 provides an explanation of the options for customizing Voyager Call Slip Dæmon.
Index	The Index is an alphabetical, detailed cross-reference of topics.

Conventions Used in This Document

The following conventions are used throughout this document:

- Names of commands, variables, stanzas, files, and paths (such as `/dev/tmp`), as well as selectors and typed user input, are displayed in `constant width` type.
- Commands or other keyboard input that must be typed exactly as presented are displayed in **`constant width bold`** type.
- Commands or other keyboard input that must be supplied by the user are displayed in ***constant width bold italic*** type.
- System-generated responses such as error messages are displayed in `constant width` type.
- Variable *portions* of system-generated responses are displayed in *constant width italic* type.
- Keyboard commands (such as **Ctrl** and **Enter**) are displayed in **bold**.
- Required keyboard input such as “Enter **vi**” is displayed in **`constant width bold`** type.
- Place holders for variable portions of user-defined input such as **ls -l *filename*** are displayed in ***italicized constant width bold*** type.
- The names of menus or status display pages and required selections from menus or status display pages such as “From the **Applications** drop-down menu, select **System-wide**,” are displayed in **bold** type.
- Object names on a window's interface, such as the **Description** field, the **OK** button, and the **Metadata** tab, are displayed in **bold** type.
- The titles of documents such as *Curator Web Client User's Guide* are displayed in *italic* type.
- Caution, and important notices are displayed with a distinctive label such as the following:

NOTE:

Extra information pertinent to the topic.



IMPORTANT:

Information you should consider before making a decision or configuration.



CAUTION:

Information you must consider before making a decision, due to potential loss of data or system malfunction involved.



TIP:

Helpful hints you might want to consider before making a decision.

RECOMMENDED:

Preferred course of action.

OPTIONAL:

Indicates course of action which is not required, but may be taken to suit your library's preferences or requirements.

Document Reproduction/Photocopying

Photocopying the documentation is allowed under your contract with Ex Libris (USA) Inc. It is stated below:

All documentation is subject to U.S. copyright protection. CUSTOMER may copy the printed documentation only in reasonable quantities to aid the employees in their use of the SOFTWARE. Limited portions of documentation, relating only to the public access catalog, may be copied for use in patron instruction.

Comment on This Document

Please contact Customer Support to provide us with your feedback. For Customer Support contact information, see SupportWeb at:

http://www.exlibrisgroup.com/support_center.htm.

To Submit Comments by E-mail

To submit comments by e-mail, please send your message to:
docmanager@endinfosys.com

Contents

Introduction	1-1
Purpose of this Chapter	1-1
Prerequisite Skills and Knowledge	1-1
Before You Begin	1-2
• Checklist	1-2
• Help	1-2
• Log In	1-3
• Login Information	1-4

Contents

Ex Libris (USA) Inc.
See notice on first page

Introduction

This chapter describes the prerequisites for beginning work in Voyager Call Slip Dæmon.

Purpose of this Chapter

This chapter's purpose is to provide:

- Prerequisites for using and tailoring Voyager Call Slip Dæmon.
- Instruction for logging in to Voyager Call Slip Dæmon.

Prerequisite Skills and Knowledge

To use this document effectively, you need knowledge of the following:

- Basic Microsoft Interface navigation
- Basic UNIX commands and navigation
- Basic Voyager System Administration Module

Before You Begin

Before you can customize Voyager Call Slip Dæmon, the client and server components must be installed and running. Review the following information to prepare for using Voyager Call Slip Dæmon.

Checklist

You must complete the following tasks to process call slip requests in Voyager Call Slip Dæmon.

- Enter Call Slip Definitions in the Voyager System Administration module
- Enter Call Slip Rules in the Voyager System Administration module
- Enter No-Fill Reasons in the Voyager System Administration module

Optionally, you may also want to complete the following tasks.

- Customize print options in the `callslip.ini` file
- Customize email options in the `callslip.ini` file
- Enter call slip status codes in the `opac.ini` file
- Customize Messages in Voyager System Administration OPAC Configuration
- Customize printing options in the `circ.ini` file

Help

Use the online help function through the **Help** Menu to assist with your questions while using Call Slip Dæmon.



Figure 1-1. Help menu

You can also access context-sensitive help by pressing **F1**.

For additional help, use the Knowledge Base or Resource Sharing capability located in SupportWeb.

Log In

When you launch Voyager Call Slip Dæmon, a log-in window displays. Use the following to log into Voyager Call Slip Dæmon.



Procedure 1-1. Logging In

1. Enter your **Operator ID** and **Password**. See [Figure 1-2](#).

NOTE:

The **Operator ID** and **Password** are set up by the Voyager System Administrator through the Security Configuration function within the Voyager System Administration module.

2. Click **OK**.

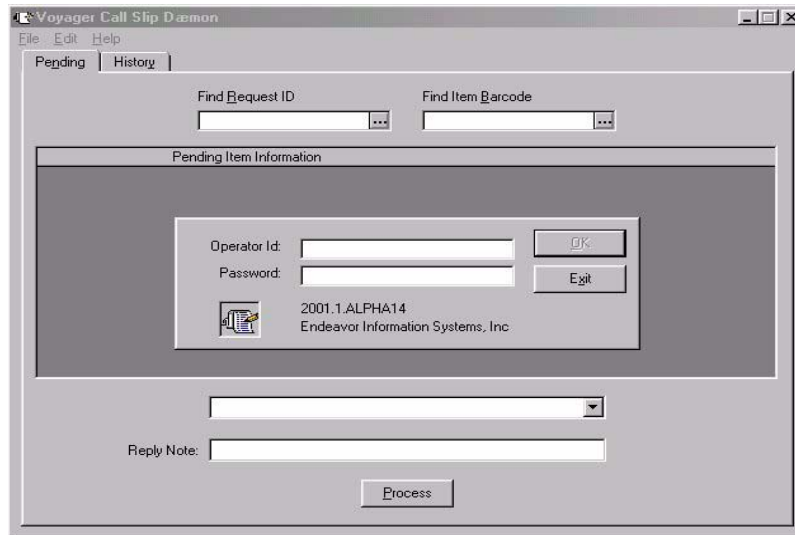


Figure 1-2. Call Slip Dæmon log-in window

3. (Optional) Select the **Call Slip Group**, and click **OK**. See [Figure 1-3](#).

Result: The first time staff log in to Voyager Call Slip Dæmon the **Call Slip Group** needs to be selected. This selection is then permanently stored in the `callslip.ini` file in the `LocationCode` field under the `[General]` stanza thus eliminating the need to repeat this step. See [LocationCode= Variable](#) on [page 4-15](#) for more information.



Figure 1-3. Select Call Slip Group

Login Information

You can display your **Operator Name**, **Operator ID**, **Location**, and **Process Method** by selecting **Login Information** from the **File** menu. See [Figure 1-4](#).

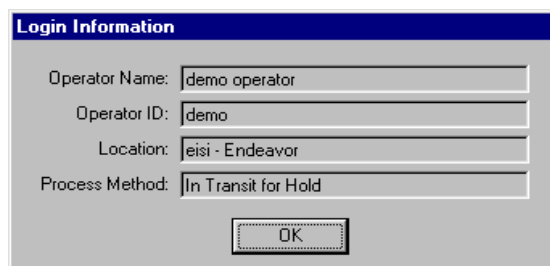


Figure 1-4. Call Slip Dæmon Login Information dialog box

Your **Process Method** determines what happens to an item once you process and fill a call slip request. Your **Process Method** may be one of three following possibilities:

- Place on Hold
- In Transit for Hold
- Charge to Patron

See *Call Slip Definitions* in the *Call Slip (Closed Stacks)* section of the *Voyager System Administration User's Guide* for more detailed information about Call Slip Process Methods.



Ex Libris (USA) Inc.
See notice on first page

Overview of Call Slip Dæmon

2

Contents

What Is Voyager Call Slip Dæmon?	2-1
Functional Overview	2-2
• Menu Items	2-2
File Menu	2-2
Edit Menu	2-3
Help Menu	2-4
• Tabbed Functions	2-5

Contents

Ex Libris (USA) Inc.
See notice on first page

Overview of Call Slip Dæmon

2

What Is Voyager Call Slip Dæmon?

Voyager Call Slip Dæmon is a tool designed to enhance the productivity of library staff when processing call slip requests from patrons. Requests can be handled immediately when submitted by a patron or queued up and handled as a group of requests. Call Slip Dæmon is designed to be flexible to meet the scheduling requirements of library staff everywhere.

Call Slip Dæmon incorporates many features to enhance the processing of call slip requests such as:

- Virtually unlimited pre-set formatting options for printing call slip requests
- Optional Automatic Print New Request feature
- Email facility to communicate the status of processed requests to the requestor
- Time-saving stored responses from which to select
- Free-key area to include non-standard responses to requests
- Update Interval option to specify how often to update the Call Slip Dæmon request queue
- Optional Alert Sound feature providing an audio signal to notify staff of a new incoming request

Functional Overview

Voyager Call Slip Dæmon combines menu options and a tabbed screen interface to aid library staff in navigating and processing call slip requests.

Menu Items

Call Slip Dæmon provides the following three menus for easy access to functions:

- **File** Menu
- **Edit** Menu
- **Help** Menu

File Menu

The **File** menu provides the main functions for Call Slip Dæmon such as get requests, print requests, and set preferences. See [Figure 2-1](#).



Figure 2-1. File menu

A description of each **File** menu function is defined in Table 2-1 on page 2-2.

Table 2-1. File Menu

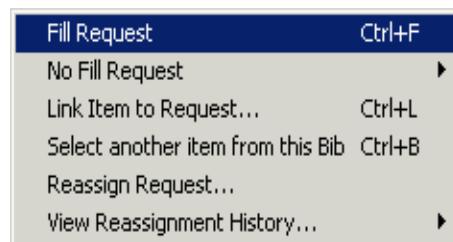
Menu Item	Description
Get Requests	Retrieves new call slip requests from the server.
Login Information	Displays your operator name, operator ID, and location.

Table 2-1. File Menu

Menu Item	Description
Print	Displays a cascading menu. Selected prints the particular call slip request(s) that is highlighted on the Pending tab. New prints all of the new call slip requests that have not yet been printed. All prints all of the call slip requests on the Pending tab.
Print Setup	Allows you to choose and set up a printer.
Preferences	Displays the Preferences dialog box.
Exit	Exits the Call Slip module.

Edit Menu

The **Edit** menu provides the functions for processing call slip requests. See [Figure 2-2](#).

**Figure 2-2. Edit Menu**

A description of each **Edit** menu function is defined in Table 2-2 on page 2-3.

Table 2-2. Edit Menu

Menu Item	Description
Fill Request (Ctrl+F)	Processes the request that is currently highlighted on the Pending tab as a Filled Request. The processed request then displays on the History tab.

Table 2-2. Edit Menu

Menu Item	Description
No Fill Request	Displays a menu of No Fill reasons (only the first 20 of the total list of No Fill reasons). Selecting a No Fill reason processes the request that is currently highlighted on the Pending tab as a No Fill Request. The processed request then displays on the History tab.
Link Item to Request (Ctrl + L)	Displays the Link Item dialog box.
Select another item from this Bib	Displays list of items for the active bibliographic record from which to select.
Reassign Request	Displays list of call slip queues.
View Reassignment History	Displays reassignment history for the highlighted call slip request.

Help Menu

The **Help** menu provides information about how to use Call Slip Dæmon and information about which version is installed. See [Figure 2-3](#).



Figure 2-3. Help menu

A description of each **Help** menu function is defined in Table 2-3 on page 2-4.

Table 2-3. Help Menu

Menu Item	Description
Help Topics	Displays the table of contents for Call Slip Help and opens the Help Window.
Endeavor on the Web	Connects to SupportWeb.
About Call Slip Dæmon	Displays the copyright notice and version number of your copy of Voyager Call Slip.

Tabbed Functions

The Voyager Call Slip Dæmon contains two tabs **Pending** and **History**. See [Figure 2-4](#).



Figure 2-4. Call Slip Dæmon tabs

The **Pending** tab displays a list of current call slip requests that have been placed.

The **History** tab displays a list of call slip requests that have been processed during the current Call Slip Dæmon session.

The following chapters describe in detail how to use and customize these functions for your environment.

Processing Call Slip Requests

3

Contents

Call Slip Requests	3-1
Retrieving Current Requests (Pending Tab)	3-1
Printing Pending Requests	3-4
Filling a Call Slip Request	3-7
Link Item to Request	3-9
Request Substitute Item Selection with Link Item to Request	3-15
Reassign Request	3-16
Call Slip Reassignment History	3-18
Displaying Processed Requests (History Tab)	3-19
• View the List of Processed Call Slip Requests	3-19

Contents

Ex Libris (USA) Inc.
See notice on first page

Call Slip Requests

Call slip requests in Voyager Call Slip Dæmon are displayed for library staff through the following two tabs.

- **Pending**
- **History**

The **Pending** tab displays new and pending call slip requests.

The **History** tab displays call slip requests that have been processed during the current login session.

This chapter describes in detail the information and functions provided on each of these tabs.

Pending Tab

A list of all new pending call slip requests is retrieved and placed on the **Pending** tab (see [Figure 3-1](#)) when you log in to the Call Slip Dæmon. (Dæmon is a Unix process. For this application, it runs and automatically checks and updates the queue for new incoming call slip requests.)

The system automatically updates the **Pending** tab as specified by the setting entered for **Update and Email Send Interval** in Preferences. The length of this interval determines the frequency with which new call slip requests automatically display on the **Pending** tab. See [Update and Email Send Interval](#) on [page 4-3](#) for more information.

The **Find Request ID** field and **Find Item Barcode** field (see [Figure 3-1](#)) can be used to search for a call slip request on the **Pending** tab. Using these fields can expedite call slip processing by enabling the system to automatically locate a specific call slip request as compared to staff manually scrolling through a long list of requests.

Scanning technology can also be used to enter the required information into either of these fields. To print the Request ID or Item Barcode as a barcode on the call slip printout, see [Printing in the Alternate Font](#) on [page 4-28](#).

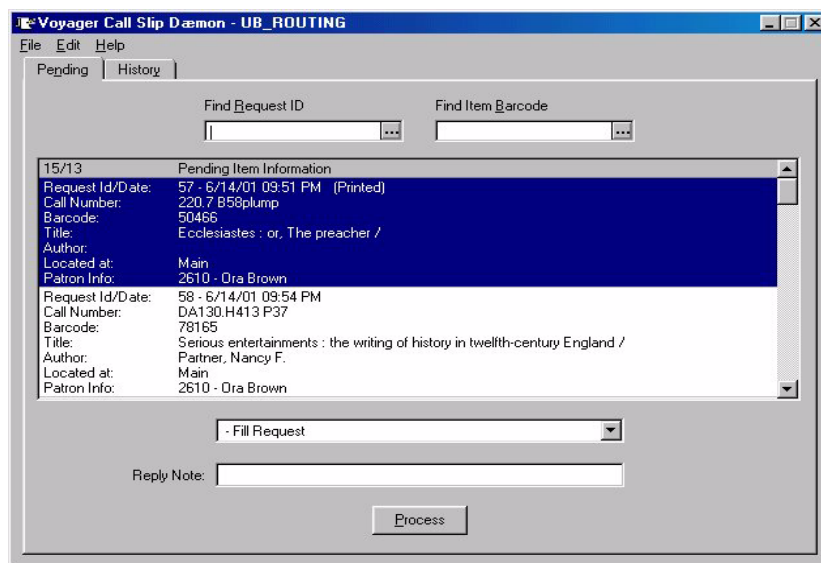


Figure 3-1. Call Slip Daemon Pending tab

Retrieving Current Requests

To retrieve any new pending call slip requests after you have logged in, select **Get Requests** (see [Figure 3-2](#)) from the **File** menu. This queries the server and returns a list of all new pending call slip requests that have been submitted since the last time the queue was updated.




Figure 3-2. Get Requests

Total Requests & Printed Requests

To determine the number of new call slip requests, look for the two numbers displayed in the top left corner of the **Pending Item Information** list box. See [Figure 3-3](#).

The first number is the total number of call slip requests on the **Pending** tab.

The second number is the total number of call slip requests that have not yet been printed.

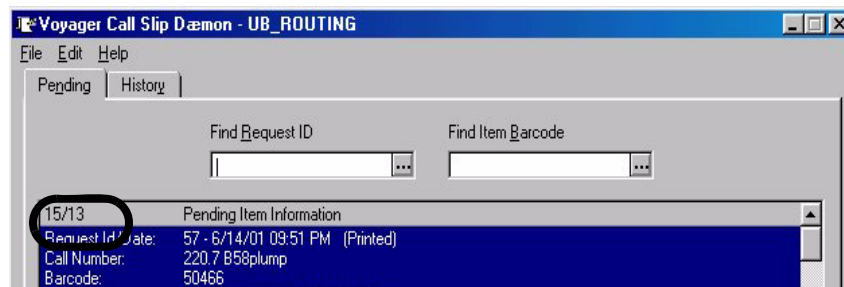


Figure 3-3. Number of call slips pending (total) and number of new call slips (not printed)

The procedure for searching for a pending call slip request is shown in [Procedure 3-1, Searching for a Pending Request](#), on page [3-4](#).



Procedure 3-1. Searching for a Pending Request

Use the following to search for a pending request by **Request ID** or **Item Barcode**.

1. Enter the **Request ID number** associated with a call slip request in the **Find Request ID** field on the **Pending** tab, or type the **Item Barcode** associated with a call slip request in the **Find Item Barcode** field.

Optionally, place the cursor in the **Find Request ID** field or the **Find Item Barcode** field; and scan the **Request ID** or **Item Barcode**, respectively.

Result: This identifies the call slip to search for and activates the **ellipsis** button. This provides quick access to a specific call slip request when there is a long list of pending call slips.

2. Click the **ellipsis button** or press **Enter**.

Result: The requested call slip displays highlighted on the **Pending** tab

Printing Pending Requests

Call slip requests can be printed from the **Pending** tab. Voyager Call Slip Dæmon print options include the following.

- All highlighted call slip requests
- All new call slip requests that have not yet been printed
- All call slip requests on the **Pending** tab

The Voyager Call Slip Dæmon prints call slip requests according to the options set in the Print Setup dialog box, the Preferences dialog box (see [Preferences](#) on [page 4-1](#)), and the [Print Template] stanza in the `callslip.ini` file. See [Defining the Callslip.ini File](#) on [page 4-7](#).

The procedure for using the Print Setup dialog box to set print options is shown in [Procedure 3-2, Setting Up and Selecting Your Printer](#), on page [3-5](#).



Procedure 3-2. Setting Up and Selecting Your Printer

Printer setup and selection is handled through the **File** menu. Use the following to select a printer and specify its setup.

1. Click the **File** menu.




Figure 3-4. Print Setup option

Result: The **File** options display.

2. Click **Print Setup**.

Result: The standard **Print Setup** Windows dialog box displays. See [Figure 3-5](#).

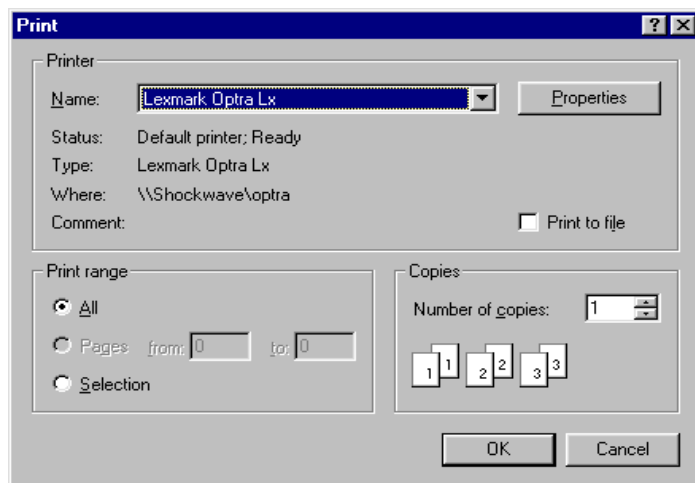


Figure 3-5. Call Slip Dæmon/Windows Print dialog box

3. Follow normal steps to customize your printer setup in Windows using standard Windows **Help (F1)** functions to assist with this process.

Result: This identifies how and where the information is to print.

4. Click **OK** to store the printer selections for the current Call Slip Dæmon session.

The procedure for printing highlighted call slip requests is shown in [Procedure 3-3, Printing Highlighted Call Slip Request\(s\)](#), on page 3-6.



Procedure 3-3. Printing Highlighted Call Slip Request(s)

Use the following to print highlighted call slip requests.

1. Click the **Pending** tab.

Result: This displays the list of pending call slip requests.

2. Click to highlight one or more call slip requests.

Result: This identifies the call slips to be printed.

3. Select **Print** from the **File** menu.

Result: The **Print** options display.

4. Select **Selected** from the cascading menu, or press **Ctrl+S**.

Result: The request(s) that is highlighted is sent to the printer.

The procedure for printing all new call slip requests is shown in [Procedure 3-4, Printing All New Call Slip Requests](#), on page [3-7](#).



Procedure 3-4. Printing All New Call Slip Requests

Use the following to print all the new call slip requests.

1. Click the **Pending** tab.

Result: This displays the list of pending call slip requests. See [Total Requests & Printed Requests](#) on [page 3-3](#) for a description of how to determine the number of call slip requests that have not yet been printed.

2. Select **Print** from the **File** menu.

Result: The **Print** options display.

3. Select **New** from the cascading menu, or press **Ctrl+N**.

Result: All of the new call slip requests that have not yet been printed are printed consecutively in the order in which they are displayed. See [Sort Pending Requests by](#) on [page 4-3](#) for more information about sort order.

Each call slip request prints on a separate page.

NOTE:

File>Print>New is enabled only if there are new call slip requests that have not yet been printed.

The procedure for printing all call slip requests is shown in [Procedure 3-5, Printing All Call Slip Requests](#), on page [3-8](#).



Procedure 3-5. Printing All Call Slip Requests

Use the following to print all call slip requests.

1. Click the **Pending** tab.
2. Select **Print** from the **File** menu.
3. Select **All** from the cascading menu.

Result: All of the call slip requests on the **Pending** tab are printed consecutively in the order in which they are displayed. See [Sort Pending Requests by](#) on [page 4-3](#) for more information about sort order.

Each call slip request prints on a separate page.

Filling a Call Slip Request

A call slip request may be processed whether or not it has been printed. When a call slip request is processed from the **Pending** tab, the request is either filled, not filled or reassigned. (Reassigned is described in more detail in [Reassign Request](#) on [page 3-18](#).)

What it means to fill a pending call slip request may vary depending on the Call Slip Print Group being processed and how that Call Slip Print Group is configured in the System Administration module.

When a request is processed but not filled, the request is assigned a No Fill Reason such as Damaged Materials (DM), Not Found (NF), or Wrong Location (WL). See “*Call Slip (Closed Stacks)*” in the System-Wide Configuration section of the *Voyager System Administration User’s Guide* for more information.

The procedure for processing a pending call slip request using fill and no fill options is shown in [Procedure 3-6, Processing a Pending Request Using Fill / No Fill Options](#), on page [3-8](#).



Procedure 3-6. Processing a Pending Request Using Fill / No Fill Options

Use the following to process a pending call slip request.

Ex Libris (USA) Inc.
See notice on first page

1. Select the request to be processed from the **Pending** tab.

Result: This highlights the request and makes it active.

2. Select the appropriate option to fill or no fill the pending call slip request using one of the following methods.
 - Select from the drop-down list at the bottom of the **Pending** tab
 - Select from the **Edit** menu
 - Right-click the call slip request and select from the list provided

Result: This identifies how to process the pending request.

3. (Optional) Enter **Reply Note** text, up to 100 characters, to the requester. This can be done dynamically for each individual call slip request.

Result: The **Reply Note** displays as part of email sent to requesters of filled and non-filled call slip requests. The **Reply Note** also displays in the Pending Requests Area of the WebVoyage Patron Information Page for non-filled requests.

4. Click the **Process** button.

Result: The request transfers from the **Pending** tab to the **History** tab. The **History** tab displays all of the requests that have been processed during the current call slip session.

Use the **Unprocess** button to undo requests that have processed during the current call slip session. See [Figure 3-13](#).

NOTE:

When a Call Slip Dæmon session is ended/exited, the **History** tab is cleared for the next call slip processing session. **Unprocess** works only during a current session.

5. (Optional) Link an item to the call slip request.

Result: If a request that is not linked to an item is processed, the **Link Item** dialog box displays. See [Link Item to Request](#) on [page 3-10](#) for more information.

The **Link Item** dialog box also displays anytime an attempt is made to process and fill a call slip request if the **Force Item Search on Process** check box in Preferences is checked. See [Preferences](#) on [page 4-1](#) for more information about the **Force Item Search on Process** check box.

Also, if a call slip request is linked to an existing item that does not have a barcode, a barcode can be added to the item before processing the call slip request. See [Adding a Barcode to a Requested Item](#) on [page 3-14](#) for more information.

Link Item to Request

Your library may allow patrons in OPAC to submit call slip requests that are not linked to existing items. For those requests to be filled in Call Slip Dæmon, they must be linked to an existing item or to a new item that is created. This capability is available with Call Slip Dæmon.

Additionally, Call Slip Dæmon allows one to change the item to which any call slip request is linked. Perhaps staff needs to link a different copy of the item to the call slip request. Call Slip Dæmon allows one to override the item that is associated with a request and link a different item to the request.

The **Link Item** dialog box (see [Figure 3-6](#)) displays in the following situations.

- **Link Item to Request** from the **Edit** menu is selected.
- **Ctrl+L** is entered.
- An attempt is made to fill a request that is not linked to an item.

NOTE:

The **Link Item** dialog box also displays when the **Force Item Search on Process** check box is checked in Preferences and an attempt is made to process and fill a call slip request.

The procedure for linking an existing item to a Call Slip request is shown in [Procedure 3-7, Linking Existing Item to Call Slip Request](#), on page [3-10](#).



Procedure 3-7. Linking Existing Item to Call Slip Request

Use the following to link an item to a call slip request.

1. Select the call slip request that you want to link to an item on the **Pending** tab.

Result: This highlights the request to be processed.

2. Select **Link Item to Request** from the **Edit** menu, press **Ctrl+L**, or right-click the mouse on the call slip request and select **Link Item to Request**.

Result: The **Link Item** dialog box displays. See [Figure 3-6](#).



Figure 3-6. Call Slip Daemon Link Item Dialog Box

3. Enter or scan the barcode of the item to link to the call slip request in the **Barcode** field.

(Or click **Search By Bib** and follow the steps in [Procedure 3-10](#), [Select Another Item](#), on page [3-17](#).)


Result: This identifies the item to link to the pending request.

NOTE:

If the barcode entered is the same as the barcode associated with the request, the request processes automatically and moves to the **History** tab.

4. Click the **Search** button

Result: The **Link Item** dialog box expands to include a search results box. See [Figure 3-7](#).

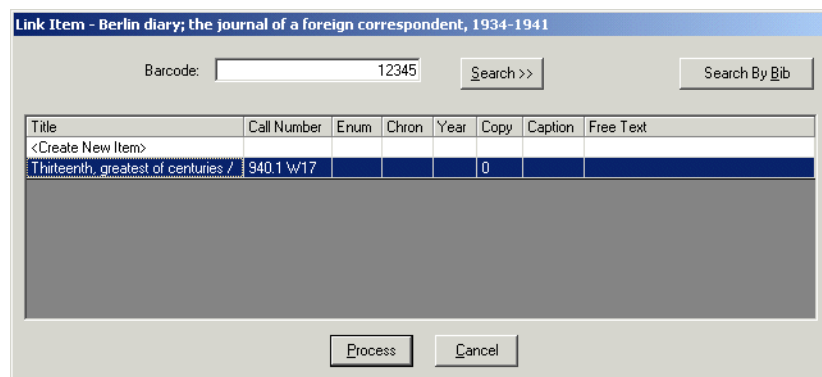

Title	Call Number	Enum	Chron	Year	Copy	Caption	Free Text
<Create New Item>							
Thirteenth, greatest of centuries /	940.1 w17				0		

Figure 3-7. Call Slip Daemon Link Item Dialog Box Expanded

If the barcode that is entered is associated with any items, the titles of those items display in the search results box. The **<Create New Item>** command also displays in the search results box. This command may display differently as a result of local customizing. [NewItem= Variable](#) on [page 4-17](#) for more information.

If the barcode that is entered is not associated with any existing items, only the **<Create New Item>** command displays in the search results box.

5. Click one of the existing items.

(Or click **Search By Bib** and follow the steps in [Procedure 3-10, Select Another Item](#), on page [3-17](#).)

Result: This highlights a specific item to be selected for the pending call slip request.

6. Click **Process**.

Result: The call slip request is linked and transferred from the **Pending** tab to the **History** tab.

Call slip requests processed during the call slip session remain on the **History** tab until the end of the call slip session.

NOTE:

You can unprocess a call slip request by selecting the request on the **History** tab and clicking the **Unprocess** button. If an existing item is linked to a call slip request, unprocessing the call slip request unlinks the call slip request and returns the call slip request to the **Pending** tab in its original state.

The procedure for creating a new item link to a Call Slip request is shown in [Procedure 3-8, Creating a New Item to Link to a Call Slip Request](#), on page [3-12](#).



Procedure 3-8. Creating a New Item to Link to a Call Slip Request

Use the following to create a new item to link to a call slip request.

1. Select the call slip request that you want to link to an item on the **Pending** tab.

Result: This highlights the request to be processed.

2. Select **Link Item to Request** from the **Edit** menu, press **Ctrl+L**, or right-click the call slip request; and select **Link Item to Request**.

Result: The **Link Item** dialog box displays. See [Figure 3-6](#).

3. Enter or scan the barcode of the item to link to the call slip request in the **Barcode** field.

Result: This identifies the item to link to the pending call slip request.

4. Click the **Search** button

Result: The **Link Item** dialog box expands to include a search results box. See [Figure 3-7](#).

5. Click **<Create New Item>** in the search results box.

Result: This provides the layout for entering new items to be linked.

6. Click **Process**.

Result: The newly created item is linked to the pending call slip request.

NOTE:

It is possible to create a new item with a duplicate barcode. The new item created has the same barcode as the one displayed on the expanded **Link Item** dialog box. If existing items are displayed on the **Link Item** dialog box and **<Create New Item>** is selected, the newly-created item receives the same barcode as the other items. There is no warning if the new item created has the same barcode as existing items.

7. (Optional) Click **Yes** or **No** to respond to a verification message. The verification message only displays if the **Verify Create New Item or Add Barcode** process option is selected in **Preferences**. See [Figure 3-8](#).



Figure 3-8. Verification Message for Create New Item

Result: The call slip request is transferred from the **Pending** tab to the **History** tab.

The call slip requests processed during the call slip session remain on the **History** tab until the end of the call slip session.

NOTE:

One can unprocess a call slip request by selecting the request on the **History** tab and clicking the **Unprocess** button. If a new item record is created and linked to a call slip request, unprocessing that call slip request unlinks the call slip request from the newly-created item, deletes the newly-created item, and returns the call slip request to the **Pending** tab in its original state.

It is possible for a call slip request to be linked to an existing item that does not have a barcode. Call Slip Dæmon allows one to add a barcode to an item before processing the call slip request.

The procedure for adding a barcode to a requested item is shown in [Procedure 3-9, Adding a Barcode to a Requested Item](#), on page [3-14](#).



Procedure 3-9. Adding a Barcode to a Requested Item

Use the following to add a barcode to a requested item that does not have a barcode.

1. Select the call slip request on the **Pending** tab.

Result: This highlights the request and makes it active.

2. Select **Link Item to Request** from the **Edit** menu, press **Ctrl+L**, or right-click the call slip request; and select **Link Item to Request**.

Result: The **Link Item** dialog box displays. See [Figure 3-6](#).

3. Enter or scan the barcode to be added into the **Barcode** field.

Result: This identifies the barcode to be added.

4. Click the **Search** button.

Result: The **Link Item** dialog box expands to include a search results box, and the **<Add Barcode to Item>** command displays. See [Figure 3-9](#). This command may display differently as a result of local customizing. See [AddBarcode=Variable](#) on [page 4-18](#) for more information.

If the barcode entered is associated with any items, the titles of those items also display in the search results box.

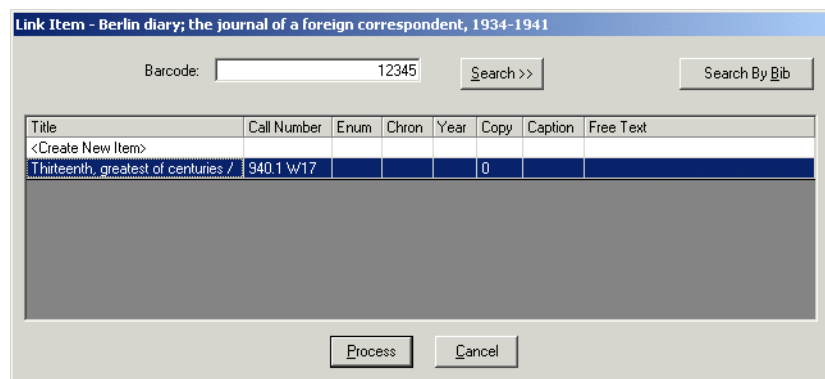


Figure 3-9. Call Slip Dæmon Link Item Dialog Box - Expanded

5. Click the **<Add Barcode to Item>** command.

Result: This identifies that the barcode is to be added to the item.

6. Click the **Process** button.

Result: The barcode is added to the linked item. The call slip request is processed and transferred from the **Pending** tab to the **History** tab.

-
7. (Optional) Click **Yes** or **No** to respond to a verification message. The verification message only displays if the **Verify Create New Item or Add Barcode** process option is selected in **Preferences**.

Result: This steps confirms or cancels the request to add a barcode.

NOTE:

One can unprocess a call slip request by selecting the request on the **History** tab and clicking the **Unprocess** button. Unprocessing a call slip request that contains a newly-added barcode deletes the barcode from the linked item and returns the call slip request to the **Pending** tab in its original state.

The call slip requests processed during the call slip session remain on the **History** tab until the end of the call slip session.

Select Another Item

The Call Slip module provides the option for the Call Slip operator to select another item for an existing call slip request. See [Figure 3-10](#).




Figure 3-10. Select another item (Edit menu)

The Call Slip operator may choose to select another item attached to the same bibliographic record or may select an item attached to an entirely different bibliographic record.

This feature displays a list of all items attached to the bibliographic record with which the call slip request is associated.

The procedure for selecting another item is shown in [Procedure 3-10, Select Another Item](#), on page [3-17](#).



Procedure 3-10. Select Another Item

Use the following to select another item for a pending request.

1. Highlight the pending call slip request to which you want to select another item.

Result: The call slip request to which a new item is to be attached is identified.

2. Click **Edit** (or right click highlighted request).

Result: This displays the **Edit** options.

3. Click **Select another item from this Bib.**

Result: The **Link Item** dialog box for **Select another item from this Bib** displays. See [Figure 3-11](#).

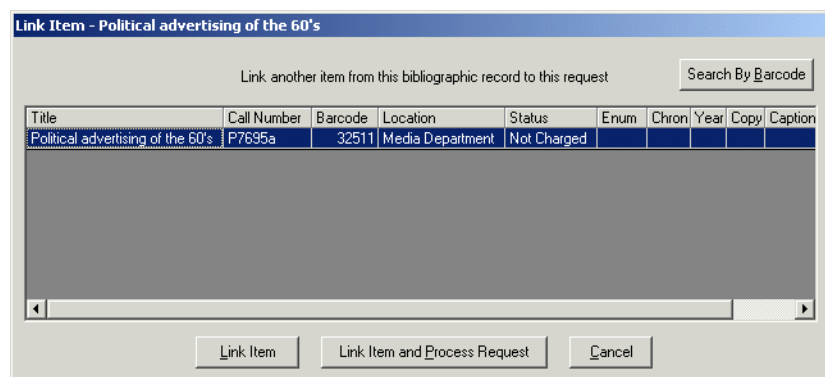


Figure 3-11. Link Item dialog box for Select another item from this Bib

NOTE:

If there are no additional items associated with the bibliographic record for the call slip request, an information message displays. See [Figure 3-12](#).



Figure 3-12. No Other Items for Bib informational message

4. Click the item record to be selected from the list.

Result: This highlights the item to be linked.

5. (Optional) Click **Search by Barcode** to identify a different bibliographic record and item to select for the call slip request and complete the item linking using [Procedure 3-7, Linking Existing Item to Call Slip Request](#), on page 3-10.

Result: This displays the **Link Item** dialog box as seen in [Figure 3-6](#).

6. Click **Link Item and Process Request**, click **Link Item**, or click **Cancel**.

Result: The substitute item is linked to the request and processed, simply linked and displayed on the **Pending** tab, or the transaction is cancelled.



TIP:

Double-click the item to link and fulfill the request in one step.

Reassign Request

The Call Slip Reassign Request feature permits staff using Call Slip Dæmon to direct a call slip request to another Call Slip queue before the request has been processed. This option exists for call slip requests with or without items linked to it.

Once reassigned, the call slip displays in the new queue specified by the Call Slip Dæmon operator and is automatically removed from the reassigning queue.

After a call slip is reassigned, the status of the Call Slip request that displays in the Circulation module and the WebVoyage module is Reassigned. The Reassigned status behaves the same as the Accepted status.

The procedure for reassigning call slip requests is shown in [Procedure 3-11, Call Slip Request Reassignment](#).



Procedure 3-11. Call Slip Request Reassignment

Use the following to reassign a pending call slip request.

1. Highlight the pending call slip request to be reassigned.

Result: The call slip request to be reassigned is identified.

2. Click **Edit** (or right click highlighted request).

Result: This displays the **Edit** options that include the **Reassign Request** option.

NOTE:

Reassign Request is an active option for individual call slip requests. When you highlight multiple call slip requests, this option is not available.

3. Click **Reassign Request**.

Result: A list of Call Slip queues displays.

4. Select the **Reassignment Queue**, and click **OK** or **Cancel**.

Result: The call slip request is reassigned to the new Call Slip Queue or the operation is cancelled.

When reassigned, the call slip request displays in the reassigned queue with the note **(REASSIGNED)**. See [Figure 3-13](#).

Request Id/Date:	235 - 9/19/2003 11:32 AM (REASSIGNED)
Call Number:	DA687.T7 H5
Barcode:	23529
Title:	Tower of London.
Author:	Hibbert, Christopher, 1924-
Located at:	Main

Figure 3-13. Call Slip Reassigned Status Message

**IMPORTANT:**

Once a call slip request is reassigned, this action cannot be unprocessed as with other requests that display on the History tab. A reassignment action immediately transfers a call slip request to the specified queue, and it does not display on the History tab of the reassigning queue.

NOTE:

If a call slip is reassigned to a Call Slip queue that is set to automatically print call slips, the **(REASSIGNED)** status is immediately replaced with the printed status.

Call Slip Reassignment History

The system tracks the history of call slip requests that are reassigned and provides the ability to print and view this reassignment information. The benefit of tracking this information is to avoid reassigning a call slip request to a queue where it has already been.

The procedure for viewing call slip reassignment history is shown in [Procedure 3-12, View Call Slip Reassignment History](#).



Procedure 3-12. View Call Slip Reassignment History

Use the following to view call slip reassignment history.

1. Highlight the pending call slip request whose history you want to view.

Result: The call slip request whose history is to be viewed is identified.

2. Click **Edit**.

Result: This displays the **Edit** options that include the **View Reassignment History** option. See [Figure 3-10](#).

NOTE:

View Reassignment History is an active option for individual call slip requests. When you highlight multiple call slip requests, this option is not active.

3. Click **View Reassignment History**.

Result: The history for the selected call slip request displays. (The history displays in reverse chronological order.) See [Figure 3-14](#).

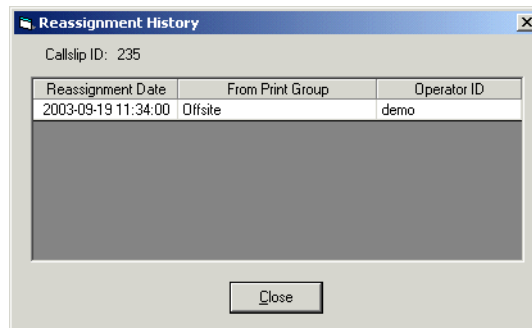


Figure 3-14. View Reassignment History dialog box

NOTE:

If there is no reassignment history, the system displays **No History Items Found**.

4. Click **OK**.

Result: This closes the open history dialog box.

Displaying Processed Requests (History Tab)

From the **History tab**, you can do the following.

- View the list of call slip requests that have been processed during the current Call Slip Dæmon session
- Unprocess call slip requests that have been processed during the current Call Slip Dæmon session

View the List of Processed Call Slip Requests

To view the list of call slip requests that you have processed during your current call slip session, click the **History** tab. The **History** tab displays the Request ID number and Request Action such as Filled, Not Filled, or Error of each processed

call slip request. The processed requests remain on the **History** tab until the Call Slip Dæmon session is ended by exiting Call Slip Dæmon or until the request(s) is unprocessed.

There are numerous reasons why one may want to unprocess a call slip request that is processed during the current Call Slip Dæmon session. For example, the wrong call slip request may have been processed, a request may have been processed with the wrong Fill Reason, or a call slip request may have been linked to the wrong item.



Procedure 3-13. Unprocessing a Processed Call Slip Request

Use the following to unprocess a call slip request.

1. Click the **History** tab.

Result: The processed call slip requests display.

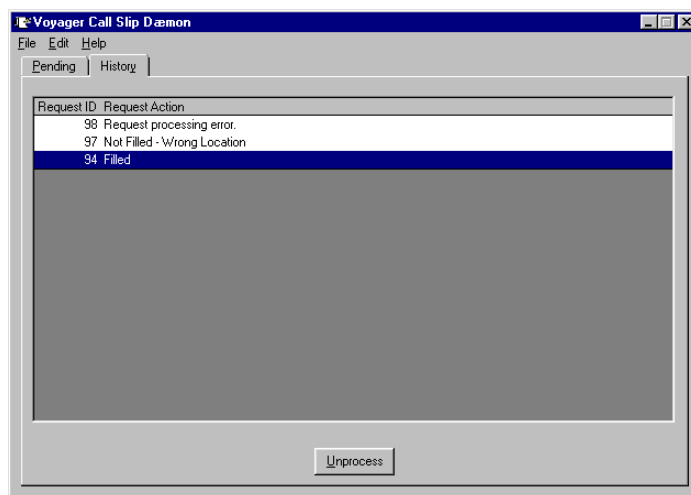


Figure 3-15. Call Slip Dæmon History tab

2. Click the processed call slip request that needs to be unprocessed.

Result: This identifies the call slip request to be unprocessed.

NOTE:

The **Unprocess** button is enabled only if one of the processed call slip requests is highlighted on the **History** tab.

3. Click the **Unprocess** button.

Result: This deletes the request from the **History** tab and transfers the request back to the **Pending** tab.

NOTE:

If you linked an existing item to a call slip request, unprocessing the call slip request unlinks the call slip request and returns that call slip request to the **Pending** tab in its original state.

If you have created a new item record and linked it to a call slip request, unprocessing that call slip request unlinks the call slip request from the newly-created item, deletes the newly-created item, and returns the call slip request to the **Pending** tab in its original state.

If you added a barcode to an item that was linked to a call slip request, unprocessing the call slip request deletes the newly-created barcode from the linked item and returns the call slip request to the **Pending** tab in its original state.

See [Link Item to Request](#) on [page 3-10](#) for more information about linked items.

Ex Libris (USA) Inc.
See notice on first page

Contents

Overview	4-1
Preferences	4-1
• New Request Options	4-2
Update and Email Send Interval	4-3
Use Alert Sound	4-3
Automatically Print New Requests	4-3
• Sort Pending Requests by	4-3
• Default Find Method	4-4
• Process Options	4-4
Force Item Search on Process	4-4
Verify Create New Item or Add Barcode	4-5
• Printer Options	4-5
Tab Width	4-5
Standard Font	4-5
Alternate Font	4-5
• Email Options	4-6
Regular Requests	4-6
Universal Borrowing Requests	4-6
• Save Preferences	4-7
Defining the Callslip.ini File	4-7
• Callslip.ini File Example	4-8
• General Stanza	4-15
LocationCode= Variable	4-15
NewItem= Variable	4-17
AddBarcode= Variable	4-18
• Preferences Stanza	4-19
• Print Options Stanza	4-19

Contents

• Email Options Stanza	4-19
• Template Stanzas	4-20
Action Codes	4-20
Field Codes	4-21
MARC Variable Data	4-23
Formatting the Data	4-25
Error Handling	4-26
Call Slip Reassignment History	4-26
Call Slip Promote History	4-27
Initiating and Ending Action Codes	4-27
Printing Field Information	4-27
Printing in the Alternate Font	4-28
Changing Font Size	4-29
Inserting a Blank Line	4-29
Inserting a Tab	4-29
Example	4-29

Ex Libris (USA) Inc.
See notice on first page

Overview

Voyager Call Slip Dæmon provides many options to tailor the system to your needs. This tailoring is handled through the Preferences function located in the **File** menu and through the options specified in the `callslip.ini` file. The following sections describe in detail the options available and how to customize them to meet your requirements.

Preferences

You can define preferences for Call Slip Dæmon by selecting **Preferences** from the **File** menu to display the **Preferences** dialog box. See [Figure 4-1](#). In the **Preferences** dialog box, you can specify the following.

- Select automatic Call Slip Dæmon features
- Define how automatic features are to perform
- Define how certain aspects of Call Slip Dæmon display
- Define certain print options with which a call slip request is printed

The following options in the **Preferences** dialog box automatically update the `[Preferences]` stanza of the `callslip.ini` file.

- Update and Email Send Interval (1-99 minutes)
- Use alert sound

- Automatically print new requests
- Sort Pending Requests by
- Default Find Method

Additionally, the **Printer Options** information in the **Preferences** dialog box automatically updates the [Print Options] stanza of the callslip.ini file.

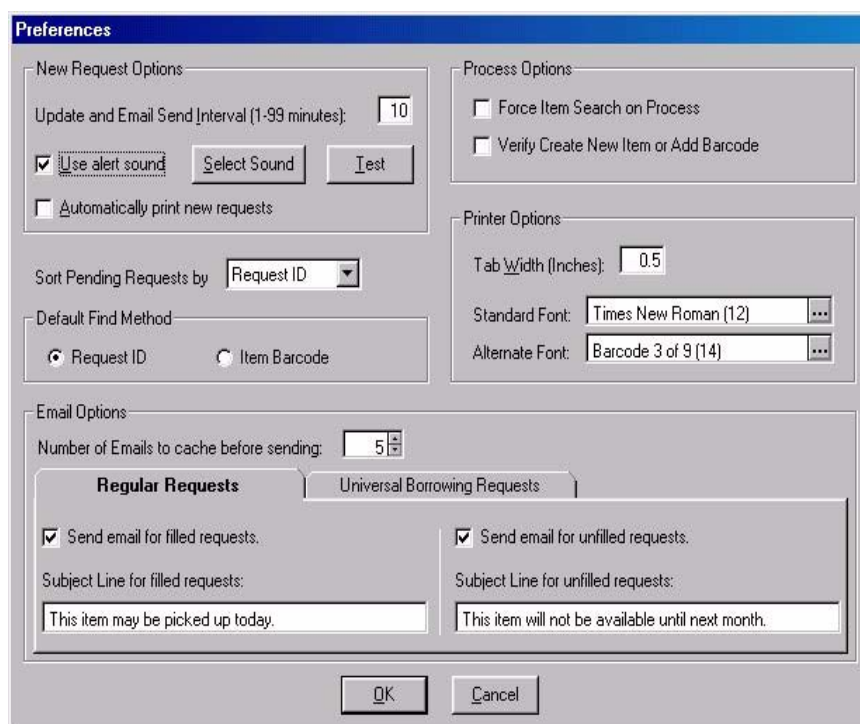


Figure 4-1. Call Slip Dæmon Preferences dialog box

New Request Options

Under New Request Options, you can specify the following.

- The frequency with which the system automatically updates the **Pending** tab
- The use of an audio alert for new pending call slip requests received
- The automatic printout of new call slip requests

Update and Email Send Interval

Use the **Update and Email Send Interval** to specify the number of minutes from 1 to 99 that elapses before the Call Slip Dæmon polls the server for new call slip requests and checks the queue for emails to be sent. When the **Update and Send Email Interval** elapses, the server is automatically queried for new pending call slip requests and checked for new emails to distribute. Subsequently, a list of all new pending call slip requests is returned to the **Pending** tab, and email messages are sent.

The setting for this option depends on the number of requests you process and your procedures. If your library retrieves requests one at a time as they are received, the interval specified should be short so that individual requests display sooner. If you retrieve requests in a batch the interval does not need to be as short.

NOTE:

The **Update and Send Email Interval** option works in conjunction with the **Number of Emails to cache before sending** option. See [Email Options](#) on [page 4-6](#). Email messages are sent when *one* of these parameters is met.

Use Alert Sound

Use the **Use alert sound** to specify if an audio signal is to be used to notify staff when new call slip requests are placed on the **Pending** tab. After the **Use alert sound** check box is selected, use the **Select Sound** button to specify the location of the audio file to be used. To confirm the options specified, use the **Test** button to test the audio file selected.

Automatically Print New Requests

Use the **Automatically print new requests** option to have Call Slip Dæmon automatically print new pending call slip requests as they are sent to the **Pending** tab.

Sort Pending Requests by

Use the **Sort Pending Requests by** option, to determine the sort order of the call slip requests on the **Pending** tab. The available sort choices are as follows:

- Request ID
- Call Number
- Title

Select the sort order that best matches your requirements. You may want to set the sort order to match your shelf order if call slip requests are processed in batches.

Default Find Method

Use the **Default Find Method** option to enhance the workflow processing of call slip requests. This option determines the default cursor placement in the **Find Request ID** field or the **Find Item Barcode** field on the **Pending** tab. Select the most common search type as the default, by **Request ID** or by **Item Barcode**.

Process Options

Preferences provides two **Process Options**.

- **Force Item Search on Process**
- **Verify Create New Item or Add Barcode**

Force Item Search on Process

Use the **Force Item Search on Process** option to add a verification step to the call slip processing procedure. When this option is selected, Call Slip Dæmon displays the **Link Item** dialog box after the call slip operator has selected a request and clicks **Process**. This forces the call slip operator to enter a barcode in order to complete processing of the request. This additional step ensures that the call slip operator is processing the correct request with the correct item.

If the barcode entered on the **Link Item** dialog box matches the barcode tied to the call slip request, the request processes and is automatically moved to the **History** tab when the **Search** button is clicked.

NOTE:

When the **Force Item Search on Process** option is not selected, the **Link Item** dialog box functions somewhat differently. After you enter the barcode and click the **Search** button, the expanded **Link Item** dialog box displays. Processing of the call slip request is not yet complete.

If the barcode that the call slip operator types or scans on the **Link Item** dialog box is not the same as the barcode tied to the call slip request, the expanded **Link Item** dialog box displays enabling the operator to use the Link Item functions to continue processing the call slip request. See [Link Item to Request](#) on [page 3-10](#) for additional information.

Verify Create New Item or Add Barcode

Use the **Verify Create New Item or Add Barcode** option to force a verification message to display when a call slip operator attempts to create a new item or add a barcode to an existing item from the **Link Item** dialog box. See Figure 3-8 on page 3-14.

If this option is not selected, a verification message will not display when a call slip operator attempts to create a new item or add a barcode to an existing item from the **Link Item** dialog box.

See [Creating a New Item to Link to a Call Slip Request](#) on [page 3-12](#), and see [Adding a Barcode to a Requested Item](#) on [page 3-14](#) for additional information.

Printer Options

There are three **Printer Options**.

- **Tab Width**
- **Standard Font**
- **Alternate Font**

Tab Width

The **Tab Width** option sets the spacing, in inches, for the tab command used in the [Print Template] stanza of the `callslip.ini` file.

Standard Font

Use the **Standard Font** option to select the standard font that is used to print call slips. Click the ellipsis to display font choices from which to select.

Alternate Font

Use the **Alternate Font** option to select an alternate font to be used to print call slips. Click the ellipsis to display font choices from which to select. As in Figure 4-1, an alternate font, Barcode 3 of 9 for example, can be selected to print barcode information on the call slip request printout.

The call slip operator can use the printed barcode on the call slip request printout to scan the barcode into the **Find Item Barcode** field on the **Pending** tab. This will aid in more quickly processing call slip requests. See [Figure 4-7](#) on page 4-31 for an example of a barcode printed on a call slip request printout.

To learn more about using the alternate font in the call slip print template in the [Print Template] stanza of the callslip.ini file, see [Defining the Callslip.ini File](#) on [page 4-7](#).

Email Options

Use the **Number of Emails to cache before sending** option within **Email Options** to group the distribution of emails into a batch to be sent at one time. Email messages to be sent queue in cache until the number specified in this option is reached. When the setting is 0 (zero), each email is sent as it is created. The maximum setting for **Number of Emails to cache before sending** is 100. Any email messages remaining in cache are sent when Call Slip Dæmon is exited.

NOTE:

The **Number of Emails to cache before sending** option works in conjunction with the **Update and Send Email Interval** option (see [Update and Email Send Interval](#) on [page 4-3](#)).



IMPORTANT:

Email messages are sent when one of these parameters (Number of Emails to cache before sending option or Update and Send Email Interval option) is met.

Regular Requests

Use the options on the **Regular Requests** tab to indicate when email requests are to be sent and specify the content of the email subject line for call slip requests in a regular (non-Universal Borrowing) environment.

Select **Send email for filled requests** and/or **Send email for unfilled requests** to specify if emails are to be sent for filled requests and/or unfilled requests. Enter the subject line content up to 80 characters in length for each email type, filled or unfilled, that you choose to send.

Universal Borrowing Requests

Use the options on the **Universal Borrowing Requests** tab to indicate when email requests are to be sent and specify the content of the email subject line for call slip requests in a Universal Borrowing environment.

Select **Send email for filled requests** and/or **Send email for unfilled requests** to specify if emails are to be sent for filled requests and/or unfilled requests. Enter the subject line content up to 80 characters in length for each email type, filled or unfilled, that you choose to send.

Save Preferences

Click the **OK** button to save the selections you have made and close the Preferences dialog box.

Click the **Cancel** button to close the Preferences dialog box without saving.

Defining the Callslip.ini File

Upon installation, the Voyager Call Slip Dæmon initialization file is located in the `.../Voyager/misc` directory. Your library may have customized the name of the main directory under which Voyager resides.

The `callslip.ini` file contains the following stanzas.

- [General]
- [Preferences]
- [Print Options]
- [Routing Slip Print Template]
- [Call Slip Print Template]
- [Email Options]
- [Email Template Filled]
- [Email Template UnFilled]
- [Email Template UB Filled]
- [Email Template UB UnFilled]

The [Preferences] and [Print Options] stanzas do not need to be configured from within the `callslip.ini` file. These stanzas directly reflect configuration selections that are made from the **File>Preferences** menu options in Call Slip Dæmon.

The information generated from the [Call Slip Print Template] stanza can be printed and used as a pull slip for patron requests.

The following stanzas determine the content and format of information printed as a result of processing call slip requests in Call Slip Dæmon.

-
- [Routing Slip Print Template]
 - [Call Slip Print Template]
 - [Email Template Filled]
 - [Email Template UnFilled]
 - [Email Template UB Filled]
 - [Email Template UB UnFilled]

Callslip.ini File Example

Figure 4-2 is an example of the callslip.ini file.

Line#	
1	[General]
2	LocationCode=
3	NewItem=<Create New Item>
4	AddBarcode=<Add Barcode to Item>
5	
6	[Preferences]
7	Alert=1
8	AutoPrint=0
9	SortPending=R
10	DefaultFind=0
11	Interval=10
12	ForceSearch=0
13	VerifyNewAdd=0
14	Sound=
15	
16	[Print Options]
17	FontName=Times New Roman
18	FontSize=12
19	TabWidth=0.5
20	AlternateFontName=Barcode 3 of 9
21	AlternateFontSize=14
22	
23	[Routing Slip Print Template]
24	Route Item To:
25	\
26	\
27	Library: \F600
28	Location: \F601
29	Address: \F602
30	\F603
31	\F604

Figure 4-2. Callslip.ini file example

```
Line#
32  \F605
33  \F606
34  \F607, \F608 \F609
35  \F610
36
37
38  [Call Slip Print Template]
39  Patron Barcode:\T\A*\F525*\a
40  \
41  \
42  \
43  Call Number:\T\F301
44  Author:\T\F203
45  Title:\T\F202
46  Location:\T\F411
47  Patron Name:\T\F509
48  Enumeration:\T\F409
49  Request date:\T\F102
50  Pickup Location:\T\F105
51  \
52  Promote Request History:
53  \F530: (Date=Promote Date:,Database=Database
    Name:,Cluster=Cluster Name:)
54  \
55  \
56  Reassignment History:
57  \F540: (Date=Date,From=From Print
    Group,By=Operator)
58  \
59  Reply to Reader:          Item is not
    available...
60  \F901
61  \
```

Figure 4-2. Callslip.ini file example

Line#	
62	\
63	\A\F101\a
64	\
65	\
66	\
67	(Request number)
68	\
69	\S24\F509\s
70	
71	[Email Options]
72	CacheCount=5
73	RegFilledActive=Y
74	RegFilledSubject=This item may be picked up today.
75	RegUnFilledActive=Y
76	RegUnFilledSubject=This item will not be available until next month.
77	UBFilledActive=Y
78	UBFilledSubject=This item may be picked up in 3 days.
79	UBUnFilledActive=Y
80	UBUnFilledSubject=This Item is no longer available.
81	
82	
83	[Email Template Filled]
84	\
85	Dear: \F509
86	\
87	The Item you requested has been retrieved and is now available.\
88	\
89	Call Number: \F301
90	Author: \F203

Figure 4-2. Callslip.ini file example

```
Line#
91  Title: \F202
92  Location: \F411
93  Enumeration: \F409
94  Request date: \F102
95  \
96  \
97  Note from the Library:\
98  \F110
99  \
100 If you need to reply to this message, reply
    to: xxx@yyy.zzz\
101 \
102 \
103 \
104 (Request number)\
105 \
106 \F101
107 \
108
109 [Email Template UnFilled]
110 \
111 Dear: \F509
112 \
113 The Item you requested is not available.\
114 \
115 Reason: \F900
116 \
117 Call Number: \F301
118 Author: \F203
119 Title: \F202
120 Location: \F411
121 Enumeration: \F409
122 Request date: \F102
```

Figure 4-2. Callslip.ini file example


```
Line#
123  \
124  \
125  Note from the Library:
126  \F110
127  \
128  If you need to reply to this message, reply
    to: xxx@yyy.zzz\
129  \
130  \
131  \
132  (Request number)\
133  \
134  \F101
135  \
136
137
138  [Email Template UB Filled]
139  \
140  Dear: \F509
141  \
142  The Item you requested from another library
    has been retrieved and is now in transit.\
143  \
144  Call Number: \F301
145  Author: \F203
146  Title: \F202
147  Location: \F411
148  Enumeration: \F409
149  Request date: \F102
150  \
151  \
152  Note from the Library:\
153  \F110
```

Figure 4-2. Callslip.ini file example

```
Line#
154  \
155  If you need to reply to this message, reply
    to: xxx@yyy.zzz\
156  \
157  \
158  \
159  (Request number)\
160  \
161  \F101
162  \
163
164  [Email Template UB UnFilled]
165  \
166  Dear: \F509
167  \
168  The Item you requested from another library
    is not available.\
169  \
170  Reason: \F900
171  \
172  Call Number: \F301
173  Author: \F203
174  Title: \F202
175  Location: \F411
176  Enumeration: \F409
177  Request date: \F102
178  \
179  \
180  Note from the Library:\
181  \F110
182  \
183  If you need to reply to this message, reply
    to: xxx@yyy.zzz\
```

Figure 4-2. Callslip.ini file example

Line#

```
184 \
185 \
186 \
187 (Request number)\
188 \
189 \F101
190 \
```

Figure 4-2. Callslip.ini file example

General Stanza

The [General] stanza stores the location code and the label content for the new item and add barcode commands. See lines 1 through 4 in Figure 4-2. The following information provides a detailed description of the variables in the [General] stanza.

LocationCode= Variable

The first time Voyager Call Slip Dæmon is accessed a dialog box listing the call slip groups created in Voyager System Administration displays. See Figure 1-3 on page 1-4. When the appropriate call slip group is selected, the group name is saved in the LocationCode= variable in the [General] stanza of the callslip.ini file.

Storing the LocationCode= variable in callslip.ini conveniently saves the call slip operator an extra step at login. However, if the call slip group needs to be changed for a particular workstation, simply delete the variable specified after LocationCode= in the callslip.ini file stored on that workstation. The next time Voyager Call Slip Dæmon is run on that workstation the Select Call Slip Group dialog box displays the list of call slip groups as defined in Voyager System Administration from which to select.

NOTE:

The LocationCode= variable can be entered manually. However, allowing the system to store the variable avoids any possible errors that may occur by doing it manually. Entering incorrect information in the LocationCode= variable causes Voyager Call Slip Dæmon to fail to run.

The following approach is recommended if the call slip group needs to be selected each time Voyager Call Slip Dæmon is run.

-
- Delete the value that is entered for the `LocationCode=` variable in the `[General]` stanza of the `callslip.ini` file and save the file.
 - Set the `callslip.ini` file to read-only.

This causes the **Call Slip Group** dialog box to display for each login session. This is a useful technique to use if you plan to use a single workstation for processing call slip requests for multiple call slip groups.

NOTE:

Each time Voyager Call Slip Dæmon is run, call slip **Preferences** resets to the options specified in the read-only version of `callslip.ini`.



Procedure 4-1. Saving Callslip.ini As Read-Only

Use the following to save the `callslip.ini` file as read-only.

1. Right-click the `callslip.ini` file.

Result: The **File** menu displays.

NOTE:

Upon installation, the `callslip.ini` file is located in the `.../Voyager/misc/` directory. Your library may have customized the name of the main directory under which Voyager resides. Check with your system administrator for your location's directory path structure.

2. Select **Properties** from the **File** menu.

Result: The **callslip.ini Properties** dialog box displays.

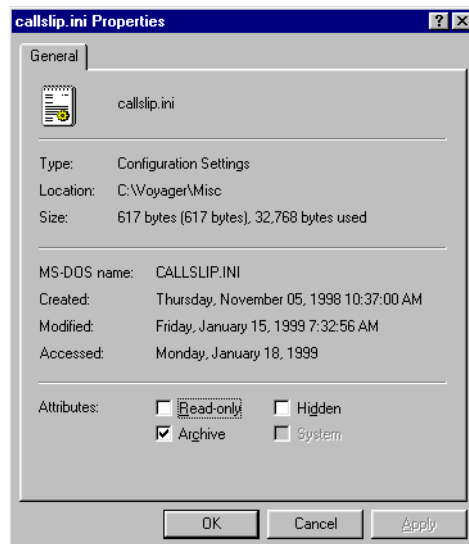


Figure 4-3. callslip.ini Properties dialog box

3. Select the **Read-only** option, and click **Apply**.

Result: This sets the file to read-only mode.

4. Click **Close** to exit the **callslip.ini Properties** dialog box.

Result: This saves the selection and closes the dialog box.

NewItem= Variable

The `NewItem=` variable provides the text that displays in the expanded **Link Item** dialog box for the command that creates new items. `Callslip.ini` has a default setting of `NewItem=<Create New Item>`. See [Figure 4-4](#) for an example of how this displays on the expanded **Link Item** dialog box. For another example, see [Figure 3-7](#).

NOTE:

If nothing is entered for the `NewItem=` variable, the create new item command displays a blank line in the expanded **Link Item** dialog box. See [Creating a New Item to Link to a Call Slip Request](#) on [page 3-12](#) for more information.

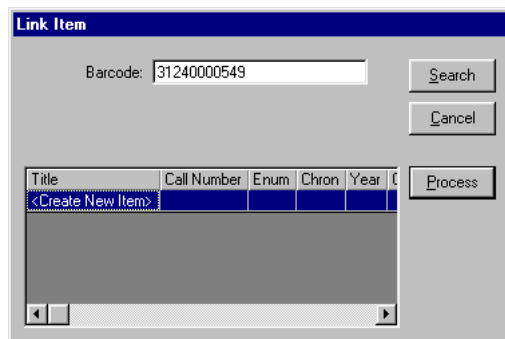


Figure 4-4. Link Item dialog box - Create New Item command displayed

AddBarcode= Variable

The AddBarcode= variable provides the text that displays in the expanded **Link Item** dialog box for the command that creates new barcodes. Callslip.ini has a default setting of AddBarcode=<Add Barcode to Item>. See [Figure 4-5](#) for an example of how this displays on the expanded **Link Item** dialog box. For another example, see Figure 3-9.

NOTE:

If nothing is entered for the AddBarcode= variable, the add barcode to item command displays a blank line in the expanded **Link Item** dialog box. See [Adding a Barcode to a Requested Item](#) on [page 3-14](#) for more information.

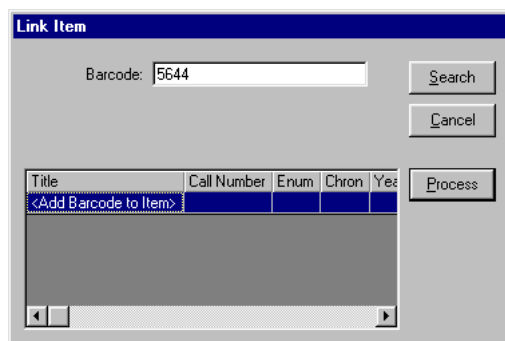


Figure 4-5. Link Item dialog box - Add Barcode command displayed

Preferences Stanza

The [Preferences] stanza of the `callslip.ini` file directly reflects the choices made in the **Preferences** dialog box in Voyager Call Slip Dæmon. This information is automatically saved in the `callslip.ini` file when it is changed in Voyager Call Slip Dæmon. The [Preferences] stanza can be manually edited. However, you may find it more expedient to use the **Preferences** dialog box in Voyager Call Slip Dæmon instead, and let the system automatically save the information to the `callslip.ini` file.

Print Options Stanza

The [Print Options] stanza of the `callslip.ini` file directly reflects the choices made in the **Print Options** group box on the **Preferences** dialog box in Voyager Call Slip Dæmon. This information is automatically saved in the `callslip.ini` file when it is changed in Voyager Call Slip Dæmon. The [Print Options] stanza can be manually edited. However, you may find it more expedient to use the **Print Options** group box on the **Preferences** dialog box in Voyager Call Slip Dæmon instead, and let the system automatically save the information to the `callslip.ini` file.

NOTE:

The [Print Options] stanza contains specifications that are used by the template stanzas that provide printed output.

Email Options Stanza

The [Email Options] stanza of the `callslip.ini` file directly reflects the choices made in the **Preferences** dialog box in Voyager Call Slip Dæmon. This stanza stores the selections that specify the following.

- Is email to be sent Yes (Y) or No (N)
- Content of the email subject line
- Number of emails to queue before sending (cache count)

This information is automatically saved in the `callslip.ini` file when it is changed in Voyager Call Slip Dæmon. The [Email Options] stanza can be manually edited. However, you may find it more expedient to use the **Preferences** dialog box in Voyager Call Slip Dæmon instead, and let the system automatically save the information to the `callslip.ini` file.

Template Stanzas

The template stanzas define the output for a variety of requirements. The setup of the following template stanzas share some common features.

- [Routing Slip Print Template]
- [Call Slip Print Template]
- [Email Template Filled]
- [Email Template UnFilled]
- [Email Template UB Filled]
- [Email Template UB UnFilled]

In addition to the static content that is stored in the templates, there are also action codes and field codes that can be used to tailor the content of the template. See [Callslip.ini File Example](#) on [page 4-8](#) for sample templates in the `callslip.ini` file.

When an operator selects **Print** from the **File** menu in Call Slip Dæmon, detailed information associated with the selected call slip request prints according to how the [Print Template] stanza of the `callslip.ini` file is set up. The print template can be completely customized. Whatever you type in the [Print Template] stanza appears on the call slip request printout. In addition, there are **action codes** that you can use in the [Print Template] stanza to change how the information displays on the printout, and certain **field codes** that you can enter after the `\F` action code to specify the field information that is to be printed.

Action Codes

Action codes are provided for formatting the output of the templates. Table 4-1 provides a list of action codes and a description of their functions.

Table 4-1. Action Codes

Action Code	Description
\	Prints a blank line.
\A	Starts alternate font (as specified in the Preferences dialog box).
\a	Ends alternate font.
\B	Starts bold.
\b	Ends bold.

Table 4-1. Action Codes

Action Code	Description
\I	Starts italic.
\i	Ends italic.
\U	Starts underline.
\u	Ends underline.
\S	Starts new font size (a two-digit size must follow \S).
\s	Ends new font size.
\T	Inserts a tab.
\F	Inserts field data (a three-digit field code must follow \F).

See Figure 4-6 on page 4-30 for an example of how to implement action codes.

Printed information prints using the font and font size specified in the Standard Font field on the Preferences dialog box in Voyager Call Slip Dæmon.

Field Codes

Field codes identify the information in the templates that is to be output for emails, call slip printouts, and routing information. Field codes work in combination with the \F action code to produce the desired result.

In addition to the predefined field codes, any MARC bibliographic field and subfields (with the exception of control fields 001 - 009) can be printed. See [MARC Variable Data](#) on [page 4-23](#) for more information.

Table 4-2 provides a list of predefined field codes and a description of the field content.

Table 4-2. Predefined Field Codes

Field Code	Description
100	Call Slip Print Group (Queue)
101	Request ID
102	Request Date & Time

Table 4-2. Predefined Field Codes

Field Code	Description
105	Pickup Locations for local call slip requests NOTE: If 105 in a Universal Borrowing situation is used for a call slip request with a pickup location at a remote database from the holding library, the pickup location is left blank.
109	User Comment
110	Call Slip Reply Note
201	Title Brief
202	Title Long
203	Author
301	Call Number
401	Item Barcode
402	Enumeration
403	Chronology
404	Year
407	Copy Number
409	Copy Information (includes Enumeration, Chronology, Year, Caption, Free Text, and Copy Number all on one line)
411	Item Location
504	Patron Title
505	Patron SSN
506	Patron Institution ID
509	Formatted Name
510	Address Line 1
511	Address Line 2
512	Address Line 3
513	Address Line 4
514	Address Line 5
515	City
516	State/Province

Table 4-2. Predefined Field Codes

Field Code	Description
517	Zip/Postal Code
518	Country
519	Phone Number
525	Patron Barcode
526	Patron Group Name
530	Date (When), Database (Where), Cluster (Which) For History of UB (Universal Borrowing) Request Promotions
540	Date (When), From (Where), By (Who) For Call Slip Reassignment History
600	UB (Universal Borrowing) Library Name
601	UB (Universal Borrowing) Location Name
602	UB (Universal Borrowing) Address Line 1
603	UB (Universal Borrowing) Address Line 2
604	UB (Universal Borrowing) Address Line 3
605	UB (Universal Borrowing) Address Line 4
606	UB (Universal Borrowing) Address Line 5
607	UB (Universal Borrowing) Address City
608	UB (Universal Borrowing) Address State
609	UB (Universal Borrowing) Address Zip
610	UB (Universal Borrowing) Address Country
900	Call Slip No-Fill Reason
901	No-Fill Reason List

See Figure 4-6 on page 4-30 for an example of how to implement field codes.

MARC Variable Data

Any variable data from MARC bibliographic records can be identified in `callslip.ini` templates and printed (except for the MARC control fields 001-009). See Table 4-3 for a description of the syntax used with MARC variable data in `callslip.ini` templates.

This capability to use MARC variable data is provided in addition to the set of predefined data elements (see Table 4-2) and action codes (see Table 4-1) for use in `callslip.ini` templates.

NOTE:

There are a few predefined data elements such as Call Number, Author, and Year that can be generated using either method. That is, these duplicate predefined codes can be used or the MARC variable data syntax can be used in a `callslip.ini` template to generate the same information on the call slip.

Table 4-3. Syntax for MARC variable data

Character Position	Character	Description
1 - 3	\MB	Action code to insert a MARC variable data field. \MB specifies that a data field is to be inserted into the print stream from a MARC bibliographic record.
4		Blank space.
5 - 7	ddd	Three-digit tag (010 - 999 defined by Ex Libris) representing the MARC data field to be inserted into the print stream. NOTE: This excludes MARC control fields 001 - 009.
8		Blank space.
9	0 - 9, , or X	Single digit representing the first MARC indicator for the field. Only insert the field into the print stream if the first indicator in the MARC field matches this value in the <code>callslip.ini</code> template. NOTE: A pipe symbol () in <code>callslip.ini</code> indicates that the field is only to be inserted into the print stream if the first indicator in the MARC field is blank. An X in the <code>callslip.ini</code> indicates that no comparison should be made with the first indicator in the MARC field. In this syntax, X acts as a wildcard character.

Table 4-3. Syntax for MARC variable data

Character Position	Character	Description
10	0 - 9, , or X	Single digit representing the second MARC indicator for the field. Only insert the field into the print stream if the second indicator in the MARC field matches this value in the callslip.ini template. NOTE: A pipe symbol () in callslip.ini indicates that the field is only to be inserted into the print stream if the second indicator in the MARC field is blank. An X in the callslip.ini indicates that no comparison should be made with the first indicator in the MARC field. In this syntax, X acts as a wildcard character.
11		Blank space.
12..n	a - z and/or 0 - 9	String of 1 - 36 alphanumeric digits designating the MARC subfield(s) to be inserted into the print stream.
o - q	\m	Ends the action code.

The following is an example of what could be included in a `callslip.ini` template that represents the implementation of the syntax described in Table 4-3.

```
\MB 650 1X abcd\m
```

This example specifies the following to the system.

- Search for all instances of the 650 field that are present in the MARC record; and subsequently, reject any instances in which the first indicator is not equal to 1.
- The X is a wildcard character and indicates that the system is to ignore the second indicator value in the 650 fields.
- All instances of subfields a, b, c, and d are to be inserted into the print stream for each of the instances of the 650 field in which the first indicator is equal to 1.
- The action is terminated by \m.

Formatting the Data

The following are formatting considerations when using MARC variable data fields.

- Data from each instance of the MARC field are printed on separate lines.

-
- Strings of data from multiple subfields are concatenated with a separating space. If the group of concatenated data strings exceeds the available print area for a single line, the text is wrapped to the next line.
 - Each line of text starts in the same column (position).
 - Data from subfield 6 is printed exactly as contained in the MARC record. Any special handling indicated in the related 880 field to print alternate graphics is ignored.

Error Handling

The following are error-handling considerations when using MARC variable data fields.

- If there is no data in the variable data field specified as specified in the template, nothing is added to the print stream.
- If a control field 001 - 009 is designated in the callslip.ini template, the following text is inserted.

*** Unsupported Field Code ***
- If a malformed action code is encountered in the callslip.ini template, the following text is inserted.

*** Malformed MARC Field Code ***

Call Slip Reassignment History

To print call slip reassignment history, use the 540 field code in combination with the \F action code. This provides historical information for reassigned call slip requests.

Example:

```
\F540:(Date=Date,From=From Print Group,By=Operator)
```

This example highlights several key points.

- The colon and parentheses are required.
- Date, From, and By are the parameter names
- Each parameter must be followed by the equal sign (=)
- A character string of your choosing follows the equal sign for each parameter and is used as a column heading in the printed output.
- The first and second parameter/character string must end with a comma.
- (Optional) The parameters may be arranged in any order. They do not need to follow the sequence identified in the example.

Call Slip Promote History

To print call slip promote history, use the 530 field code in combination with the \F action code. This provides the history for Universal Borrowing request promotions.

Example:

```
\F530:(Date=Date,Database=Database Name,Cluster=Cluster Name)
```

This example highlights several key points.

- The colon and parentheses are required.
- Date, Database, and Cluster are the parameter names.
- Each parameter must be followed by the equal sign (=).
- A character string of your choosing follows the equal sign for each parameter and is used as a column heading in the printed output.
- The first and second parameter/character string must end with a comma.
- (Optional) The parameters may be arranged in any order. They do not need to follow the sequence identified in the example.

Initiating and Ending Action Codes

All action codes begin with the backslash character. Many of the action codes work in pairs starting a function with the uppercase character and ending the function with the lowercase character. See [Table 4-1](#) for a list of action codes.

One of the action code pairs is for making content bold. To make template content bold, place \B at the beginning of the text to be bold and \b and the end of the bolded text. An example of a character string that produces bolded text is as follows:

```
\BPatron Barcode:\b
```

This character string generates:

Patron Barcode:

Follow the same process to implement other action code pairs to format template content, both static or variable content.

Printing Field Information

To print field information, a field code must be entered after the \F action code. See [Table 4-2](#) for a list of field codes.

Enter the following information in the template to print the **Patron Name** field stored on the server after the heading Patron Name.

Patron Name: \F509

If Adam Jones is stored in the **Patron Name** (Formatted Name) field, this character string generates:

Patron Name: Adam Jones

See Figure 4-6 on page 4-30.

Printing in the Alternate Font

Use the \A and \a action code pair and the alternate font capability to print barcode information. With the **Request ID** field code of 101, the following character string generates a printed barcode:

\A\F101\a

See Figure 4-6 on page 4-30 and see [Figure 4-7](#) on page 4-31 for an example of a template that generates a printed barcode.

The alternate font can be specified by using the **Alternate Font** option on the **Preferences** dialog box.

To ensure that the printed barcode does not overlap with surrounding information, insert blank lines with the backslash character before and after the barcode specifications in the template. See Figure 4-6. This improves the scanability of the printed barcode.

NOTE:

The barcode font that is included with Voyager is called Barcode 3 of 9. If the library's scanning device requires start/stop characters for the barcode and Barcode 3 of 9 is used, enter asterisks before and after the barcode specification in the template such as *\F101*. See Figure 4-6 on page 4-30 for an example of the character string required to generate the desired result. If a different barcode font is used, read the barcode font's documentation to determine what start/stop character must be used for that font.

Caution: If bold formatting is used with the barcode, the barcode height prints taller and the digits beneath the barcode may not be visible. If italic formatting is used with the barcode, the barcode height prints shorter. Test templates to confirm that printing generates the desired results.

Changing Font Size

Changing font size within the template content requires one of the pairs of action codes, specifically, `\s` and `\s`. In addition the new font size needs to be specified. To print certain template content using a different font size, surround the text with `\s##` (where `##` is the new font size) at the beginning of the modified text and `\s` at the end of the modified text. See Figure 4-6 on page 4-30 and see [Figure 4-7](#) on page 4-31 for an example of the usage of `\s` and `\s`.

Inserting a Blank Line

To insert a blank line in printed output, enter a line with only the backslash (`\`) character in the template content. See Figure 4-6 on page 4-30 and see [Figure 4-7](#) on page 4-31 for an example with blank lines inserted in the text.

Inserting a Tab

To format template content with a tab, use the `\T` action code. Enter the `\T` before the information to be indented. The indentation spacing that applies to this action code is determined by the Tab Width (Inches) option on the **Preferences** dialog box.

To print the following information:

Reply to Reader:

Damaged material; not available

Enter the following character string in the template:

Reply to Reader:

`\T\F901`

Example

Figure 4-6 is an example of a template that can be embedded in the `callslip.ini` file.

Line#	
1	[Call Slip Print Template]
2	Call Number: \F301
3	Author: \F203
4	Title: \F202
5	Enumeration: \F409
6	Location: \F411
7	Patron Name: \F509
8	Request Date: \F102
9	\
10	\
11	Reply to Reader: Item is not available ...
12	\F901
13	\
14	\
15	\
16	\A*\F101*\a
17	\
18	(Request Number)
19	\
20	\S24\F509\s
21	

Figure 4-6. Example of [Call Slip Print Template] stanza in the Callslip.ini file

Figure 4-7 shows the printed output of a call slip request when the [Call Slip Print Template] stanza in Figure 4-6 is used.

<p>Call Number: PS3573.A425 C6 1983 Author: Walker, Alice, 1944- Title: Color Purple / Enumeration: Location: Main Collection Patron Name: Aura R. Stevens Request Date: 11/3/98 01:26 PM</p> <p>Reply to Reader: Item is not available ... <input type="checkbox"/> Damaged <input type="checkbox"/> Lost <input type="checkbox"/> Not Available <input type="checkbox"/> Not Found</p> <p>1739403</p> <p>(Request number) Aura R. Stevens</p>
--

Figure 4-7. Example of a call slip printout



Ex Libris (USA) Inc.
See notice on first page

Index

A

about Call Slip Dæmon, [2-4](#)
About this document, [1-1](#)
 prerequisite skills and knowledge, [1-1](#)
about this document, [xiii](#)
action codes, [4-20](#)
add
 barcode to requested item, [3-14](#)
audience
 of this document, [xiii](#)
automatically print new call slip requests, [4-3](#)

B

barcode
 add to requested item, [3-14](#)

C

Call Slip Dæmon menu items, [2-2](#)
 Edit menu, [2-3](#)
 File menu, [2-2](#)
 Help menu, [2-4](#)
Call Slip request reassignment procedure, [3-19](#)
callslip.ini file
 defining, [4-7–4-31](#)
 [Email Options] stanza, [4-19](#)
 [General] stanza, [4-15](#)
 [Preferences] stanza, [4-19](#)
 [Print Options] stanza, [4-19](#)
 template stanzas, [4-20](#)
 action codes, [4-20](#)
 changing font size, [4-29](#)
 field codes, [4-21](#)
 initiating and ending action codes, [4-27](#)
 inserting a blank line, [4-29](#)
 inserting a tab, [4-29](#)

 printing field information, [4-27](#)
 printing in the alternate font, [4-28](#)
comment field (Reply Note), [3-9](#)
comments
 about this document, [xv](#)
conventions used
 in this document, [xiv](#)
create
 new item to link to a call slip request, [3-12](#)
current requests
 add barcode to requested item, [3-14](#)
 link item to request, [3-10](#)
 create new item, [3-12](#)
 printing, [3-4](#)
 all call slip requests, [3-8](#)
 all new call slip requests, [3-7](#)
 specific call slip request(s), [3-6](#)
 processing, [3-8](#)
 retrieving list, [3-2](#)

D

defining callslip.ini file, [4-7–4-31](#)

E

email, [3-9](#), [4-20](#)
Email Options, [4-3](#), [4-6](#), [4-19](#)
[Email Options] stanza, [4-19](#)

F

feedback, customer, [xv](#)
field codes, [4-21](#)
file
 callslip.ini, [1-2](#), [4-7](#)
 circ.ini, [1-2](#)
 opac.ini, [1-2](#)
filling call slip request, [3-8](#)

G

[General] stanza, [4-15](#)

H

help

About Call Slip Dæmon, [2-4](#)

Endeavor on the Web, [2-4](#)

Help Topics, [2-4](#)

History tab, [3-21](#)

how to use this document, [xiii](#)

I

intended audience

of this document, [xiii](#)

L

Link Item to Request, [3-10](#)

add barcode to item, [3-14](#)

create new item, [3-12](#)

M

MARC variable data, [4-23](#)

N

no fill reasons, [3-8](#)

P

photocopying

documentation, [xv](#)

preferences, [4-1](#)

automatically print new call slip requests, [4-3](#)

default find method, [4-4](#)

force item search on process, [4-4](#)

printer options, [4-5](#)

sort pending requests, [4-3](#)

update and email send interval, [4-3](#)

use alert sound, [4-3](#)

verify create new item or barcode, [4-5](#)

[Preferences] stanza, [4-19](#)

[Print Options] stanza, [4-19](#)

printer options, [4-5](#)

printing

all call slip requests, [3-8](#)

all new call slip requests, [3-7](#)

specific call slip request(s), [3-6](#)

processed call slip requests

displaying, [3-21](#)

unprocessing, [3-21](#)

processing

current call slip requests, [3-8](#)

promote history, [4-27](#)

pull slip, [4-7](#)

purpose

of this document, [xiii](#)

R

reassign call slip requests, [3-18](#)

reassignment history, [3-20](#), [4-23](#), [4-26](#)

view, [3-20](#)

reissue

reason for, [xiii](#)

Reply Note, [3-9](#)

reproduction, of documentation, [xv](#)

request promotions (UB), [4-23](#)

retrieving call slip requests, [3-2](#)

S

search

for pending requests, [3-4](#)

Search By Bib, [3-11](#), [3-12](#)

sort pending call slip requests, [4-3](#)

stanza

[Call Slip Print Template], [4-20](#)

[Email Options], [4-19](#)

[Email Template Filled], [4-20](#)

[Email Template UB Filled], [4-20](#)

[Email Template UB UnFilled], [4-20](#)

[Email Template UnFilled], [4-20](#)

[General], [4-15](#)

[Preferences], [4-19](#)

[Print Options], [4-19](#)

[Routing Slip Print Template], [4-20](#)

AddBarcode, [4-18](#)
LocationCode, [4-15](#)
NewItem, [4-17](#)
view Call Slip reassignment history, [3-20](#)

T

template

action codes, [4-20](#)

changing font size, [4-29](#)

field codes, [4-21](#)

inserting a blank line, [4-29](#)

inserting a tab, [4-29](#)

MARC variable data, [4-23](#)

printing field information, [4-27](#)

printing in the alternate font, [4-28](#)

U

UB promote requests, [4-23](#)


unprocess call slip request, [3-22](#)

update and email send interval, [4-3](#)

use alert sound, [4-3](#)

V

variable



Ex Libris (USA) Inc.
See notice on first page