librcm — reusable C modules

Frank Braun

2020-10-26

Table of Contents

Introduction
The importance of C today
The importance of C in the future
Resusable C modules
Goals
User guide
Error handling5
Memory managment5
File handling
Assertions5
Testing5
Coding rules
Tutorials
How to use librcm modules
How to write a module
API reference
librcm module dependencies9
rcm_assert.h — Robust assertions9
rcm_base64.h — Base64 encoding
rcm_base64buf.h — Base64 buffer
rcm_errbuf.h — Error buffer
rcm_mem.h — Memory allocator
rcm_membuf.h — Memory buffer
rcm_mfatest.h — MFA test module
rcm_mod.h — Example module
rcm_pid.h — Process ID
rcm_rand.h — Number generator
rcm_sleep.h — Sleep module
rcm rfc3339.h — RFC3339 time

This document describes how to write *reusable C modules* and documents librom.



Check https://librcm.org for updates. Source code on GitHub.

This document has four main parts:

- 1. The Introduction.
- 2. The User guide.
- 3. The Tutorials.
- 4. The API reference.

Introduction

The C programming language was first introduced in 1972 and first standardized in 1989 as ANSI C (called C89). The most important revision of ANSI C in regards to this document is C99. We ignore all later revisions.

The importance of C today

According to the TIOBE Index for August 2020 C is the most popular programming language in the world.

Many operating systems, programming languages, and widely used libraries are written in C.

High-quality examples:

- The OpenBSD operating system.
- The Lua programming language.
- The SQLite database engine.

Many higher-level programming programming languages allow to interface with the C ABI.

Several new programming languages have the explicit goal to produce libraries compatible with the C ABI, for example Zig and Rust. Others, like Go, are criticized for not conforming to the C ABI. Conforming to the C ABI is mutually exclusive with garbage collection.

The importance of C in the future

Given the importance of C today, it's high performance, it's high portability (if written correctly), and the rise of low-performance IoT devices, C is likely to stay for many decades. The Lindy effect also applies.

This means that **well written** C can be used and reused for a very long time. However, C suffers from a lot of poor quality code. The C ecosystem also lacks a repository of **easily reusable** C libraries, especially ones that can be embedded in other libraries, can be used in embedded devices, and are highly portable.

The problem of poor quality code is being addressed by restrictive coding standards and static analysis tools. We know that doesn't make C a safe language, but that doesn't mean C will go away.

Reusable C libraries, however, are still a major problem. This is mostly due to the fact that the C programming language is so low-level and flexible that it neither defines a standard way on *how* to write libraries, nor does it have a standardized way to handle errors, manage memory, and deal with dependencies.

Having standardized ways to do things greatly helps to reduce cognitive overhead and thereby raises program quality and programmer productivity.

This is arguable a major reason that Go became so successful. The language itself is not extremely

powerful, but making package names part of the language specification and having widely shared opinions in the Go community what comprises idiomatic code makes Go highly reusable and reduces the cognitive burden when reading and editing code written by others.

In this document we describe an opinionated method on how to write high quality, future-proof C code, while giving rationales for the decisions made. The power of this approach mainly comes from the **simplicity** that comes from standardizing on the *only true-way of doing things* $^{\text{TM}}$. It forces the programmer into a standardized way of writing C code with less decisions to be made along the way, freeing up mental capacity for writing the *actual* code.

But it comes at the cost that even less C code is reusable, because it doesn't conform to the future-proof C method described herein. However, as more and more C code becomes a future-proof **reusable C module** this is less and less of a problem. And it gives as an excuse to rewrite the low-level stuff we always wanted to rewrite. So let's get to it.

Resusable C modules

What does module mean?

A C module is comprised of a single C header file (.h) that defines an API (can be used by *consumers* of the module), a single C file (.c) which implements it, and a test C file that tests the API. The module should *consume* as little other modules and header files as possible, to keep the dependency graph small.

What does reusable mean?

Reusable means that such a module should be useful on as many platforms as possible. Supported platforms include:

- All major POSIX systems: Linux, Mac OS, OpenBSD, and FreeBSD.
- Both major mobile platforms: Android and iOS.
- Embedded systems (like Arduino/AVR microcontrollers). Currently untested.
- 32-bit and 64-bit systems.
- Little-endian and big-endian systems.
- All major compilers: GCC, Clang, MinGW, and Visual Studio.
- All major processor architectures: x86, ARM, PowerPC, and MIPS.

Goals

- Modules must not leak symbols into the global name space.
- Modules must be compilable as static in an amalgamation file, to make them reusable in libraries without any symbol leakage.
- Modules must minimize cognitive overhead. Standardize everything.
- Modules should avoid dynamic memory allocation wherever possible.

See also the STB how-to.

User guide

Error handling

TODO:

- · error codes
- · error messages
- error flow
- exceptions

Memory managment

TODO

File handling

TODO

Assertions

TODO



Compile with -DNDEBUG for production. This will remove the abort(3) call in rcm_assert(), but still return errors, if rcm_assert() fails.

Testing

TODO:

- valgrind, clang, greatest
- assertions
- · allowed types
- simulated failure with rcm_mfatest.h MFA test module
- 100% code coverage

Coding rules

- Write portable ANSI C89 (Visual Studio has poor support for C99).
- #include <stdbool.h> is OK.
- Modules are single header files.

- Public domain for new code (use the Unlicense).
- Permissive license (BSD, MIT, or ISC) for modified third party code.
- No GPL.
- Format the code with clang-format (standardized .clang-format file).
- Write unit tests for the code with the greatest testing library.
- goto is not allowed except for error handling as described above.
- No calls to exit(3) or abort(3).

Allowed defines

The number of defines used in reusable C modules must be kept to the absolute minimum! Otherwise #ifdef-hell ensues.

List of allowed #ifdef-statements:

- ANDROID: Android.
- APPLE: Apple platform (MacOS and iOS).
- linux: Linux (also defined on Android).
- FreeBSD: FreeBSD.
- OpenBSD: OpenBSD.
- _MSC_VER: The Visual Studio compiler is used. Defined as an integer literal that encodes the major and minor number elements of the compiler's version number.
- NDEBUG: combined with #ifndef to disable debugging code.
- TARGET_OS_IOS: Is == 0 for Mac OS and > 0 for iOS (on Apple platform).
- _WIN32: Windows (usually with #ifndef to implement POSIX first).

Coding style

- Error buffer: char err[ERRBUF_SIZE] (module rcm_errbuf.h)
- Return variables: int rc
- Check coding style with remchk
- Format code with clang-format -i -style=file (using the style file .clang-format)

Tutorials

How to use librem modules

TODO

How to write a module

A reusable C module mod consists of four components:

```
    The header file: rcm_mod.h
    The implementation C file: rcm_mod.c
    The unit test file: rcm_mod_test.c
```

4. The module documentation (generated with rcmdoc): rcm_mod.adoc

Only the header and the C files are really necessary to reuse the module. The online documentation for a module is linked from the header file.

TODO: use rcm_membuf as example on how to write a module.

How to write the header file

```
/* SPDX-License-Identifier: Unlicense OR MIT */ ①
#ifndef RCM_MOD_H ②
#define RCM_MOD_H
/* Documentation: https://librcm.org/#rcm_mod.h */ 3
#ifndef RCM API
#define RCM API extern ④
#endif
/*
Example module: ⑤
Example module which shows how to write _reusable C modules_. 6
*/
/* Does nothing. */ ⑦
RCM_API void rcm_mod_foo(void); 8
/* Returns 23. */
RCM_API int rcm_mod_bar(void);
#endif /* RCM_MOD_H */ 9
```

- 1 License identifier
- 2 Include guard
- 3 Link to online documentation
- 4 Define RCM_API. Allows to compile all module functions as static
- 5 Module name, ends with:
- **6** Module description
- 7 Function comment(s)
- 8 Function definition(s)
- 9 End of include guard

How to write the C file


TODO

How to write the test file

TODO

API reference

librcm module dependencies

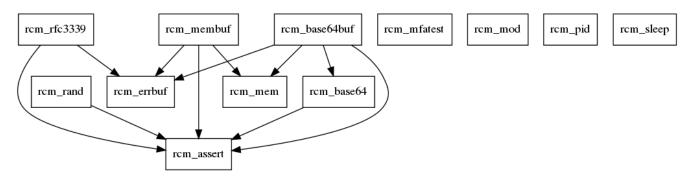

rcm_assert.h — Robust assertions

The robust assertion macro is inspired by the "JPL Institutional Coding Standard for the C Programming Language", Rule 16, (see https://librcm.org/mirrors/JPL_Coding_Standard_C.pdf).

Recommended use:

```
if (!rcm_assert(p >= 0)) {
   return RCM_ASSERT_ERR_FAILED_ASSERT;
}
```

Compile with -DNDEBUG for production and without for development and testing.

Defines

```
#define rcm_assert(e) rcm_assert_handle((e), __FILE__, __LINE__, #e)
```

Robust assertion macro.

Typedefs

```
typedef enum {
   RCM_ASSERT_OK = 0,
   RCM_ASSERT_ERR_FAILED_ASSERT = -4
} rcm_assert_err_t;
```

The assert error type.

An assertion handler. Should return false to mark the assertion as failed. Should return true to ignore failed assertions completely.

Functions

```
void rcm_assert_set_handler(rcm_assert_handler_func *handler);
```

Set the assertion handler. The default is rcm_assert_default_handler. Set to NULL to disable logging of assertions.

```
void rcm_assert_set_handler_data(void *data);
```

Set data pointer passed to the assertion handler.

The default assert handler. Prints the failed assertion to stderr and then calls abort(3) if not compiled with NDEBUG.

Internal function. It calls the rcm_assert_handler, if not NULL and assert_result is false.

```
int rcm_assert_num_of_asserts(void);
```

Reset number of assertions. Debug only.

```
void rcm_assert_abort(int n);
```

Abort assertion n. Debug only.

```
void rcm_assert_reset_abort(void);
```

Reset assertion abortion. Debug only.

rcm_base64.h — Base64 encoding

This module implements low-level funtions for the base64 standard encoding with padding as described in RFC 4648. Use the rcm_base64_buf module for higher-level functions (with memory

allocation and error buffers).

Typedefs

```
typedef enum {
   RCM_BASE64_OK = 0,
   RCM_BASE64_ERR_FAILED_ASSERT = -4,
   RCM_BASE64_ERR_ILLEGAL_LENGTH = -10,
   RCM_BASE64_ERR_ILLEGAL_CHAR = -11
} rcm_base64_err_t;
```

The base64 error type.

Functions

```
size_t rcm_base64_encode_len(size_t len);
```

Returns the base64 encoded length of a binary input buffer of size len.

Writes the base64 encoding of the input buffer in of length len to out and appends a \0 character. The output buffer out has to be at least the size rcm base64 encode len(len)+1!

Returns the decoded length of an base64 encoded input buffer in of size len and writes it to out.

Decodes the base64 encoded input in of length len and writes it to out (if not NULL). If the the output buffer out is not NULL it has to be at least of the size rcm_base64_decode_len(len)!

```
const char *rcm_base64_errstr(rcm_base64_err_t errnum);
```

Return an error string describing the given error number errnum. For RCM_BASE64_OK an empty string is returned ("", not NULL).

rcm_base64buf.h — Base64 buffer

This module implements high-level functions for the base64 standard encoding with padding as described in RFC 4648. Use the rcm_base64 module for lower-level functions (without memory allocation and error buffers).

Typedefs

```
typedef enum {
   RCM_BASE64BUF_OK = 0,
   RCM_BASE64BUF_ERR_NOMEM = -2,
   RCM_BASE64BUF_ERR_FAILED_ASSERT = -4,
   RCM_BASE64BUF_ERR_ILLEGAL_LENGTH = -10,
   RCM_BASE64BUF_ERR_ILLEGAL_CHAR = -11
} rcm_base64buf_err_t;
```

The base64buf error type.

Functions

Encodes the base64 encoding of the input buffer in of lenght len and writes it as a null-terminated string to out.

Decodes the base64 encoded input in of length len and writes it to the freshly allocated out buffer. If outlen is not NULL, the length of the output buffer is written to it. In case of error out remains unmodified, an error code is returned, and an error message is written to err.

```
const char *rcm_base64buf_errstr(rcm_base64buf_err_t errnum);
```

Return an error string describing the given error number errnum. For RCM_BASE64BUF_OK an empty string is returned ("", not NULL).

rcm_errbuf.h — Error buffer

The error buffer module.

Defines

```
#define RCM_ERRBUF_SIZE 1024
```

The default error buffer size.

Functions

```
void rcm_errbuf_set(char *err, const char *format, ...);
```

Sets error buffer err to format string (printf(3)-like) with arguments ···. Does nothing, if err is NULL.

```
void rcm_errbuf_set_str(char *err, const char *string);
```

Sets error buffer err to string. Does nothing, if err is NULL.

rcm_mem.h — Memory allocator

This modules defines the memory allocator for *reusable C modules*.

Typedefs

```
typedef enum { RCM_MEM_OK = 0, RCM_MEM_ERR_NOMEM = -2 } rcm_mem_err_t;
```

The memory error type.

```
typedef void *rcm_mem_malloc_func(size_t size);
```

Memory allocator (malloc(3)-like).

```
typedef void *rcm_mem_calloc_func(size_t nmemb, size_t size);
```

Memory allocator (calloc(3)-like).

Functions

```
void *rcm_mem_malloc(size_t size);
```

Allocates size bytes and returns a pointer to the allocated memory. The memory is not initialized.

```
void *rcm_mem_calloc(size_t nmemb, size_t size);
```

Allocates memory for an array of nmemb elements of size bytes and returns a pointer to the allocated memory. The memory is set to zero.

```
void rcm_mem_free(void *ptr);
```

Frees the memory space pointed to by ptr.

```
void rcm_mem_freecharptr(char **ptr);
```

Free the memory space pointed to by ptr and set ptr to NULL.

```
void rcm_mem_freeucharptr(unsigned char **ptr);
```

Free the memory space pointed to by ptr and set ptr to NULL.

```
void rcm_mem_set_malloc(rcm_mem_malloc_func *func);
```

Set malloc function used by this module. If func is NULL the default allocator is set.

```
void rcm_mem_set_calloc(rcm_mem_calloc_func *func);
```

Set calloc function used by this module. If func is NULL the default allocator is set.

```
int rcm_mem_num_of_allocs(void);
```

Reset number of allocations. Debug only. Returns the total number of allocations so far.

```
void rcm_mem_abort(int n);
```

Abort memory allocation. Debug only. Parameter n is the memory allocation to abort.

```
void rcm_mem_reset_abort(void);
```

Reset memory allocation abortion. Debug only.

rcm_membuf.h — Memory buffer

Higher level memory allocation API which sets an error buffer if allocations fail.

Typedefs

```
typedef enum {
   RCM_MEMBUF_OK = 0,
   RCM_MEMBUF_ERR_NOMEM = -2,
   RCM_MEMBUF_ERR_FAILED_ASSERT = -4,
} rcm_membuf_err_t;
```

The membuf error type.

Functions

```
rcm_membuf_err_t rcm_membuf_new(void **out, size_t size, char *err);
```

Allocate memory buffer out of the given size. The memory is initialized to zero.

```
void rcm_membuf_free(void *buf);
```

Free memory buffer buf.

```
const char *rcm_membuf_errstr(rcm_membuf_err_t errnum);
```

Return an error string describing the given error number errnum. For RCM_MEMBUF_OK an empty string is returned ("", not NULL).

rcm mfatest.h — MFA test module

Memory/file/assertion test wrapper module. To be used for unit tests written with the C testing library greatest.h.

Typedefs

```
typedef int rcm_mfatest_func(char *err);
```

Test function type.

Functions

```
enum greatest_test_res rcm_mfatest_wrap(rcm_mfatest_func test_func);
```

Memory/file/assertion test wrapper function. The expected error value is 0. Just wrap the test_func with it.

Memory/file/assertion test wrapper function with expected error value rval. Just wrap the test_func with it.

rcm_mod.h — Example module

Example module which shows how to write reusable C modules.

Functions

```
void rcm_mod_foo(void);
```

Does nothing.

```
int rcm_mod_bar(void);
```

Returns 23.

rcm_pid.h — Process ID

Module to deal with process IDs (PIDs).

Functions

```
int rcm_pid_get(void);
```

Returns the process ID (PID) of the calling process.

rcm_rand.h — Number generator

Portable call to the system random number generator (RNG).

Typedefs

```
typedef enum {
   RCM_RAND_OK = 0,
   RCM_RAND_ERR_FAILED_ASSERT = -4,
   RCM_RAND_ERR_RANDOM = -14
} rcm_rand_err_t;
```

The rand error type.

Functions

```
rcm_rand_err_t rcm_rand_bytes(unsigned char *out, size_t len);
```

Read len random bytes from the sytem RNG and write it to out. If not enought bytes could be read RCM_RAND_ERR_RANDOM is returned (and out can be partially written to).

```
const char *rcm_rand_errstr(rcm_rand_err_t errnum);
```

Return an error string describing the given error number errnum. For RCM_RAND_OK an empty string is returned ("", not NULL).

rcm_sleep.h — Sleep module

Implements a portable sleep(3) function.

Functions

```
void rcm_sleep(unsigned int seconds);
```

Makes the calling thread sleep until a given number of seconds have elapsed. On POSIX systems a signal which is not ignored interrupts the function.

rcm_rfc3339.h — RFC3339 time

Module to deal with time strings in RFC3339 format.

Defines

```
#define RCM_RFC3339_BUFSIZE 21
```

The default RFC3339 string buffer size.

Typedefs

```
typedef enum {
    RCM_RFC3339_OK = 0,
    RCM_RFC3339_ERR_FAILED_ASSERT = -4,
    RCM_RFC3339_ERR_PARSE = -12,
    RCM_RFC3339_ERR_TIME = -13
} rcm_rfc3339_err_t;
```

The RFC3339 error type.

```
typedef struct rcm_rfc3339_t rcm_rfc3339_t;
```

The RCF3339 time type.

Functions

Parse time value in RFC3339 format and store the result in time (if not NULL). Returns RCM_RFC3339_ERR_PARSE, if the parsing failed. 0, otherwise. In case of error, the error message is written to err.

```
rcm_rfc3339_err_t rcm_rfc3339_now(rcm_rfc3339_t *t, char *err);
```

Return the current time (now) in UTC and store it in t. Returns RCM_RFC3339_ERR_TIME, if the time could not be determined. 0, otherwise. In case of error, the error message is written to err.

Format time as RFC3339 in UTC to out buffer (\0-terminated). The out buffer must have at least size RCM_RFC3339_BUFSIZE!

```
bool rcm_rfc3339_after(rcm_rfc3339_t ltime, rcm_rfc3339_t rtime);
```

Return true if ltime is after rtime, false otherwise.

```
bool rcm_rfc3339_before(rcm_rfc3339_t ltime, rcm_rfc3339_t rtime);
```

Return true if ltime is before rtime, false otherwise.

```
rcm_rfc3339_t rcm_rfc3339_from_time_t(time_t time);
```

Convert from time_t to rfc3339_t.

```
const char *rcm_rfc3339_errstr(rcm_rfc3339_err_t errnum);
```

Return an error string describing the given error number errnum. For $RCM_RFC3339_OK$ an empty string is returned ("", not NULL).