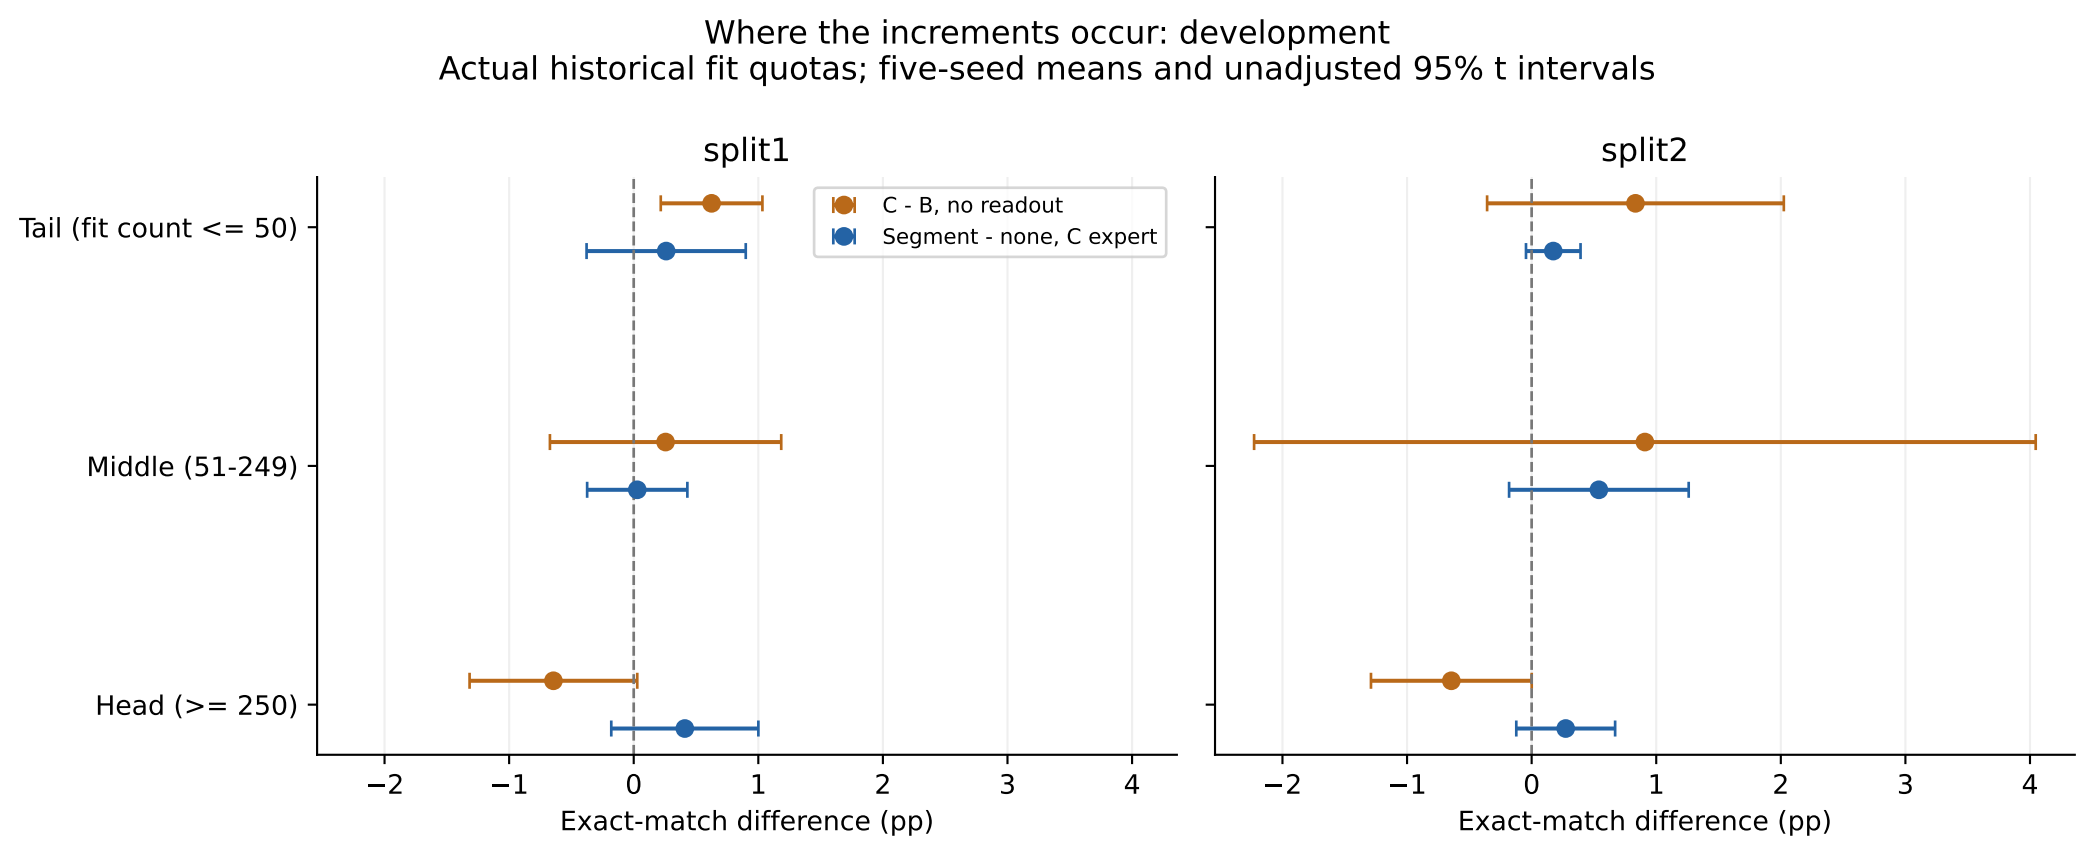
Where the increments occur: development
Actual historical fit quotas; five-seed means and unadjusted 95% t intervals
split1
split2
C - B, no readout
Segment - none, C expert
Tail (fit count <= 50)
Middle (51-249)
Head (>= 250)
−2
−1
0
1
2
3
4
Exact-match difference (pp)