


Descriptor-Assisted LAM Service Mapping

Network deployment

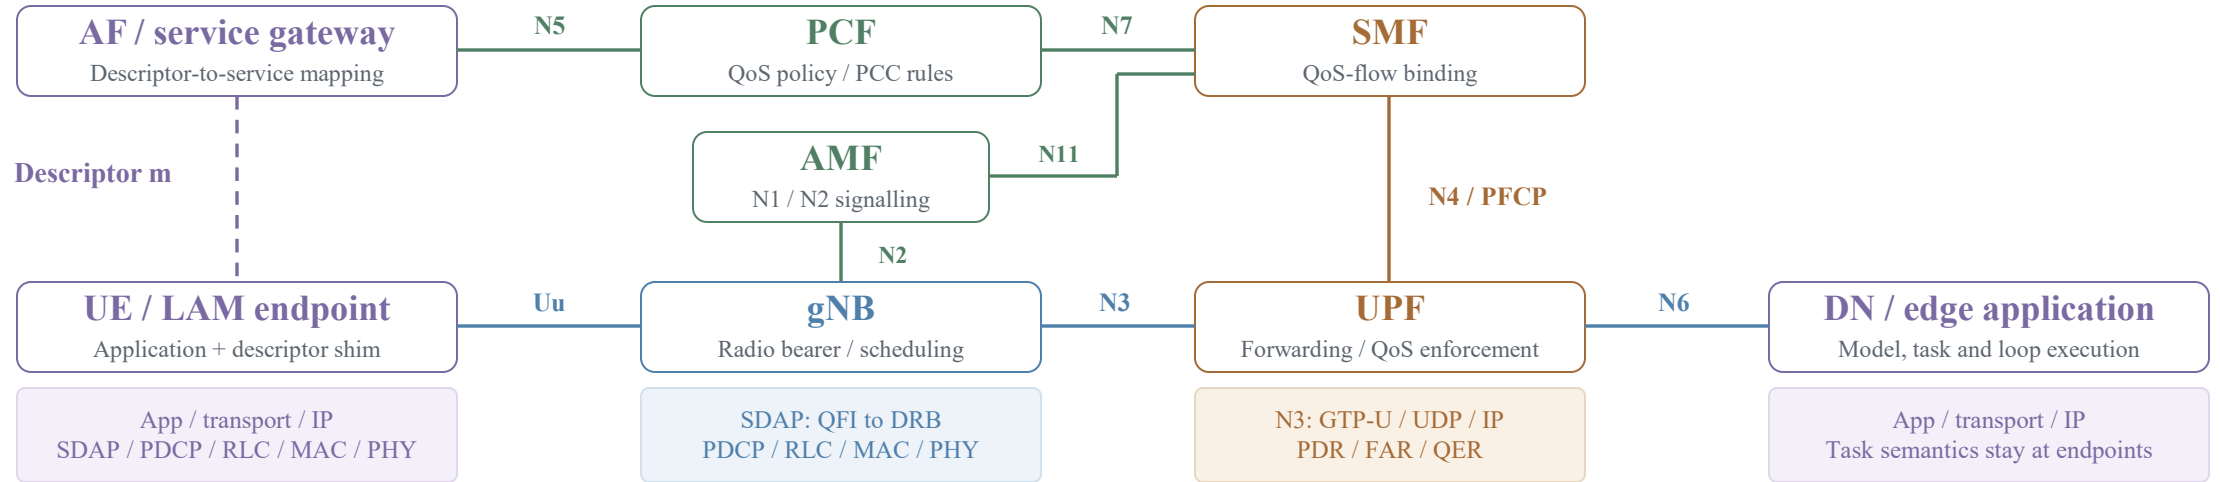

Step 1 Describe the Service

Endpoint shim / AF

```
enum class LAM { G, A, E, U };
struct Descriptor {
    OpaqueId service_id; LAM type;
    Id session_id, chunk_id;
    Timestamp timestamp;
    Bin deadline, reliability, count;
    Signature signature;
};
```

Publish compact, authenticated metadata.
Traffic observations remain available for monitoring and coarse consistency checks.

Step 2 Bind and Sort

AF / gateway, PCF-SMF, endpoint queues

```
struct SessionBinding {
    Id session_id; FlowFilter flow;
    Affinity model, memory, edge;
};
struct ChunkHints {
    Bin deadline, dependency, value;
};
```

Registration: manifest, tenant, attestation, limits.
Session: bind flows and maintain affinity.
Chunk: sort within the admitted envelope.

Step 3 Apply QoS Profiles

PCF / SMF → UPF and gNB

```
struct GenerativeQoS {
    Duration ttft, tpot, completion;
};
```

Elastic rate with generation latency targets.

```
struct AgenticQoS { Id parent_step;
    Expiry expiry; Key idempotency;
};
```

App preserves dependencies and deduplicates.

```
struct EmbodiedQoS { Id loop;
    Timestamp sensing, action;
};
```

Align sensing, inference and action timing.

```
struct QoSFlow { Qfi qfi;
    QoSClass qos_class; RateLimits rates;
};
```