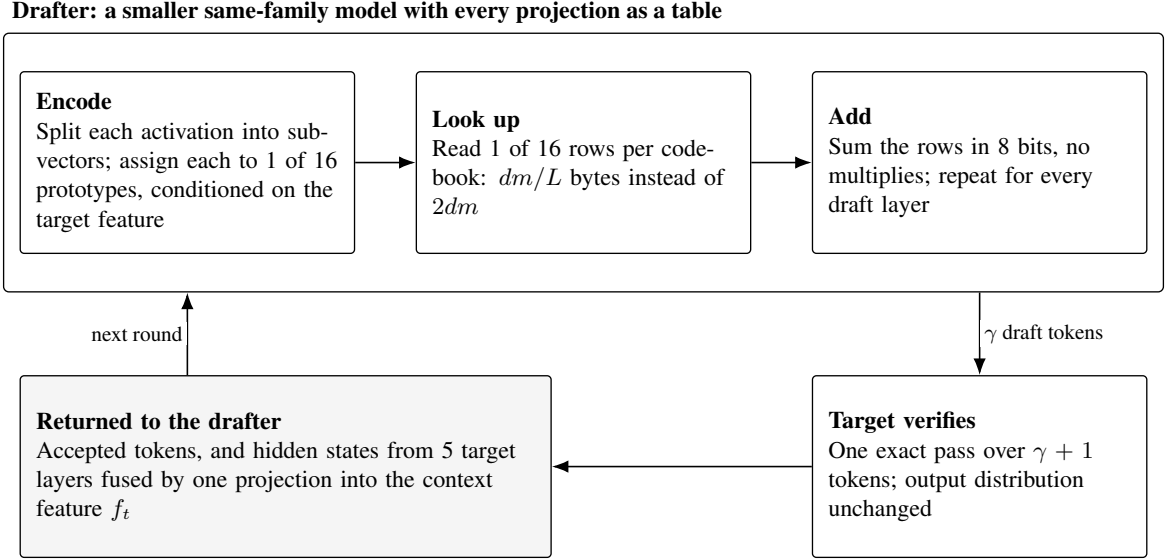

Drafter: a smaller same-family model with every projection as a table
Encode
Split each activation into sub-vectors; assign each to 1 of 16 prototypes, conditioned on the target feature
Look up
Read 1 of 16 rows per code-book: $dm/L$ bytes instead of $2dm$
Add
Sum the rows in 8 bits, no multiplies; repeat for every draft layer
$\gamma$ draft tokens
Target verifies
One exact pass over $\gamma + 1$ tokens; output distribution unchanged
Returned to the drafter
Accepted tokens, and hidden states from 5 target layers fused by one projection into the context feature $f_t$
next round