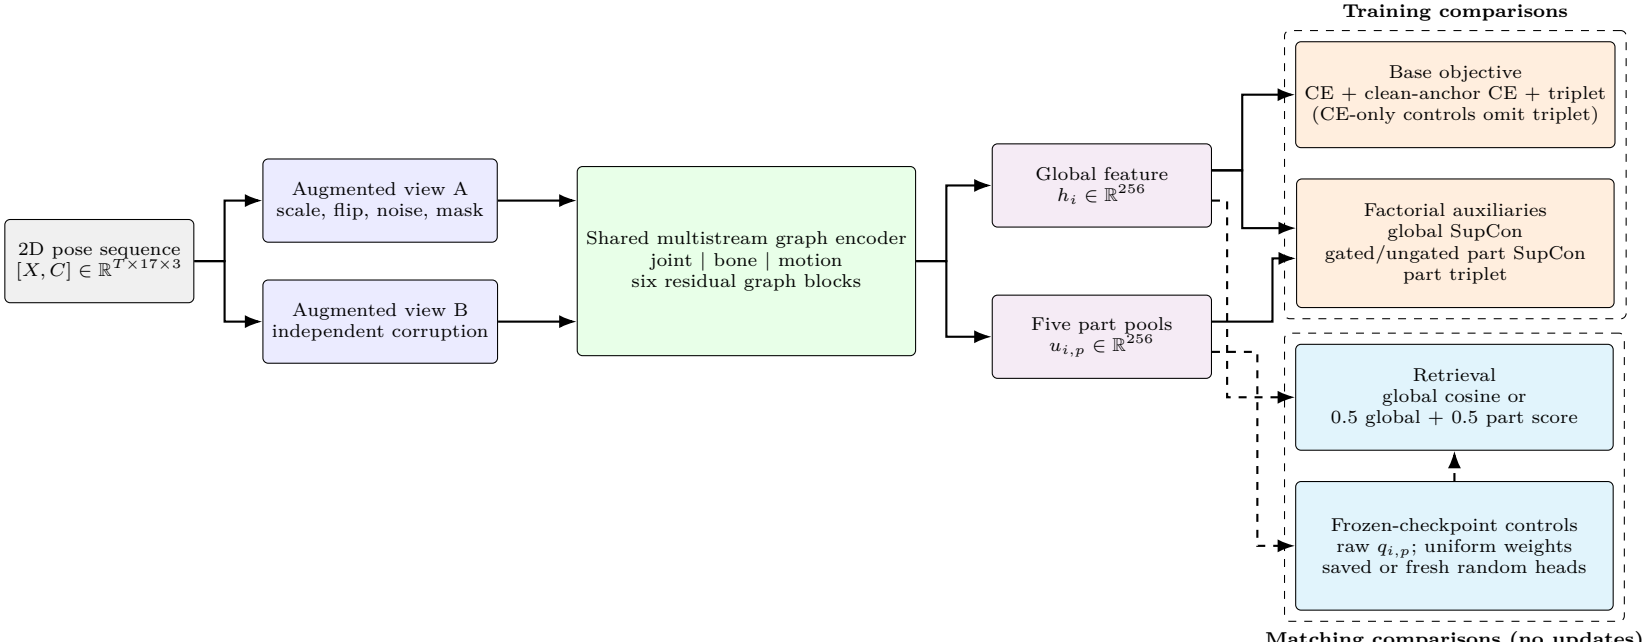
2D pose sequence
$[X, C] \in \mathbb{R}^{T\times 17\times 3}$
Augmented view A
scale, flip, noise, mask
Augmented view B
independent corruption
Shared multistream graph encoder
joint | bone | motion
six residual graph blocks
Global feature
$h_i \in \mathbb{R}^{256}$
Five part pools
$u_{i,p} \in \mathbb{R}^{256}$
Training comparisons
Base objective
CE + clean-anchor CE + triplet
(CE-only controls omit triplet)
Factorial auxiliaries
global SupCon
gated/ungated part SupCon
part triplet
Retrieval
global cosine or
0.5 global + 0.5 part score
Frozen-checkpoint controls
raw $q_{i,p}$; uniform weights
saved or fresh random heads
Matching comparisons (no updates)