

XtalOpt User Guide

Release 11.0

Generated by Doxygen 1.8.11

Contents

1	XtalOpt Tutorial	1
1.1	Launch XtalOpt	1
1.2	Enter composition and restraints	2
1.2.1	Chemical Composition	2
1.2.2	Cell Parameters	2
1.2.3	Interatomic Distances	3
1.2.4	Molecular-Unit Builder	3
1.2.5	Random Spacegroup Generator	4
1.2.6	Mitosis	4
1.3	Optimizer setup	5
1.3.1	VASP	5
1.3.2	GULP	6
1.3.3	PWscf	7
1.3.4	CASTEP	8
1.3.5	SIESTA	9
1.4	Queue setup	10
1.4.1	Using a remote PBS cluster	11
1.4.2	Using a remote SGE cluster	13
1.4.3	Using a remote SLURM cluster	14
1.4.4	Using a remote LSF cluster	15
1.4.5	Using a remote LoadLeveler cluster	17
1.4.6	Running optimizations locally	18
1.5	What is written to the local directory?	18
1.6	Search Settings	19
1.7	"Begin"	20
1.8	Monitor progress	21
1.8.1	View trends	22
1.8.2	View Crystals in Avogadro2	23
1.9	Command Line Interface	23

2	Saving and Resuming Sessions in XtalOpt	25
2.1	How to save your session	25
2.2	How to resume your session	25
3	Optimization Schemes	26
3.1	Overview: What are optimization schemes, and why use them?	26
3.1.1	In a nutshell.. . . .	26
3.1.2	More details	26
3.2	Optimization scheme user interface	27
3.2.1	Optimization step list	27
3.2.2	Add new optimization step	27
3.2.3	Remove current optimization step	28
3.2.4	Select template	28
3.2.5	Template editor	28
3.2.6	Save scheme	28
3.2.7	Resume scheme	28
3.3	How to build an optimization scheme?	28
3.4	How to save an optimization scheme for later?	29
3.5	How to load an optimization scheme?	29
3.6	What is saved?	29
3.7	Suggestions for optimization schemes	29
3.7.1	Crystals (XtalOpt)	29

1 XtalOpt Tutorial

1.1 Launch XtalOpt

Simply run the "XtalOpt" executable (or in MacOS, open the XtalOpt.app file).

1.2 Enter composition and restraints

The screenshot shows the XtalOpt software interface with the 'Structure Limits' tab selected. The interface is divided into several sections:

- Composition:** Empirical Formula: ; Formula Units: . Below is a table:

Symbol	Z	#	Mass	Min. Radius
O	8	2	15.9994	0.264
Ti	22	1	47.867	0.64

- Interatomic Distances:** ☐ Use Custom Interatomic Distances; ☒ Use Scaled Interatomic Distances (Scale factor: ; Minimum radius:); ☐ Check IAD Post-Optimization; ☐ Create Molecular Units.
- Unit Cell Parameters:** Minimum and Maximum values for Length A, B, C (Å), Angle α, β, γ (°), and Volume (Å³/FU).
- Mitosis:** ☐ Use Mitosis; ☐ Export subcells?; # of Divisions: ; a: ; b: ; c: .
- Space-group Generation:** ☐ Initialize with RandSpg?; Spg Options: .

At the bottom, there are buttons for 'Save Session', 'Resume stored session', 'Optimized: 0', 'Running: 0', 'Failures: 0', 'Begin...', and 'Hide'.

The interface opens to the "Structure Limits" tab, shown above.

1.2.1 Chemical Composition

We will use a 6 formula unit supercell of titanium dioxide for this tutorial, so enter "Ti1 O2" for the "Empirical Formula". Under the "Formula Units" we can type 6. If the user wants to search multiple formula units, they would only have to type in the range, or individual numbers they wish to search (e.g., 1-6; or 1-2, 4, 6).

1.2.2 Cell Parameters

We will assume that we know nothing about the system and use very loose restraints (however, note that a search is much more effective if chemically reasonable restraints are used). Set all cell length minima to 1 angstrom and maxima to 20 angstroms. Constrain the angles to be between 60 and 120 degrees, and the volume from between 1 and 500 cubic angstroms. (Note that due to the angle adjustment described in CPC, 2011, 182, 372-387, 60-120 degrees is the largest range of cell angles that XtalOpt will generate.) Furthermore, the volume of the cell can be fixed, so that all cells generated will have the exact same volume.

1.2.3 Interatomic Distances

There are now two different kinds of interatomic distances available: scaled interatomic distances and custom interatomic distances. If "Use Scaled Interatomic Distances" is checked, the covalent radii of the elements will be multiplied by the "Scale factor", and any radii below the "Minimum radius" will be set to the "Minimum Radius." The minimum interatomic distance, then, between pairs of atoms in this setup is the sum of their radii. For our example, check the "Use Scaled Interatomic Distances" checkbox and set "Scale factor" to 0.40 and "Minimum radius" to 0.25.

Custom interatomic distances is an alternative option. If the "Use Custom Interatomic Distances" box is checked instead, the user can specify the minimum interatomic distance between every pair of atom type in the table below the check box.

Finally, a checkbox labelled "Check IAD Post-Optimization" is also now available. If this box is checked, the interatomic distances are checked after the optimization is complete, and if any structures fail the interatomic distance check, they will be marked as failed structures.

1.2.4 Molecular-Unit Builder

If the user chooses to define specific molecular units, this option will allow them to do so. Once the chemical composition has been defined, the user can choose the center and neighbor atoms to be set as single-center molecules. For example, with the 6 formula unit TiO_2 , we could set 6 Ti atoms to be the center of 2 O atoms in a linear geometry. We can also decide what the interatomic distance between the center and neighboring atoms will be. If there are left over atoms, they will be placed randomly after the molecular units are added.

The molecular units are only used in the initial generation.

1.2.5 Random Spacegroup Generator

Spacegroup Options

Ti1 O2

	Space Group	Formula Units Possible	Allow randSpg?	Min xtals per FU
1	P 1	16	<input checked="" type="checkbox"/>	0
2	P -1	16	<input checked="" type="checkbox"/>	0
3	P 1 2 1	16	<input checked="" type="checkbox"/>	0
4	P 1 21 1	16	<input checked="" type="checkbox"/>	0
5	C 1 2 1	16	<input checked="" type="checkbox"/>	0
6	P 1 m 1	16	<input checked="" type="checkbox"/>	0
7	P 1 c 1	16	<input checked="" type="checkbox"/>	0
8	C 1 m 1	16	<input checked="" type="checkbox"/>	0
9	C 1 c 1	16	<input checked="" type="checkbox"/>	0
10	P 1 2/m 1	16	<input checked="" type="checkbox"/>	0
11	P 1 21/m 1	16	<input checked="" type="checkbox"/>	0
12	C 1 2/m 1	16	<input checked="" type="checkbox"/>	0
13	P 1 2/c 1	16	<input checked="" type="checkbox"/>	0
14	P 1 21/c 1	16	<input checked="" type="checkbox"/>	0
15	C 1 2/c 1	16	<input checked="" type="checkbox"/>	0
16	P 2 2 2	16	<input checked="" type="checkbox"/>	0

Select all Deselect all Increment All Decrement All

With the implementation of RandSpg, the initial generation of structures can be created by using specific spacegroups (or a variety of spacegroups). The choice for spacegroups will be limited by the chemical composition and number of formula units.

Spacegroup constraints can only be used in the initial generation. Molunit and randSpg cannot be used simultaneously.

For more information on randSpg, see [this paper](#).

1.2.6 Mitosis


For structures with large unit cells/large number of atoms, one can use "Mitosis" to increase the local order of the initially generated structures. This will create a small subcell, then multiply the subcell in each direction to fulfill the stoichiometry and unit cell size. "# of Divisions" defines how many subcells will be replicated, based upon the user defined number of "Formula Units", and the a, b, c determine in which direction the cells are replicated.

1.3 Optimizer setup

XtalOpt currently supports the [VASP](#), [GULP](#), [PWscf](#), [CASTEP](#), and [SIESTA](#) codes for performing geometry optimizations. Each is detailed in its own section below.

Be aware that program installation is different, and it is almost certain that the submit files included with these schemes will not work on any cluster other than the Zurek group's "parity" cluster at SUNY Buffalo's Center for Computational Research. It may take some experimentation to get jobs to submit successfully, and you may need to contact the system administrators of the cluster for assistance for information about MPI, executable locations, etc. Perhaps the easiest method to find the correct submit script is to run some trial submissions by hand, and then replace the structure/search specific information with the appropriate keywords once a working script has been generated.

1.3.1 VASP

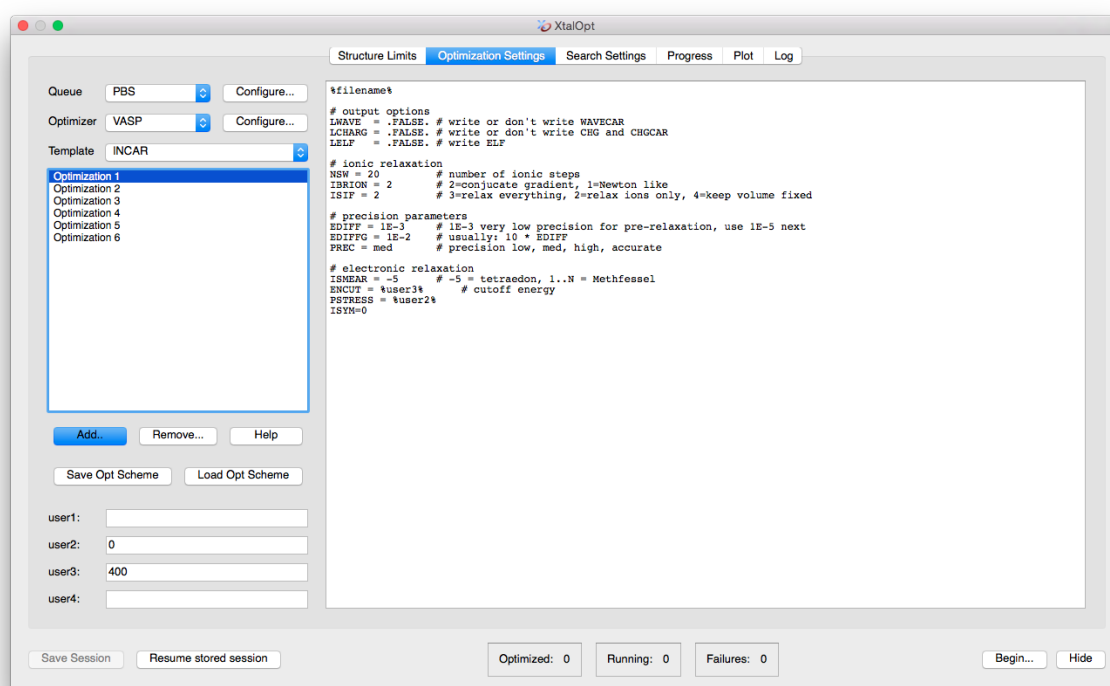

On the next tab, load the optimization scheme by clicking the "Load Opt Scheme" button and selecting the "samples/vasp-xtalopt.scheme" file that is distributed with the source code. If you do not have a copy of the source code, the scheme file can be obtained by clicking [here](#).

For more details on optimization schemes, see [Optimization Schemes](#).

After loading the optimization scheme, XtalOpt will prompt for the POTCAR files to use. Select files appropriate for the prompted atom. XtalOpt will construct the POTCAR files on the local computer, and then copy them over to the cluster when the calculation is submitted. It is necessary to have the VASP POTCAR files for each atomic species located somewhere on the local computer. See the VASP manual for information on obtaining the POTCAR files.


Take a moment to look through each file for each optimization step. Notice that the INCAR template includes two user-specified values, %user2% and %user3% for the external pressure and the energy cutoff, respectively. By entering appropriate values in the "user2:" and "user3:" fields on the left, it is easy to update these values for all optimization steps.

Notice the other %keyword% values in the job.pbs templates. These are used to enter information that is specific to a search or structure when the actual input files are written prior to job submission. Click the "Help" button for a full listing of the available keywords.

XtalOpt expects VASP to use the default filenames, mainly POSCAR, CONTCAR, and OUTCAR.

[Skip to next section.](#)

1.3.2 GULP

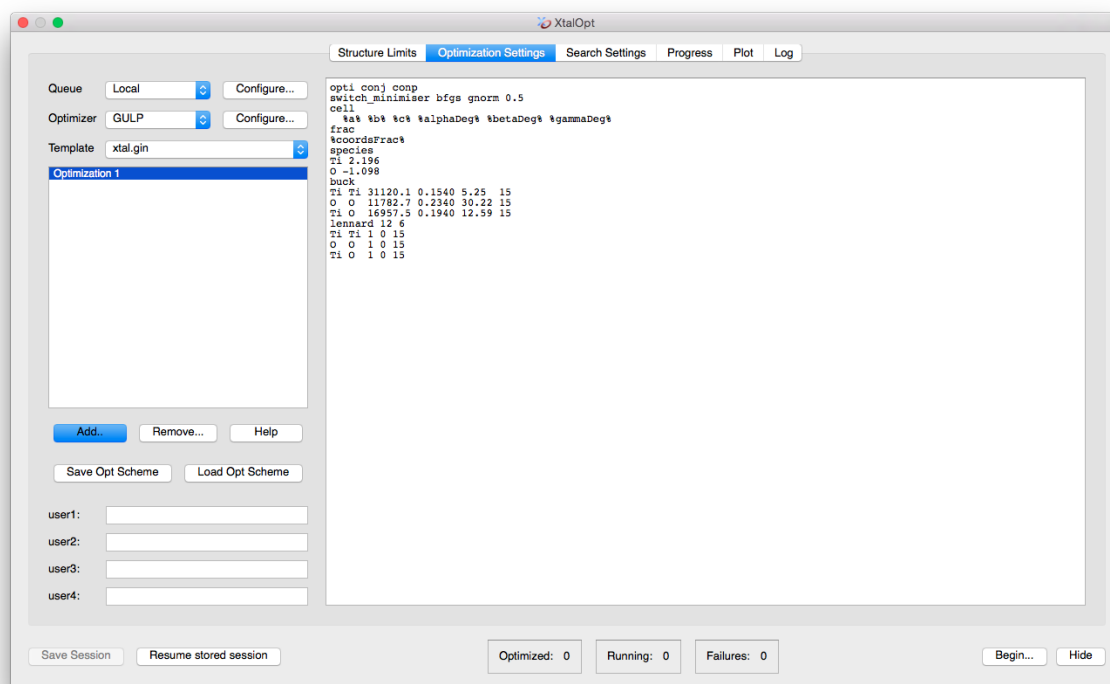

On the next tab we choose GULP for the local optimizer and enter a template for GULP to use. Select "GULP" as the "Optimizer" and "xtal.gin" as "Template". Next, fill out the text field on the right with the following template:

```
opti conj comp
switch_minimiser bfgs gnorm 0.5
cell
  %a% %b% %c% %alphaDeg% %betaDeg% %gammaDeg%
frac
%coordsFrac%
species
Ti 2.196
O -1.098
buck
Ti Ti 31120.1 0.1540 5.25 15
O O 11782.7 0.2340 30.22 15
Ti O 16957.5 0.1940 12.59 15
lennard 12 6
Ti Ti 1 0 15
O O 1 0 15
Ti O 1 0 15
```

Alternatively, one can load the scheme file distributed with the source code under samples/gulp-TiO-xtalopt.scheme. If the source code is not available, the scheme file can be obtained by clicking [here](#).

For more details on optimization schemes, see [Optimization Schemes](#).


Note the "%" surrounding various keywords. These will be replaced by the structure-specific data when the optimizer is invoked for each structure. Click "Help" to view all of the keywords available. The number of optimization steps can be modified with the "Add/Resume" buttons. The "user" fields in the lower left corner allow users to specify their own keyword/value pairs, which is useful for making changes to multiple optimization steps at once. We will only be using one optimization step in this tutorial.

XtalOpt expects GULP to use the following filenames:

```
gulp < xtal.gin > xtal.got
```

[Skip to next section.](#)

1.3.3 PWscf

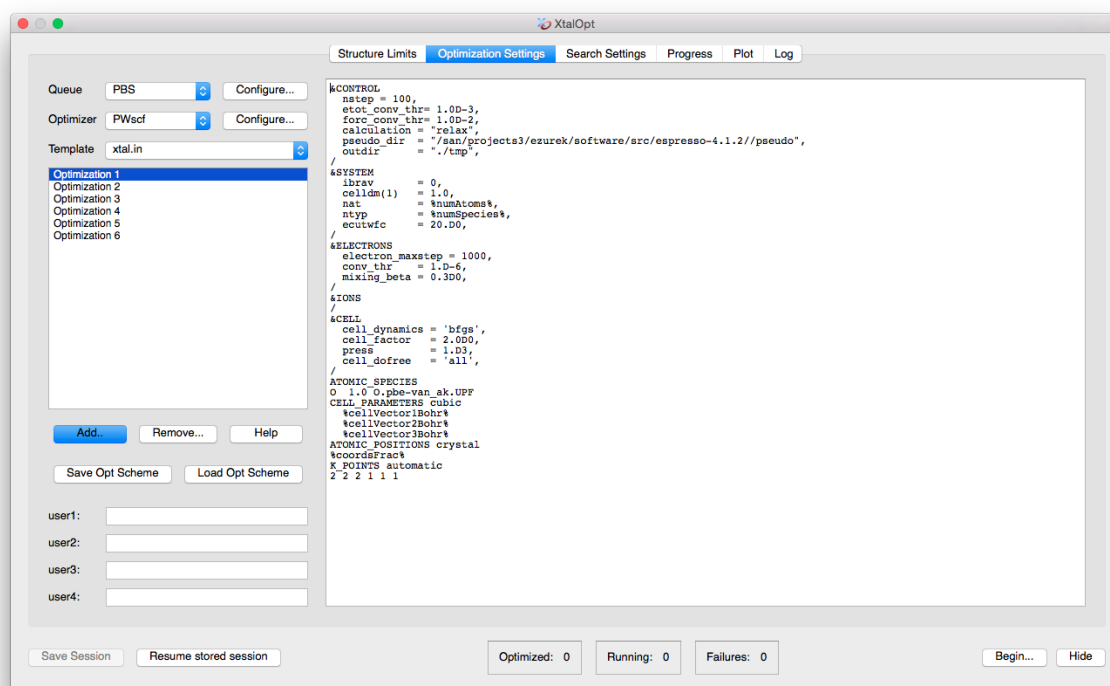

On the next tab, load the optimization scheme that is distributed with the source code under the samples/ directory. The scheme that we want is named "pwscf-xtalopt.scheme". If the source code is not available, the scheme file can be obtained by clicking the "Original Format" link at the bottom of the page [here](#).

For more details on optimization schemes, see [Optimization Schemes](#).

Each PWscf input file will need to be edited to specify:

1. The pseudo_dir containing the pseudopotential files on the remote cluster, and
2. The pseudopotentials for each atom (under ATOMIC_SPECIES)

Take a moment to look through each file for each optimization step.


Notice the %keyword% values in the job.pbs templates. These are used to enter information that is specific to a search or structure when the actual input files are written prior to job submission. Click the "Help" button for a full listing of the available keywords.

XtalOpt expects PWscf to use the following filenames:

```
pw.x < xtal.in > xtal.out
```

[Skip to next section.](#)

1.3.4 CASTEP

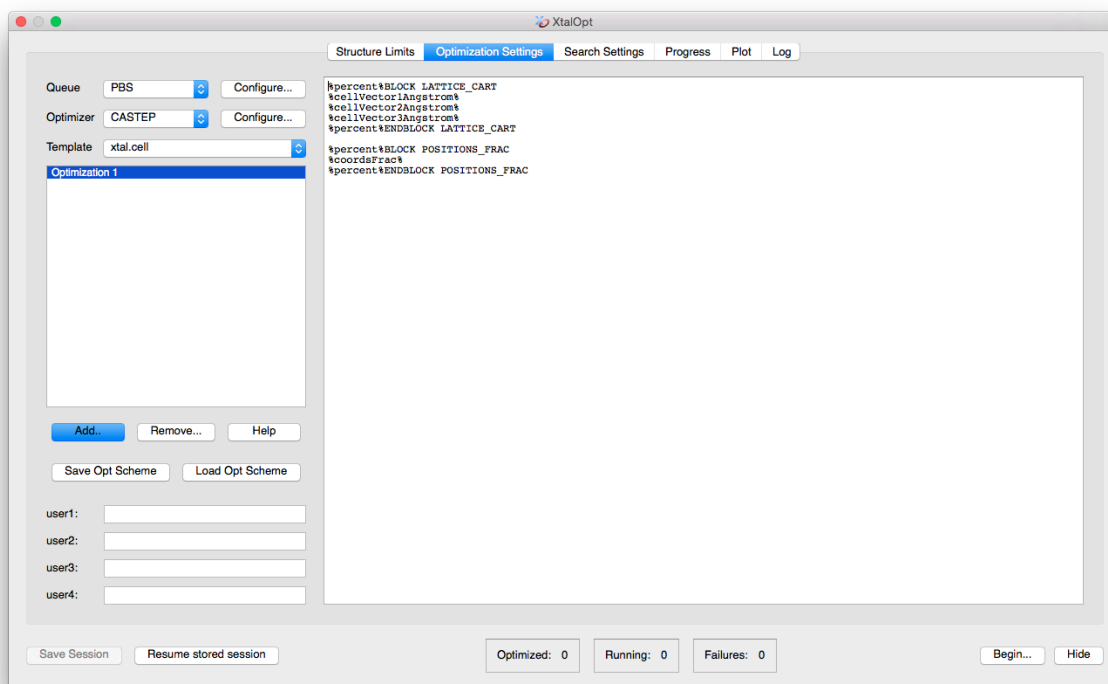

On the next tab, load the optimization scheme that is distributed with the source code under the `samples/` directory. The scheme that we want is named "castep-xtalopt.scheme". If the source code is not available, the scheme file can be obtained by clicking the "Original Format" link at the bottom of the page [here](#).

For more details on optimization schemes, see [Optimization Schemes](#).

It is important to note that CASTEP input files require the "%" character to define blocks. The percent character is special in the XtalOpt input template parser to define keywords (see below). To insert a literal "%" into the input, use `percent%`.

E.g. Specification of the fractional coordinate block in the `.cell` template should look like:

```
%block% POSITIONS_FRAC
%coordsFrac%
%endblock% POSITIONS_FRAC
```

Take a moment to look through each file for each optimization step.


Notice the `%keyword%` values in the `job.pbs` templates. These are used to enter information that is specific to a search or structure when the actual input files are written prior to job submission. Click the "Help" button for a full listing of the available keywords.

XtalOpt expects CASTEP to use the following filenames:

```
# XtalOpt will write xtal.cell, xtal.param
castep xtal
# CASTEP will create xtal.castep
```

[Skip to next section.](#)

1.3.5 SIESTA

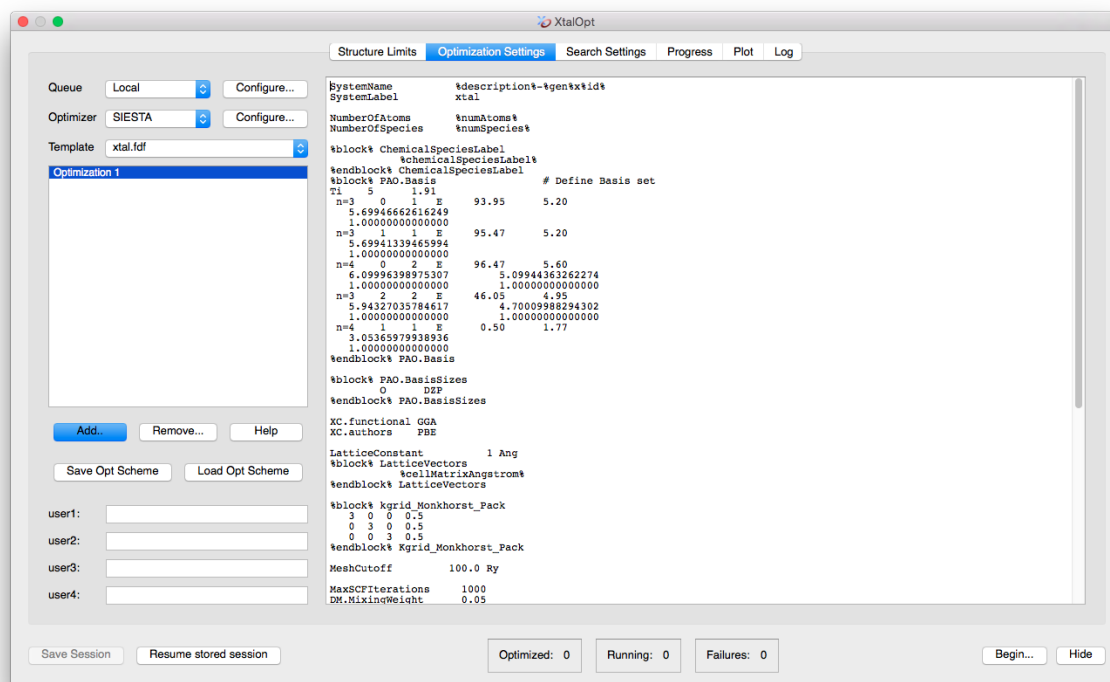

On the next tab we choose SIESTA for the local optimizer and enter a template for SIESTA to use. Select "SIESTA" as the "Optimizer" and "xtal.fdf" as "Template".

Next, fill out the text field on the right with the following template:

```

SystemName          %description%-%gen%x%id%
SystemLabel          xtal

NumberOfAtoms        %numAtoms%
NumberOfSpecies      %numSpecies%

%block% ChemicalSpeciesLabel
%chemicalSpeciesLabel%
%endblock% ChemicalSpeciesLabel

%block% PAO.Basis          # Define Basis set
Ti      5      1.91
n=3     0      1 E      93.95      5.20
5.69946662616249
1.000000000000000
n=3     1      1 E      95.47      5.20
5.69941339465994
1.000000000000000
n=4     0      2 E      96.47      5.60
6.09996398975307      5.09944363262274
1.000000000000000
n=3     2      2 E      46.05      4.95
5.94327035784617      4.70009988294302
1.000000000000000
n=4     1      1 E      0.50      1.77
3.05365979938936
1.000000000000000
%endblock% PAO.Basis

%block% PAO.BasisSizes
O      DZP
%endblock% PAO.BasisSizes

XC.functional GGA
XC.authors    PBE

```

```

LatticeConstant          1 Ang
%block% LatticeVectors
%cellMatrixAngstrom%
%endblock% LatticeVectors

%block% kgrid_Monkhorst_Pack
  3  0  0  0.5
  0  3  0  0.5
  0  0  3  0.5
%endblock% Kgrid_Monkhorst_Pack

MeshCutoff              100.0 Ry

MaxSCFIterations         1000
DM.MixingWeight           0.05
DM.NumberPulay            3
DM.Tolerance              1.d-4

SolutionMethod           diagon

SpinPolarized            true
LongOutput               true

MD.TypeOfRun             cg
MD.NumCGSteps            1000
MD.VariableCell           true
MD.MaxForceTol            0.01 eV/Ang #0.005 eV/Ang
WriteForces               true
WriteCoorCerius           true
WriteCoorXmol             false
WriteDenchar              true
WriteMullikenPop          1

UseSaveData               true

#Diag.ParallelOverK true

AtomicCoordinatesFormat Fractional
%block% AtomicCoordinatesAndAtomicSpecies
%atomicCoordsAndAtomicSpecies%
%endblock% AtomicCoordinatesAndAtomicSpecies

```

Or load the optimization scheme by clicking the "Load Opt Scheme" button and selecting the "samples/siesta-TiO-xtalopt.scheme" file that is distributed with the source code. If the source code is not available, the scheme file can be obtained by clicking [here](#).

For more details on optimization schemes, see [Optimization Schemes](#).

After loading the optimization scheme, XtalOpt will prompt for the xtal.psf files to use. Select files appropriate for the prompted atom. XtalOpt will copy the individual files over to each structure directory when the calculation is submitted. See the SIESTA manual for information on obtaining the .psf files.

Notice the other %keyword% values in the xtal.fdf templates. These are used to enter information that is specific to a search or structure when the actual input files are written prior to job submission. Click the "Help" button for a full listing of the available keywords.

Note: that in the current implementation XtalOpt uses the Total Final Energy printed in the output to determine the fitness of a structure. If the user would like to use a different thermodynamic quantity for the fitness, please contact the XtalOpt developers.


XtalOpt expects SIESTA to use the following filenames:

```
siesta < xtal.fdf > xtal.out
```

1.4 Queue setup

XtalOpt currently supports using the [PBS](#), [SGE](#), [SLURM](#), [LSF](#), and [LoadLeveler](#) queuing systems on remote SSH-accessible clusters, as well as an internal [local](#) queue that manages calculations on the user's workstation. Each queuing interface is detailed in its own section below.

1.4.1 Using a remote PBS cluster

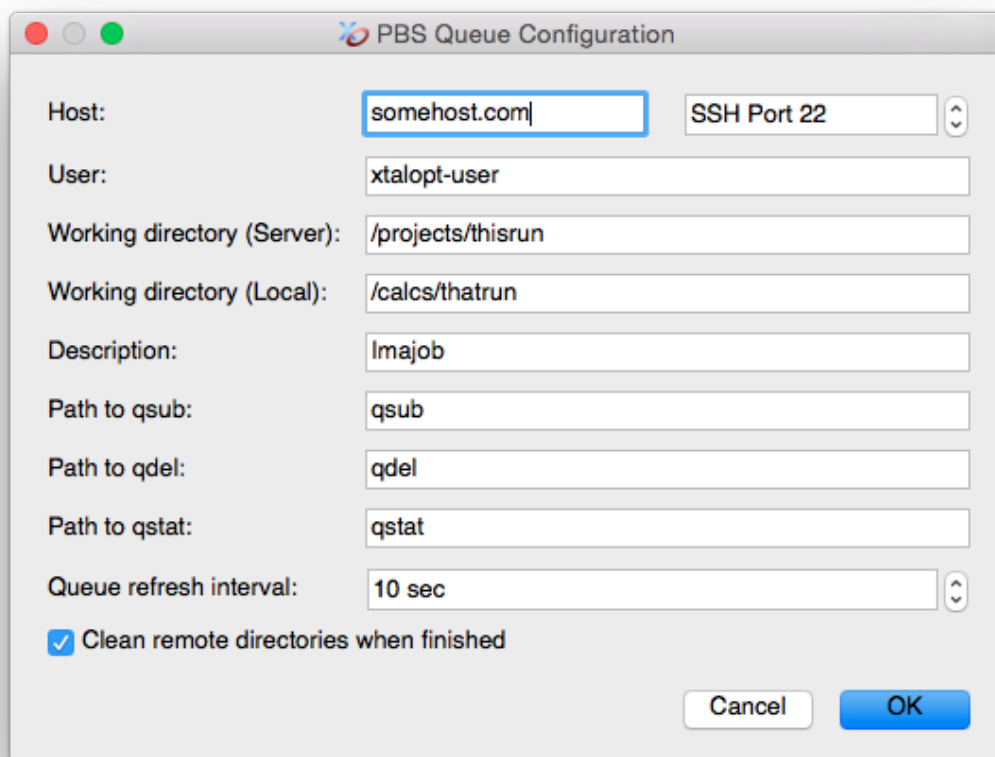

The image shows a macOS-style dialog box titled "PBS Queue Configuration". It contains several input fields and a checkbox. The fields are: "Host:" with the value "somehost.com", "SSH Port 22" (a dropdown menu), "User:" with the value "xtalopt-user", "Working directory (Server):" with the value "/projects/thisrun", "Working directory (Local):" with the value "/calcs/thatrun", "Description:" with the value "lmajob", "Path to qsub:" with the value "qsub", "Path to qdel:" with the value "qdel", "Path to qstat:" with the value "qstat", and "Queue refresh interval:" with the value "10 sec" (a dropdown menu). At the bottom, there is a checked checkbox labeled "Clean remote directories when finished". There are "Cancel" and "OK" buttons at the bottom right.

Select "PBS" from the list of Queues, and then click the "Configure..." button. A new window will prompt for:

- host: The hostname of the PBS cluster's head node
- user: The username used to log into the cluster
- Working directory (Server): A directory that is readable/writable by "user" on the cluster, used when performing optimizations.
- Working directory (Local): A directory that is readable/writable by the current user on the local computer. This is where the final structures and resume files are written.
- Description: Used for the %description% keyword in input templates.
- Path to qsub: Where to find the qsub executable on the remote cluster. Note that if qsub is in the cluster's \$PATH, setting this to just 'qsub' will work.
- Path to qdel: Where to find the qdel executable on the remote cluster. Note that if qdel is in the cluster's \$PATH, setting this to just 'qdel' will work.
- Path to qstat: Where to find the qstat executable on the remote cluster. Note that if qstat is in the cluster's \$PATH, setting this to just 'qstat' will work.
- "Clean remote directories when finished": will remove all of the generated files from the cluster. Only the files on the local computer will be kept. If you do not want this to occur, make sure to uncheck this option.

A new template, "job.pbs" is added to the list of available templates. This is the job submission script for PBS. This script should roughly follow this design:

```
#!/bin/bash
#PBS -l nodes=1:ppn=8
#PBS -o ../%gen%x%id%-%optstep%.out
#PBS -e ../%gen%x%id%-%optstep%.err
#PBS -N %description%-%gen%x%id%-%optstep%

###Include this for XtalOpt scripts!###
export PBS_O_WORKDIR=%rempath%

# Change to structure's working directory, copy input files to node's scratch dirs:
for node in `cat $PBS_NODEFILE | sort | uniq`; do
rsh $node "cp $PBS_O_WORKDIR/* $PBSTMPDIR/";
done

# Move to the scratch directory
cd $PBSTMPDIR
echo "running in directory $PBSTMPDIR"

# Set any environment variables needed for the optimizer/MPI here:

# Run optimizer, be sure to use the filenames that XtalOpt expects.
# See the template menu in XtalOpt and the example templates in the
# samples/ directory of the XtalOpt sources.

# Don't forget to clean up after MPI if needed!

// Print files from each node
for node in `cat $PBS_NODEFILE | sort | uniq`; do
echo "$node:"
rsh $node "ls -l $PBSTMPDIR"
done
# Copy back results from master node's scratch directory
cp $PBSTMPDIR/* $PBS_O_WORKDIR/
```

For more details on optimization schemes, see [Optimization Schemes](#).


A handy trick for monitoring jobs outside of XtalOpt is to include the following line in job.pbs:

```
#PBS -N %description%-%gen%x%id%-%optstep%
```

This will name each job, for example, xtalSearch-3x4-2, where xtalSearch is a user-specified description of the search, and 3x4-2 means that it is the fourth structure in the third generation running its second optimization step.

[Skip to next section.](#)

1.4.2 Using a remote SGE cluster

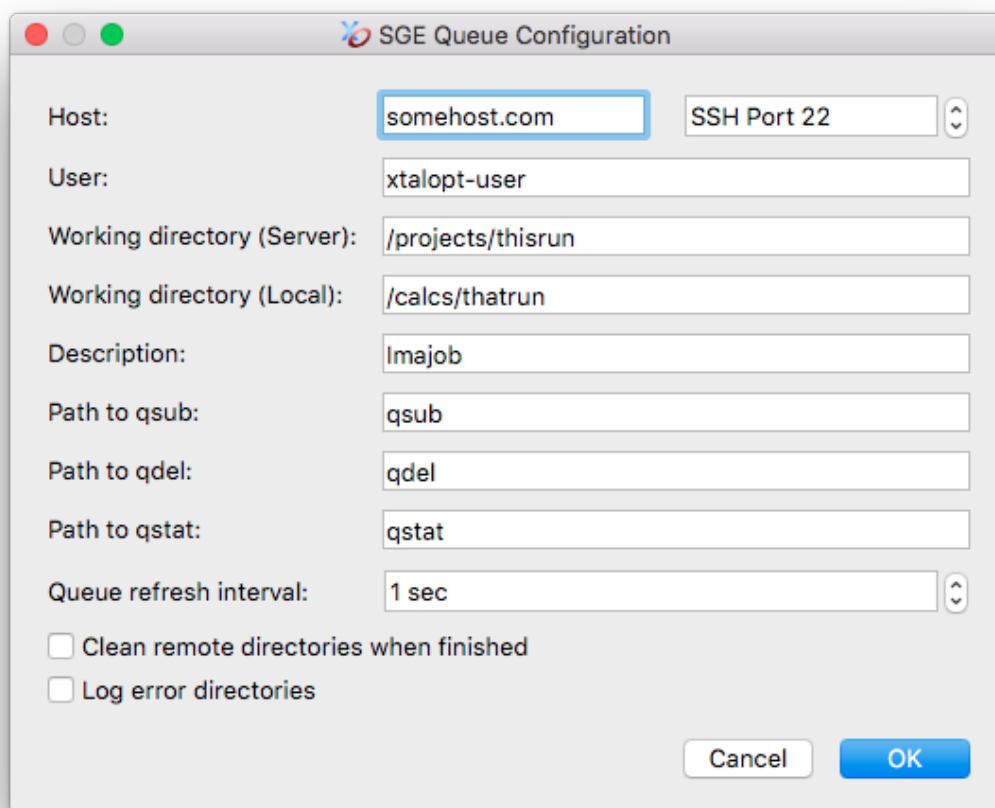

SGE Queue Configuration

Host: somehost.com SSH Port 22

User: xtalopt-user

Working directory (Server): /projects/thisrun

Working directory (Local): /calcs/thatrun

Description: Imajob

Path to qsub: qsub

Path to qdel: qdel

Path to qstat: qstat

Queue refresh interval: 1 sec

☐ Clean remote directories when finished

☐ Log error directories

Cancel OK

Select "SGE" from the list of Queues, and then click the "Configure..." button. A new window will prompt for:


- host: The hostname of the SGE cluster's head node
- user: The username used to log into the cluster
- Working directory (Server): A directory that is readable/writable by "user" on the cluster, used when performing optimizations.
- Working directory (Local): A directory that is readable/writable by the current user on the local computer. This is where the final structures and resume files are written.
- Description: Used for the %description% keyword in input templates.
- Path to qsub: Where to find the qsub executable on the remote cluster. Note that if qsub is in the cluster's \$PATH, setting this to just 'qsub' will work.
- Path to qdel: Where to find the qdel executable on the remote cluster. Note that if qdel is in the cluster's \$PATH, setting this to just 'qdel' will work.
- Path to qstat: Where to find the qstat executable on the remote cluster. Note that if qstat is in the cluster's \$PATH, setting this to just 'qstat' will work.
- "Clean remote directories when finished": will remove all of the generated files from the cluster. Only the files on the local computer will be kept. If you do not want this to occur, make sure to uncheck this option.

A new template, "job.sge" is added to the list of available templates. This is the job submission script for SGE. It may take some experimentation to get jobs to submit successfully, and you may need to contact the system administrators of the cluster for assistance or information about MPI, executable locations, etc. Perhaps the easiest method to find the correct SGE script is to run some trial submissions by hand, and then replace the structure/search specific information with the appropriate keywords once a working script has been generated.

For more details on optimization schemes, see [Optimization Schemes](#).

[Skip to next section.](#)

1.4.3 Using a remote SLURM cluster

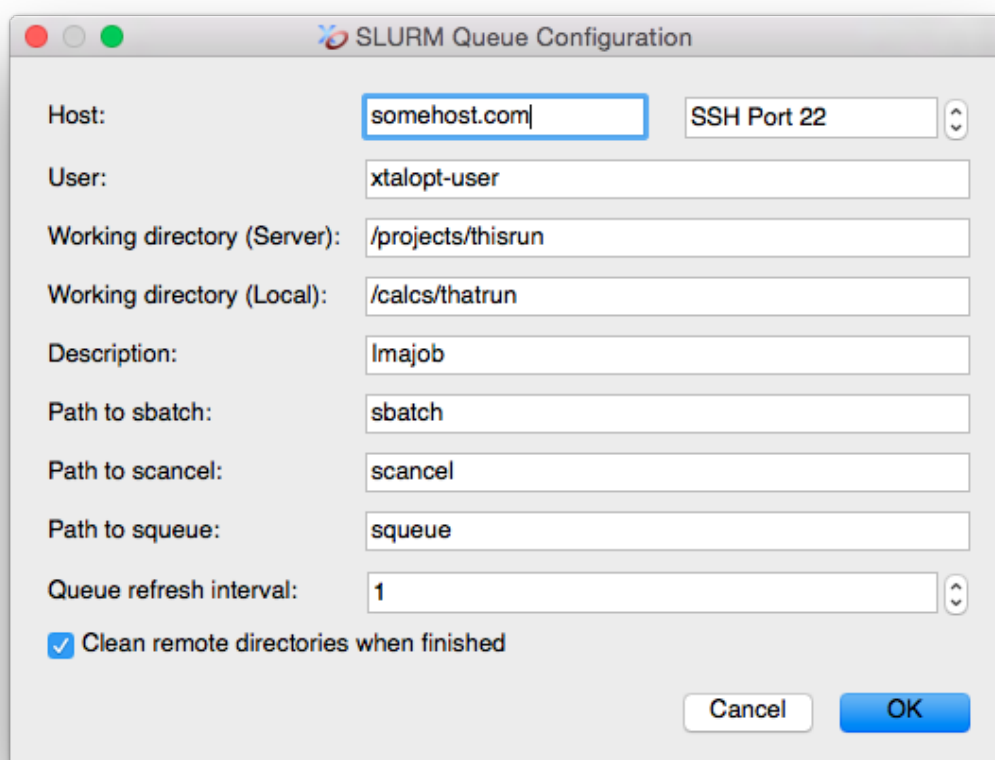A screenshot of a macOS-style dialog box titled "SLURM Queue Configuration". The dialog contains several input fields and a checkbox. The "Host:" field is highlighted with a blue border and contains the text "somehost.com". The "SSH Port" field is a dropdown menu showing "22". The "User:" field contains "xtalopt-user". The "Working directory (Server):" field contains "/projects/thisrun". The "Working directory (Local):" field contains "/calcs/thatrun". The "Description:" field contains "Imajob". The "Path to sbatch:" field contains "sbatch". The "Path to scancel:" field contains "scancel". The "Path to squeue:" field contains "squeue". The "Queue refresh interval:" field is a spinner box showing the number "1". At the bottom, there is a checked checkbox labeled "Clean remote directories when finished". At the bottom right, there are two buttons: "Cancel" and "OK".

Host:	somehost.com	SSH Port	22
User:	xtalopt-user		
Working directory (Server):	/projects/thisrun		
Working directory (Local):	/calcs/thatrun		
Description:	Imajob		
Path to sbatch:	sbatch		
Path to scancel:	scancel		
Path to squeue:	squeue		
Queue refresh interval:	1		
<input checked="" type="checkbox"/> Clean remote directories when finished			
		Cancel	OK

Select "SLURM" from the list of Queues, and then click the "Configure..." button. A new window will prompt for:

- host: The hostname of the SLURM cluster's head node
- user: The username used to log into the cluster
- Working directory (Server): A directory that is readable/writable by "user" on the cluster, used when performing optimizations.
- Working directory (Local): A directory that is readable/writable by the current user on the local computer. This is where the final structures and resume files are written.
- Description: Used for the %description% keyword in input templates.

- Path to sbatch: Where to find the sbatch executable on the remote cluster. Note that if sbatch is in the cluster's \$PATH, setting this to just 'sbatch' will work.
- Path to scancel: Where to find the scancel executable on the remote cluster. Note that if scancel is in the cluster's \$PATH, setting this to just 'scancel' will work.
- Path to squeue: Where to find the squeue executable on the remote cluster. Note that if squeue is in the cluster's \$PATH, setting this to just 'squeue' will work.
- "Clean remote directories when finished": will remove all of the generated files from the cluster. Only the files on the local computer will be kept. If you do not want this to occur, make sure to uncheck this option.

A new template, "job.slurm" is added to the list of available templates. This is the job submission script for SLURM. It may take some experimentation to get jobs to submit successfully, and you may need to contact the system administrators of the cluster for assistance or information about MPI, executable locations, etc. Perhaps the easiest method to find the correct SLURM script is to run some trial submissions by hand, and then replace the structure/search specific information with the appropriate keywords once a working script has been generated.

For more details on optimization schemes, see [Optimization Schemes](#).

[Skip to next section.](#)

1.4.4 Using a remote LSF cluster

Select "LSF" from the list of Queues, and then click the "Configure..." button. A new window will prompt for:

- host: The hostname of the LSF cluster's head node


- user: The username used to log into the cluster
- Working directory (Server): A directory that is readable/writable by "user" on the cluster, used when performing optimizations.
- Working directory (Local): A directory that is readable/writable by the current user on the local computer. This is where the final structures and resume files are written.
 - Description: Used for the description% keyword in input templates.
 - Path to bsub: Where to find the bsub executable on the remote cluster. Note that if bsub is in the cluster's \$PATH, setting this to just 'bsub' will work.
 - Path to bkill: Where to find the bkill executable on the remote cluster. Note that if bkill is in the cluster's \$PATH, setting this to just 'bkill' will work.
 - Path to bjobs: Where to find the bjobs executable on the remote cluster. Note that if bjobs is in the cluster's \$PATH, setting this to just 'bjobs' will work.
- "Clean remote directories when finished": will remove all of the generated files from the cluster. Only the files on the local computer will be kept. If you do not want this to occur, make sure to uncheck this option.

A new template, "job.lsf" is added to the list of available templates. This is the job submission script for LSF. It may take some experimentation to get jobs to submit successfully, and you may need to contact the system administrators of the cluster for assistance or information about MPI, executable locations, etc. Perhaps the easiest method to find the correct LSF script is to run some trial submissions by hand, and then replace the structure/search specific information with the appropriate keywords once a working script has been generated.

For more details on optimization schemes, see [Optimization Schemes](#).

[Skip to next section.](#)

1.4.5 Using a remote LoadLeveler cluster

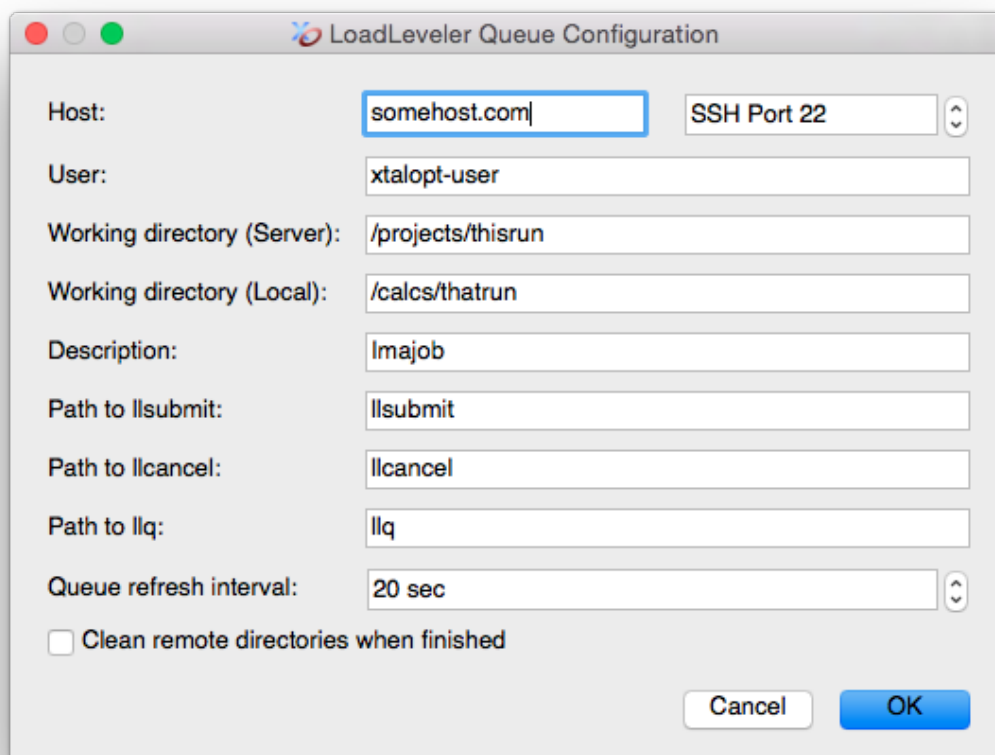

The image shows a macOS-style dialog box titled "LoadLeveler Queue Configuration". It contains several input fields and a checkbox. The fields are: "Host:" with the value "somehost.com", "SSH Port 22" in a dropdown, "User:" with the value "xtalopt-user", "Working directory (Server):" with the value "/projects/thisrun", "Working directory (Local):" with the value "/calcs/thatrun", "Description:" with the value "lmajob", "Path to lsubmit:" with the value "lsubmit", "Path to llcancel:" with the value "llcancel", "Path to llq:" with the value "llq", and "Queue refresh interval:" with the value "20 sec" in a dropdown. At the bottom left is a checkbox labeled "Clean remote directories when finished" which is currently unchecked. At the bottom right are "Cancel" and "OK" buttons.

Select "LoadLeveler" from the list of Queues, and then click the "Configure..." button. A new window will prompt for:


- host: The hostname of the LoadLeveler cluster's head node
- user: The username used to log into the cluster
- Working directory (Server): A directory that is readable/writable by "user" on the cluster, used when performing optimizations.
- Working directory (Local): A directory that is readable/writable by the current user on the local computer. This is where the final structures and resume files are written.
- Description: Used for the description% keyword in input templates.
- Path to lsubmit: Where to find the lsubmit executable on the remote cluster. Note that if lsubmit is in the cluster's \$PATH, setting this to just 'lsubmit' will work.
- Path to llcancel: Where to find the llcancel executable on the remote cluster. Note that if llcancel is in the cluster's \$PATH, setting this to just 'llcancel' will work.
- Path to llq: Where to find the llq executable on the remote cluster. Note that if llq is in the cluster's \$PATH, setting this to just 'llq' will work.
- "Clean remote directories when finished": will remove all of the generated files from the cluster. Only the files on the local computer will be kept. If you do not want this to occur, make sure to uncheck this option.

A new template, "job.ll" is added to the list of available templates. This is the job submission script for LoadLeveler. It may take some experimentation to get jobs to submit successfully, and you may need to contact the system administrators of the cluster for assistance or information about MPI, executable locations, etc. Perhaps the easiest method to find the correct LoadLeveler script is to run some trial submissions by hand, and then replace the structure/search specific information with the appropriate keywords once a working script has been generated.

For more details on optimization schemes, see [Optimization Schemes](#).

[Skip to next section.](#)

1.4.6 Running optimizations locally

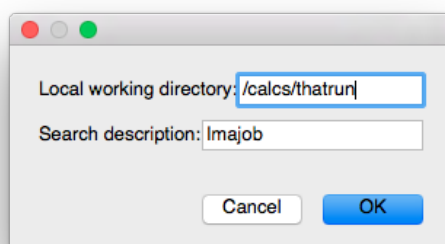

Select "Local" from the list of Queues, and then click the configure button. A new window will prompt for:

- Local working directory: A directory that is readable/writable by the current user on the local computer. This is where the final structures and resume files are written.

If the optimizer's executable (vasp, gulp, pw.x, castep, etc) is not in your system path, you will need to specify the location of the executable by clicking the "Configure..." button next to the optimizer selection menu.

For more details on optimization schemes, see [Optimization Schemes](#).

1.5 What is written to the local directory?

A directory for each structure is created at

```
[Local working directory]/<gen#>x<id#>
```

that will contain input, output, and data files specific to each structure. Two additional files are also written to the local filesystem:

```
[Local working directory]/xtalopt.state
```

which contains save/resume information to continue a session that has been stopped, and

```
[Local working directory]/results.txt
```

which stores a list of all structures sorted by increasing enthalpy. The latter file is handy for offline analysis, since there is no need to open XtalOpt to find the most stable structures of a previous search.

1.6 Search Settings

The screenshot shows the XtalOpt application window with the 'Search Settings' tab selected. The interface is organized into several panels. The 'Initial Generation' panel on the left has 'Initial structures' set to 20 and an empty 'Initial Seed Structures' list. The 'Search Parameters' panel in the center-top includes 'Pool size per FU' (20), 'Continuous structures' (5), a checked 'Limit running jobs?' option with a 'Limit to 1 jobs' dropdown, 'If a job fails' set to '2 times' with a 'replace with random' dropdown, and 'Total Number of Structures' set to 600. The 'Formula Unit Options' panel below it has checkboxes for 'Allow initial mitosis', 'Allow FU Crossovers' (set to 'Allow at Generation: 4'), and 'Use one gene pool?', along with 'Chance of later mitosis' set to 50%. The 'Crossover' panel on the bottom left shows 'Percent new crossover' at 15% and 'Minimum contribution' at 25%. The 'Stripline' panel in the center-bottom has 'Percent new stripple' at 50%, 'Strain stdev range' from 0.500 to 0.500, 'Amplitude range' from 0.500 to 1.000, and 'Waves in axis 1' and 'Waves in axis 2' both set to 1. The 'Tolerances' panel on the right includes 'Spacegroup perception' with 'Length tolerance' at 0.050 Å and a 'Re-detect spacegroups...' button, and 'Duplicate matching' with 'Length tolerance' at 0.100 Å, 'Angle tolerance' at 2.000°, and a 'Reset duplicates...' button. The 'Permustrain' panel at the bottom right shows 'Percent new permustrain' at 35%, 'Maximum strain stdev' at 0.500, and 'Number of exchanges' at 4. At the bottom of the window, there are buttons for 'Save Session', 'Resume stored session', and status boxes for 'Optimized: 0', 'Running: 0', and 'Failures: 0', along with 'Begin...' and 'Hide' buttons.

In the "Search Settings" tab, most of the default settings should suffice (See CPC, 2011, 182, 372-387). We arbitrarily set the initial structures to 20 and the continuous structures to 5, although these may need to be adjusted based on available resources. We will not specify initial seeds, but the option to do so exists on this screen.

It is not necessary to limit the number of running jobs unless running locally, as the PBS queue on the cluster will manage job control for us. If running locally, set the job limit no higher than [number of available processor cores] - 1 (e.g. for a quadcore processor, allow three jobs to run simultaneously). This allows one core to remain free for the system to run.

There is now a termination criteria called "Total Number of Structures" that will end the run once a certain number of structures have been produced by XtalOpt.

The tolerances for duplicate matching are also found in this tab. They can be adjusted at any point in the run and the results.txt file will update with the correct duplicates found based upon the new tolerances.

1.7 "Begin"

Gen	Mol	Job ID	Status	Time Elapsed	Enthalpy (eV)	Volume	Space Group	Ancestry
1	1	N/A	Waiting for Optimization (1 of 1)	0:00:00	N/A	281.59	1: P1	Randomly generated
2	1	2	Waiting for Optimization (1 of 1)	0:00:00	N/A	324.85	1: P1	Randomly generated
3	1	3	Waiting for Optimization (1 of 1)	0:00:00	N/A	436.01	1: P1	Randomly generated
4	1	4	Waiting for Optimization (1 of 1)	0:00:00	N/A	384.94	1: P1	Randomly generated
5	1	5	Waiting for Optimization (1 of 1)	0:00:00	N/A	83.60	1: P1	Randomly generated
6	1	6	Waiting for Optimization (1 of 1)	0:00:00	N/A	76.25	1: P1	Randomly generated
7	1	7	Waiting for Optimization (1 of 1)	0:00:00	N/A	325.54	1: P1	Randomly generated
8	1	8	Waiting for Optimization (1 of 1)	0:00:00	N/A	298.76	1: P1	Randomly generated
9	1	9	Waiting for Optimization (1 of 1)	0:00:00	N/A	226.71	1: P1	Randomly generated
10	1	10	Waiting for Optimization (1 of 1)	0:00:00	N/A	359.45	1: P1	Randomly generated
11	1	11	Waiting for Optimization (1 of 1)	0:00:00	N/A	246.84	1: P1	Randomly generated
12	1	12	Waiting for Optimization (1 of 1)	0:00:00	N/A	245.57	1: P1	Randomly generated
13	1	13	Waiting for Optimization (1 of 1)	0:00:00	N/A	238.33	1: P1	Randomly generated
14	1	14	Waiting for Optimization (1 of 1)	0:00:00	N/A	492.63	1: P1	Randomly generated
15	1	15	Waiting for Optimization (1 of 1)	0:00:00	N/A	437.93	1: P1	Randomly generated
16	1	16	Waiting for Optimization (1 of 1)	0:00:00	N/A	156.03	1: P1	Randomly generated
17	1	17	Waiting for Optimization (1 of 1)	0:00:00	N/A	493.89	1: P1	Randomly generated
18	1	18	Waiting for Optimization (1 of 1)	0:00:00	N/A	193.47	1: P1	Randomly generated

Figure 1 The "Progress" tab immediately after starting a search

XtalOpt has everything it needs to start its search at this point; click the "Begin" button in the lower right corner of the application to tell it to start the search algorithm. A progress bar appears as the random first generation is created. Switch to the "Progress" tab and 20 entries will appear, all with a status of "Waiting for Optimization". Click "Refresh" on this tab to begin the local optimizations. From here, XtalOpt will continue to run without user input, starting new optimizations and generating new structures until it is stopped by the user.

1.8 Monitor progress

XtalOpt - Imajob @ somehost.com

Structure Limits

Optimization Settings

Search Settings

Progress

Plot

Log

Gen	Mol	Job ID	Status	Time Elapsed	Enthalpy (eV)	Volume	Space Group	Ancestry	
20	1	20	N/A	Optimized	0:00:16	-230.119	286.73	1: P1	Randomly generated
21	2	1	N/A	Optimized	0:00:06	-238.802	182.20	136: P4 ₂ /mmm	Stripple: 1x12 stdev=0.50000 amp=0.02264 waves=1,1
22	2	2	N/A	Duplicate of 1x2	0:00:04	-236.612	184.22	6: Pm	Stripple: 1x2 stdev=0.50000 amp=0.11003 waves=1,1
23	2	3	N/A	Optimized	0:00:11	-234.265	205.06	1: P1	Stripple: 1x17 stdev=0.22894 amp=0.53867 waves=1,1
24	2	4	N/A	Optimized	0:00:07	-235.109	174.88	6: Pm	Stripple: 1x12 stdev=0.18816 amp=0.97071 waves=1,1
25	3	1	N/A	Optimized	0:00:08	-233.592	185.11	4: P2 ₁	Stripple: 2x1 stdev=0.35948 amp=0.60497 waves=1,1
26	2	5	N/A	Duplicate of 1x12	0:00:20	-238.802	182.20	136: P4 ₂ /mmm	Permustrain: 1x1 stdev=0.16277 exch=4
27	3	2	N/A	Optimized	0:00:26	-235.758	190.59	5: C2	Stripple: 2x1 stdev=0.50000 amp=0.49720 waves=1,1
28	3	3	N/A	Duplicate of 2x1	0:00:12	-238.802	182.20	136: P4 ₂ /mmm	Stripple: 2x1 stdev=0.50000 amp=0.18255 waves=1,1
29	2	6	N/A	Optimized	0:00:04	-238.802	182.20	136: P4 ₂ /mmm	Stripple: 1x12 stdev=0.12458 amp=0.75044 waves=1,1
30	2	7	N/A	Optimized	0:00:07	-234.446	182.16	6: Pm	Crossover: 1x2 (60%) + 1x19 (40%)
31	2	8	N/A	Optimized	0:00:14	-235.327	166.53	225: Fm-3m	Stripple: 1x12 stdev=0.41797 amp=0.51789 waves=1,1
32	4	1	N/A	Optimized	0:00:09	-238.59	180.75	14: P2 ₁ /c	Stripple: 3x3 stdev=0.12166 amp=0.59499 waves=1,1
33	2	9	N/A	Optimized	0:00:14	-235.173	201.34	1: P1	Crossover: 1x19 (49%) + 1x4 (51%)
34	3	4	7419	Running (Opt Step 1 of 1, 0 failures)	0:00:25	N/A	182.20	1: P1	Permustrain: 2x6 stdev=0.38651 exch=4
35	4	2	N/A	Checking status...	0:00:18	-232.786	214.89	1: P1	Stripple: 3x2 stdev=0.44728 amp=0.82453 waves=1,1
36	2	10	N/A	Waiting for Optimization (1 of 1)	0:00:00	N/A	185.81	1: P1	Permustrain: 1x19 stdev=0.17759 exch=4
37	5	1	N/A	Waiting for Optimization (1 of 1)	0:00:00	N/A	180.75	1: P1	Permustrain: 4x1 stdev=0.03405 exch=4

Refresh

Refresh period: 1 seconds

Print Results File

Remove Extra Files

Rank all

Refresh all

Save Session

Resume stored session

Optimized: 30

Running: 4

Failures: 0

Begin...

Hide

Figure 2 The “Progress” tab mid-run

As XtalOpt performs the search, the progress table continuously updates, providing information about each structure. We see individuals in various stages of completion: most are optimized (in blue), structure 2x72 has been automatically marked as a duplicate (dark green) of structure 1x2 and removed from the breeding pool, structure 3x4 is currently undergoing a local optimization (light green), while structure 2x10 is waiting to be optimized (light blue).

Other useful information is displayed about each structure, such as the time spent in optimization, the optimized enthalpy, the cell volume, spacegroup, and each structure's ancestry (i.e. parent(s) and parameters for the genetic operator that generated it). A status bar on the bottom of the window shows the number of structures that are optimized, running, and failing at any given time. This information is visible regardless of which tab is currently being viewed.

After every structure has been optimized, it is checked to see if it is a super cell by performing a primitive reduction. If the primitive reduction yields a crystal with fewer atoms than it originally had, the original crystal is marked as a super cell and a new crystal is generated that is labelled as a primitive reduction of the original. This primitive-reduced crystal does not undergo optimization - it is labelled with the same energy as the original crystal. And, if the user is searching the formula units of the primitive-reduced crystal, the primitive-reduced crystal becomes a part of that smaller formula unit's gene pool.


In addition, every time a new crystal is optimized, if the user is searching multiple formula units and the crystal is found to be low in energy, a supercell of the crystal may be generated and be added to the higher formula unit's gene pool.

An additional feature of the progress table is the ability to immediately visualize any of the individuals in the Avogadro main window – simply clicking on a row in this table will display the three-dimensional structure in Avogadro, where it can be visualized, modified, or exported. If the user would like to add a bit of "intelligent design" to the evolutionary process, a structure can be modified and then resubmitted using a context (right-click) menu from the progress table.

A particularly useful plot is that of enthalpy vs. cell volume, as shown above. From this view, we see a general trend that enthalpy increases with volume (the effect is much more pronounced for systems at higher pressures), and also that below a certain volume enthalpy rises sharply. From this data set, we see that there is a cluster of very low enthalpy structures with cell volumes around 180 cubic angstroms. Armed with this data, we can update the starting volume on the Cell Initialization tab mid-run to reflect this new piece of information that the search has provided us. Many of the other parameters governing structure generation and algorithm specifics can be similarly modified during a search without the need to restart the algorithm.

The plot is also interactive; zooming and panning are possible using simple mouse controls. Clicking on a structure's point on the plot will load it in the main Avogadro window, allow all the same functionality as described above in [Monitor progress](#).

1.8.2 View Crystals in Avogadro2

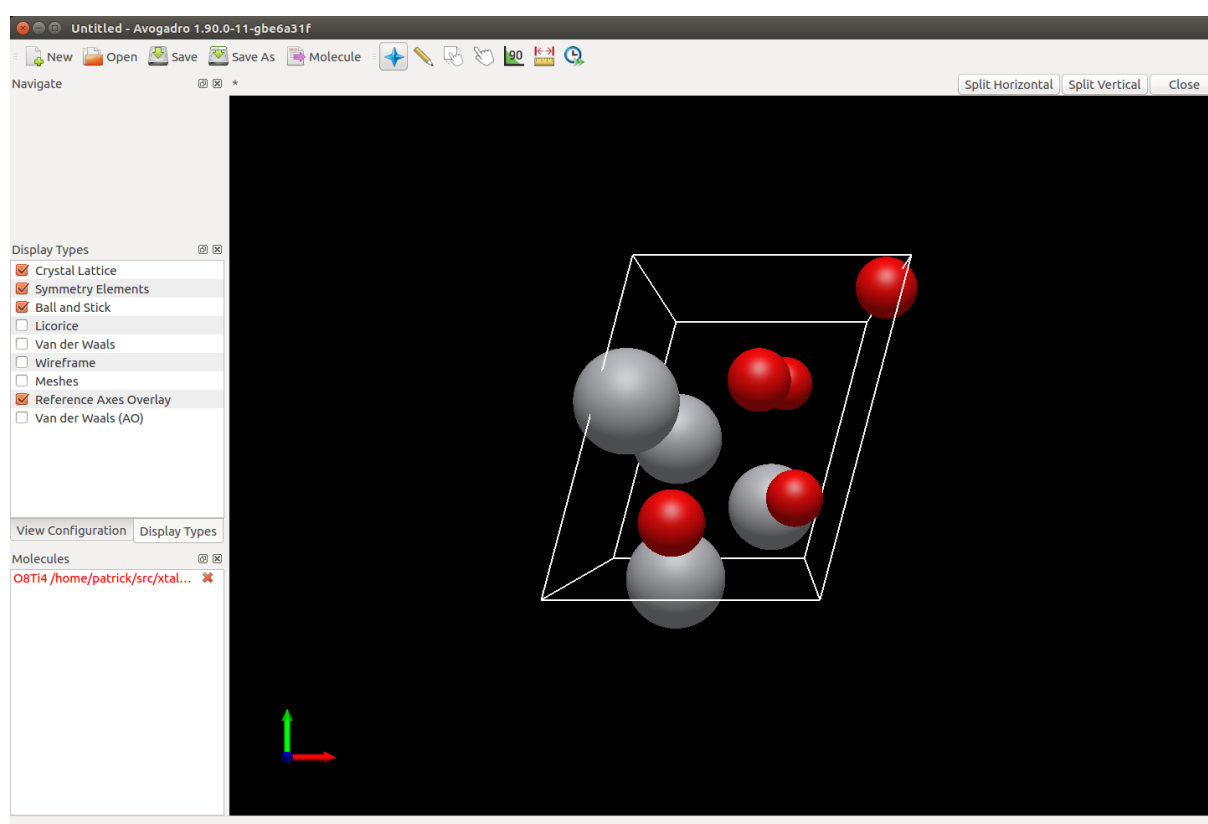

As of release 11, while an XtalOpt window is open, the user may easily view the crystals in Avogadro2. As long as an Avogadro2 window is open and an Avogadro2 RPC server is running, when a user selects crystals in XtalOpt (either via the plot tab or the progress tab), the molecule in the Avogadro2 window will automatically be set to the crystal the user selected. This allows for quick and easy visualization when analyzing a run.

1.9 Command Line Interface

As of release 11, there is a command line interface (CLI) available within XtalOpt. This allows users to set settings and run searches without the use of the GUI.

First of all, one can see all of the XtalOpt CLI options by running "xtalopt --help" from a terminal. This prints all options and a description of each one.

When performing a CLI run, an input file for XtalOpt is required. An example which contains detailed explanations of various options is [here](#).

A CLI run is begun by entering into the terminal "xtalopt --cli". By default, XtalOpt will search for an "xtalopt.in" file in the current directory to use for the input file. If a different input file is desired, the user may explicitly select an input file with "--input-file <file>". The vast majority of the options are taken from the GUI, so more information on these options can be seen by reading about them in their respective places in the manual. One difference is that template files need to be created to represent the different templates for queue interfaces and optimization schemes. These templates use the same %keywords% that are used in the GUI, and an example of a GULP template can be seen [here](#).

When a CLI run first begins, all of the options set by the user and XtalOpt's resulting settings will be printed to the terminal (and to an "xtaloptSettings.log" file in the local working directory). The user should glance over these printed options to ensure that they are set correctly. While a CLI run is going, the user is still able to update settings via a file in their local working directory called "xtalopt-runtime-options.txt". The settings in the "xtalopt-runtime-options.txt" file are read every iteration of the event loop. Thus, if a setting is changed in that file, it will quickly be updated in the program.


In addition, while the CLI run is going, job submissions, completions, and errors will be reported in the terminal. If one wishes to end the CLI run at any time, they just need to use "ctrl-C" or whatever their process interruption command is.

One is also able to resume a run via the CLI if they type in "xtalopt --resume --dir <path/to/resume/dir>". This will check to see if an "xtalopt.state" file is in the specified directory, and if it is, XtalOpt will attempt to resume the run.

While a CLI run is going (or after any run is finished), the user may view the enthalpy/energy results via the "results.txt" file in the local working directory. They may also generate a plot with the "xtalopt --plot --dir <path/to/dir>" command. This will immediately display a plot using the same code as that used to generate the plot tab in a GUI run. Similar to a GUI run, plot axes and other options may be changed. In addition, if Avogadro2 is running in the background with an RPC server running, XtalOpt will still also set the molecule in the Avogadro2 view to the crystals the user selects.

A note for Linux users: if a window manager is not running on the computer attempting to use CLI mode, the program may still crash. One solution to get around this is to add the "-platform offscreen" option to the command line arguments (this will only work if X11 is installed on the computer). This requirement will hopefully be removed in the next XtalOpt update.

2 Saving and Resuming Sessions in XtalOpt

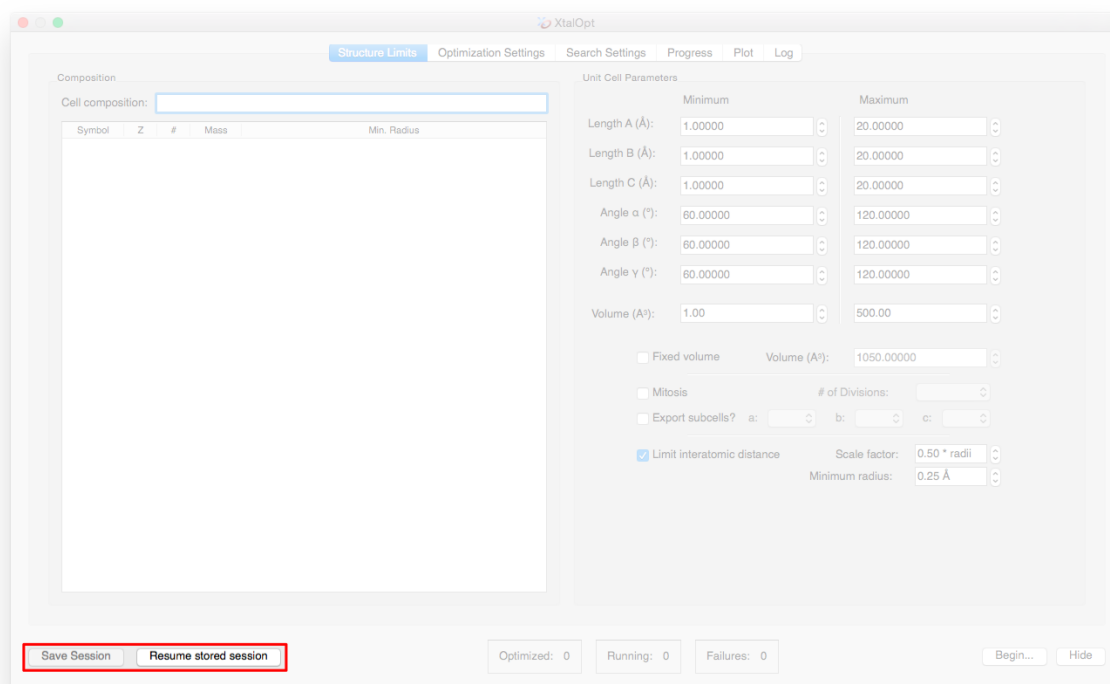

2.1 How to save your session

XtalOpt will write a small file named `xtalopt.state` to its working directory that contains the information necessary to resume the session at a later time. The file can be rewritten manually by clicking the "Save Session" button highlighted above, and XtalOpt will automatically save the session every time a structure is updated.

XtalOpt will also write a file "structure.state" in each candidate structure's directory. This file stores XtalOpt-specific information about the structure.

2.2 How to resume your session

To resume a session, simply click "Resume stored session" (highlighted above) and select the `xtalopt.state` file in the working directory of the session you would like to resume. XtalOpt will then begin to load the structures and search parameters. You can monitor the progress with the progress bar that appears at the bottom of the window.

While the structures are loading, you may encounter errors that say:

```
Error, no (or not appropriate for [OPTIMIZER]) xtal data in [DIRECTORY].
```

This could be a result of resuming a structure that has not yet done any local optimizations. If so, safely ignore this message.

As mentioned in the message, these can typically be ignored if it only happens for a handful of structures. This occurs when a structure has been generated in XtalOpt, but it has not completed any geometry optimization so there are no output files from which to load the geometry. If it happens for a significant number of structures (or structures that are known to have completed at least one geometry optimization step), the output files from the optimizer may be missing or corrupt.

After resuming a session, XtalOpt will ask if you would like to continue the search or enter read-only mode. Read-only mode will not generate new structures or submit geometry optimizations.

Note

If you are considering resuming a read-only session, take a look at the results.txt file in the working directory. It contains a list of all structures, sorted by enthalpy, with additional useful information. This can save some time when trying to locate the most stable structure of an old search.

The working directories for XtalOpt are relocatable, meaning that the directory containing xtalo.state and the [gen]x[id] structure folders may be moved, tarred, zipped, etc. and still be resumed at a later time from a different location on the filesystem, or even a different computer.

3 Optimization Schemes

3.1 Overview: What are optimization schemes, and why use them?

3.1.1 In a nutshell..

An optimization scheme is a series of optimization steps ("optsteps") that are to be performed in sequence on a structure. Each optimization step consists of a set of input file templates for the queuing system and optimizer to be used, and the structure is updated after each completes. So if an optimization scheme contains three optimization steps, a structure's lifecycle is:

1. Generation of initial structure
2. Perform optstep 1 on initial structure
3. Update structure from the results of optstep 1
4. Perform optstep 2 on current structure (result of optstep 1)
5. Update structure from the results of optstep 2
6. Perform optstep 3 on current structure (result of optstep 2)
7. Update structure from the results of optstep 3
8. Current structure (result of optstep 3) is either accepted into the breeding pool or discarded, depending on its enthalpy relative to the other optimized structures.

3.1.2 More details


The efficiency of searching a potential energy surface for a global minimum can be significantly improved by moving each candidate structure to the nearest local minimum, i.e. performing a geometry optimization. The differences between searching with and without carrying out these local optimizations are explored in detail in Woodley SM, Catlow CRA. Comp. Mat. Sci. 2009;45(1):84-95 (Available at: <http://linkinghub.elsevier.com/retrieve/pii/S0927025608003030>).

Why not just perform a single geometry optimization on each structure? Stochastic search techniques, such as XtalOpt, will often need to perform geometry optimizations on structures that are far from a stationary point on the potential energy surface. For example, the randomly generated structures in the first generation of an evolutionary search are often highly disordered with unrealistic atomic separations. If these structures were to be optimized in a single step with accurately small convergence criteria, it would be quite expensive. Also, it is more than likely that most of the optimizations would not finish successfully before reaching the maximum number of geometry steps allowed by the optimizer or specified in the input. A second issue is that complex structures (periodic crystals, for example) often have so many degrees of freedom that convergence in a single step is difficult from a poor starting point (consider the effect on atomic coordinates when a unit cell's translation vector is modified).

The first problem (effectively optimizing to small convergence) can be solved by implementing an optimization scheme that optimizes to successively smaller convergence cutoffs.

The second problem can be addressed by reducing the degrees of freedom in the early optsteps and only optimizing everything once each component has individually converged to a reasonable parameterization. See [Suggestions for optimization schemes](#) for examples.

3.2 Optimization scheme user interface

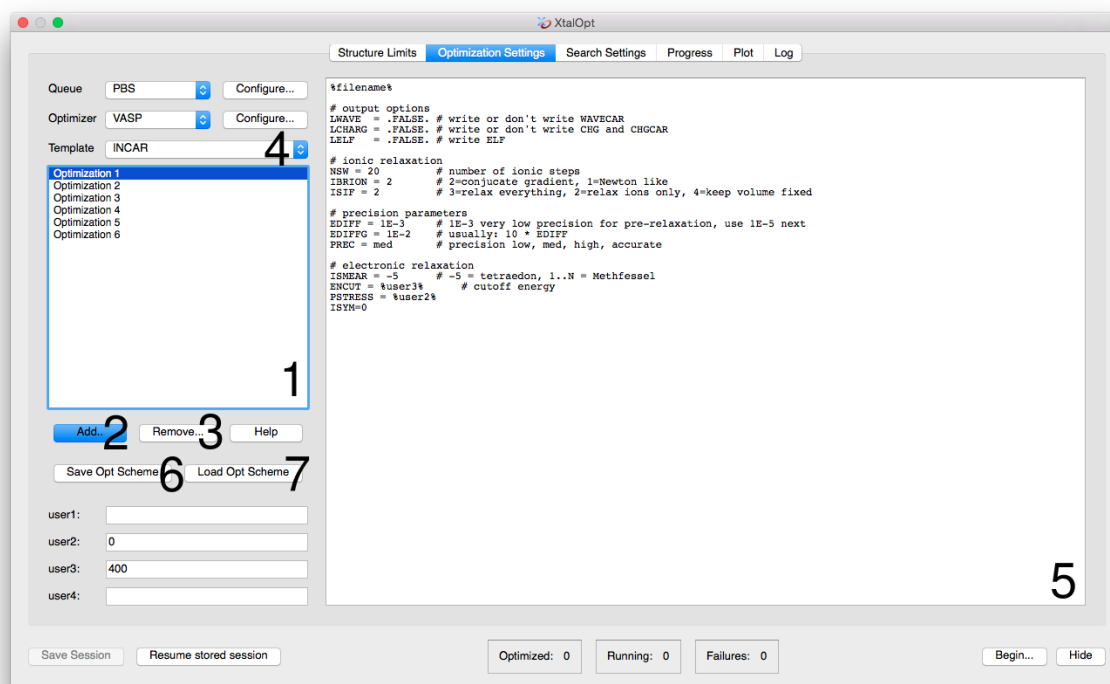

We will use the above screenshot as we describe the process of creating, saving, and loading optimization schemes. The numbers indicate:

1. List of optimization steps
2. Button to add new optimization step
3. Button to remove current optimization step
4. Template selection menu
5. Template editor
6. Button to save current optimization scheme to file
7. Button to load optimization scheme from file

3.2.1 Optimization step list

This list shows the currently available optimization steps in the order that they will be performed. The optstep that is currently selected for editing is highlighted, and the editable optstep can be selected by clicking the appropriate entry.

3.2.2 Add new optimization step

Clicking this button will append a new optimization step to the optstep list. The new optstep's templates will be copies of the currently selected optstep's templates.

3.2.3 Remove current optimization step

Click this button to delete the currently selected optimization step.

3.2.4 Select template

This menu contains the filenames of the templates that are required by the currently selected queuing system (e.g. PBS, SGE, local...) and optimizer. The currently selected template is displayed in the template editor, and selecting a different template will update the editor.

3.2.5 Template editor

This text editor is used to view and edit the currently selected template for the current optstep.

3.2.6 Save scheme

This button will prompt for a location to save a .scheme file containing the current optimization step.

3.2.7 Resume scheme

This button will prompt for an existing .scheme file to load.

3.3 How to build an optimization scheme?

Creating a working scheme from scratch may take some time. We recommend checking the samples/ directory of the source code to obtain sample scheme for each optimizer (see [How to load an optimization scheme?](#)) and verifying that they are appropriate for the system under consideration before starting a search.

If there is not an appropriate sample, the following prescription may be used to generate your own:

1. Generate a random structure of the system under consideration. This may be done by hand, or by running a search just long enough to create the first random generation and saving one of the structures.
2. Create a starting optstep with the desired convergence criteria
3. Manually submit the optimization
4. If the optimization fails:
 - (a) First determine why – if the maximum iterations were exceeded or the optimization was aborted due to a badly performing minimizer, try one of the ideas below. Other optimization problems are beyond the scope of this document.
 - (b) Reduce the convergence criteria of the current trial optstep
 - (c) Remove degrees of freedom, e.g. by fixing cell parameters, atomic positions, etc.
 - (d) Reduce the accuracy of the calculation in other ways (use a coarser integration grid, etc).
 - (e) Change the minimizer (e.g. tell the optimizer to use conjugate gradients rather than BFGS, etc)
5. Once the optimization succeeds, create another set of input files with the desired convergence criteria for all degrees of freedom.

6. Manually submit the new optimization step. If it fails, try the ideas above until it converges.
7. Once the structure has converged to the desired level of accuracy, try to optimize another randomly generated structure using the optsteps that succeeded previously. Refine them if needed.
8. Once you have successfully optimized enough random structures that you are confident in your method, gather all of the inputs used and write your scheme from them.

The scheme may be written by copying each input file into the template editor (with the appropriate optstep and template selected, of course) and replacing the structure-specific information with the appropriate keywords. Click the "Help" button for the complete list of keywords.

We have found that the optimization schemes are surprisingly transferable within an optimizer, so once you have a working optimization scheme for a given optimization code only minor tweaks (usually to the energy cutoffs, etc.) are necessary to use it on a different chemical system.

It is important to note that the optimization scheme does not have to perfectly converge your structures. A final post-processing optimization to refine any structure found in the search is highly recommended.

3.4 How to save an optimization scheme for later?

Once you have written your optimization scheme, you will want to save it for fast retrieval later (otherwise you will need to copy/paste and edit all of the templates again!). To save, simply click the "Save Opt Scheme" button and enter an appropriate filename with an extension of .scheme.

3.5 How to load an optimization scheme?

Loading an optimization is quite simple – just click the "Load Opt Scheme" button and select the .scheme file you wish to load. This will also update the current queuing system and optimizer to those specified by the scheme.

3.6 What is saved?

The optimization scheme files contain more than just the templates for each optstep. They also store queue and optimizer specific settings. This is useful for storing configuration options for different clusters along with the scheme. Note that although XtalOpt will prompt for an SSH password if needed, it is **NOT** stored in the scheme file.

3.7 Suggestions for optimization schemes

3.7.1 Crystals (XtalOpt)

The following list describes the optimization steps used in the samples/vasp-xtalopt.scheme file distributed with the XtalOpt source code:

1. Fix unit cell, only optimize atomic coordinates. A very loose convergence criterion is used, and the number of KPOINTS is kept small.
2. The cell volume is fixed, but atomic positions and cell parameters are allowed to vary. The convergence criteria is the same as before, as is the KPOINT grid.
3. All degrees of freedom are considered using the same convergence criteria as before, but with a finer KPOINT grid.
4. Same as before, but with a stricter convergence criteria.
5. Same as before, but with a stricter convergence criteria and more KPOINTS.
6. Same as before, but with more KPOINTS.

This is only one of many possible optimization schemes that may work for crystals. It may need to be modified to work for your particular system.

