



Objectif du projet :


Notre projet consiste à créer un serveur de backup automatisé qui aura comme stockage le NAS Synology de l'école pour sauvegarder les containers et les machines virtuelles contenues dans les deux serveurs de notre classe.

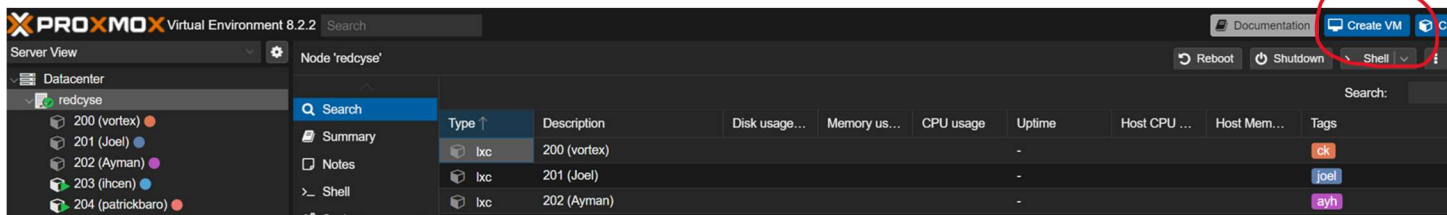

D'abord nous allons créer une machine virtuelle Proxmox backup server dans le server Redcyse

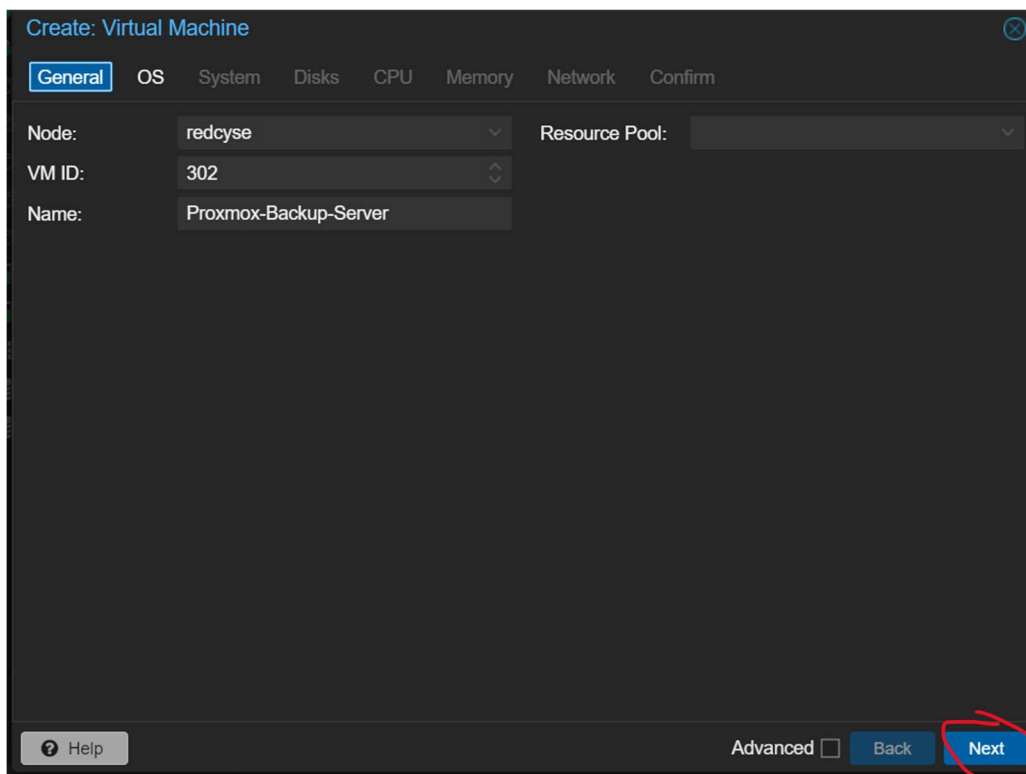

Nous avons donné l'ID 302 pour la VM avec le nom Proxmox-Backup-Server

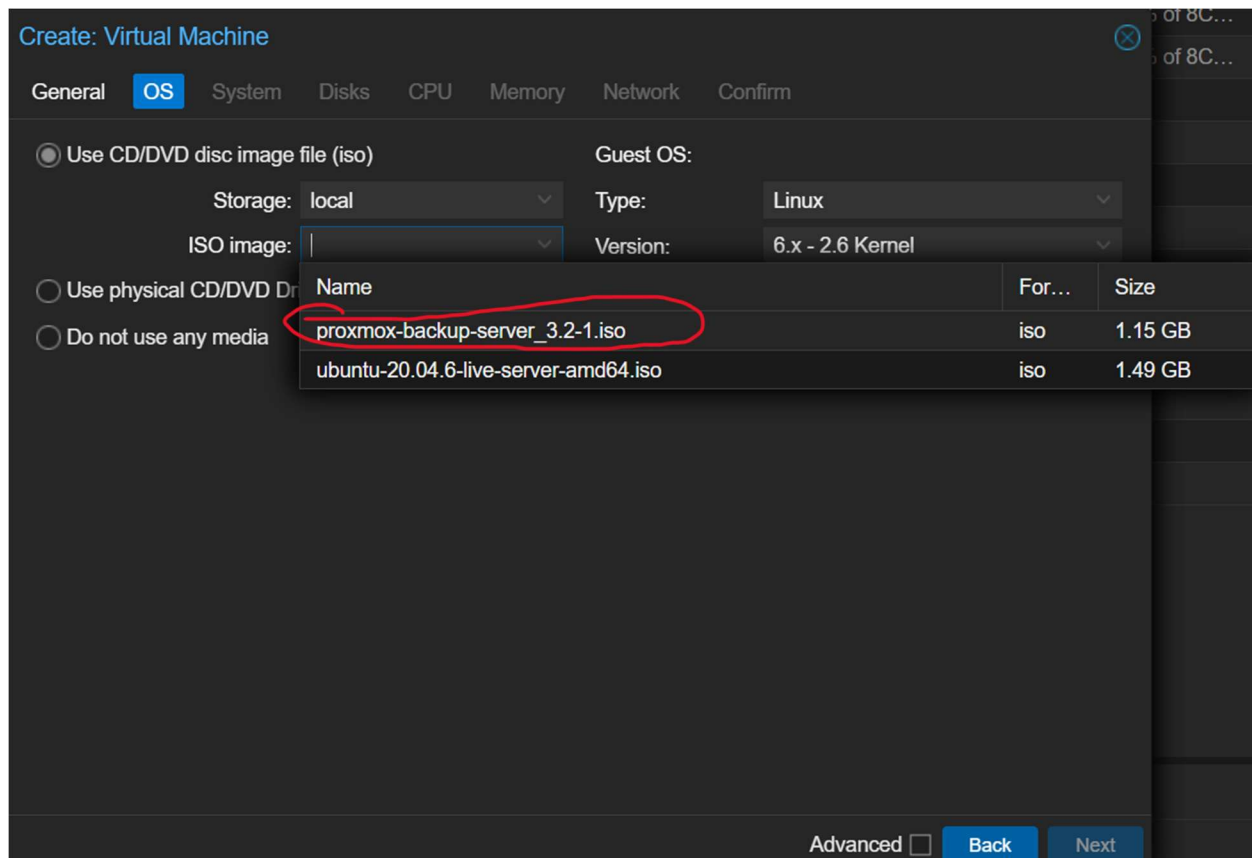

Maintenant on va choisir l'ISO de Proxmox backup server que nous avons télécharger


Create: Virtual Machine ✕

General OS **System** Disks CPU Memory Network Confirm

Graphic card:	Default ▾	SCSI Controller:	VirtIO SCSI single ▾
Machine:	Default (i440fx) ▾	Qemu Agent:	☒
Firmware			
BIOS:	Default (SeaBIOS) ▾	Add TPM:	☐


? Help Advanced ☐ Back Next

Next

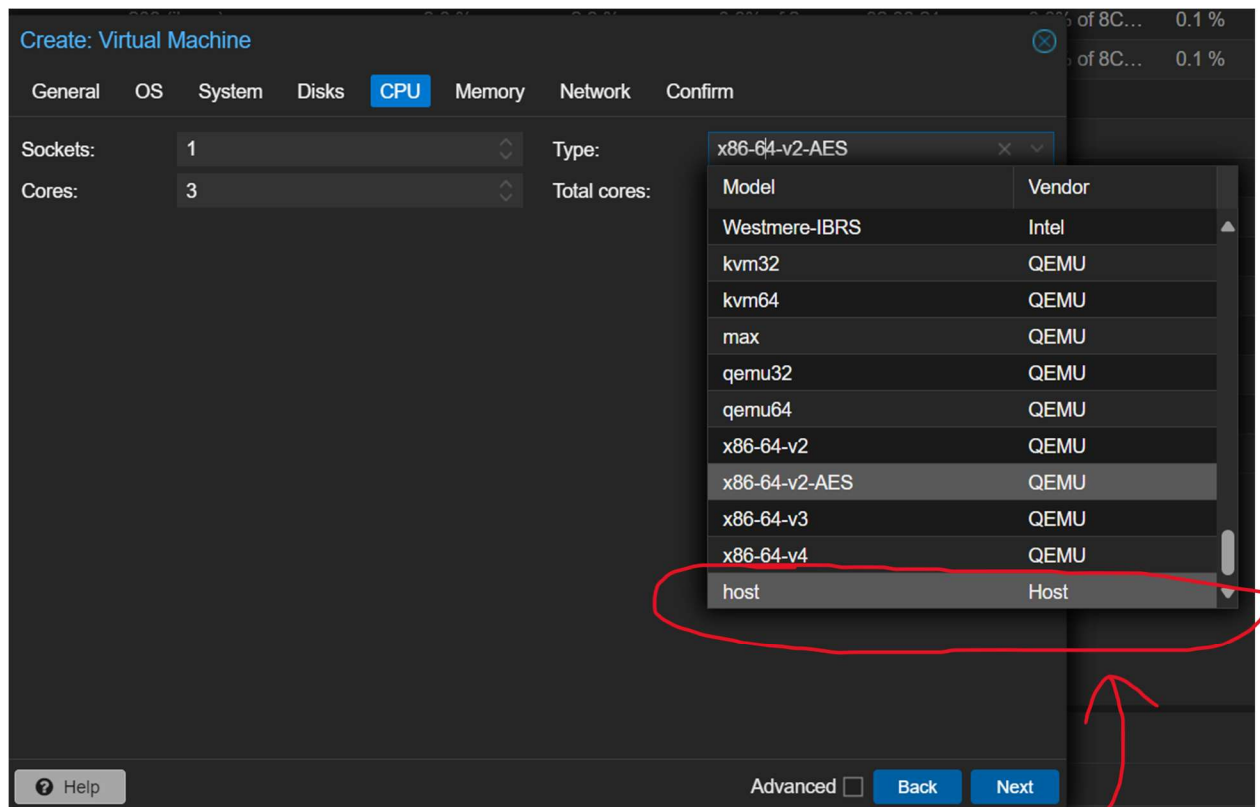

Dans CPU mettre 3 cœurs ou plus selon la capaciter de votre CPU

Mettre le type en Host

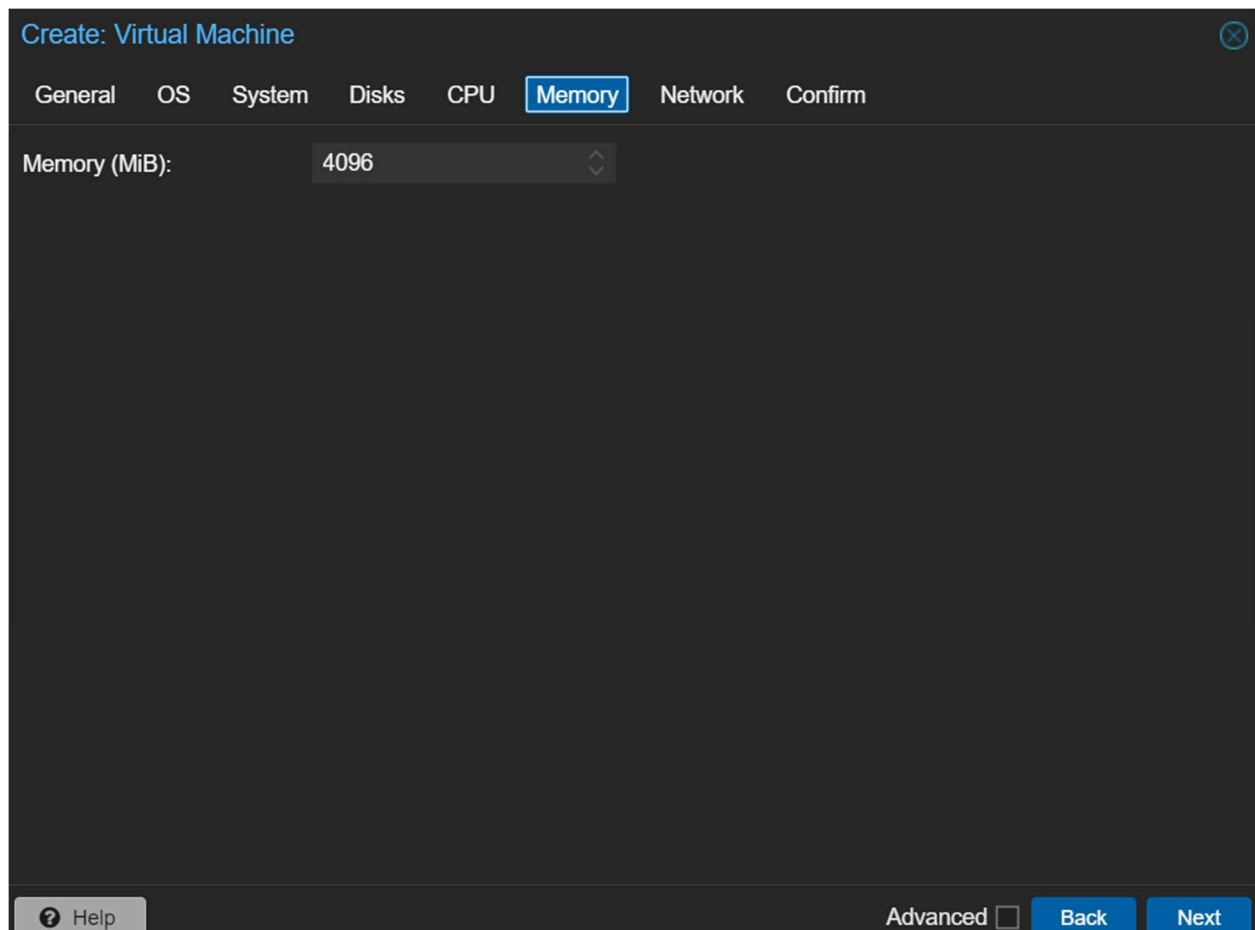

Nous avons choisi 4Go de ram mais cela dépend des capaciter de votre appareil.

Create: Virtual Machine

General

OS

System

Disks

CPU

Memory

Network

Confirm

Key ↑	Value
agent	1
cores	3
cpu	host
ide2	local:iso/proxmox-backup-server_3.2-1.iso,media=cdrom
memory	4096
name	Proxmox-Backup-Server
net0	virtio,bridge=vbr0,firewall=1
nodename	redcyse
numa	0
ostype	l26
scsi0	local-lvm:32,iothread=on
scsihw	virtio-scsi-single
sockets	1
vmid	302

☐ Start after created

Advanced ☐

Back

Finish

Vérifier si tout est bon et cliquez sur finish

Après avoir créé votre VM lancer la pour commencer l'installation de proxmox backup server

Proxmox Backup Server 3.2 (iso release 1) - <https://www.proxmox.com/>



Welcome to Proxmox Backup Server

Install Proxmox Backup Server (Graphical)

Install Proxmox Backup Server (Console)

Advanced Options

enter: select, arrow keys: navigate, e: edit entry, esc: back

Nous allons commencer à installer proxmox backup server



Proxmox Backup Server

END USER LICENSE AGREEMENT (EULA)

END USER LICENSE AGREEMENT (EULA) FOR PROXMOX BACKUP SERVER

By using Proxmox Backup Server software you agree that you accept this EULA, and that you have read and understand the terms and conditions. This also applies for individuals acting on behalf of entities. This EULA does not provide any rights to Support Subscriptions Services as software maintenance, updates and support. Please review the Support Subscriptions Agreements for these terms and conditions. The EULA applies to any version of Proxmox Backup Server and any related update, source code and structure (the Programs), regardless of the delivery mechanism.

1. License. Proxmox Server Solutions GmbH (Proxmox) grants to you a perpetual, worldwide license to the Programs pursuant to the GNU Affero General Public License V3. The license agreement for each component is located in the software component's source code and permits you to run, copy, modify, and redistribute the software component (certain obligations in some cases), both in source code and binary code forms, with the exception of certain binary only firmware components and the Proxmox Images (e.g. Proxmox logo). The license rights for the binary only firmware components are located within the components. This EULA pertains solely to the Programs and does not limit your rights under, or grant you rights that supersede, the license terms of any particular component.

2. Limited Warranty. The Programs and the components are provided and licensed "as is" without warranty of any kind, expressed or implied, including the implied warranties of merchantability, non-infringement or fitness for a particular purpose. Neither Proxmox nor its affiliates warrants that the functions contained in the Programs will meet your requirements or that the operation of the Programs will be entirely error free, appear or perform precisely as described in the accompanying documentation, or comply with regulatory requirements.

3. Limitation of Liability. To the maximum extent permitted under applicable law, under no

Abort

Previous

I agree

Acceptor

Choisir votre disque dur puis next



Proxmox Backup Server (PBS)

The Proxmox Installer automatically partitions your hard disk. It installs all required packages and makes the system bootable from the hard disk. All existing partitions and data will be lost.

To continue the installation, press the Next button.

- **Please verify the installation target**
The displayed hard disk will be used for the installation.
Warning: All existing partitions and data will be lost.
- **Automatic hardware detection**
The installer automatically configures your hardware.
- **Graphical user interface**
Final configuration will be done on the graphical user interface, via a web browser.

Target Harddisk Options

Abort Previous **Next**



Location and Time Zone selection

The Proxmox Installer automatically makes location-based optimizations, like choosing the nearest mirror to download files from. Also make sure to select the correct time zone and keyboard layout.

Press the Next button to continue the installation.

- **Country:** The selected country is used to choose nearby mirror servers. This will speed up downloads and make updates more reliable.
- **Time Zone:** Automatically adjust daylight saving time.
- **Keyboard Layout:** Choose your keyboard layout.

A screenshot of the Proxmox installer's 'Location and Time Zone selection' screen. The screen has a light beige background. At the top, there are three fields: 'Country' with a text input containing 'Canada', 'Time zone' with a dropdown menu showing 'America/Moncton', and 'Keyboard Layout' with a dropdown menu showing 'U.S. English'. At the bottom left is an 'Abort' button. At the bottom right are 'Previous' and 'Next' buttons. The 'Next' button is circled in red. A mouse cursor is visible near the 'Previous' button.

Choisir votre pays ou région et la time zone



Proxmox Backup Server

Administration Password and Email Address

Proxmox Backup Server is a full-featured, highly secure system, based on Debian GNU/Linux.

In this step, please provide the *root* password.

- **Password:** Please use a strong password. It should be at least 8 characters long, and contain a combination of letters, numbers, and symbols.
- **Email:** Enter a valid email address. Your Proxmox Backup Server will send important alert notifications to this email account (all emails for 'root').

To continue the installation, press the Next button.

Form fields for Password, Confirm, and Email. The Email field contains the value `emtoure15@monccnb.ca`. The Next button is circled in red.

Choisir un mot de passe et une adresse électronique

ICI ne rien changer cliquez sur Next

 Proxmox Backup Server

Management Network Configuration

Please verify the displayed network configuration. You will need a valid network configuration to access the management interface after installing.

After you have finished, press the Next button. You will be shown a list of the options that you chose during the previous steps.

- **IP address (CIDR):** Set the main IP address and netmask for your server in CIDR notation.
- **Gateway:** IP address of your gateway or firewall.
- **DNS Server:** IP address of your DNS server.

Management Interface

● ens18 - bc:24:11:63:04:5b (virtio_net) ▼

Hostname (FQDN)

pbs.localdomain

IP Address (CIDR)

10.0.17.77 / 16

Gateway

10.0.0.1

DNS Server

10.0.0.1

Abort

Previous

Next



Summary

Please confirm the displayed information. Once you press the **Install** button, the installer will begin to partition your drive(s) and extract the required files.

Option	Value
Filesystem:	ext4
Disk(s):	/dev/sda
Country:	Canada
Timezone:	America/Moncton
Keymap:	en-us
Email:	emtoure15@monccnb.ca
Management Interface:	ens18
Hostname:	pbs
IP CIDR:	10.0.17.77/16
Gateway:	10.0.0.1
DNS:	10.0.0.1

☒ Automatically reboot after successful installation

Abort

Previous

Install

Vérifier si tout est bon puis installer



Enterprise Backup Solution

Open-Source Backup Software for Servers

- Client/server backup system
- Secure backups for VMs, container, and hosts
- Deduplication
- Incremental backups
- Remote sync
- Easy management

For more information, visit www.proxmox.com or the Proxmox Backup Server project page.

Graphical User Interface

Easily manage your backups with the integrated web interface.

Performance

The entire software stack is written in Rust and provides high speed, performance, and memory efficiency.

extracting pve-firmware_3.11-1_all.deb
68%

Abort

Install

```
-----  
Welcome to the Proxmox Backup Server. Please use your web browser to  
configure this server - connect to:  
https://10.0.146.170:8007/  
-----
```

Après l'installation vous aller être sur le terminal de la VM et pour vous connectez a votre server de backup écrivez l'URL ici sur votre navigateur.

PROXMOX Backup Server 3.2-2

Dashboard

pbs (Uptime: 00:03:09) [Show Fingerprint](#)

CPU usage	0.13% of 2 CPU(s)	IO delay	0.00%
RAM usage	4.22% (165.34 MiB of 3.83 GiB)	Load average	0.26, 0.17, 0.07
HD space(root)	11.00% (1.97 GB of 17.91 GB)	SWAP usage	0.00% (0 B of 2.37 GiB)

CPU(s) 2 x Intel(R) Xeon(R) CPU E5430 @ 2.66GHz (1 Socket)
Kernel Version Linux 6.8.4-2-pve (2024-04-10T17:36Z)
Boot Mode Legacy BIOS
Repository Status ✓ Production-ready Enterprise repository enabled ⚠ Enterprise repository needs valid subscription

Longest Tasks (30 days)

Log Rotation	<0.1s	✓
--------------	-------	---

Task Summary (30 days)

Backups	0	0	0
Prunes	0	0	0
Garbage collections	0	0	0
Syncs	0	0	0
Verify	0	0	0
Tape Backup	0	0	0
Tape Restore	0	0	0

Datastore Usage

Name ↑	Size	Used	Available
No Data			


Running Tasks

No running tasks


Subscription

✗ No valid subscription. You do not have a valid subscription for this server.

Vous êtes maintenant connecter à votre server de backup et c'est ici ou la Magie opère

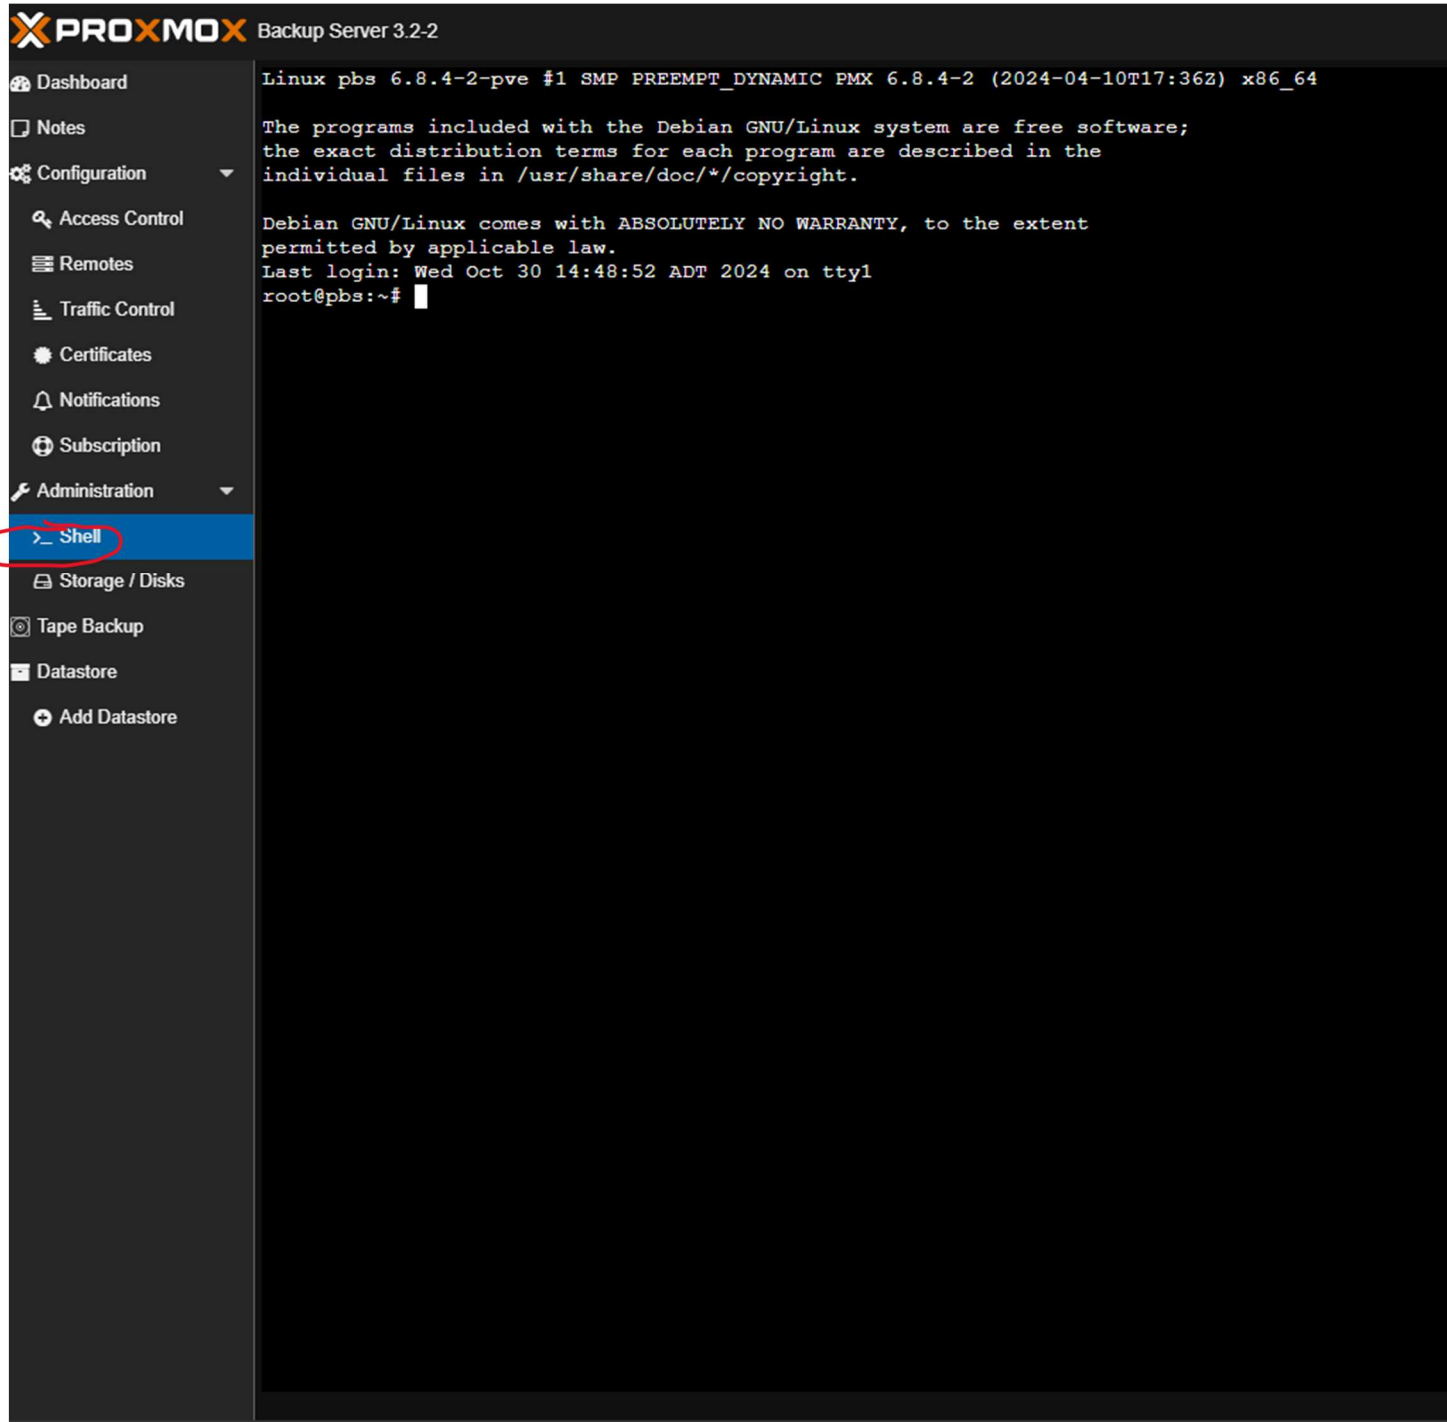

Aller d'abord dans le Shell

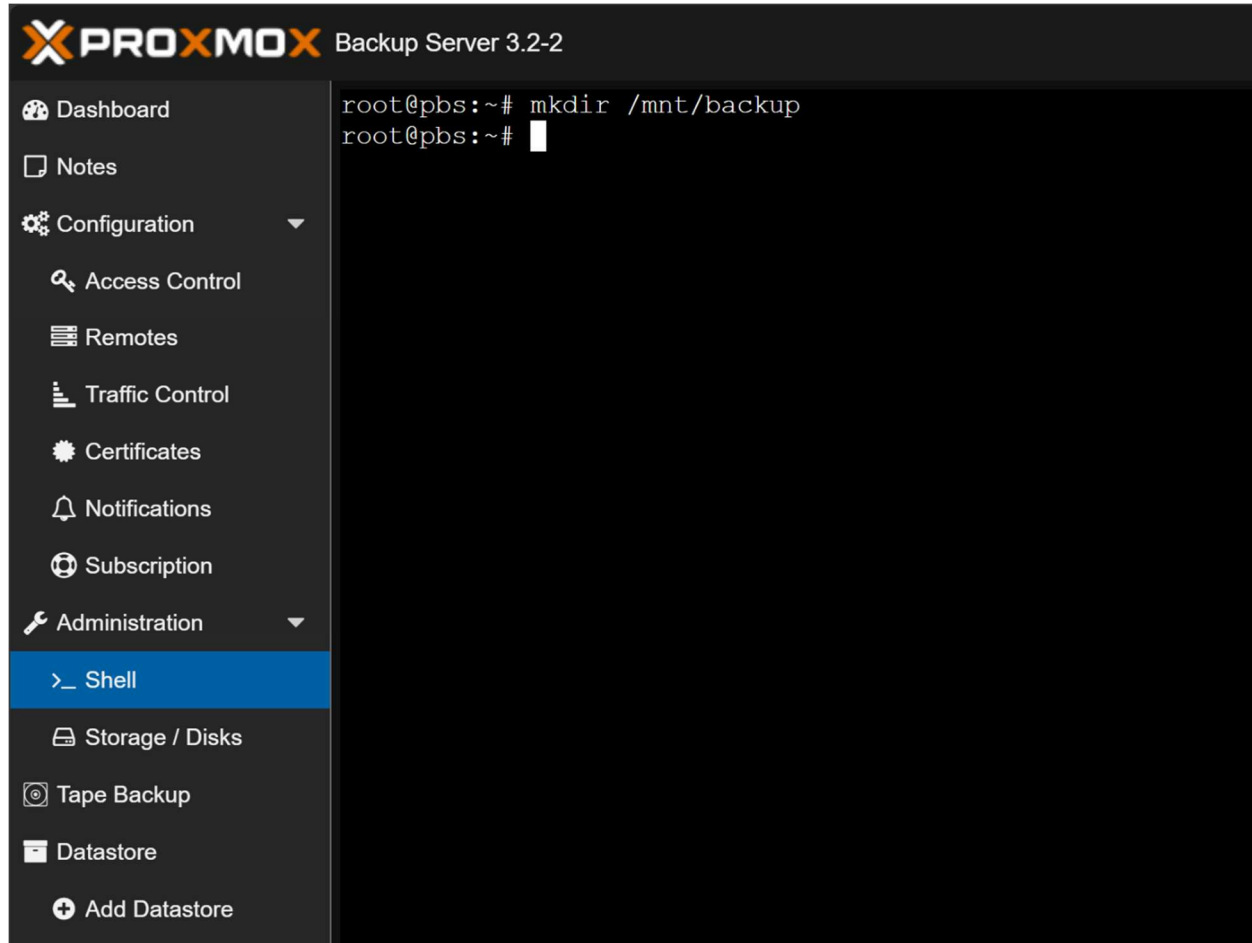


Rentrer la commande suivante : `mkdir /mnt/backup`

Ici on crée le dossier de backup

```
root@pbs:~# nano /root/creds.txt
```

Crée le fichier creds.txt comme ceci

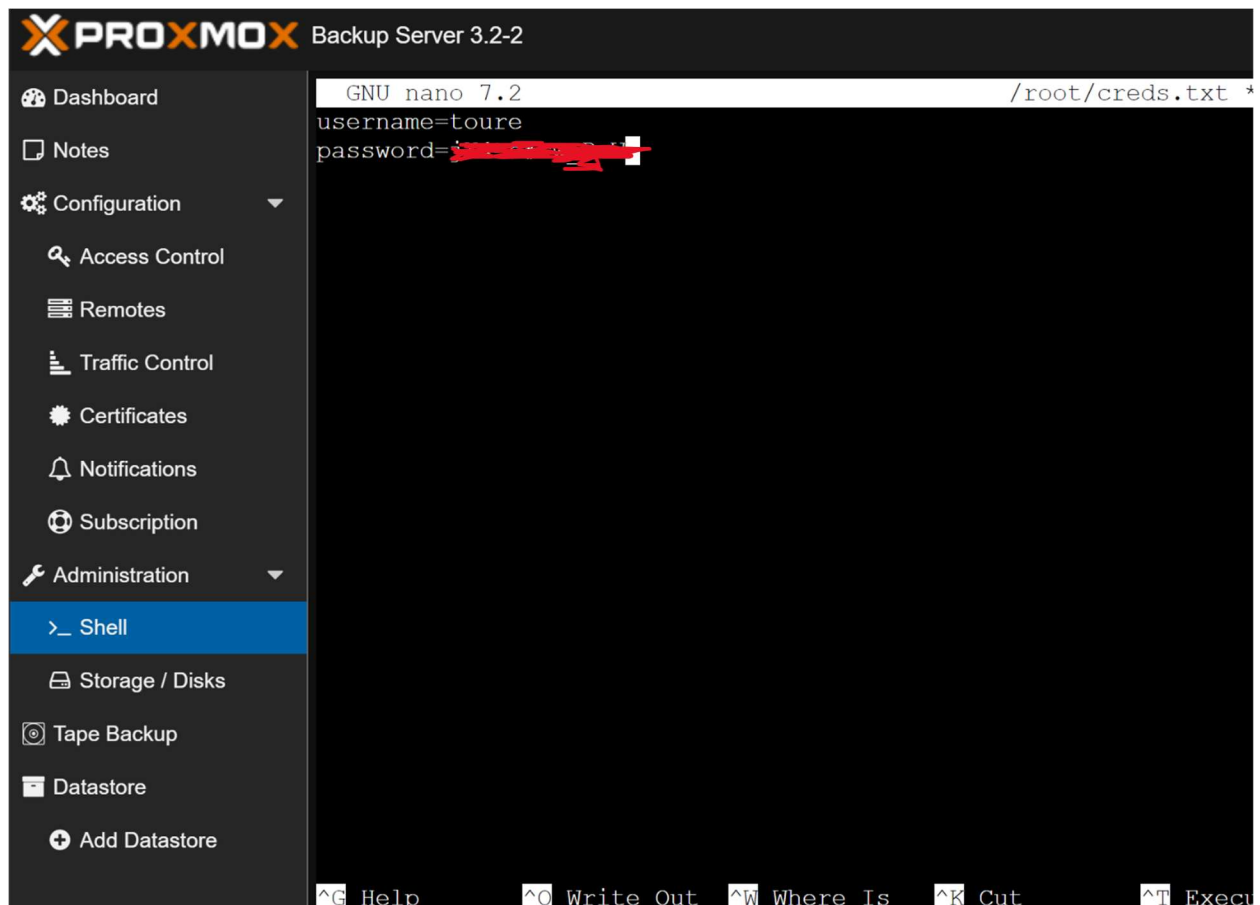


Une page va s'ouvrir et écrivez username= (écrivez votre nom d'utilisateur)

Puis password= (écrivez un mot de passe)

Après avoir fait sa appuyer sur la touche ctrl + x pour quitter la page nano

```
root@pbs:~# chmod 600 /root/creds.txt
```

Maintenant vous aller écrire cette commande cela va changer les permissions de l'accès au fichier creds.txt et seul l'utilisateur propriétaire du fichier peut y avoir accès

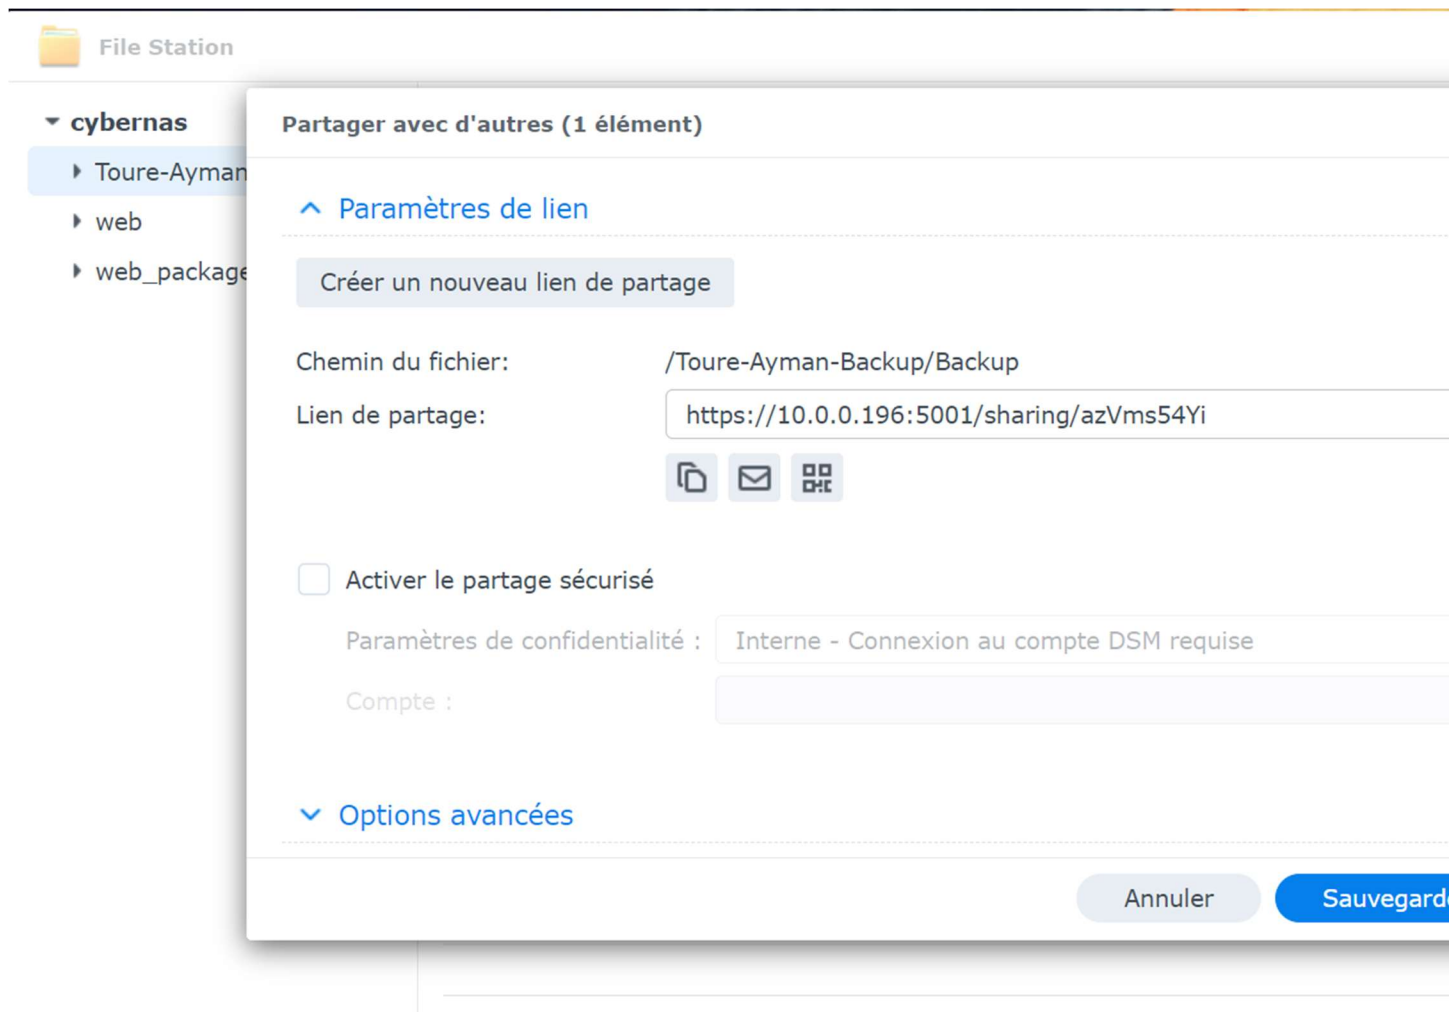

Ceci est le lien de notre dossier dans le NAS Synology

```
root@pbs:~# mount -t cifs //10.0.0.196/Toure-Ayman-Backup /mnt/backup -o credentials=/root/creds.txt,uid=34,gid=34,vers=3.0
```

Vous allez rentrer cette commande qui vas monter un partage réseau CIFS le fichier de backup local que nous avons créé plus tôt en utilisant les identifications stocker dans le fichier creds.txt Nous avons spécifier à la fin les id utilisateur et du groupe puis la version du Protocol CIFS a 3.0.

L'INFORMATIONS EN ROUGE DOIT ETRE CHANGER ET METTRE A LA PLACE LE LIEN Du chemin de votre dossier de partage


Pour verifier si la commande a marcher rentrer la commande df -h

```
root@pbs:~# df -h
Filesystem                Size      Used Avail Use% Mounted on
udev                     2.9G         0   2.9G   0% /dev
tmpfs                    589M       672K   588M   1% /run
/dev/mapper/pbs-root      28G       1.9G   24G    8% /
tmpfs                    2.9G         0   2.9G   0% /dev/shm
tmpfs                    5.0M         0   5.0M   0% /run/lock
tmpfs                    589M         0   589M   0% /run/user/0
//10.0.0.196/Toure-Ayman-Backup 1.0T     4.5G 1020G   1% /mnt/backup
```

On peut voir ici que le dossier a bien été monter

Maintenant que le dossier a bien été monter on vas cree un data store qui vas envoyer toute les donnee directement dans le dossier partage Nas Synology pour se faire on vas aller dans

add Datastore

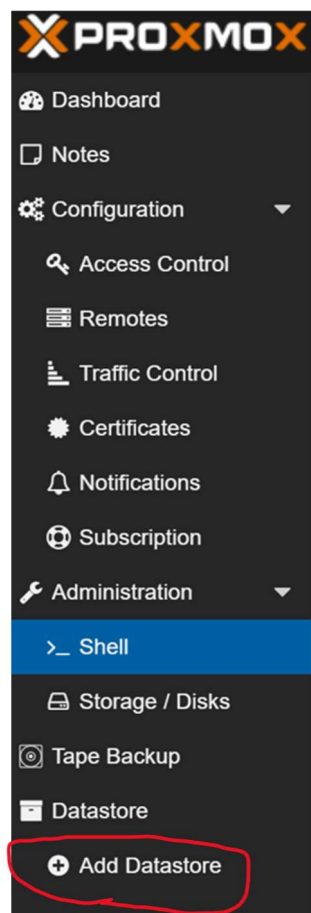

Add: Datastore ✕

General Prune Options

Name:

Backing Path:

GC Schedule:

Prune Schedule:

Comment:

? Help Add

Donner lui un nom

Add: Datastore ✕

General Prune Options

Name:

Backing Path:

GC Schedule:

Prune Schedule:

Comment:

? Help Add

Et donner le chemin du dossier backup donc mnt/backup puis cliquez sur Prune options

Add: Datastore ✕

General **Prune Options**

Keep Last: ✕ ⬆ ⬆

Keep Daily: ✕ ⬆ ⬆

Keep Monthly: ✕ ⬆ ⬆

Keep Hourly:

Keep Weekly:

Keep Yearly:

? Help Add

Ici vous choisissez le nombre de sauvegarde que le server vas garder par jour et par mois , donc faite comme nous si vous le souhaitez.

PROXMOX Backup Server 3.2-2

Dashboard
Notes
Configuration
Access Control
Remotes
Traffic Control
Certificates
Notifications
Subscription
Administration
Shell
Storage / Disks
Tape Backup
Datastore
Synology
Add Datastore

Access Control

User Management Two Factor Authentication API Token Permissions Realms

Add Edit Remove Change Password Show Permissions Unlock TFA

User name ↑	Realm ↑	Enabled	Expire	Name	TFA Lock	Comment
root	pam	Yes	never		No	

Voilà on a créé un data store qui est lie au Nas Synology

Maintenant on va créer un utilisateur

Add: User

User name: proxsave

First Name:

Realm: Proxmox Backup authen

Last Name:

Password:

E-Mail:

Confirm password:

Expire: never


Enabled: ☒

Comment:

Help

Add

On a nommé notre utilisateur comme ceci faite de même si vous voulez

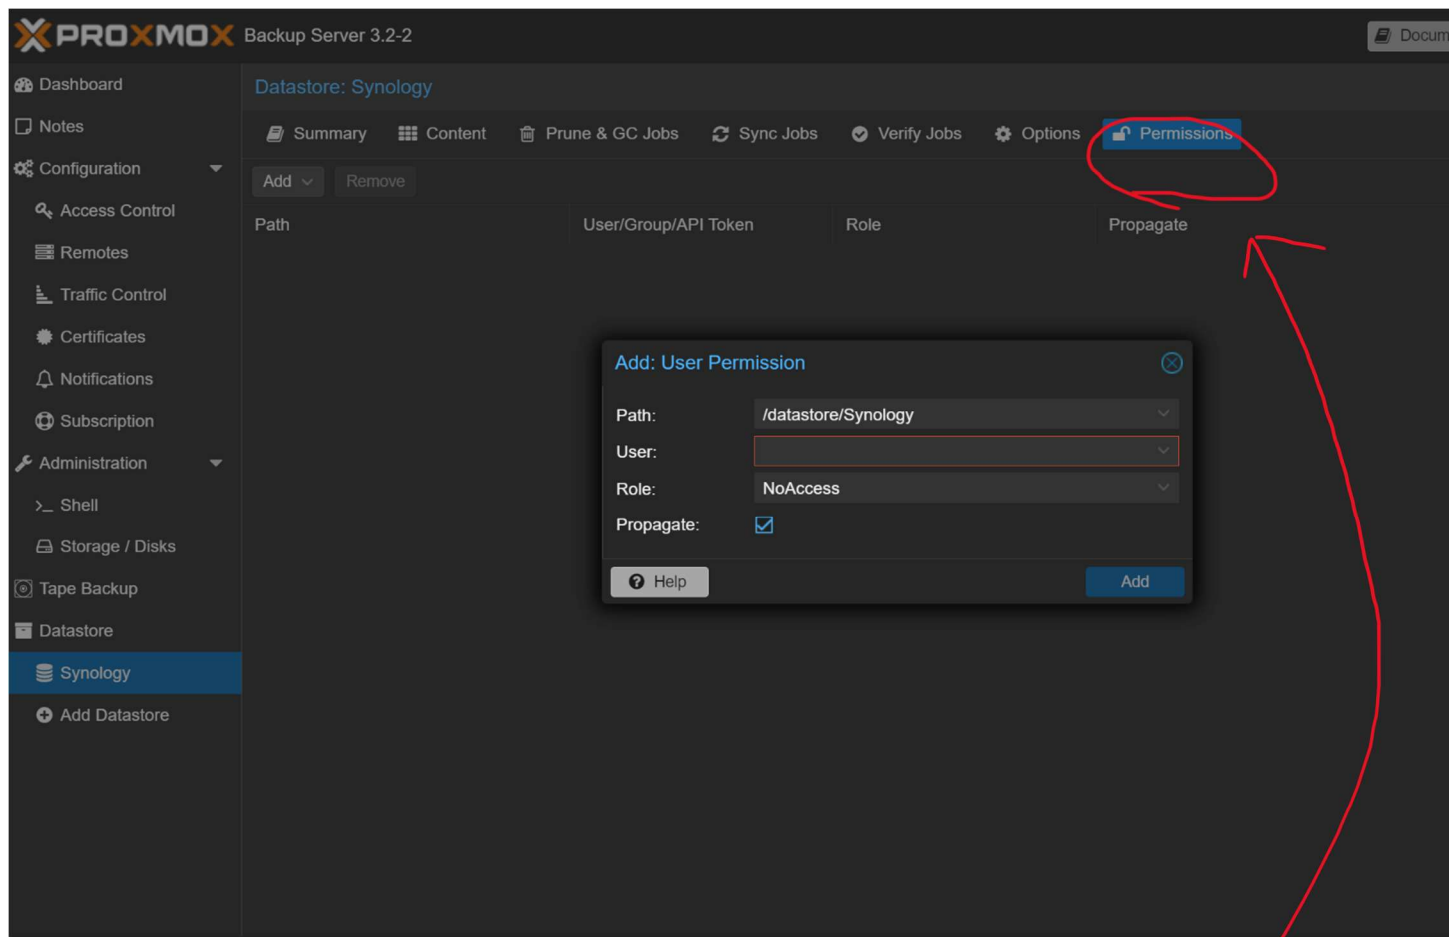

Maintenant on va donner les permissions à notre nouvel utilisateur d'accéder au datastore

Choisissez-le data store que nous avons créé ensemble et mettre l'utilisateur que vous avez créé

Ensuite

pbs (Uptime: 26 days 13:12:34)

[Show Fingerprint](#)

Datastore Usage

Name ↑	Size
Synology	1.10 TB

CPU usage 0.39% of 3 CPU(s) **IO delay** 0.00%

RAM usage 5.44% (319.77 MiB of 5.74 GiB) **Load average** 0,0,0

HD space(root) 8.13% (2.36 GB of 29.01 GB) **SWAP usage** 0.00% (0 B of 3.87 GiB)

CPU(s) 3 x Intel(R) Xeon(R) CPU E5430 @ 2.66GHz (1 Socket)

Kernel Version Linux 6.8.4-2-pve (2024-04-10T17:36Z)

Boot Mode Legacy BIOS

Repository Status ✓ Production-ready Enterprise repository enabled ⚠ Enterprise repository needs valid subscription

Longest Tasks (30 days)

Console (xterm.js)	
Console (xterm.js)	
Console (xterm.js)	

Fingerprint

04:2c:85:fd:1f:fe:22:bb:17:fb:b0:0d:45:dd:38:d8:a1:ef:66:95:80:90:f7:a0:b8:a2:aa:b8:4b:c9:ef:19

[Copy](#) [Ok](#)

Copier le fingerprint du server de backup maintenant aller dans l'interface du server principale

← ↻ 🏠 Not secure | https://10.0.0.200:8006/#v1:0:18:4:::8::2

PROXMOX Virtual Environment 8.2.2

Server View

Datacenter

▼ Datacenter

▼ redcyse

200 (vortex) ●

201 (Joel) ●

202 (Ayman) ●

203 (ihcen) ●

204 (patrickbaro) ●

205 (cer) ●

206 (Hubert) ●

207 (Guillaume) ●

208 (Amine) ●

209 (mohamed) ●

302 (Proxmox-backup-server) ●

localnetwork (redcyse)

local (redcyse)

local-lvm (redcyse)

🔍 Search

📄 Summary

📝 Notes

📊 Cluster

🔗 Ceph

⚙️ Options

📀 Storage

💾 Backup

↔️ Replication

👤 Permissions

👤 Users

🔑 API Tokens

🔍 Two Factor

👥 Groups

🏊 Pools

👤 Roles

🏠 Realms

💓 HA

🌐 SDN

Add ▼

Remove

Edit

📁 Directory

📁 LVM

📁 LVM-Thin

📁 BTRFS

📁 NFS

📁 SMB/CIFS

📁 GlusterFS

📁 iSCSI

📁 CephFS

📁 RBD

📁 ZFS over iSCSI

📁 ZFS

📁 Proxmox Backup Server

📁 ESXi

Type	Content
Directory	VZDump backup file, ISO image, Container
LVM-Thin	Disk image, Container

Clic sur Storage et proxmox backup server

Not secure | https://10.0.0.200:8006/#v1:0:18:4:::8::2

PROXMOX Virtual Environment 8.2.2

Server View

Datacenter

- redcyse
 - 200 (vortex)
 - 201 (Joel)
 - 202 (Ayman)
 - 203 (Ihcen)
 - 204 (patrickbaro)
 - 205 (cer)
 - 206 (Hubert)
 - 207 (Guillaume)
 - 208 (Amine)
 - 209 (mohamed)
 - 302 (Proxmox-backup-server)
 - localnetwork (redcyse)
 - local (redcyse)
 - local-lvm (redcyse)

Search

Summary

Notes

Cluster

Ceph

Options

Storage

Backup

Replication

Permissions

Users

API Tokens

Two Factor

Groups

Pools

Roles

Realms

HA

SDN

Add Remove Edit

ID	Type	Content	Path/Target
local	Directory	VZDump backup file, ISO image, Container te...	/var/lib/vz
local-lvm	LVM-Thin	Disk image, Container	

Add: Proxmox Backup Server

General Backup Retention Encryption

ID: pbs Nodes: All (No restrictions)

Server: 10.0.133.228 Enable: ☒

Username: proxsave@pbs Content: backup

Password: ***** Datastore: Synology

Namespace: Root

Fingerprint: 04:2c:85:fd:1f:fe:22:bb:17:fb:b0:0d:45:dd:38:d8:a1:ef:66:95:80:90:f7:a0:b8:a2:ae

Help Add

Tasks Cluster log

Start Time	End Time	Node	User name	Description
Nov 01 11:09:32		redcyse	root@pam	VM/CT 302 - Console
Nov 01 11:16:46	Nov 01 12:00:17	redcyse	root@pam	VM/CT 302 - Console
Nov 01 11:09:36	Nov 01 11:09:37	redcyse	root@pam	VM 301 - Destroy
Nov 01 11:09:24	Nov 01 11:09:25	redcyse	root@pam	VM 300 - Destroy
Nov 01 11:08:05	Nov 01 11:09:22	redcyse	root@pam	VM/CT 302 - Console
Nov 01 11:03:48	Nov 01 11:17:57	redcyse	root@pam	VM/CT 302 - Console

Maintenant on ajoute un nouveau Storage

Coller le fingerprint du server de backup

Donner lui un nom et un username puis un mot de passe

On peut voir ici que le data store a bien été créé

PROXMOX Virtual Environment 8.2.2

Server View

Datacenter

redcyse

- 200 (vortex)
- 201 (Joel)
- 202 (Ayman)
- 203 (ihcen)
- 204 (patrickbaro)
- 205 (cer)
- 206 (Hubert)
- 207 (Guillaume)
- 208 (Amine)
- 209 (mohamed)
- 302 (Proxmox-backup-server)
- localnetwork (redcyse)
- local (redcyse)
- local-lvm (redcyse)
- pbs (redcyse)

Search

Summary

Notes

Cluster

Ceph

Options

Storage

Backup

Replication

Permissions

Users

API Tokens

Two Factor

Groups

Pools

Roles

Realms

HA

SDN

Add Remove Edit

ID ↑	Type	Content
local	Directory	VZDump backup file, ISO image, Cont
local-lvm	LVM Thin	Disk image, Container
pbs	Proxmox B...	VZDump backup file

Tasks Cluster log

Start Time ↓	End Time	Node	User name	Description
Nov 01 11:09:32		redcyse	root@pam	VM/CT 302 - Console
Nov 01 11:16:46	Nov 01 12:00:17	redcyse	root@pam	VM/CT 302 - Console
Nov 01 11:09:36	Nov 01 11:09:37	redcyse	root@pam	VM 301 - Destroy
Nov 01 11:09:24	Nov 01 11:09:25	redcyse	root@pam	VM 300 - Destroy
Nov 01 11:08:05	Nov 01 11:09:22	redcyse	root@pam	VM/CT 302 - Console
Nov 01 11:03:48	Nov 01 11:17:57	redcyse	root@pam	VM/CT 302 - Console

Ce qu'on a fait est que nous avons fait le lien être le server de backup et le server principale en ajoutant un data store avec le finger print du server de backup

Maintenant on va créer un backup job

Not secure | https://10.0.0.200:8006/#v1:0:18:4:::8::21

PROXMOX Virtual Environment 8.2.2

Server View

Datacenter

- redcyse
 - 200 (vortex)
 - 201 (Joel)
 - 202 (Ayman)
 - 203 (ihcen)
 - 204 (patrickbaro)
 - 205 (cer)
 - 206 (Hubert)
 - 207 (Guillaume)
 - 208 (Amine)
 - 209 (mohamed)
 - 302 (Proxmox-backup-server)
 - localnetwork (redcyse)
 - local (redcyse)
 - local-lvm (redcyse)
 - pbs (redcyse)

Search

Summary

Notes

Cluster

Ceph

Options

Storage

Backup

Replication

Permissions

- Users
- API Tokens
- Two Factor
- Groups
- Pools
- Roles
- Realms

HA

SDN

Add Remove Edit Job Detail Run now

Enabled Node Schedule Next Run Storage Comment Retention

Tasks Cluster log

Start Time ↓	End Time	Node	User name	Description
Nov 01 11:09:32		redcyse	root@pam	VM/CT 302 - Console
Nov 01 11:16:46	Nov 01 12:00:17	redcyse	root@pam	VM/CT 302 - Console
Nov 01 11:09:36	Nov 01 11:09:37	redcyse	root@pam	VM 301 - Destroy
Nov 01 11:09:24	Nov 01 11:09:25	redcyse	root@pam	VM 300 - Destroy
Nov 01 11:08:05	Nov 01 11:09:22	redcyse	root@pam	VM/CT 302 - Console
Nov 01 11:03:48	Nov 01 11:17:57	redcyse	root@pam	VM/CT 302 - Console

Aller dans backup et clic sur add

Create: Backup Job

General

Retention

Note Template

Advanced

Node:

redcyse

Storage:

pbs

Schedule:

21:00

Selection mode:

Include selected VMs

Notification mode:

Default (Auto)

Send email to:

emtoure15@monccnb.ca

Send email:

Always

Compression:

ZSTD (fast and good)

Mode:

Snapshot

Enable:

☒

Job Comment:

☐	ID ↑	Node	Status	Name	Type
☒	200	redcyse	stopped	vortex	LXC Container
☒	201	redcyse	stopped	Joel	LXC Container
☒	202	redcyse	stopped	Ayman	LXC Container
☒	203	redcyse	stopped	ihcen	LXC Container
☒	204	redcyse	stopped	patrickbaro	LXC Container
☒	205	redcyse	stopped	cer	LXC Container
☒	206	redcyse	stopped	Hubert	LXC Container
☒	207	redcyse	stopped	Guillaume	LXC Container
☒	208	redcyse	stopped	Amine	LXC Container
☒	209	redcyse	stopped	mohamed	LXC Container
☐	302	redcyse	running	Proxmox-backup-server	Virtual Machine

Help

Create

Choisir le Storage qui est lie avec le server de backup choisir l'heure ou la sauvegarde des donner vont se faire puis une adresse mail ou les informations vont être envoyer

Ici vous choisissez qu'es ce que vous voulez sauvegarder

PROXMOX Virtual Environment 8.2.2

Server View

Datacenter

redcyse

- 200 (vortex)
- 201 (Joel)
- 202 (Ayman)
- 203 (ihcen)
- 204 (patrickbaro)
- 205 (cer)
- 206 (Hubert)
- 207 (Guillaume)
- 208 (Amine)
- 209 (mohamed)
- 302 (Proxmox-backup-server)
- localnetwork (redcyse)
- local (redcyse)
- local-lvm (redcyse)
- pbs (redcyse)

Search

Summary

Notes

Cluster

Ceph

Options

Storage

Backup

Replication

Permissions

- Users
- API Tokens
- Two Factor
- Groups
- Pools
- Roles
- Realms

HA

SDN

Add

Remove

Edit

Job Detail

Run now

Enabled	Name	Schedule	Next Run	Storage
✓	redcyse	21:00	2024-11-01 21:00:00	pbs

Tasks

Cluster log

Start Time ↓	End Time	Node	User name	Description
Nov 01 11:09:32		redcyse	root@pam	VM/CT 302 - Console
Nov 01 11:16:46	Nov 01 12:00:17	redcyse	root@pam	VM/CT 302 - Console
Nov 01 11:09:36	Nov 01 11:09:37	redcyse	root@pam	VM 301 - Destroy
Nov 01 11:09:24	Nov 01 11:09:25	redcyse	root@pam	VM 300 - Destroy
Nov 01 11:08:05	Nov 01 11:09:22	redcyse	root@pam	VM/CT 302 - Console
Nov 01 11:03:48	Nov 01 11:17:57	redcyse	root@pam	VM/CT 302 - Console

Donc a 21h le server va automatiquement sauvegarder les données dans le storage pbs qui lui est lie au dossier /mnt/backup dans le server de backup et ce dossier est lie au NAS synology.

Add: Verification Job

Local Datastore:

Synology

Schedule:

daily

Namespace:

Root

Skip Verified:

☒

Max. Depth:

Full

Re-Verify After:

1

days

Comment:

Help

Advanced ☐

Add

Nous allons créer une tâche de vérification. La vérification permet de vérifier quelles données enregistrer dans le proxmox backup server est égale aux données se trouvant sur les containers et machines virtuelles. Cela permet aussi de vérifier qu'aucune donnée a été perdu en route.

PROXMOX Backup Server 3.2-2

Documentation Tasks 0 root@pam

Dashboard

Notes

Configuration

Access Control

Remotes

Traffic Control

Certificates

Notifications

Subscription

Administration

Shell

Storage / Disks

Tape Backup

Datastore

Synology

Add Datastore

Datastore: Synology

Summary Content Prune & GC Jobs Sync Jobs Verify Jobs Options Permissions

Reload V. Verify All Prune All

Namespace: Root Add NS Search group, date or owner

Backup Group	Comment	Actions	Backup Time	Size	Count	Owner	Encrypted	Verify State
Root Namespace								
ct/200	vortex	V. 3%	2024-11-01 12:08:54		1	proxsave@...	No	None
ct/201	Joel	V. 3%	2024-11-01 12:10:21		1	proxsave@...	No	None
ct/202	Ayman	V. 3%	2024-11-01 12:10:56		1	proxsave@...	No	None
ct/203	ihcen	V. 3%	2024-11-01 12:11:33		1	proxsave@...	No	None
ct/204	patrickbaro	V. 3%	2024-11-01 12:12:07		1	proxsave@...	No	None
ct/205	cer	V. 3%	2024-11-01 12:13:26		1	proxsave@...	No	None
ct/206	Hubert	V. 3%	2024-11-01 12:14:56		1	proxsave@...	No	None
ct/207	Guillaume	V. 3%	2024-11-01 12:15:33		1	proxsave@...	No	None
ct/208	Amine	V. 3%	2024-11-01 12:16:05		1	proxsave@...	No	None
ct/209	mohamed	V. 3%	2024-11-01 12:17:20		1	proxsave@...	No	None
vm/300	Ubuntu-Backup-manager	V. 3%	2024-10-30 18:30:04		1	proxsave@...	No	All OK
vm/301	Ubuntu-Storage-Backup	V. 3%	2024-10-30 18:34:36		1	proxsave@...	No	All OK

Conclusion :

En fin, ce projet nous a permis à apprendre ce qu'était de faire le lien entre une machine virtuelle et un stockage dans le reseau, d'apprendre des commandes linux pour monter un partage et surtout de mettre en place un vrai système de backup qui sera benefique pour toute

notre classe. Nous avons rencontré quelques défis, comme le fait d'oublier de mettre host lors de la création de notre VM, ce qui nous empêchait de lancer la VM. Nous avons aussi omis de mettre la version du protocole SMB lors de l'écriture de la commande qui nous permettait de monter le partage. Pour arranger la situation, fallait ajouter la version 3.0 de SMB à la fin de notre commande pour que ça marche. Et le dernier soucis que nous avons eu a été d'essayer de sauvegarder la VM qui lui sauvegarder les autres VM. Pendant la sauvegarde, la VM sauvegarder se met en pause, donc on ne peut mettre en pause un VM qui nous permet de faire la sauvegarde.