


```
parlai.agents.bert  
_ranker.bi_encoder_ranker.  
BiEncoderRankerAgent.score  
_candidates
```

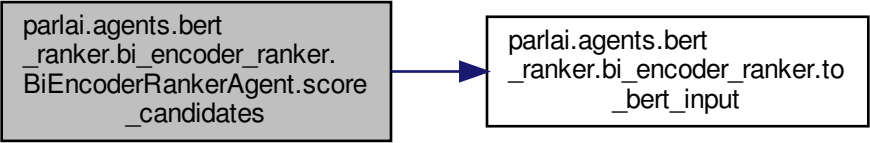

A diagram illustrating a transformation of a PyTorch module path. On the left, a gray rectangular box contains the path `parlai.agents.bert_ranker.bi_encoder_ranker.BiEncoderRankerAgent.score_candidates`. A blue arrow points from this box to a white rectangular box on the right. The white box contains the transformed path `parlai.agents.bert_ranker.bi_encoder_ranker.to_bert_input`. The transformation involves replacing `BiEncoderRankerAgent.score_candidates` with `to_bert_input`.

```
parlai.agents.bert  
_ranker.bi_encoder_ranker.to  
_bert_input
```