

new title

LILY NGUYEN¹ AND ANDRE SAE¹¹*Department of Physics, The University of Texas at Austin
Austin, TX 78712, USA*


ABSTRACT

abstract

Keywords: word1 — word2 — word3 — word4 — word5

1. INTRODUCTION

The PageRank algorithm, first introduced by Larry Page and Sergey Brin, was one of the first algorithms to rank webpages based on their link structure rather than just content [Brin & Page \(1998\)](#). The algorithm models the web as a directed graph and simulates a "random surfer" who follows hyperlinks with some probability or jumps to a random page to avoid getting stuck [Page et al. \(1999\)](#).

**Figure 1.** example graph 1.

This setup defines a Markov process where each page's importance is proportional to the importance of pages linking to it. The final PageRank vector corresponds to the steady-state distribution of this process and can be found either by iteration or by solving for the dominant eigenvector of the hyperlink matrix $\mathbf{H}$ [Langville & Meyer \(2009\)](#).

In this project, we first implemented PageRank using the difference equation $x_{k+1} = \mathbf{H}x_k$, which resulted in the scores converging once the solution reached the maximum tolerance allowed. We then confirmed our result by solving for the eigenvector associated with the largest eigenvalue of the matrix $\mathbf{H}$. Our goal was to understand how the algorithm behaves under different network structures and how quickly it converges [Langville & Meyer \(2004\)](#).

To start, we defined a 6-node directed graph where each page links to one or more pages, as shown in Figure 1. From this, we constructed the hyperlink matrix $\mathbf{H}$, where each non-zero entry $\mathbf{H}_{ij}$ is equal to $\frac{1}{|\mathcal{P}_{ij}|}$, the reciprocal of the number of outbound links from page P_j . This matrix represents the probability that a random surfer on page j clicks through to page i :

$$\mathbf{H} = \begin{pmatrix} 0 & 0 & 1/3 & 0 & 0 & 0 \\ 1/2 & 0 & 1/3 & 0 & 0 & 0 \\ 1/2 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1/2 & 1 \\ 0 & 0 & 1/3 & 1/2 & 0 & 0 \\ 0 & 0 & 0 & 1/2 & 1/2 & 0 \end{pmatrix} \quad (1)$$

We initialized the PageRank vector $\mathbf{x}_0$ with equal values and assumed that each page is equally likely to be visited at first:

$$\mathbf{x}_0 = \begin{pmatrix} 1/6 \\ 1/6 \\ 1/6 \\ 1/6 \\ 1/6 \\ 1/6 \end{pmatrix} \quad (2)$$




Figure 3. example graph 2.

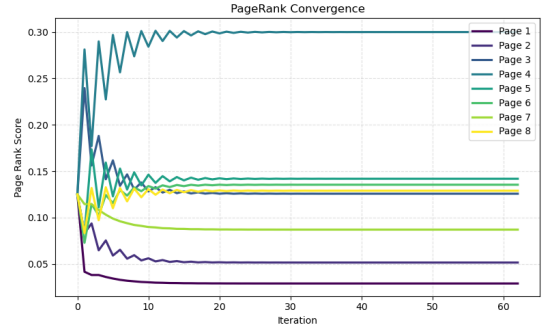


Figure 4. PageRank Convergence for graph 2.

3. RESULTS

61

62 results

63

4. SUMMARY AND CONCLUSION

64

65 summary/concl

66

4.1. Acknowledgements

67

68 We thank Professor Mitra for his guidance and instruction throughout the course, as well as the teaching assistants for their helpful feedback. We also acknowledge the Department of Physics for providing an excellent academic foundation to support this work. This work was completed as part of the requirements for C S 323E: Elements of Scientific Computing at the University of Texas at Austin.

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

87

88

89

90

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

66

67

68

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

87

88

89

90

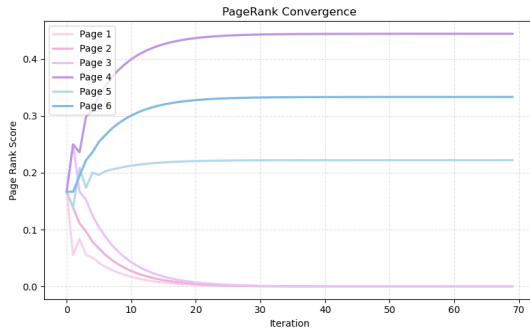


Figure 2. PageRank convergence for graph 1.

60

TALK ABOUT SECOND GRAPH EX HERE

REFERENCES

- 74 Brin, S., & Page, L. 1998, Computer Networks, 30, 107.
75 <https://snap.stanford.edu/class/cs224w-readings/>
76 [Brin98Anatomy.pdf](#)
- 77 Langville, A. N., & Meyer, C. D. 2004, Internet
78 mathematics, 1, 335
- 79 —. 2009, Google's pagerank and beyond: The science of
80 search engine rankings., 1st edn. (Princeton, N.J:
81 Princeton University Press)
- 82 Page, L., Brin, S., Motwani, R., & Winograd, T. 1999, The
83 PageRank Citation Ranking: Bringing Order to the
84 Web., Technical Report 1999-66, Stanford InfoLab.
85 <http://ilpubs.stanford.edu:8090/422/>