

new title

Lily Nguyen¹ and Andre Sae¹

¹*Department of Physics, The University of Texas at Austin
Austin, TX 78712, USA*

ABSTRACT

abstract

Keywords: stochastic — hyperlink — directed graph — word4 — word5

INTRODUCTION

The PageRank algorithm, first introduced by Larry Page and Sergey Brin, was one of the first algorithms to rank webpages based on their link structure rather than just content [Brin & Page \(1998\)](#). The algorithm models the web as a directed graph and simulates a "random surfer" who follows hyperlinks with some probability or jumps to a random page to avoid getting stuck [Page et al. \(1999\)](#).

This setup defines a Markov process where each page's importance is proportional to the importance of pages linking to it. The final PageRank vector corresponds to the steady-state distribution of this process and can be found either by iteration or by solving for the dominant eigenvector of the hyperlink matrix $\mathbf{H}$ [Langville & Meyer \(2009\)](#).

In this project, we first implemented PageRank using the difference equation $x_{k+1} = \mathbf{H}x_k$, which resulted in the scores converging once the solution reached the maximum tolerance allowed. We then confirmed our result by solving for the eigenvector associated with the largest eigenvalue of the matrix $\mathbf{H}$. Our goal was to understand how the algorithm behaves under different network structures and how quickly it converges [Langville & Meyer \(2004\)](#).

DATA AND OBSERVATIONS

For an $n \times n$ hyperlink matrix $\mathbf{H}$ to be stochastic, each column must be a probability vector with non-negative entries that sum to 1. This ensures that probability is conserved at each step of the Markov process and allows the system to converge to a unique steady-state solution. This condition is only satisfied if every page has at least one outgoing link. Otherwise, the corresponding column in $\mathbf{H}$ would contain all zeroes and violate the stochastic property.




Figure 1. example graph 1.

To start, we defined a 6-node directed graph where each page links to one or more pages, as shown in Figure 1. From this, we constructed the hyperlink matrix $\mathbf{H}$, where each non-zero entry $\mathbf{H}_{ij}$ is equal to $\frac{1}{|\mathcal{P}_{ij}|}$, the reciprocal of the

number of outbound links from page P_j . This matrix represents the probability that a random surfer on page j clicks through to page i :

$$\mathbf{H} = \begin{pmatrix} 0 & 0 & 1/3 & 0 & 0 & 0 \\ 1/2 & 0 & 1/3 & 0 & 0 & 0 \\ 1/2 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1/2 & 1 \\ 0 & 0 & 1/3 & 1/2 & 0 & 0 \\ 0 & 0 & 0 & 1/2 & 1/2 & 0 \end{pmatrix} \quad (1)$$

We initialized the PageRank vector $\mathbf{x}_0$ with equal values and assumed that each page is equally likely to be visited at first:

$$\mathbf{x}_0 = \begin{pmatrix} 1/6 \\ 1/6 \\ 1/6 \\ 1/6 \\ 1/6 \\ 1/6 \end{pmatrix} \quad (2)$$

We then applied the iterative update rule $\mathbf{x}_{n+1} = \mathbf{H}\mathbf{x}_n$ until the rank vector converged below a given tolerance to simulate a random surfer moving through the web graph via the links. We visualized the convergence of the PageRank vector by plotting each page's rank score for each iteration, which allowed us to track how the scores changed until they reached a steady state. Our results are shown in Figure 2.

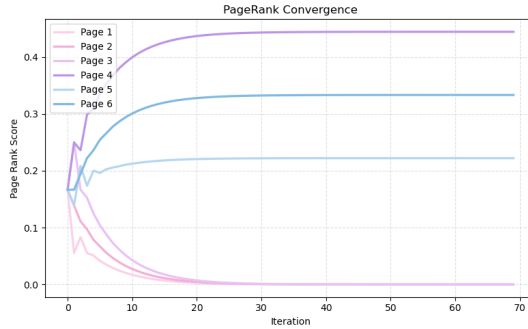


Figure 2. PageRank convergence for graph 1.

The convergence of the iterative method is a direct consequence of the underlying theory of stochastic matrices. According to **Theorem 4.9**, if $\mathbf{H}$ is an $n \times n$ stochastic matrix and $\mathbf{x}_0$ is some initial vector, then the system defined by the difference equation $\mathbf{x}_{n+1} = \mathbf{H}\mathbf{x}_n$ converges to a unique steady-state vector. This limit corresponds to the eigenvector $\mathbf{v}_1$ associated with eigenvalue $\lambda = 1$, since all the other eigenvalue components vanish as $k \rightarrow \infty$:

$$\mathbf{x}_{\text{equilibrium}} = \lim_{k \rightarrow \infty} \mathbf{H}^k \mathbf{x}_0 = c_1 \mathbf{v}_1 \quad (3)$$

Theorem 4.9 greatly simplifies the PageRank iterative process. Instead of repeatedly applying $\mathbf{x}_{n+1} = \mathbf{H}\mathbf{x}_n$, we can directly compute the dominant eigenvector of $\mathbf{H}$ corresponding to the eigenvalue $\lambda = 1$. This vector represents the steady-state solution and results in the same PageRank distribution as the limit of the iterative method.

Both the iterative difference equation and the eigenvector method yield the same steady-state PageRank vector:

45

$$\mathbf{x}_{\text{converged}} = \begin{pmatrix} 0 \\ 0 \\ 0 \\ 4/9 \\ 2/9 \\ 1/3 \end{pmatrix}$$

(4)

46 This distribution reflects the long-term behavior of a random surfer nagivating the web graph. Based on the values,
47 we rank the pages in order of importance as follows:

- 48 1. Page 4: most important (score = 4/9)
- 49 2. Page 6: second (score = 1/3)
- 50 3. Page 5: third (score = 1/3)
- 51 4. Pages 1–3: least important (score = 0)

52 This confirms that Pages 4–6 FINISH WRITING INTERPRETATION OF FINAL VE
53 TALK ABOUT SECOND GRAPH EX. HERE




Figure 3. example graph 2.

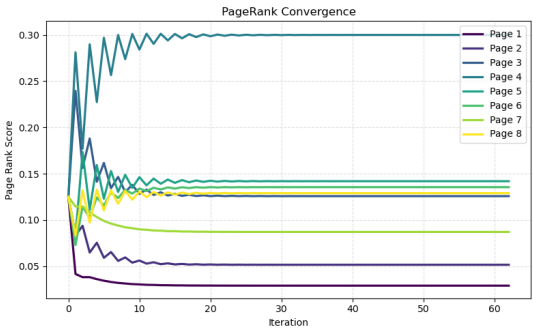


Figure 4. PageRank Convergence for graph 2.

54

RESULTS

55 results

56

SUMMARY AND CONCLUSION

57 summary/concl

Acknowledgements

We thank Professor Mitra for his guidance and instruction throughout the course, as well as the teaching assistants for their helpful feedback. We also acknowledge the Department of Physics for providing an excellent academic foundation to support this work. This work was completed as part of the requirements for C S 323E: Elements of Scientific Computing at the University of Texas at Austin.

REFERENCES

- 63 Brin, S., & Page, L. 1998, Computer Networks, 30, 107.
64 [https://snap.stanford.edu/class/cs224w-readings/
65 Brin98Anatomy.pdf](https://snap.stanford.edu/class/cs224w-readings/Brin98Anatomy.pdf)
- 66 Langville, A. N., & Meyer, C. D. 2004, Internet
67 mathematics, 1, 335
- 68 —. 2009, Google’s pagerank and beyond: The science of
69 search engine rankings., 1st edn. (Princeton, N.J:
70 Princeton University Press)
- 71 Page, L., Brin, S., Motwani, R., & Winograd, T. 1999, The
72 PageRank Citation Ranking: Bringing Order to the
73 Web., Technical Report 1999-66, Stanford InfoLab.
74 <http://ilpubs.stanford.edu:8090/422/>