



# EL9343 Homework 12

Due: Dec. 14th 8:00 a.m.

- Run the Bellman-Ford algorithm on the following graph, with vertex  $d$  as the source. In each pass, relax the edges in the order of  $\{(a, b), (a, c), (a, e), (a, f), (b, c), (c, e), (d, e), (d, f), (e, f)\}$ . Write down the  $d$  array after each pass.

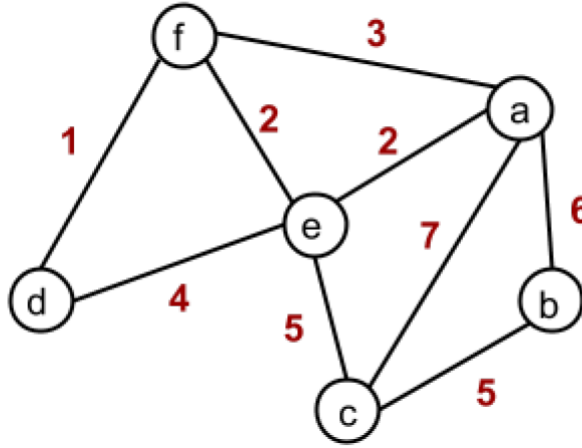


Solution:

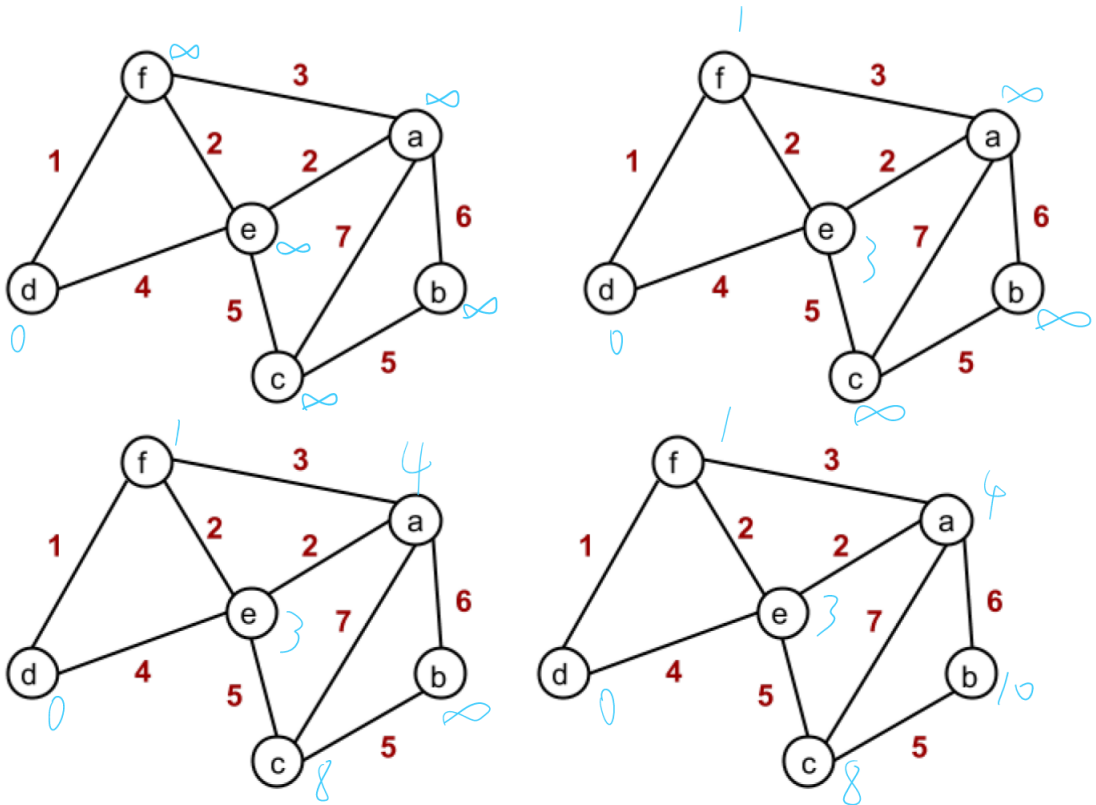


No.	a	b	c	d	e	f
1	inf	inf	inf	0	inf	inf
2	inf	inf	inf	0	3	1
3	4	inf	8	0	3	1
4	4	10	8	0	3	1

2. Run the Dijkstra's algorithm on the following graph, with node 0 as the source node. Write down the  $d$  array before each EXTRACT-MIN, also the final array.

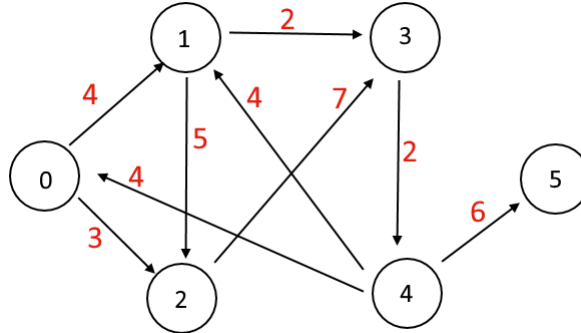

No.	0	1	2	3	4	5
1	0	inf	inf	inf	inf	inf
2	0	4	3	inf	inf	inf
3	0	4	3	10	inf	inf
4	0	4	3	6	inf	inf
5	0	4	3	6	8	inf
6	0	4	3	6	8	14

3. Run the Floyd-Warshall algorithm on the following graph. Show the matrix  $D^{(k)}$  that results for each iteration of the outer loop.

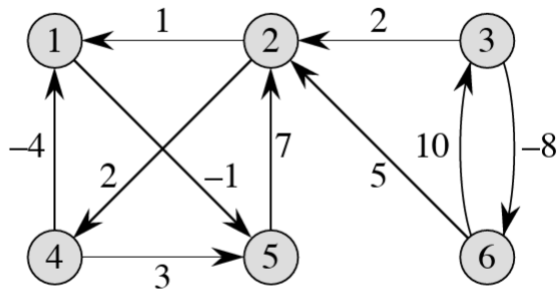

$k$	$D^k$
0	$\begin{pmatrix} 0 & \infty & \infty & \infty & -1 & \infty \\ 1 & 0 & \infty & 2 & \infty & \infty \\ \infty & 2 & 0 & \infty & \infty & -8 \\ -4 & \infty & \infty & 0 & 3 & \infty \\ \infty & 7 & \infty & \infty & 0 & \infty \\ \infty & 5 & 10 & \infty & \infty & 0 \end{pmatrix}$
1	$\begin{pmatrix} 0 & \infty & \infty & \infty & -1 & \infty \\ 1 & 0 & \infty & 2 & 0 & \infty \\ \infty & 2 & 0 & \infty & \infty & -8 \\ -4 & \infty & \infty & 0 & -5 & \infty \\ \infty & 7 & \infty & \infty & 0 & \infty \\ \infty & 5 & 10 & \infty & \infty & 0 \end{pmatrix}$
2	$\begin{pmatrix} 0 & \infty & \infty & \infty & -1 & \infty \\ 1 & 0 & \infty & 2 & 0 & \infty \\ 3 & 2 & 0 & 4 & 2 & -8 \\ -4 & \infty & \infty & 0 & -5 & \infty \\ 8 & 7 & \infty & 9 & 0 & \infty \\ 6 & 5 & 10 & 7 & 5 & 0 \end{pmatrix}$
3	$\begin{pmatrix} 0 & \infty & \infty & \infty & -1 & \infty \\ 1 & 0 & \infty & 2 & 0 & \infty \\ 3 & 2 & 0 & 4 & 2 & -8 \\ -4 & \infty & \infty & 0 & -5 & \infty \\ 8 & 7 & \infty & 9 & 0 & \infty \\ 6 & 5 & 10 & 7 & 5 & 0 \end{pmatrix}$
4	$\begin{pmatrix} 0 & \infty & \infty & \infty & -1 & \infty \\ -2 & 0 & \infty & 2 & -3 & \infty \\ 0 & 2 & 0 & 4 & -1 & -8 \\ -4 & \infty & \infty & 0 & -5 & \infty \\ 5 & 7 & \infty & 9 & 0 & \infty \\ 3 & 5 & 10 & 7 & 2 & 0 \end{pmatrix}$
5	$\begin{pmatrix} 0 & 6 & \infty & 8 & -1 & \infty \\ -2 & 0 & \infty & 2 & -3 & \infty \\ 0 & 2 & 0 & 4 & -1 & -8 \\ -4 & 2 & \infty & 0 & -5 & \infty \\ 5 & 7 & \infty & 9 & 0 & \infty \\ 3 & 5 & 10 & 7 & 2 & 0 \end{pmatrix}$
6	$\begin{pmatrix} 0 & 6 & \infty & 8 & -1 & \infty \\ -2 & 0 & \infty & 2 & -3 & \infty \\ -5 & -3 & 0 & -1 & -6 & -8 \\ -4 & 2 & \infty & 0 & -5 & \infty \\ 5 & 7 & \infty & 9 & 0 & \infty \\ 3 & 5 & 10 & 7 & 2 & 0 \end{pmatrix}$

4. We are given a directed graph  $G = (V, E)$  on which each edge  $(u, v) \in E$  has an associated value  $r(u, v)$ , which is a real number in the range  $0 \leq r(u, v) \leq 1$  that represents the reliability of a communication channel from vertex  $u$  to vertex  $v$ . We interpret  $r(u, v)$  as the probability that the channel from  $u$  to  $v$  will not fail, and we assume that these probabilities are independent. Give an efficient algorithm to find the most reliable path between two given vertices,  $u$  and  $v$ . Assume that Dijkstra's algorithm runs in  $O(|E| \log |V|)$ , and your algorithm should also run in  $O(|E| \log |V|)$ . Briefly describe why your algorithm is correct.

Similar to Dijkstras algorithm, the time complexity is  $O(|E| \log |V|)$

---

**Algorithm 1** Find The Most Reliable Path

---

**Input:** graph:  $G = (V, E)$

**Input:** source and target vertex:  $s, t$

**Input:** probability matrix:  $r(u, v) \in R$

**Output:** Most Reliable Path

```
for  $v \in V$  do
     $p[v] = 0$ 
end for
 $p[s] = 1$ 
 $S = \{\}$ 
 $Q = MAX - HEAPIFY(V)$ 
while  $Q \neq \emptyset$  do
     $u = EXTRACT - MAX(Q)$ 
    for  $v \in Adj[u]$  do
        if  $p[v] < p[u] \times r(u, v)$  then
             $p[v] = p[u] \times r(u, v)$ 
        end if
    end for
end while
```

---