TP GLPI

```
sudo apt install -y apache2
```

```
Paramétrage de libaprutil1t64:amd64 (1.6.3-1.1ubuntu7) ...
Paramétrage de libaprutil1-ldap:amd64 (1.6.3-1.1ubuntu7) ...
Paramétrage de libaprutil1-dbd-sqlite3:amd64 (1.6.3-1.1ubuntu7) ...
Paramétrage de apache2-utils (2.4.58-1ubuntu8.8) ...
Paramétrage de apache2-bin (2.4.58-1ubuntu8.8) ...
Paramétrage de apache2 (2.4.58-1ubuntu8.8) ...
Enabling module mpm_event.
Enabling module authz_core.
Enabling module authz_host.
Enabling module authn_core.
Enabling module auth_basic.
Enabling module access_compat.
Enabling module authn_file.
Enabling module authz_user.
Enabling module alias.
Enabling module dir.
Enabling module autoindex.
Enabling module env.
Enabling module mime.
Enabling module negotiation.
Enabling module setenvif.
Enabling module filter.
Enabling module deflate.
Enabling module status.
Enabling module reqtimeout.
Enabling conf charset.
Enabling conf localized-error-pages.
Enabling conf other-vhosts-access-log.
Enabling conf security.
Enabling conf serve-cgi-bin.
Enabling site 000-default.
Created symlink /etc/systemd/system/multi-user.target.wants/apache2.service → /usr/lib/systemd/system/apache2.service.
Could not execute systemctl:  at /usr/bin/deb-systemd-invoke line 148.
Created symlink /etc/systemd/system/multi-user.target.wants/apache-htcacheclean.service → /usr/lib/systemd/system/apache
Traitement des actions différées (« triggers ») pour ufw (0.36.2-6) ...
Traitement des actions différées (« triggers ») pour man-db (2.12.0-4build2) ...
Traitement des actions différées (« triggers ») pour libc-bin (2.39-0ubuntu8.6) ...
Scanning processes...
Scanning linux images...

Running kernel seems to be up-to-date.

No services need to be restarted.

No containers need to be restarted.

No user sessions are running outdated binaries.

No VM guests are running outdated hypervisor (qemu) binaries on this host.
lina@lina:~$ _
```

```
lina@lina:~$ curl -I http://127.0.0.1
HTTP/1.1 403 Forbidden
Date: Sun, 11 Jan 2026 12:23:27 GMT
Server: Apache/2.4.65 (Debian)
Content-Type: text/html; charset=iso-8859-1
```

```
lina@lina:~$ sudo apt install -y php pphp-cli php-common php-mysql php-curl php-gd php-intl php-mbstring php-xml -php-zip php-bz2
E: L'option « p » de la ligne de commande [-php-zip] n'est pas reconnue quand elle est utilisée avec d'autres options.
lina@lina:~$ _
```

```
lina@lina:~$ sudo apt install -y php php-cli php-common php-mysql php-curl php-gd php-intl php-mbstring php-xml php-zip php-bz2
```

```
janv. 11 12:29:19 lina apachectl[14918]: AH00015: Unable to open logs
janv. 11 12:29:19 lina systemd[1]: apache2.service: Control process exited, code=exited, status=1/FAILURE
janv. 11 12:29:19 lina systemd[1]: apache2.service: Failed with result 'exit-code'.
janv. 11 12:29:19 lina systemd[1]: Failed to start apache2.service - The Apache HTTP Server.
Paramétrage de php-cli (2:8.3+93ubuntu2) ...
update-alternatives: utilisation de « /usr/bin/php.default » pour fournir « /usr/bin/php » (php) en mode automatique
update-alternatives: utilisation de « /usr/bin/phar.default » pour fournir « /usr/bin/phar » (phar) en mode automatique
update-alternatives: utilisation de « /usr/bin/phar.phar.default » pour fournir « /usr/bin/phar.phar » (phar.phar) en mode automatique
Paramétrage de php-zip (2:8.3+93ubuntu2) ...
Paramétrage de php-gd (2:8.3+93ubuntu2) ...
Paramétrage de php-curl (2:8.3+93ubuntu2) ...
Paramétrage de php8.3 (8.3.6-0ubuntu0.24.04.5) ...
Paramétrage de php (2:8.3+93ubuntu2) ...
Traitement des actions différées (« triggers ») pour man-db (2.12.0-4build2) ...
Traitement des actions différées (« triggers ») pour libc-bin (2.39-0ubuntu8.6) ...
Traitement des actions différées (« triggers ») pour php8.3-cli (8.3.6-0ubuntu0.24.04.5) ...
Traitement des actions différées (« triggers ») pour libapache2-mod-php8.3 (8.3.6-0ubuntu0.24.04.5) ...
Job for apache2.service failed because the control process exited with error code.
See "systemctl status apache2.service" and "journalctl -xeu apache2.service" for details.
invoke-rc.d: initscript apache2, action "restart" failed.
● apache2.service - The Apache HTTP Server
     Loaded: loaded (/usr/lib/systemd/system/apache2.service; enabled; preset: enabled)
     Active: failed (Result: exit-code) since Sun 2026-01-11 12:29:21 UTC; 119ms ago
       Docs: https://httpd.apache.org/docs/2.4/
    Process: 14948 ExecStart=/usr/sbin/apachectl start (code=exited, status=1/FAILURE)
        CPU: 22ms

janv. 11 12:29:21 lina systemd[1]: Starting apache2.service - The Apache HTTP Server...
janv. 11 12:29:21 lina apachectl[14950]: AH00558: apache2: Could not reliably determine the server's fully qualified domain name, using 127.0.1.1. Set the 'Serv
erName' directive globally to suppress this message
janv. 11 12:29:21 lina apachectl[14950]: (98)Address already in use: AH00072: make_sock: could not bind to address [::]:80
janv. 11 12:29:21 lina apachectl[14950]: (98)Address already in use: AH00072: make_sock: could not bind to address 0.0.0.0:80
janv. 11 12:29:21 lina apachectl[14950]: no listening sockets available, shutting down
janv. 11 12:29:21 lina apachectl[14950]: AH00015: Unable to open logs
janv. 11 12:29:21 lina systemd[1]: apache2.service: Control process exited, code=exited, status=1/FAILURE
janv. 11 12:29:21 lina systemd[1]: apache2.service: Failed with result 'exit-code'.
janv. 11 12:29:21 lina systemd[1]: Failed to start apache2.service - The Apache HTTP Server.
Scanning processes...
Scanning linux images...

Running kernel seems to be up-to-date.

No services need to be restarted.

No containers need to be restarted.

No user sessions are running outdated binaries.

No VM guests are running outdated hypervisor (qemu) binaries on this host.
lina@lina:~$ _
```

```
lina@lina:~$ php -v
PHP 8.3.6 (cli) (built: Jul 14 2025 18:30:55) (NTS)
Copyright (c) The PHP Group
Zend Engine v4.3.6, Copyright (c) Zend Technologies
    with Zend OPcache v8.3.6, Copyright (c), by Zend Technologies
lina@lina:~$
```

```
lina@lina:~$ sudo apt install -y mariadb-server mariadb-client
```

```
Paramétrage de libmysqlclient21:amd64 (8.0.44-0ubuntu0.24.04.2) ...
Paramétrage de libclone-perl:amd64 (0.46-1build3) ...
Paramétrage de libfcgi0t64:amd64 (2.4.2-2.1ubuntu0.24.04.1) ...
Paramétrage de libhtml-tagset-perl (3.20-6) ...
Paramétrage de liblwp-mediatypes-perl (6.04-2) ...
Paramétrage de libfcgi-bin (2.4.2-2.1ubuntu0.24.04.1) ...
Paramétrage de libencode-locale-perl (1.05-3) ...
Paramétrage de libsnappy1v5:amd64 (1.1.10-1build1) ...
Paramétrage de socat (1.8.0.0-4build3) ...
Paramétrage de libio-html-perl (1.004-3) ...
Paramétrage de libmariadb3:amd64 (1:10.11.13-0ubuntu0.24.04.1) ...
Paramétrage de libtimedate-perl (2.3300-2) ...
Paramétrage de pv (1.8.5-2build1) ...
Paramétrage de libfcgi-perl (0.82+ds-3build2) ...
Paramétrage de liburing2:amd64 (2.5-1build1) ...
Paramétrage de liburi-perl (5.27-1) ...
Paramétrage de libdbi-perl:amd64 (1.643-4build3) ...
Paramétrage de libhttp-date-perl (6.06-1) ...
Paramétrage de mariadb-client-core (1:10.11.13-0ubuntu0.24.04.1) ...
Paramétrage de libdbd-mysql-perl:amd64 (4.052-1ubuntu3) ...
Paramétrage de libhtml-parser-perl:amd64 (3.81-1build3) ...
Paramétrage de mariadb-server-core (1:10.11.13-0ubuntu0.24.04.1) ...
Paramétrage de libhttp-message-perl (6.45-1ubuntu1) ...
Paramétrage de mariadb-client (1:10.11.13-0ubuntu0.24.04.1) ...
Paramétrage de libcgi-pm-perl (4.63-1) ...
Paramétrage de libhtml-template-perl (2.97-2) ...
Paramétrage de mariadb-server (1:10.11.13-0ubuntu0.24.04.1) ...
Created symlink /etc/systemd/system/multi-user.target.wants/mariadb.service → /usr/lib/systemd/system/mariadb.service.
Paramétrage de mariadb-plugin-provider-bzip2 (1:10.11.13-0ubuntu0.24.04.1) ...
Paramétrage de mariadb-plugin-provider-lzma (1:10.11.13-0ubuntu0.24.04.1) ...
Paramétrage de mariadb-plugin-provider-lzo (1:10.11.13-0ubuntu0.24.04.1) ...
Paramétrage de mariadb-plugin-provider-lz4 (1:10.11.13-0ubuntu0.24.04.1) ...
Paramétrage de libcgi-fast-perl (1:2.17-1) ...
Paramétrage de mariadb-plugin-provider-snappy (1:10.11.13-0ubuntu0.24.04.1) ...
Traitement des actions différées (« triggers ») pour man-db (2.12.0-4build2) ...
Traitement des actions différées (« triggers ») pour libc-bin (2.39-0ubuntu8.6) ...
Traitement des actions différées (« triggers ») pour mariadb-server (1:10.11.13-0ubuntu0.24.04.1) ...
Scanning processes...
Scanning linux images...

Running kernel seems to be up-to-date.

No services need to be restarted.

No containers need to be restarted.

No user sessions are running outdated binaries.

No VM guests are running outdated hypervisor (qemu) binaries on this host.
lina@lina:~$
```

```
lina@lina:~$ sudo systemctl status mariadb
● mariadb.service - MariaDB 10.11.13 database server
     Loaded: loaded (/usr/lib/systemd/system/mariadb.service; enabled; preset: enabled)
     Active: active (running) since Sun 2026-01-11 12:32:57 UTC; 33s ago
       Docs: man:mariadbd(8)
             https://mariadb.com/kb/en/library/systemd/
   Main PID: 15731 (mariadbd)
     Status: "Taking your SQL requests now..."
      Tasks: 13 (limit: 14970)
     Memory: 78.8M (peak: 81.7M)
        CPU: 590ms
     CGroup: /system.slice/mariadb.service
             └─15731 /usr/sbin/mariadbd

janv. 11 12:32:57 lina mariadbd[15731]: 2026-01-11 12:32:57 0 [Note] InnoDB: Loading buffer pool(s) from /var/lib/mysql/
janv. 11 12:32:57 lina mariadbd[15731]: 2026-01-11 12:32:57 0 [Warning] You need to use --log-bin to make --expire-logs-
janv. 11 12:32:57 lina mariadbd[15731]: 2026-01-11 12:32:57 0 [Note] Server socket created on IP: '127.0.0.1'.
janv. 11 12:32:57 lina mariadbd[15731]: 2026-01-11 12:32:57 0 [Note] InnoDB: Buffer pool(s) load completed at 260111 12:
janv. 11 12:32:57 lina mariadbd[15731]: 2026-01-11 12:32:57 0 [Note] /usr/sbin/mariadbd: ready for connections.
janv. 11 12:32:57 lina mariadbd[15731]: Version: '10.11.13-MariaDB-0ubuntu0.24.04.1'  socket: '/run/mysqld/mysqld.sock'
janv. 11 12:32:57 lina systemd[1]: Started mariadb.service - MariaDB 10.11.13 database server.
janv. 11 12:32:57 lina /etc/mysql/debian-start[15749]: Upgrading MariaDB tables if necessary.
janv. 11 12:32:57 lina /etc/mysql/debian-start[15760]: Checking for insecure root accounts.
janv. 11 12:32:57 lina /etc/mysql/debian-start[15764]: Triggering myisam-recover for all MyISAM tables and aria-recover
lines 1-23/23 (END)
```

```
lina@lina:~$ sudo mysql_secure_installation

NOTE: RUNNING ALL PARTS OF THIS SCRIPT IS RECOMMENDED FOR ALL MariaDB
      SERVERS IN PRODUCTION USE!  PLEASE READ EACH STEP CAREFULLY!

In order to log into MariaDB to secure it, we'll need the current
password for the root user. If you've just installed MariaDB, and
haven't set the root password yet, you should just press enter here.

Enter current password for root (enter for none):
OK, successfully used password, moving on...

Setting the root password or using the unix_socket ensures that nobody
can log into the MariaDB root user without the proper authorisation.

You already have your root account protected, so you can safely answer 'n'.

Switch to unix_socket authentication [Y/n] y
Enabled successfully!
Reloading privilege tables..
 ... Success!


You already have your root account protected, so you can safely answer 'n'.

Change the root password? [Y/n] y
New password:
Re-enter new password:
```

```
Remove anonymous users? [Y/n] y
 ... Success!

Normally, root should only be allowed to connect from 'localhost'.  This
ensures that someone cannot guess at the root password from the network.

Disallow root login remotely? [Y/n] y
 ... Success!

By default, MariaDB comes with a database named 'test' that anyone can
access.  This is also intended only for testing, and should be removed
before moving into a production environment.

Remove test database and access to it? [Y/n] y
 - Dropping test database...
 ... Success!
 - Removing privileges on test database...
 ... Success!

Reloading the privilege tables will ensure that all changes made so far
will take effect immediately.

Reload privilege tables now? [Y/n] y
 ... Success!

Cleaning up...

All done!  If you've completed all of the above steps, your MariaDB
installation should now be secure.

Thanks for using MariaDB!
```

```
lina@lina:~$ sudo mariadb
```

```
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 41
Server version: 10.11.13-MariaDB-0ubuntu0.24.04.1 Ubuntu 24.04

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> CREATE DATABASE glpidb CHARACTER SET utf8mb4 COLLATE utf8mb4_unicode_ci;
```

```
MariaDB [(none)]> CREATE USER 'glpiuser'@'localhost'IDENTIFIEDNBY 'motdepassefort';
```

```
Normally, root should only be allowed to connect from 'localhost'.  This
ensures that someone cannot guess at the root password from the network.

Disallow root login remotely? [Y/n] y
 ... Success!

By default, MariaDB comes with a database named 'test' that anyone can
access.  This is also intended only for testing, and should be removed
before moving into a production environment.

Remove test database and access to it? [Y/n] y
 - Dropping test database...
 ... Success!
 - Removing privileges on test database...
 ... Success!

Reloading the privilege tables will ensure that all changes made so far
will take effect immediately.

Reload privilege tables now? [Y/n] y
 ... Success!

Cleaning up...

All done!  If you've completed all of the above steps, your MariaDB
installation should now be secure.

Thanks for using MariaDB!
lina@lina:~$ sudo mariadb
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 41
Server version: 10.11.13-MariaDB-0ubuntu0.24.04.1 Ubuntu 24.04

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> CREATE DATABASE glpidb CHARACTER SET utf8mb4 COLLATE utf8mb4_unicode_ci;
Query OK, 1 row affected (0,003 sec)

MariaDB [(none)]> CREATE USER 'glpiuser'@'localhost'IDENTIFIEDNBY '1205';
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your MariaDB server vers
NTIFIEDNBY '1205'' at line 1
MariaDB [(none)]> CREATE USER 'glpiuser'@'localhost'IDENTIFIEDNBY 'mdp';
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your MariaDB server vers
NTIFIEDNBY 'mdp'' at line 1
MariaDB [(none)]> CREATE USER 'glpiuser'@'localhost'IDENTIFIEDNBY 'motdepasse';
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your MariaDB server vers
NTIFIEDNBY 'motdepasse'' at line 1
MariaDB [(none)]>
```

```
MariaDB [(none)]> GRANT ALL PRIVILEGES ON glpidb.* TO 'glpiuser'@'LOCALHOST'; FLUSH PRIVILEGES;
```

```
MariaDB [(none)]> EXIT
Bye
```

```
lina@lina:~$ cd /var/www/html
```

```
lina@lina:/var/www/html$ sudo wget -O glpi.tgz https://github.com/glpi-project/glpi/releases/download/11.0.4/glpi-11.0.4.tgz
```

```
tar (child): glpi.tgz: Cannot open: No such file or directory
tar (child): Error is not recoverable: exiting now
tar: Child returned status 2
tar: Error is not recoverable: exiting now
lina@lina:/var/www/html$ sudo wget -O glpi.tgz https://github.com/glpi-project/glpi/releases/download/11.0.4/glpi-11.0.4
--2026-01-11 12:55:35--  https://github.com/glpi-project/glpi/releases/download/11.0.4/glpi-11.0.4.tgz
Resolving github.com (github.com)... 140.82.121.4
Connecting to github.com (github.com)|140.82.121.4|:443... connected.
HTTP request sent, awaiting response... 302 Found
Location: https://release-assets.githubusercontent.com/github-production-release-asset/39182755/42df44bb-ab73-4950-a9d7-
=https&se=2026-01-11T13%3A46%3A51Z&rscd=attachment%3B+filename%3Dglpi-11.0.4.tgz&rsct=application%2Foctet-stream&skoid=9
d=398a6654-997b-47e9-b12b-9515b896b4de&skt=2026-01-11T12%3A46%3A26Z&ske=2026-01-11T13%3A46%3A51Z&sks=b&skv=2018-11-09&si
JMq%2F7LYbEvI%3D&jwt=eyJ0eXAiOiJKV1QiLCJhbGciOiJIUzI1NiJ9.eyJpc3MiOiJnaXRodWIuY29tIiwiYXVkIjoicmVsZWFzZS1hc3NldHMuZ2l0ah
IsImV4cCI6MTc2ODEzNzkzNSwibmJmIjoxNzY4MTM2MTM1LCJwYXRoIjoicmVsZWFzZWFzc2V0cHJvZHVjdGlvbi5ibG9iLmNvcmUud2lu2G93cy5u2XQifQ
luGQ&response-content-disposition=attachment%3B%20filename%3Dglpi-11.0.4.tgz&response-content-type=application%2Foctet-s
--2026-01-11 12:55:35--  https://release-assets.githubusercontent.com/github-production-release-asset/39182755/42df44bb
-11-09&sr=b&spr=https&se=2026-01-11T13%3A46%3A51Z&rscd=attachment%3B+filename%3Dglpi-11.0.4.tgz&rsct=application%2Foctet
1947aa7ab0&sktid=398a6654-997b-47e9-b12b-9515b896b4de&skt=2026-01-11T12%3A46%3A26Z&ske=2026-01-11T13%3A46%3A51Z&sks=b&sk
UR%2B3G9AMlA%2FjMq%2F7LYbEvI%3D&jwt=eyJ0eXAiOiJKV1QiLCJhbGciOiJIUzI1NiJ9.eyJpc3MiOiJnaXRodWIuY29tIiwiYXVkIjoicmVsZWFzZS
ia2V5Ijoia2V5MSIsImV4cCI6MTc2ODEzNzkzNSwibmJmIjoxNzY4MTM2MTM1LCJwYXRoIjoicmVsZWFzZWFzc2V0cHJvZHVjdGlvbi5ibG9iLmNvcmUud2
wfLEEwLrWeKE8lqluGQ&response-content-disposition=attachment%3B%20filename%3Dglpi-11.0.4.tgz&response-content-type=applic
Resolving release-assets.githubusercontent.com (release-assets.githubusercontent.com)... 185.199.111.133, 185.199.108.13
Connecting to release-assets.githubusercontent.com (release-assets.githubusercontent.com)|185.199.111.133|:443... connec
HTTP request sent, awaiting response... 200 OK
Length: 88698907 (85M) [application/octet-stream]
Saving to: ‘glpi.tgz’

glpi.tgz                                    100%[===================================================================

2026-01-11 12:55:39 (24,3 MB/s) - ‘glpi.tgz’ saved [88698907/88698907]
```

```
lina@lina:/var/www/html$ sudo tar -xvzf glpi.tgz
```

```
glpi/ajax/dropdownSoftwareLicense.php
glpi/ajax/dropdownShowIPNetwork.php
glpi/ajax/dropdownRubDocument.php
glpi/ajax/dropdownProjectTaskTicket.php
glpi/ajax/dropdownNotificationTemplate.php
glpi/ajax/dropdownNotificationEvent.php
glpi/ajax/dropdownMassiveActionOs.php
glpi/ajax/dropdownMassiveActionField.php
glpi/ajax/dropdownMassiveActionAuthMethods.php
glpi/ajax/dropdownMassiveActionAddValidator.php
glpi/ajax/dropdownMassiveActionAddActor.php
glpi/ajax/dropdownMassiveAction.php
glpi/ajax/dropdownLocation.php
glpi/ajax/dropdownItilActors.php
glpi/ajax/dropdownInstallVersion.php
glpi/ajax/dropdownFieldsBlacklist.php
glpi/ajax/dropdownConnectNetworkPortDeviceType.php
glpi/ajax/dropdownConnectNetworkPort.php
glpi/ajax/dropdownConnect.php
glpi/ajax/dropdownAllItems.php
glpi/ajax/domainrecord_data_form.php
glpi/ajax/displaypreference.php
glpi/ajax/displayMessageAfterRedirect.php
glpi/ajax/debug.php
glpi/ajax/dcroom_size.php
glpi/ajax/dashboard.php
glpi/ajax/criteria_filter.php
glpi/ajax/comparekbRevisions.php
glpi/ajax/commonitilsatisfaction.php
glpi/ajax/commonitilobject_item.php
glpi/ajax/common.tabs.php
glpi/ajax/comments.php
glpi/ajax/change_item.php
glpi/ajax/central.php
glpi/ajax/cable.php
glpi/ajax/asset/
glpi/ajax/asset/customfield.php
glpi/ajax/asset/assetdefinition.php
glpi/ajax/agent.php
glpi/ajax/actors.php
glpi/ajax/actorinformation.php
glpi/ajax/2fa.php
glpi/SUPPORT.md
glpi/SECURITY.md
glpi/README.md
glpi/LICENSE
glpi/INSTALL.md
glpi/CONTRIBUTING.md
glpi/CHANGELOG.md
lina@lina:/var/www/html$
```

```
lina@lina:/var/www/html$ ls /var/www/html
glpi  glpi.tgz  index.html
```

```
lina@lina:/var/www/html$ sudo chown -R www-data:www-data /var/www/html/glpi
lina@lina:/var/www/html$ sudo chmod -R 755 /var/www/html/glpi
```

```
lina@lina:~$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
       valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
       valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000
    link/ether 08:00:27:93:d9:9e brd ff:ff:ff:ff:ff:ff
    inet 192.168.1.227/24 metric 100 brd 192.168.1.255 scope global dynamic enp0s3
       valid_lft 86357sec preferred_lft 86357sec
    inet6 2a02:8429:d407:ce01:a00:27ff:fe93:d99e/64 scope global dynamic mngtmpaddr noprefixroute
       valid_lft 707sec preferred_lft 707sec
    inet6 fe80::a00:27ff:fe93:d99e/64 scope link
       valid_lft forever preferred_lft forever
3: br-5931537a7639: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc noqueue state UP group default
    link/ether be:ba:07:f6:8e:34 brd ff:ff:ff:ff:ff:ff
    inet 172.18.0.1/16 brd 172.18.255.255 scope global br-5931537a7639
       valid_lft forever preferred_lft forever
    inet6 fe80::bcba:7ff:fef6:8e34/64 scope link
       valid_lft forever preferred_lft forever
4: docker0: <NO-CARRIER,BROADCAST,MULTICAST,UP> mtu 1500 qdisc noqueue state DOWN group default
    link/ether 06:6e:d1:6f:1f:71 brd ff:ff:ff:ff:ff:ff
    inet 172.17.0.1/16 brd 172.17.255.255 scope global docker0
       valid_lft forever preferred_lft forever
5: veth101cf8b@if2: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc noqueue master br-5931537a7639 state UP group defau
    link/ether 2e:19:06:15:d6:fa brd ff:ff:ff:ff:ff:ff link-netnsid 0
    inet6 fe80::2c19:6ff:fe15:d6fa/64 scope link
       valid_lft forever preferred_lft forever
6: vethc76bf88@if2: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc noqueue master br-5931537a7639 state UP group defau
    link/ether 7e:2f:69:b2:67:87 brd ff:ff:ff:ff:ff:ff link-netnsid 1
    inet6 fe80::7c2f:69ff:feb2:6787/64 scope link
       valid_lft forever preferred_lft forever
7: veth8989b330@if2: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc noqueue master br-5931537a7639 state UP group defau
    link/ether 1a:d4:f2:96:40:0d brd ff:ff:ff:ff:ff:ff link-netnsid 2
    inet6 fe80::18d4:f2ff:fe96:400d/64 scope link
       valid_lft forever preferred_lft forever
lina@lina:~$
```

https://192.168.1.227/glpi

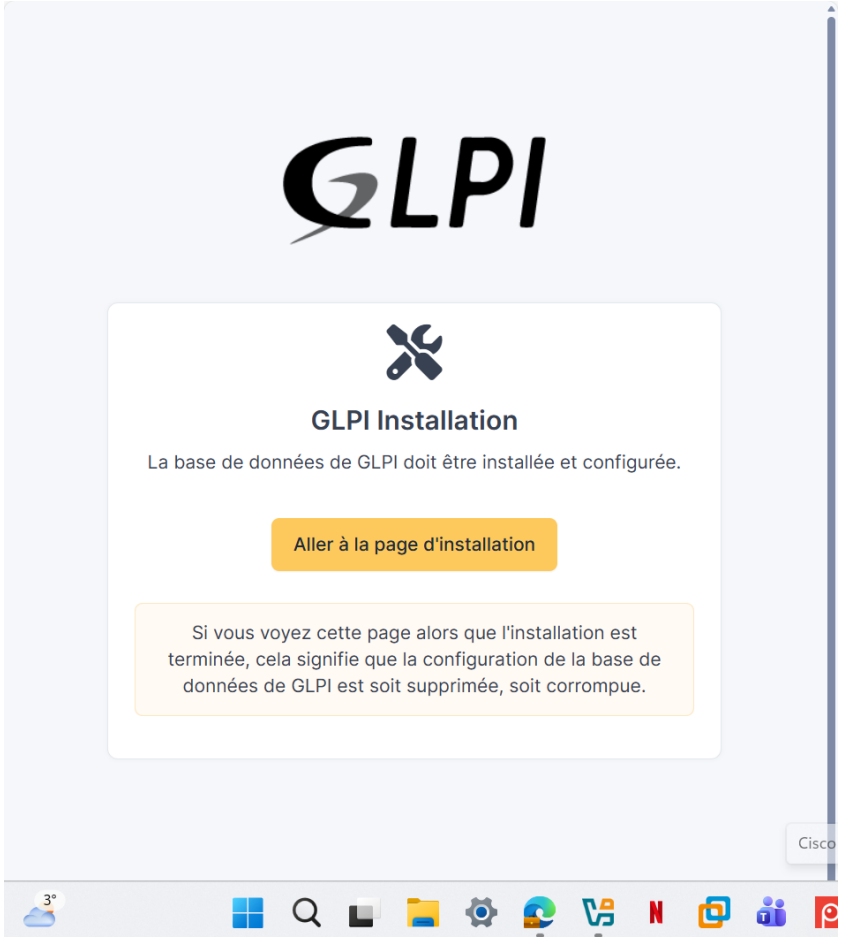

GLPI Installation
Sélectionnez votre langue
Français
OK

GLPI Installation
Licence
GNU GENERAL PUBLIC LICENSE
Version 3, 29 June 2007
Copyright (C) 2007 Free Software Foundation, Inc. <https://fsf.org/>
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.
Preamble
The GNU General Public License is a free, copyleft license for
software and other kinds of works.
Des traductions non officielles sont également disponibles
Continuer

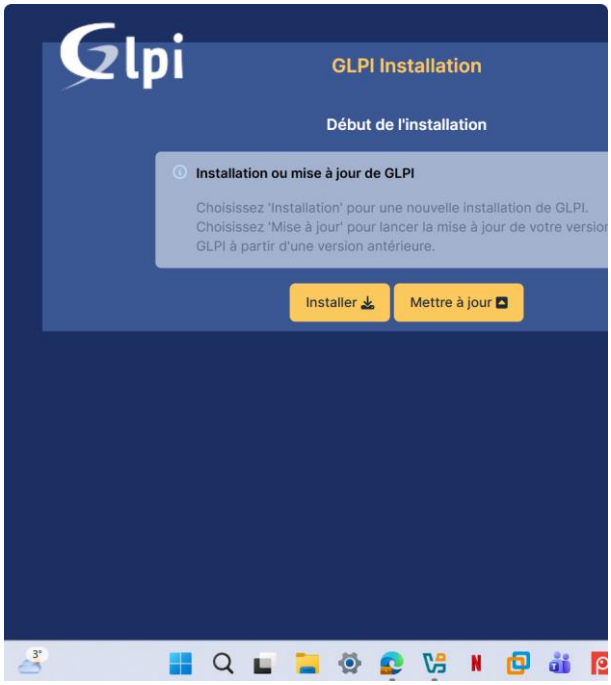

```
lina@lina:~$ sudo apt install -y php-mysql php-curl php-gd php-intl php-mbstring php-xml php-zip
Lecture des listes de paquets... Fait
Construction de l'arbre des dépendances... Fait
Lecture des informations d'état... Fait
php-mysql est déjà la version la plus récente (2:8.3+93ubuntu2).
php-curl est déjà la version la plus récente (2:8.3+93ubuntu2).
php-gd est déjà la version la plus récente (2:8.3+93ubuntu2).
php-intl est déjà la version la plus récente (2:8.3+93ubuntu2).
php-mbstring est déjà la version la plus récente (2:8.3+93ubuntu2).
php-xml est déjà la version la plus récente (2:8.3+93ubuntu2).
php-zip est déjà la version la plus récente (2:8.3+93ubuntu2).
0 mis à jour, 0 nouvellement installés, 0 à enlever et 64 non mis à jour.
```

```
sudo apt install -y php-bcmath
```

```
sudo apt install -y php-ldap
```

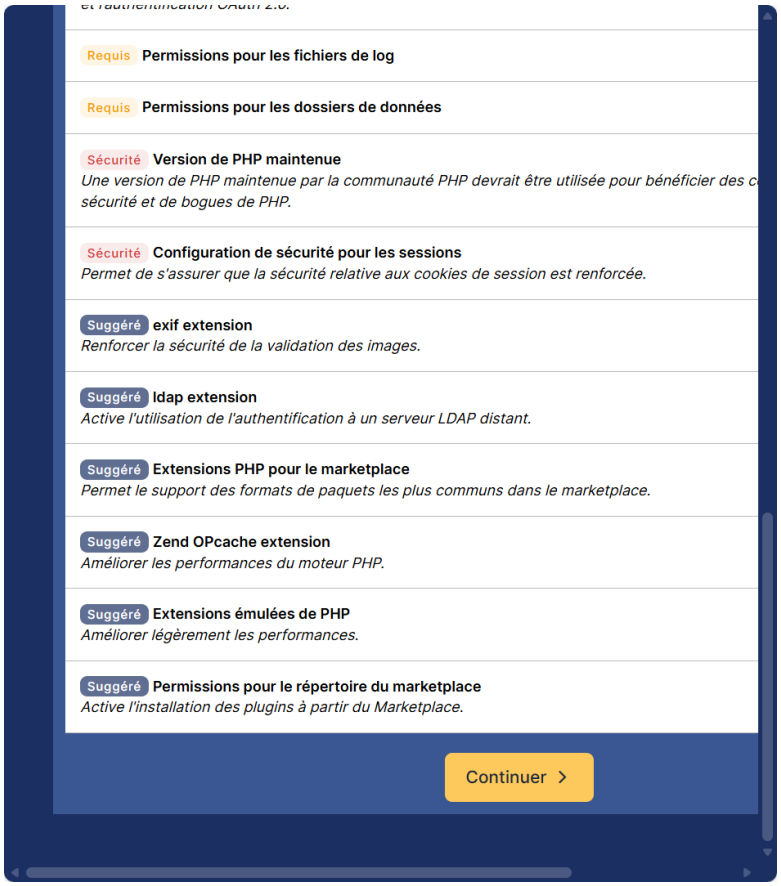

GLPI Installation
Étape 2
Test de connexion à la base de données
Connexion à la base de données réussie
Veuillez sélectionner une base de données :
CRÉER UNE NOUVELLE BASE DE DONNÉES :
OU UTILISER UNE BASE EXISTANTE :
glpidb
Continuer

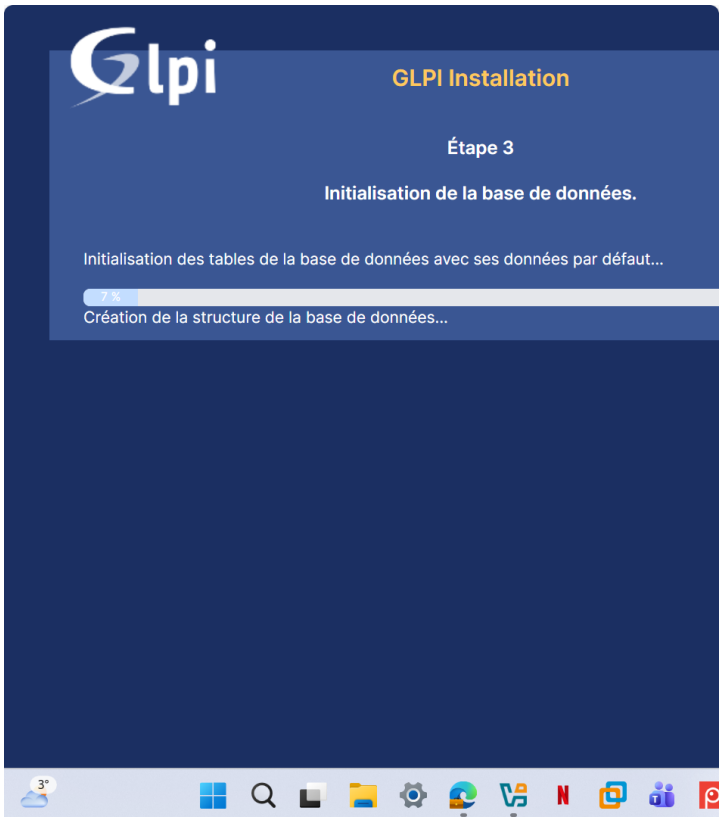
GLPI Installation
Étape 3
Initialisation de la base de données.
Initialisation des tables de la base de données avec ses données par défaut...
7 %
Création de la structure de la base de données...

GLPI Installation
Étape 3
Initialisation de la base de données.
Initialisation des tables de la base de données avec ses données par défaut...
100 %
Structure de la base de données créée.
Données par défaut importées.
Formulaires par défaut créés.
Règles par défaut initialisées.
Clefs de sécurités générées.
Paramètres par défaut définis.
Installation terminée.
Continuer

GLPI Installation
Étape 4
Récolter des données
Envoyer "statistiques d'usage"
Nous avons besoin de vous pour améliorer GLPI et son écosystème de plugins !
Depuis GLPI 9.2, nous avons introduit une nouvelle fonctionnalité de statistiques appe
envoie anonymement, avec votre permission, des données à notre site de télémétrie.
Une fois envoyées, les statistiques d'usage sont agrégées et rendues disponibles à ur
développeurs GLPI.
Dites-nous comment vous utilisez GLPI pour que nous améliorons GLPI et ses plugins
Voir ce qui serait envoyé...
Référencez votre GLPI
Par ailleurs, si vous appréciez GLPI et sa communauté, prenez une minute pour référe
remplissant le formulaire suivant
Le formulaire d'inscription
Continuer

GLPI Installation
Étape 5
Une dernière chose avant de démarrer
Vous souhaitez obtenir de l'aide pour intégrer GLPI dans votre SI, faire corriger un bu
règles ou dictionnaires pré-configurés ?
Nous mettons à votre disposition l'espace https://services.glpi-network.com.
GLPI-Network est un service commercial qui comprend une souscription au support
garantissant la correction des bugs rencontrés avec un engagement de délai.
Sur ce même espace, vous pourrez contacter un partenaire officiel pour vous aider d
de GLPI.
Continuer

GLPI Installation
Étape 6
L'installation est terminée
Les identifiants et mots de passe par défaut sont :
glpi/glpi pour le compte administrateur
tech/tech pour le compte technicien
normal/normal pour le compte normal
post-only/postonly pour le compte postonly
Vous pouvez supprimer ou modifier ces comptes ainsi que les données initiales.
Utiliser GLPI

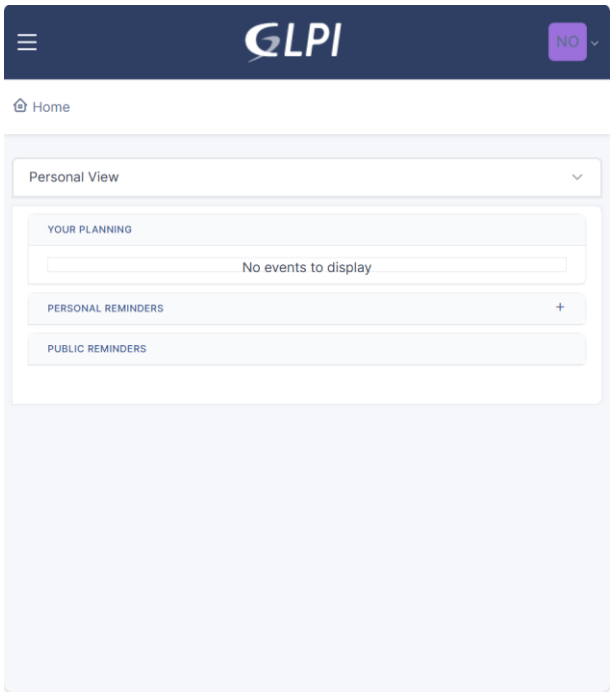


```
lina@lina:~$ sudo rm -rf /var/www/html/glpi/install
```

GLPI
Connexion à votre compte
Identifiant
glpi
Mot de passe
Source de connexion
Base interne GLPI
Se souvenir de moi
15:30
11/01/2026

GLPI
GL
Accueil
Tableau de bord
Pour des raisons de sécurité, veuillez changer le mot de passe par défaut pour le(s) utilisateur(s) : glpi post-only tech normal
Central
Vous visionnez actuellement des données de démonstration.
Désactiver les données de démonstration
Nouveau
Validation
En cours (Attribué)
En attente
Résolu
Clos
Statuts des tickets par mois
Utilisateurs
Groupes
Profils

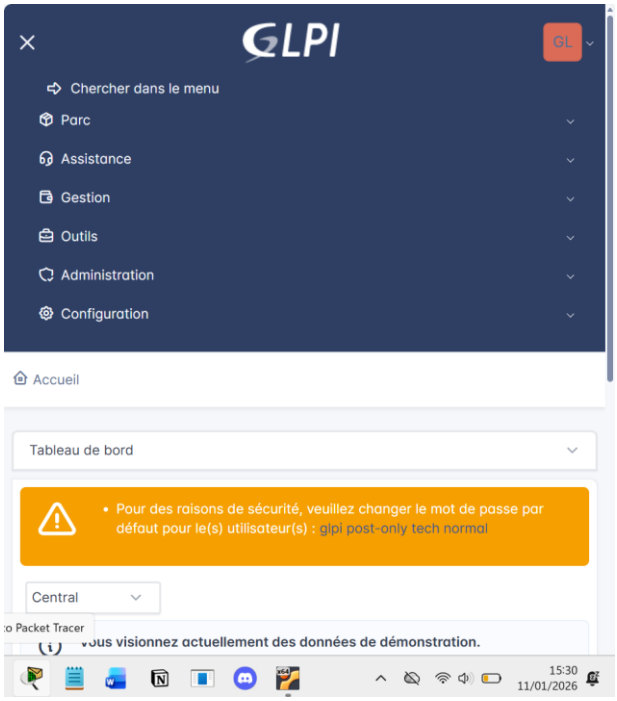
GLPI
GL
Chercher dans le menu
Parc
Assistance
Gestion
Outils
Administration
Configuration
Accueil
Tableau de bord
Pour des raisons de sécurité, veuillez changer le mot de passe par défaut pour le(s) utilisateur(s) : glpi post-only tech normal
Central
Vous visionnez actuellement des données de démonstration.
15:30
11/01/2026

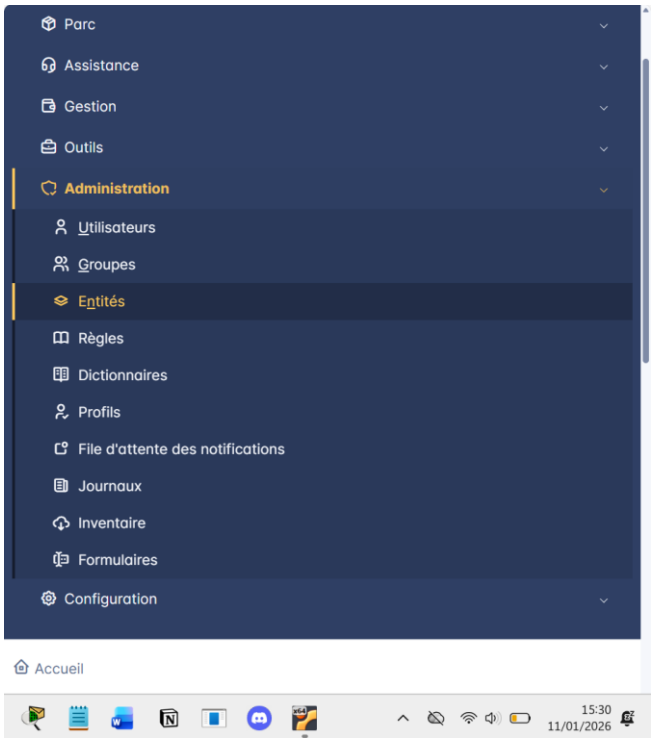
Parc
Assistance
Gestion
Outils
Administration
Utilisateurs
Groupes
Entités
Règles
Dictionnaires
Profils
File d'attente des notifications
Journaux
Inventaire
Formulaires
Configuration
Accueil
15:30
11/01/2026

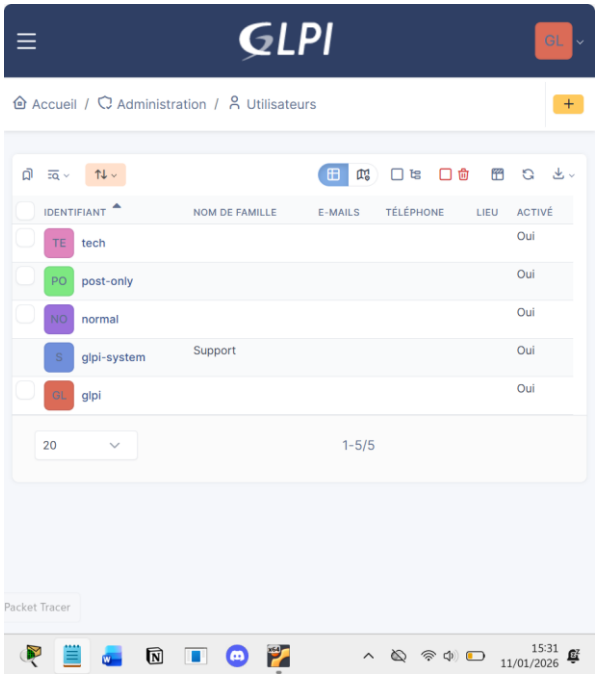
GLPI
GL
Accueil / Administration / Utilisateurs
IDENTIFIANT
NOM DE FAMILLE
E-MAILS
TÉLÉPHONE
LIEU
ACTIVÉ
TE tech Oui
PO post-only Oui
NO normal Oui
S glpi-system Support Oui
GL glpi Oui
20
1-5/5
Packet Tracer
15:31
11/01/2026

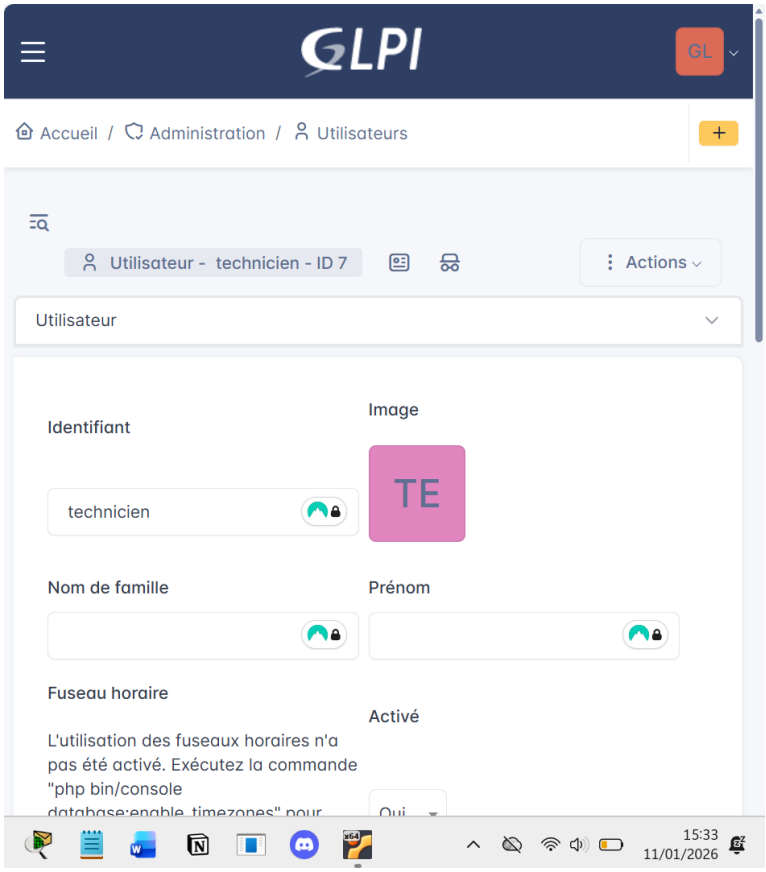
GLPI
GL
Accueil / Administration / Utilisateurs
Utilisateur - technicien - ID 7
Actions
Utilisateur
Identifiant
technicien
Image
TE
Nom de famille
Prénom
Fuseau horaire
L'utilisation des fuseaux horaires n'a pas été activé. Exécutez la commande "php bin/console
Activé
Oui
15:33
11/01/2026

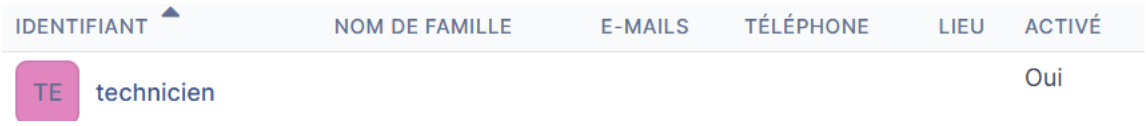
IDENTIFIANT
NOM DE FAMILLE
E-MAILS
TÉLÉPHONE
LIEU
ACTIVÉ
TE technicien
Oui

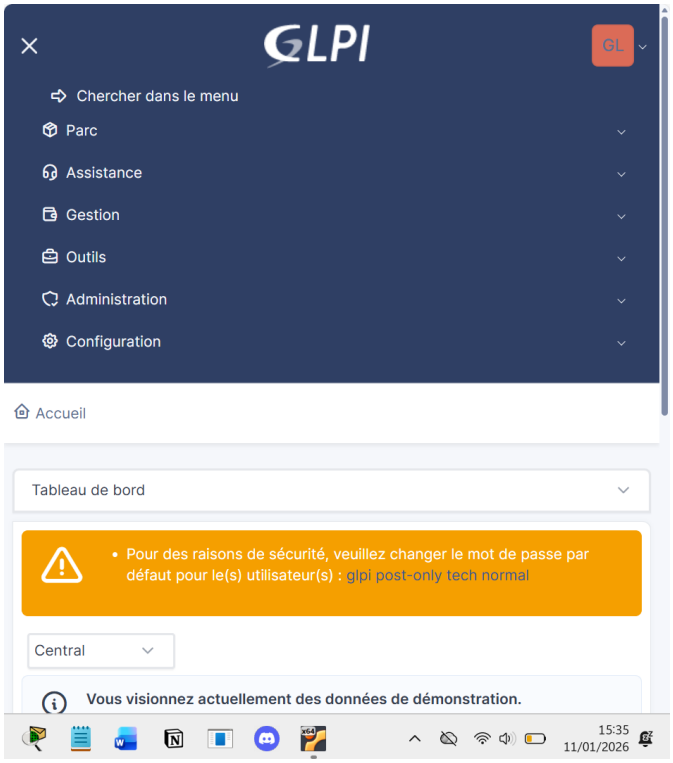
GLPI
GL
Chercher dans le menu
Parc
Assistance
Gestion
Outils
Administration
Configuration
Accueil
Tableau de bord
Pour des raisons de sécurité, veuillez changer le mot de passe par défaut pour le(s) utilisateur(s) : glpi post-only tech normal
Central
Vous visionnez actuellement des données de démonstration.
15:35
11/01/2026

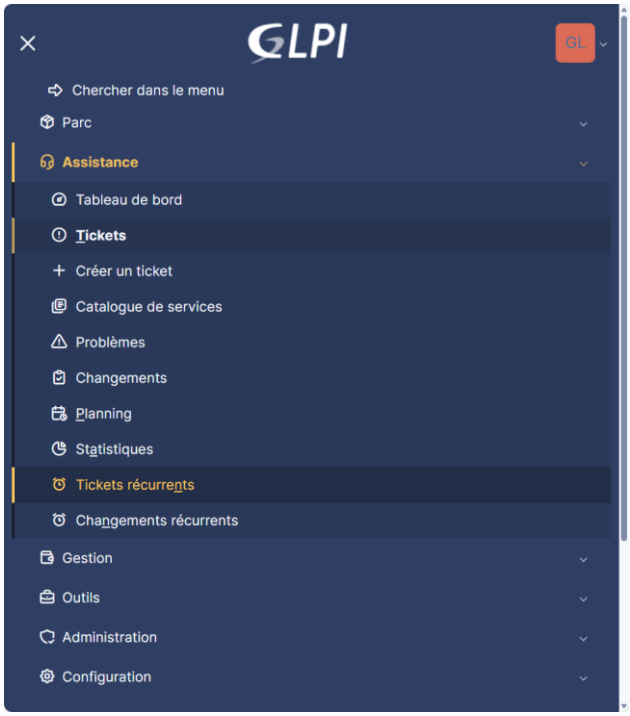
GLPI
GL
Chercher dans le menu
Parc
Assistance
Tableau de bord
Tickets
Créer un ticket
Catalogue de services
Problèmes
Changements
Planning
Statistiques
Tickets récurrents
Changements récurrents
Gestion
Outils
Administration
Configuration

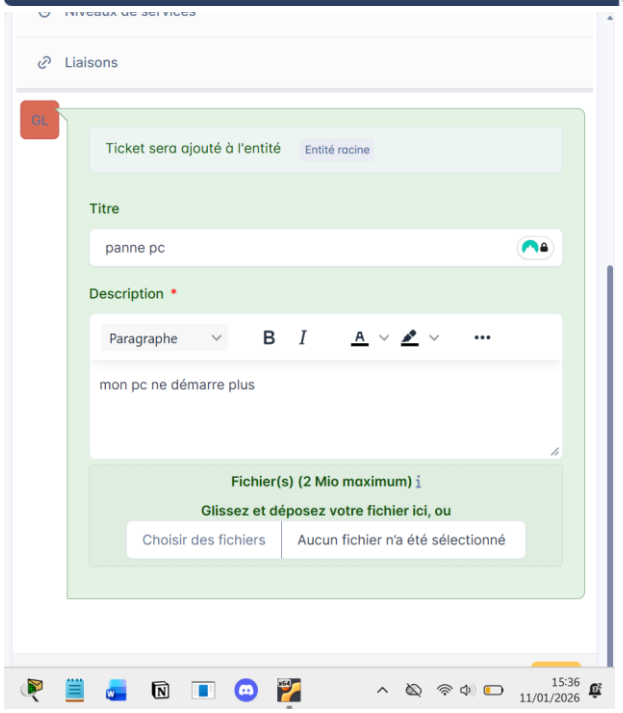
Liaisons
GL
Ticket sera ajouté à l'entité
Entité racine
Titre
panne pc
Description *
Paragraphe
mon pc ne démarre plus
Fichier(s) (2 Mio maximum)
Glissez et déposez votre fichier ici, ou
Choisir des fichiers
Aucun fichier n'a été sélectionné
15:36
11/01/2026

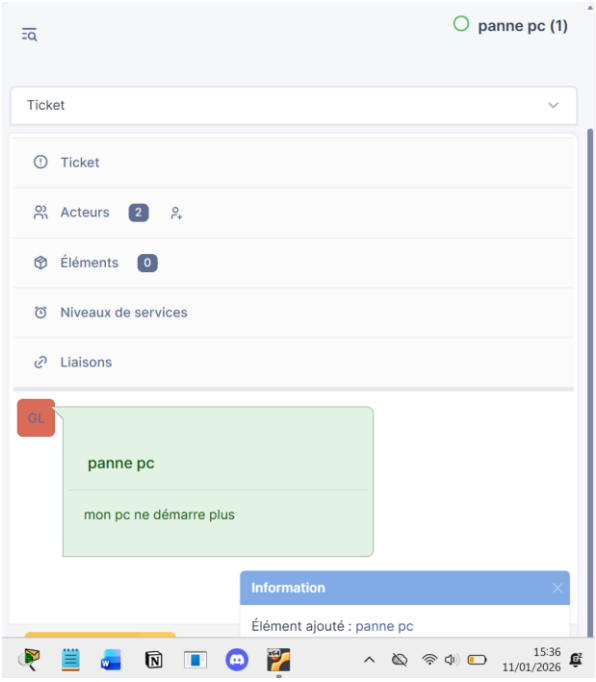
panne pc (1)
Ticket
Ticket
Acteurs 2
Éléments 0
Niveaux de services
Liaisons
GL
panne pc
mon pc ne démarre plus
Information
Élément ajouté : panne pc
15:36
11/01/2026