
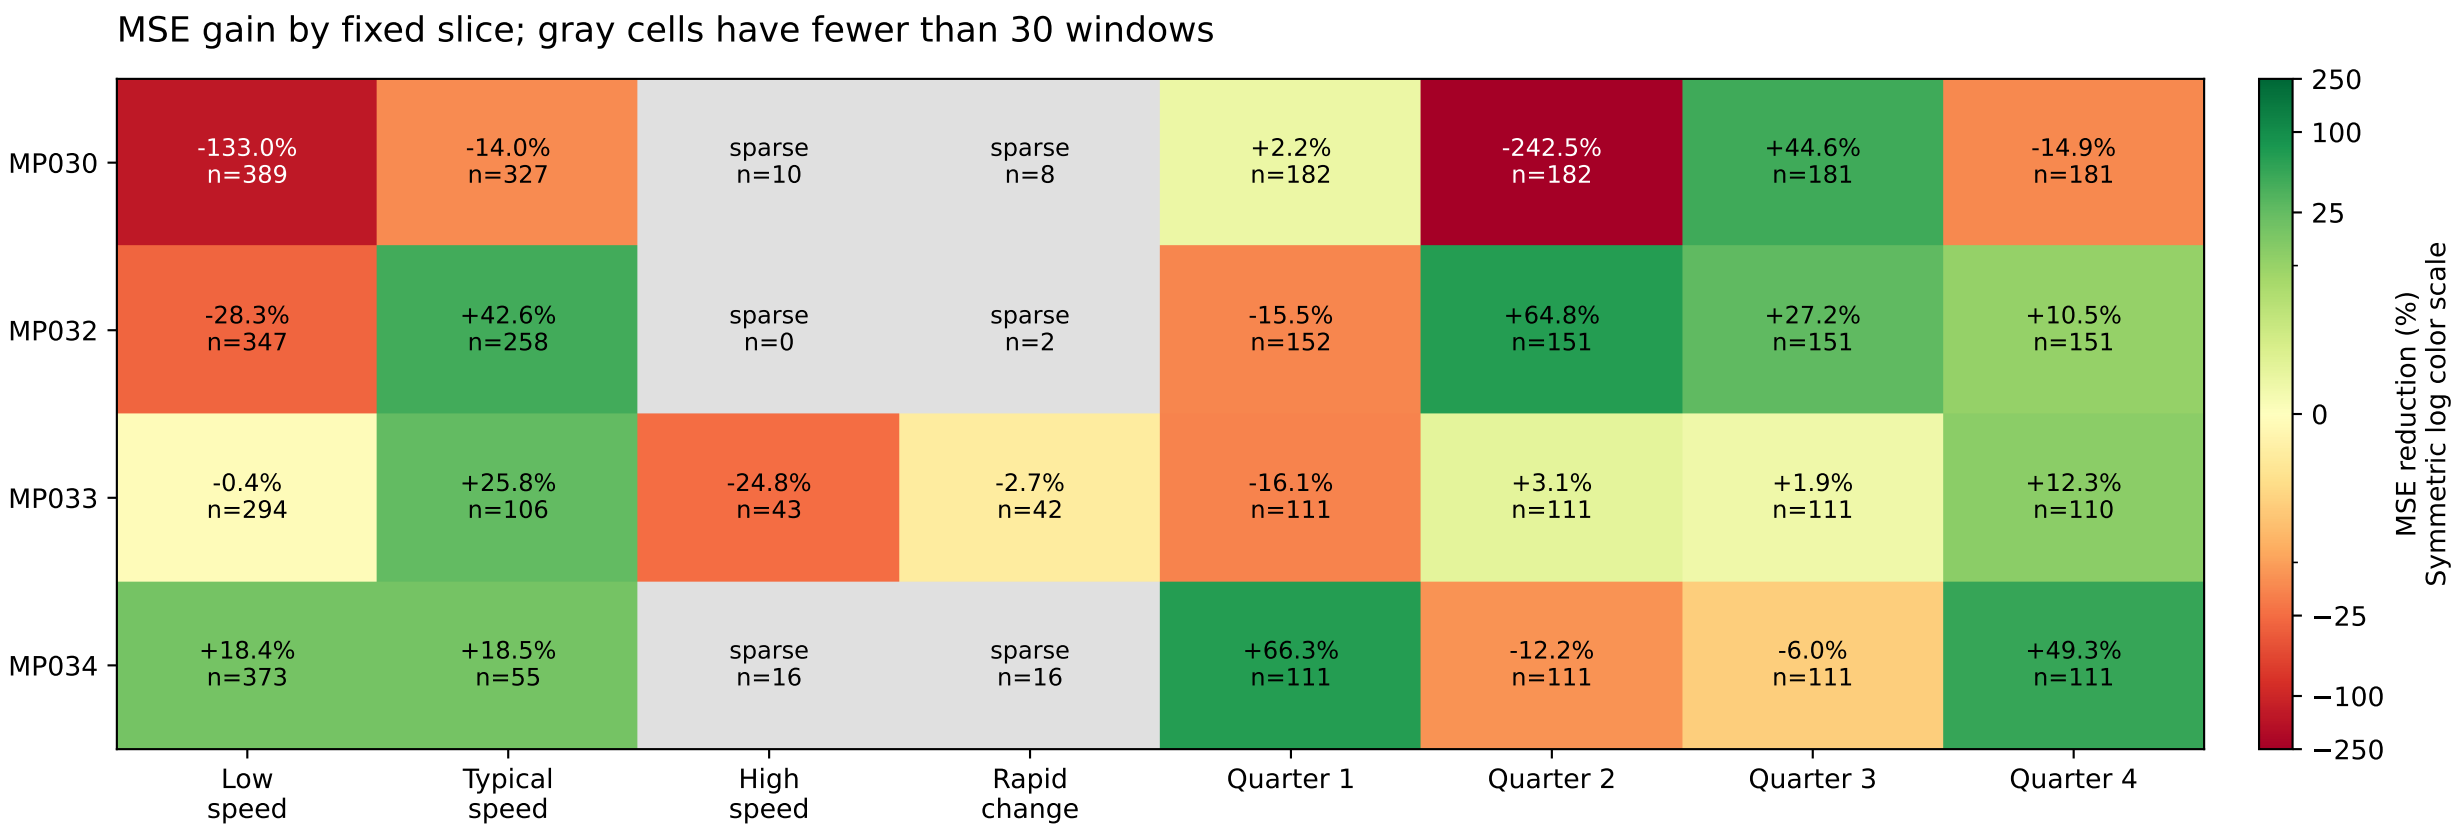


Archived transformer vs matched MLP pairs: behavior robustness

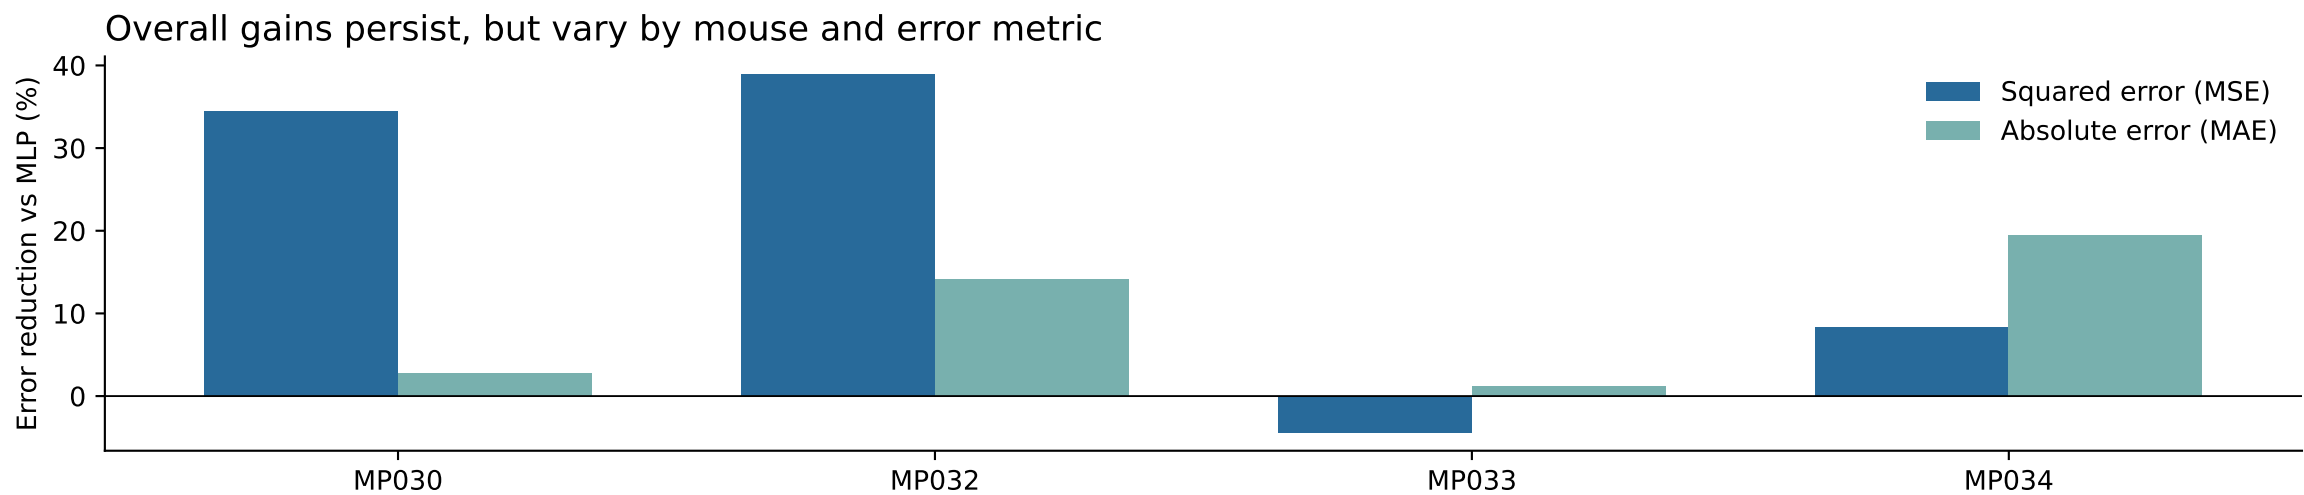

Six seeds; mean errors of all 15 two-model pairs per family; four reused recordings.
Positive values favor transformers. Slices/windows/pairs are dependent; this is descriptive, not independent confirmation.