



PointsBoard v11.3.2

Beginner Setup and Update Guide

Existing GitHub repository: flights • Existing Cloudflare Worker: flights

Guide item	Value
Release	11.3.2 - recommendation presentation and deployment-alignment update
Guide date	July 24, 2026
Production URL	https://flights.benson-lin.workers.dev
Skill level	Beginner - use the numbered screenshots

Security rule

Never place the seats.aero or SerpApi keys in GitHub, source files, screenshots, or shared documents. Keep them as encrypted Cloudflare Worker secrets.

This guide incorporates the actual GitHub and Cloudflare screens encountered during the first deployment, including the missing hidden-file failure and the /api/health SPA-routing problem.

1. What is already deployed

PointsBoard is a full-stack React application. GitHub stores the source and runs verification. Cloudflare Workers Builds installs dependencies, builds the interface, deploys static assets, and runs protected /api routes that call seats.aero and SerpApi without exposing provider keys to the browser.

Part	Current value
GitHub repository	flights
Production branch	main
Cloudflare Worker	flights
Public URL	flights.benson-lin.workers.dev
Health endpoint	/api/health
Build command	npm run build
Deploy command	npx wrangler deploy


What a successful deployment must preserve

- Saved Routes and nearby-airport expansion.
- All original reward-program, cabin, time, stops, layover, duration, and connection-airport filters.
- Recommended Redemptions, Original Reward Results, Exact Same Flight, and Cash Fares.
- Original-currency taxes/fees and manual USD FX conversion.
- Strict Demo/Live separation and protected API keys.

Why Cloudflare Workers, not GitHub Pages alone

The app contains server-side /api/search, /api/cashfare, and /api/health routes. GitHub stores and verifies the source; Cloudflare hosts both the built interface and protected Worker logic.

2. What changed in v11.3.2

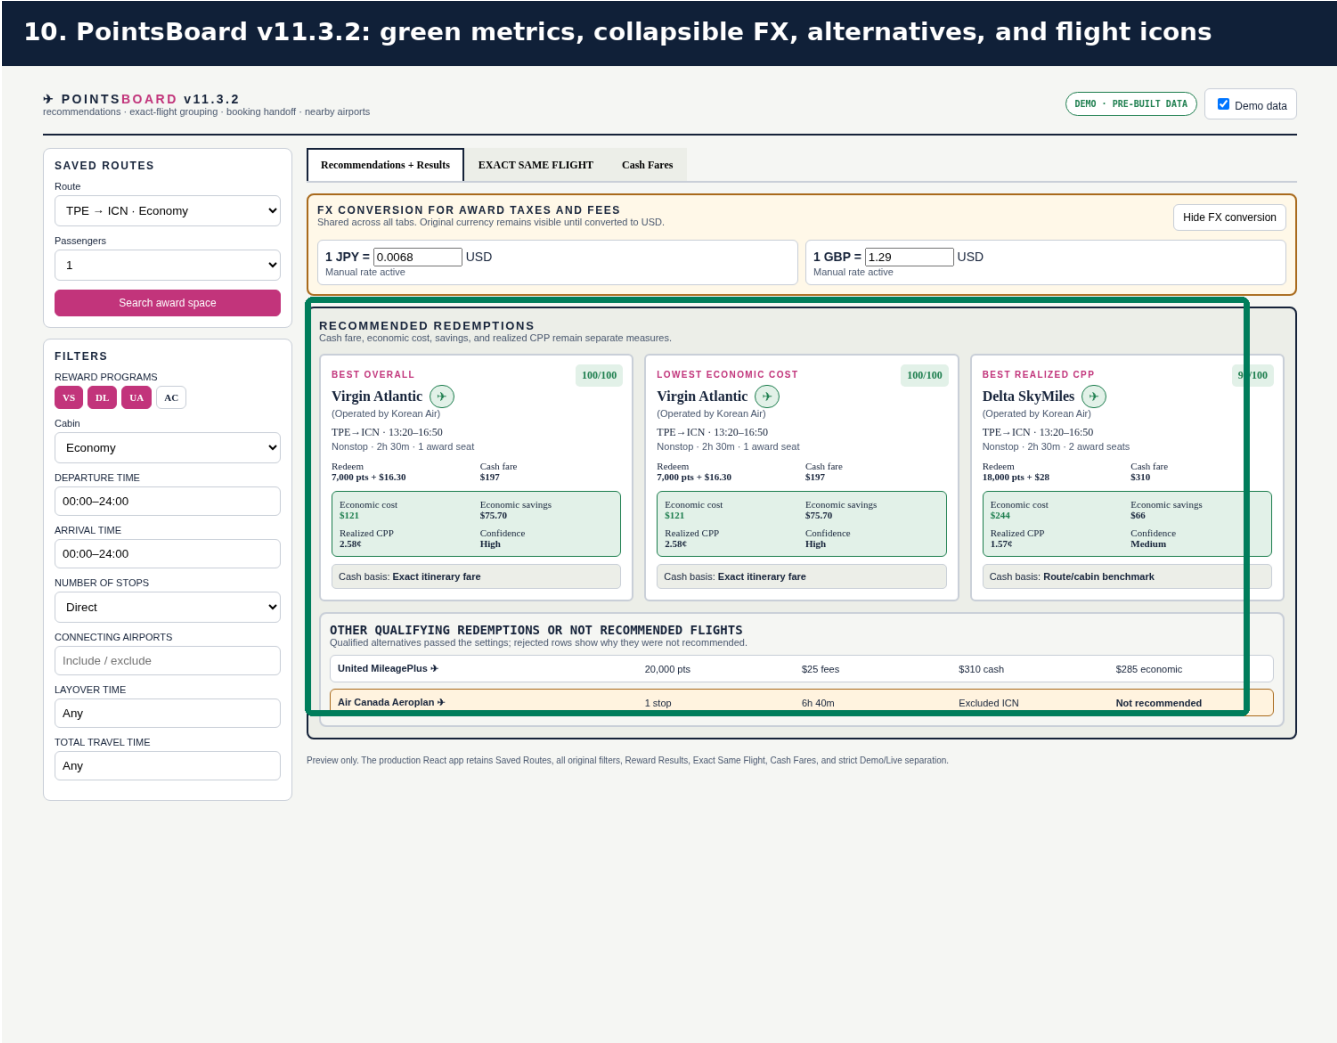

3. Download, extract, and confirm the package

Use the complete v11.3.2 ZIP for the safest update. The separate updated-files ZIP is available for advanced users who want to replace only changed files.

Required at repository root	Purpose
package.json and package-lock.json	Exact Node dependencies and test/build scripts.
wrangler.jsonc	Worker name, entry point, static assets, SPA fallback, and /api routing.
src/	React interface and calculation modules.
worker/ and functions/	Protected API routes and health endpoint.
public/	CPP library, favicon, and security headers.
.github/workflows/verify.yml	GitHub Actions clean install, test, build, and dry-run verification.
.gitignore, .nvmrc, .dev.vars.example	Hidden files required for safe setup and deployment testing.

Do not upload generated or secret-bearing folders

Do not commit node_modules, dist, .dev.vars, .wrangler, or .wrangler-dry-run. Verify that .gitignore is present after upload.

Recommended backup

1. Download a ZIP backup of the current GitHub flights repository.
2. Keep a copy of the currently deployed v11.3.1 package.
3. Do not delete or recreate the Cloudflare Worker; update the existing flights Worker so its secrets and URL remain attached.

4. Update the existing GitHub repository named flights

Recommended method - GitHub Desktop or local Git

1. Clone the existing flights repository to your computer.
2. Extract the complete v11.3.2 package.
3. Copy the contents of the v11.3.2 project folder into the cloned repository folder.
4. Do not delete the cloned repository's hidden .git folder.
5. Confirm .github, .gitignore, .nvmrc, package.json, package-lock.json, wrangler.jsonc, src, worker, functions, and public are visible.
6. Commit with the message: Update PointsBoard to v11.3.2.
7. Push the commit to main.

Alternative - changed-files patch

The updated-files ZIP preserves relative paths. Replace each file in the flights repository with the matching file from the patch. This method is faster but easier to perform incorrectly when nested or hidden files are involved.

Do not rename the project

The repository is flights and the Cloudflare Worker is flights. The included wrangler.jsonc uses name: flights so future builds continue updating the same Worker.

5. If the Actions tab shows “Get started with GitHub Actions”

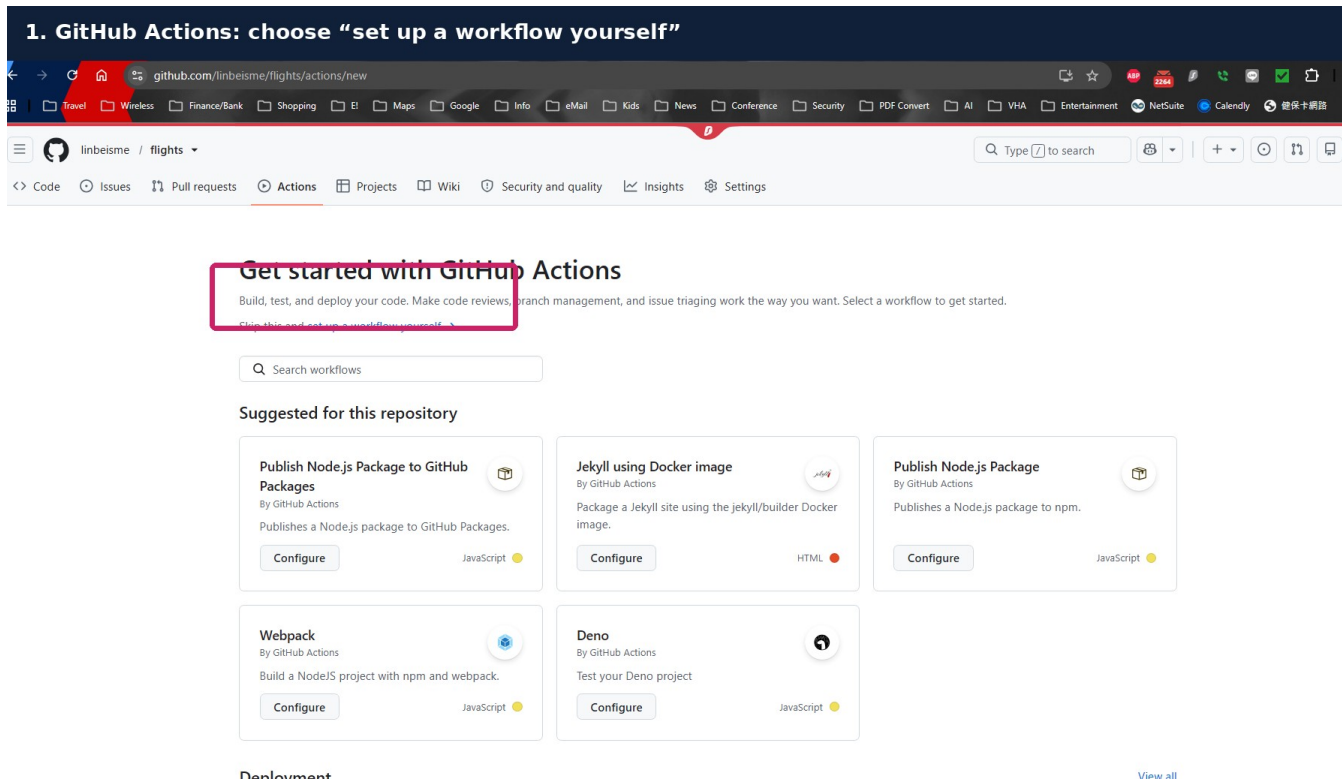


Figure 2. The actual GitHub screen encountered when the hidden .github workflow folder was not uploaded.

1. Do not choose the suggested Node, Jekyll, Webpack, or Deno templates.
2. Select set up a workflow yourself.
3. Name the file .github/workflows/verify.yml.
4. Use the verify.yml included in this v11.3.2 package.
5. Commit directly to main.

```
name: Verify PointsBoard
on:
  push:
    branches: [main]
  pull_request:
  workflow_dispatch:
```

The workflow_dispatch trigger creates a Run workflow button for manual verification.

6. How to read a failed GitHub Actions run

2. A red X means: open “Test and build” to find the failed step

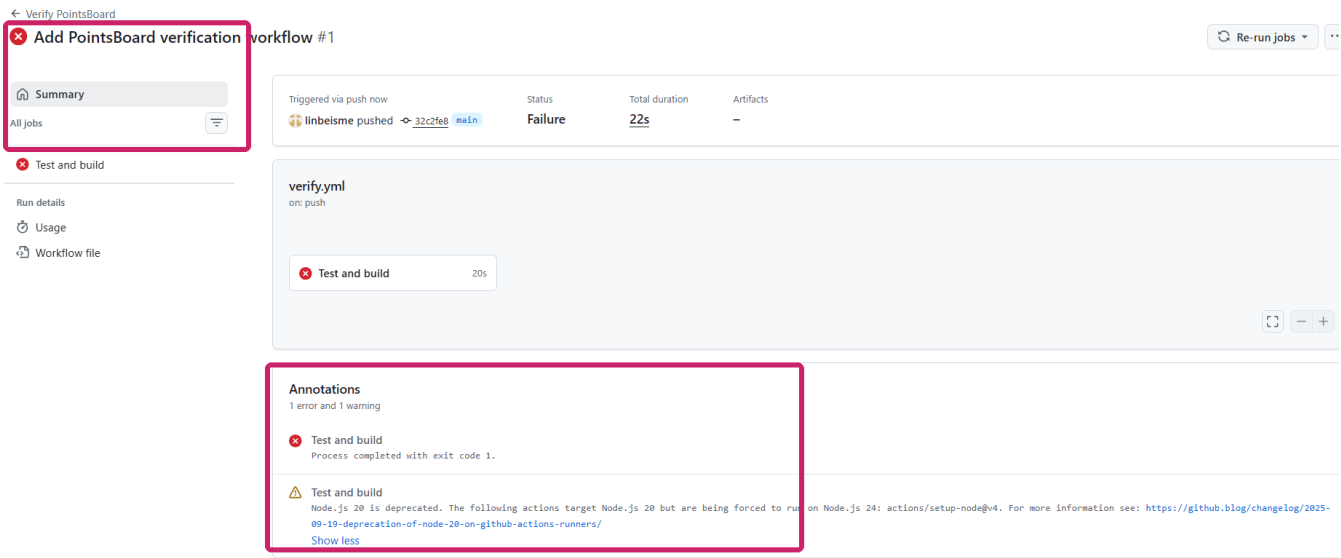


Figure 3. A red workflow summary does not identify the cause by itself; open the failed job and failed step.

1. Open Actions > Verify PointsBoard.
2. Select the newest failed run.
3. Select Test and build in the left panel.
4. Expand the step marked with a red X.
5. Read the final error lines; the yellow Node warning is not necessarily the cause.

Node warning versus actual failure

A Node.js deprecation warning can be non-blocking. Correct the first red step or explicit Error line rather than treating every yellow annotation as the failure.

7. The hidden .gitignore problem encountered during setup

3. Actual setup issue: hidden .gitignore was not uploaded

Summary
Jobs
Test and build
Run details
Usage
Workflow file

Test and build

failed in 1 minute in 20s

Search logs

Run automated tests

```

124
125 All v11.3 feature checks passed.
126 ✓ v11.3.1 full original filters, saved routes, recommendations, and new views are retained in source and preview
127 node:fs:448
128   return binding.readFileUtf8(path, stringToFlags(options.flag));
129
130
131 Error: ENOENT: no such file or directory, open '.gitignore'
132   at readFileSync (node:fs:448:20)
133     at read (file:///home/runner/work/flights/flights/test-deployment.mjs:4:24)
134     at file:///home/runner/work/flights/flights/test-deployment.mjs:9:19
135     at ModuleJob.run (node:internal/modules/esm/module_job:325:25)
136     at async ModuleLoader.import (node:internal/modules/esm/loader:606:24)
137     at async asyncRunEntryPointWithESMLoader (node:internal/modules/run_main:117:5) {
138   errno: -2,
139   code: 'ENOENT',
140   syscall: 'open',
141   path: '.gitignore'
142 }
143
144 Node.js v20.20.2
145 Error: Process completed with exit code 1.

```

Build production application

Validate Cloudflare deployment

Post Set up Node.js

Post Check out repository

Complete job

Figure 4. The actual failure: ENOENT because .gitignore was missing from the repository root.

Browser uploads and ZIP extraction workflows can overlook filenames beginning with a period. The deployment test intentionally checks for .gitignore because it protects secrets and generated folders.

Create these hidden files if missing

```
.gitignore
.nvmrc
.dev.vars.example
.github/workflows/verify.yml
```

Minimum .gitignore contents

```
node_modules/
dist/
.dev.vars
.wrangler/
.wrangler-dry-run/
```

After committing the missing file, use the new workflow run created by the commit; do not rely on the old failed run.

8. Expected GitHub verification

The included workflow uses Node 22 and performs the same production checks before Cloudflare deploys the code.

```
npm ci
npm test
npm run build
npm run deploy:dry
```

Step	Passing result	What a failure means
Install exact dependencies	Green	package-lock.json is present and npm is reachable.
Run audit tests	Green	Calculation, filter, currency, recommendation, Worker, and UI regressions passed.
Build production assets	Green	Vite compiled the React application.
Validate Cloudflare bundle	Green	Wrangler accepted the Worker and asset configuration without deploying.

Stop before Cloudflare if GitHub is red

Do not promote an update when npm test, npm run build, or the Wrangler dry run fails. Open the failed step and correct the repository before continuing.

9. Confirm the Cloudflare Workers Build

4. Cloudflare build succeeded: Installing, Building, and Deploying are green

Workers & Pages > flights
Ask AI Support

Overview Metrics **Deployments** Bindings Observability Domains Settings
Edit code

← Back to builds
42s Retry build

main Manually deployed
in 1m

Build settings ^ linbeisme/flights

Build command	npm run build
Deploy command	npx wrangler deploy
Root directory	/
Build token	flights build token
Build variables	None

Initializing
2s

Cloning
1s

Installing
14:44:48.302

Building
23s

Deploying
3s

13s

14:44:45.813 Initializing build environment...
 14:44:45.813 Initializing build environment...
 14:44:47.906 Success: Finished initializing build environment
 14:44:48.424 Cloning repository...
 14:44:49.880 Restoring from dependencies cache
 14:44:49.883 Restoring from build output cache

[Download log](#) [Copy build log](#)

Figure 5. The actual successful Cloudflare build: Installing, Building, and Deploying all completed.

1. Open Cloudflare > Workers & Pages > flights > Deployments.
2. Open the newest build for main.
3. Confirm Build command is npm run build.
4. Confirm Deploy command is npx wrangler deploy.
5. Confirm Root directory is / or blank when package.json is at the repository root.
6. Wait for all build stages to turn green.

A normal push to main should trigger a new Workers Build automatically because the GitHub repository is already connected.

10. Enable and verify the Worker URL

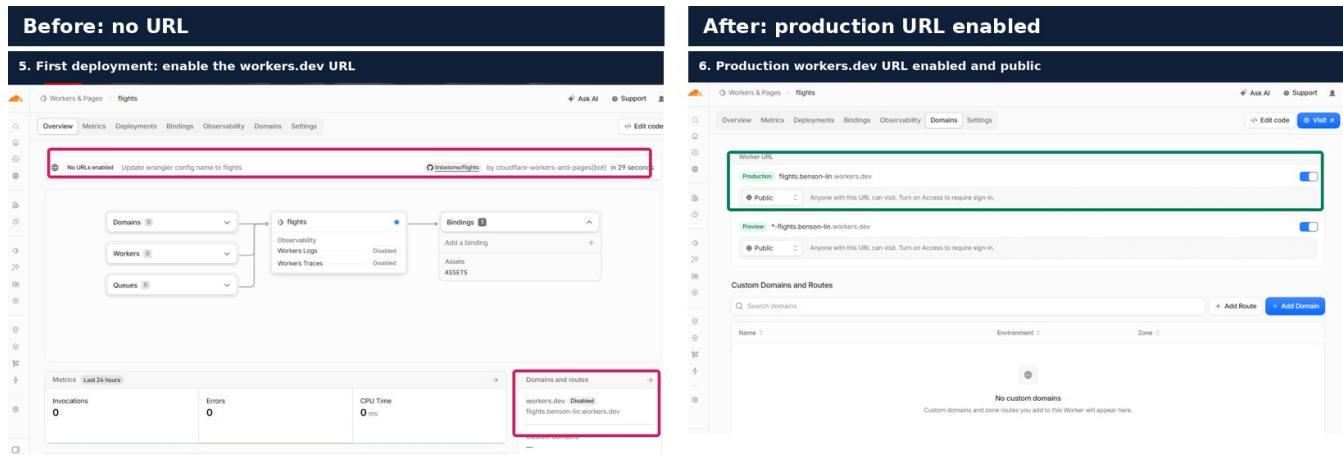


Figure 6. Before and after: the production workers.dev URL is enabled and public.

1. Open the Domains tab.
2. Enable the production Worker URL.
3. Keep access Public unless you deliberately configure Cloudflare Access.
4. Open <https://flights.benson-lin.workers.dev>.

11. Build secrets versus Worker runtime secrets

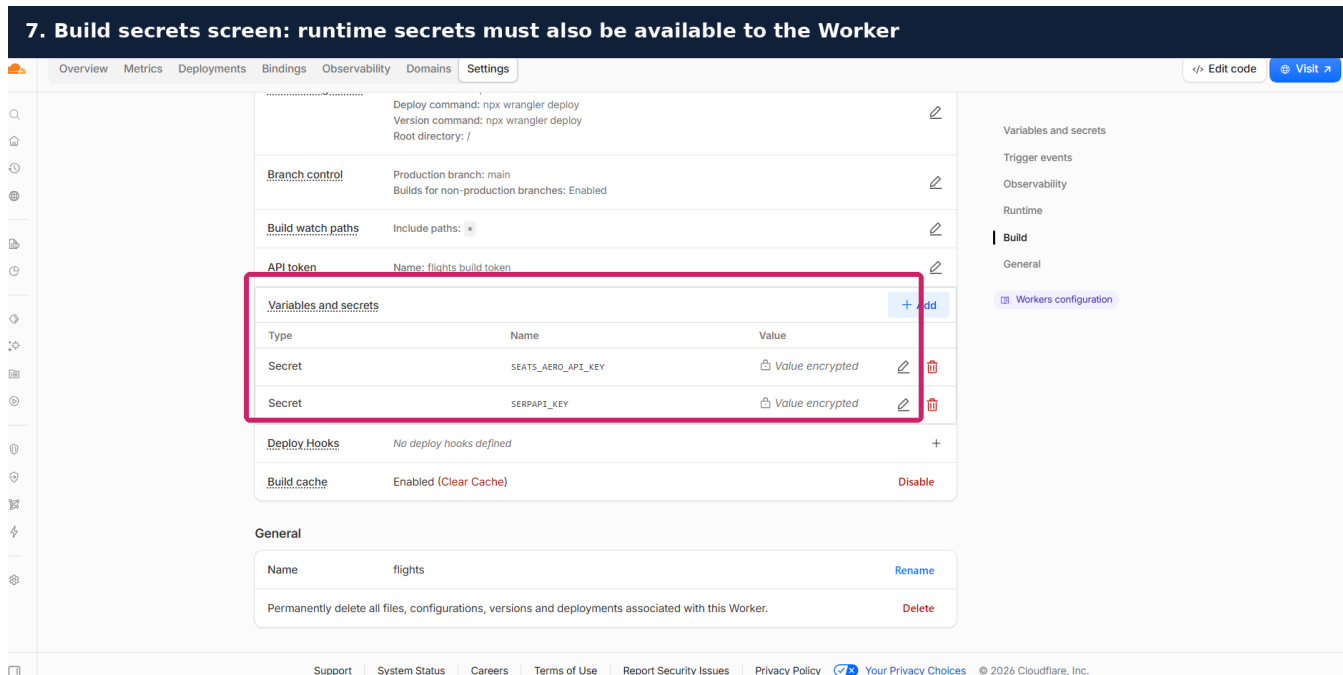


Figure 7. The actual Variables and secrets screen encountered during setup.

Cloudflare dashboard wording can vary. Build variables are available to the build process; the deployed Worker also needs the keys as encrypted runtime secrets. The practical verification is the `/api/health` response.

Secret name	Required for	Safe verification
SEATS_AERO_API_KEY	Live award search	liveAwardConfigured must be true.
SERPAPI_KEY	Live cash fares	liveCashConfigured must be true.

1. Open Workers configuration or the Worker's runtime Variables and Secrets area.
2. Add each value as type Secret, not plaintext.
3. Deploy the secret changes.
4. Do not put either value in GitHub or `.dev.vars.example`.

Normal code updates do not normally require re-entering secrets

When the existing flights Worker is updated rather than recreated, encrypted runtime secrets should remain attached. Re-enter them only if `/api/health` reports false.

12. If /api/health opens the application instead of JSON

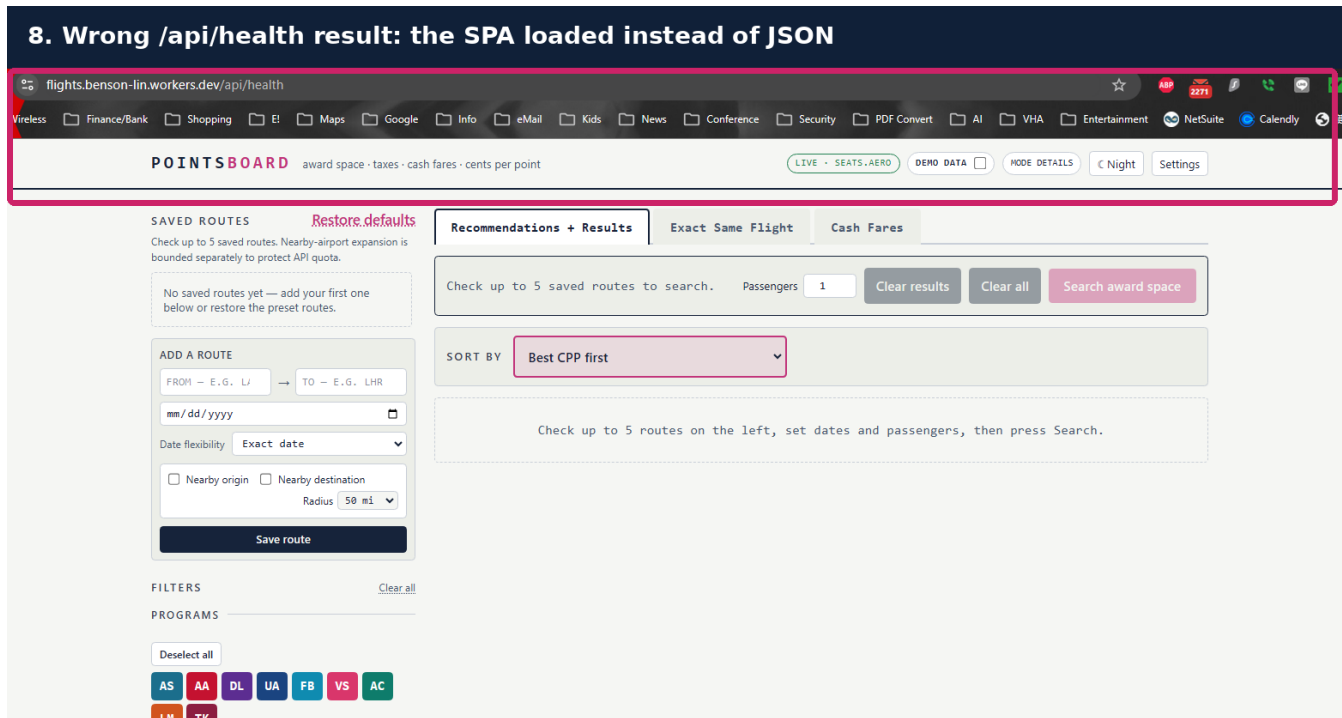


Figure 8. The actual incorrect result: the SPA shell appeared at /api/health.

This occurs when the static single-page-application fallback handles /api/health before the Worker API route. The fix is to run the Worker first for /api paths.

Required wrangler.jsonc routing

```
{
  "name": "flights",
  "main": "worker/index.js",
  "compatibility_date": "2026-07-01",
  "assets": {
    "directory": "./dist",
    "binding": "ASSETS",
    "not_found_handling": "single-page-application",
    "run_worker_first": ["/api/*"]
  }
}
```

Commit the correction to main, wait for a new Cloudflare build, and hard-refresh /api/health.

13. Confirm the correct health response

9. Correct /api/health result: JSON and both provider flags are true

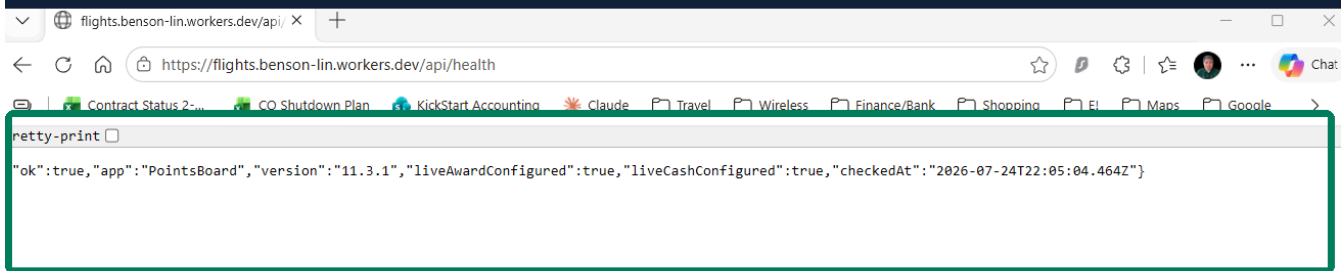


Figure 9. The correct live health response from the deployed flights Worker.

```
{
  "ok": true,
  "app": "PointsBoard",
  "version": "11.3.2",
  "liveAwardConfigured": true,
  "liveCashConfigured": true
}
```

Value	Meaning
ok: true	Worker routing and health handler are operating.
version: 11.3.2	The updated package is deployed.
liveAwardConfigured: true	The seats.aero runtime secret is available.
liveCashConfigured: true	The SerpApi runtime secret is available.

Stop if a provider flag is false

Correct the corresponding encrypted runtime secret and redeploy before relying on Live mode.

14. Verify the updated recommendation interface

10. PointsBoard v11.3.2: green metrics, collapsible FX, alternatives, and flight icons

POINTSBOARD v11.3.2
recommendations · exact-flight grouping · booking handoff · nearby airports

DEMO · PRE-BUILT DATA ☒ Demo data

SAVED ROUTES

Route
TPE → ICN · Economy

Passengers
1

Search award space

FILTERS

REWARD PROGRAMS
VS DL UA AC

Cabin
Economy

DEPARTURE TIME
00:00–24:00

ARRIVAL TIME
00:00–24:00

NUMBER OF STOPS
Direct

CONNECTING AIRPORTS
Include / exclude

LAYOVER TIME
Any

TOTAL TRAVEL TIME
Any

Recommendations + Results EXACT SAME FLIGHT Cash Fares

FX CONVERSION FOR AWARD TAXES AND FEES
Shared across all tabs. Original currency remains visible until converted to USD.
1 JPY = 0.0068 USD
1 GBP = 1.29 USD
Manual rate active

RECOMMENDED REDEMPTIONS
Cash fare, economic cost, savings, and realized CPP remain separate measures.

BEST OVERALL 100/100

Virgin Atlantic (Operated by Korean Air)
TPE → ICN · 13:20–16:50
Nonstop · 2h 30m · 1 award seat

Redem 7,000 pts + \$16.30 Cash fare \$197

Economic cost \$121 Economic savings \$75.70
Realized CPP 2.58¢ Confidence High

Cash basis: Exact itinerary fare

LOWEST ECONOMIC COST 100/100

Virgin Atlantic (Operated by Korean Air)
TPE → ICN · 13:20–16:50
Nonstop · 2h 30m · 1 award seat

Redem 7,000 pts + \$16.30 Cash fare \$197

Economic cost \$121 Economic savings \$75.70
Realized CPP 2.58¢ Confidence High

Cash basis: Exact itinerary fare

BEST REALIZED CPP 9/100

Delta SkyMiles (Operated by Korean Air)
TPE → ICN · 13:20–16:50
Nonstop · 2h 30m · 2 award seats

Redem 18,000 pts + \$28 Cash fare \$310

Economic cost \$244 Economic savings \$66
Realized CPP 1.57¢ Confidence Medium

Cash basis: Route/cabin benchmark

OTHER QUALIFYING REDEMPTIONS OR NOT RECOMMENDED FLIGHTS
Qualified alternatives passed the settings; rejected rows show why they were not recommended.

United MileagePlus →	20,000 pts	\$25 fees	\$310 cash	\$285 economic
Air Canada Aeroplan →	1 stop	6h 40m	Excluded ICN	Not recommended

Preview only. The production React app retains Saved Routes, all original filters, Reward Results, Exact Same Flight, Cash Fares, and strict Demo/Live separation.

Figure 10. v11.3.2 retains all original filters and adds the new recommendation presentation.

1. Leave Demo data enabled for the first test.
2. Run a pre-built route.
3. Confirm the four decision metrics are inside a light-green block.
4. Confirm the Other qualifying redemptions or not recommended flights section appears when applicable.
5. Apply a filter and confirm recommendations, alternatives, and Exact Same Flight update consistently.
6. Turn Demo off and confirm all Demo rows disappear before a Live search.

15. Use the flight popup and collapsible FX panel

Flight details popup

11. Flight icon popup: flight number, schedule, and available seats

FX panel hidden

12. FX conversion panel hidden while the toggle remains available

Figure 11. Flight details popup and the same page with the shared FX panel hidden.

The same FX rates apply across Recommendations + Results, Exact Same Flight, and Cash Fares. Original foreign-currency taxes remain visible, and cash-dependent calculations stay unavailable until a valid USD conversion rate is entered.

16. Production smoke test after every update

Demo test

- ☐ Pre-built routes load.
- ☐ Filters affect Recommendation and Exact Same Flight views.
- ☐ Light-green metrics, flight popup, alternatives, and FX toggle work.
- ☐ Turning Demo off removes every synthetic row.

Narrow Live test

- ☐ Use one route, one date, one passenger, and nearby airports off.
- ☐ Confirm results are not labeled Demo.
- ☐ Confirm taxes/fees retain the source currency.
- ☐ Confirm cash fare is exact, benchmark, or unavailable with provenance.
- ☐ Confirm no synthetic cash fare is generated when the provider returns none.
- ☐ Confirm booking links and copyable booking details remain available.

Rollback if needed

1. Open Cloudflare > flights > Deployments.
2. Select the prior known-good deployment or redeploy the previous Git commit.
3. Confirm /api/health and repeat the Demo smoke test.
4. Do not delete the Worker or secrets during rollback.

17. Troubleshooting and final checklist

Symptom	Corrective action
Actions page shows setup templates	Create .github/workflows/verify.yml using set up a workflow yourself.
npm test says .gitignore is missing	Create .gitignore at the repository root and commit it.
Cloudflare build cannot find package.json	Use root directory / or blank; package.json must be at repository root.
Worker name mismatch	Keep both Cloudflare and wrangler.jsonc name as flights.
/api/health opens the app	Keep assets.run_worker_first set to ["/api/*"].
Provider flag is false	Add/correct the encrypted runtime secret, then deploy.
FX calculations are blank	Open the FX panel and enter a valid USD rate for the original currency.
Flight popup says not supplied	The provider did not return that field; the app intentionally does not invent it.

Final update checklist

- [] GitHub flights repository contains all project and hidden files.
- [] Verify PointsBoard workflow is green.
- [] Cloudflare flights build is green.
- [] /api/health reports version 11.3.2 and both provider flags true.
- [] Demo mode and strict Live mode both pass.
- [] Recommendation green block, flight popup, FX toggle, and alternatives work.
- [] One narrow Live search succeeds.

Official references checked July 24, 2026

[GitHub - Workflows and .github/workflows](#)

[GitHub - Manually running workflow_dispatch workflows](#)

[Cloudflare Workers Builds](#)

[Cloudflare Workers Build configuration](#)

[Cloudflare Worker static-asset routing](#)

[Cloudflare Worker secrets](#)