portfolio

(List)

- >> Introduction
- >> Projects
- >> Skills with personal project's codes
- **>>** _Aim

Hyeonseo

1. Introduction

About Jang



Hyeonseo Jang

periwinkle6232@gmail.com

Skills

Info



















HTML CSS

JAVA SCRIPT **JQuery**











>> Education for IT

ETC

Program for professional smart web& contents Software based on JAVA YeoungNam Institution (2019,10,18~2020,06,15)

>> Certificate

SQL D

LinuxMoster Level2


Computer Specialist in Spreadsheet & Database Level2

>> Projects

- 01. Java Swing project
- 02. JSP project
- 03. Spring framework project
- 04. Personal project (ing)

2. Team Projects

Projects

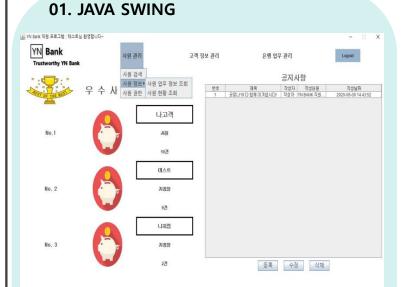

BANK SWING PROGRAM
For employees(including Manager)



BANK program web version YN BANK



Travel agency mall specialized in package products

TOURLAND

2. TeamProjects - Summarizing N Environment

S AND E

01. JAVA SWING

BANK program for employees including Manager

S: JAVA Swing program which is possible simple transaction like deposit and withdrwal.

E: eclipse, Java, HTML5, Gradle, Window Builder, MySQL-Dbeaver, Exerd, chartFX 02. JSP

Web version BANK site

YN BANK

S: Extense of swing project.
Employee bank project structured as MVC MODEL2version.


E: eclipse, Java, HTML5, CSS3, JavaScript(jQuery), AJAX, JSP, MySQL-DBeaver, eXERD, Github, Tomcat 8.5, 03. SPRING

Package exclusive tour agency mall TOURLAND

S: Using Spring Framework, Mall for Package products

E: Java, HTML5, CSS3, JavaScript(jQuery), AJAX, BootStrap3, Java, JSP-Spring, MySQL-DBeaver, MyBatis, eXERD, Github, Tomcat 8.5

2. TeamProjects

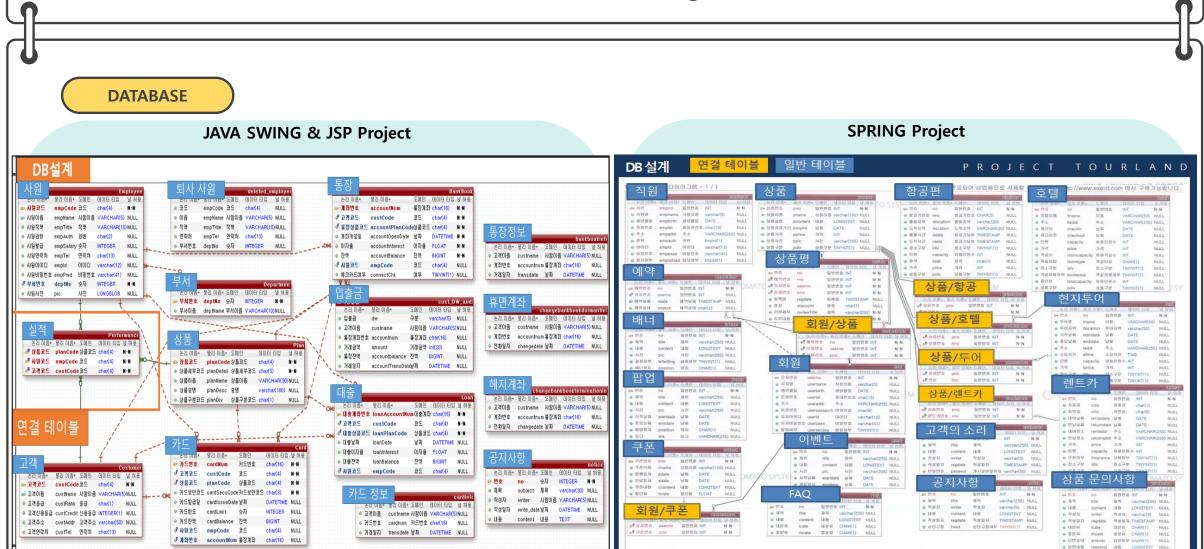

2-1. Swing Project-Summary

Project No.1 - Manager mode- managing Employees, all employees mode -support Customer service, deposit, withdrawal



>> Program

Bank program which has 2 way mode


>> How many Developers: 3

division of employee, customer, bank

- >> Development aim:
 - Design of Database
 - Learning and adjustiing JAVA codes
 - Writing for Documents
 (USECASE, UI Wireframe, Date Definition document, E.T.C.)
 - Using gradle, experiencing team project by using git

2-1. Swing Project-Functional

2way verion for manager and all employees, related to managing employees like authority

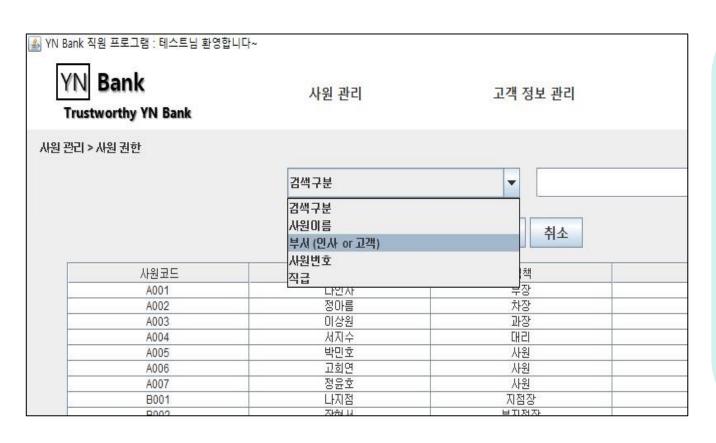

>> Responsibilities

(Main)

-Ranking for best employee, changing ranking by performance

⟨Emp menu — Management, Information, Authority for Employee⟩

-Searching

(adding, modifying, deleting by popup menu)

- information (about Personal performance,
- Updating table info by searching
- >> Codes (GIT)
 - Entire codes
 - codes about Employee

2-2. JSP Project -Summary

Project No.2 – Using same database with swing project. JSP project that added E-interac, product enrollment function.



>> Program

은행직원용 프로그램 (관리자 모드, 일반사원 모드)

- >> How many developers: 3
- >> Development aim:

Using Model2 MVC Pattern

Focused on function more than design.

More meticulous codes by communication

Adding function to meet up customer's require

Modifiying database as required

Loading by AJAX

>> Web site:

move to YN BANK

2-2. JSP Project - Functional

Entire function of employee and customer, tarnsfer, list and paging on board



>> Responsibilities

(Main and E.T.C.)

- -Monthly Rank for employee
- -board paging and regular expression

<Employee—same with swing and adding >

- My profile when log in
- Searching performance by target product

(Customer)

- Managing customer, and financial product

(Duties)

- tansferring and E-interac to other banks

>> Codes (GIT)

- Entire codes
- Regular Expression codes

2-3. SPRING Project -Summary

Project No.3 – travel agent site based on same logic with shoppong mall. Exculusive packaging product. 3 steps for sale Reservation – payment – cofirm reservation by employee



>> Program

Management program for travel agency (manager page, customer page)

- >> How many developers: 4
- >> Development aim:

Combination of rentcar, hotel, tour with flight essential

Customer can choose their own option

Make every database not using API

Create management as a baseline to extent

Create manager page by using bootstrap for efficiency


Every developer need to make board function.
Using proper API

>> Web site:

Move to Tourland

2-3. SPRING Project - Function

Connect customer web site and manager's page with some design - employee, customer, product, design

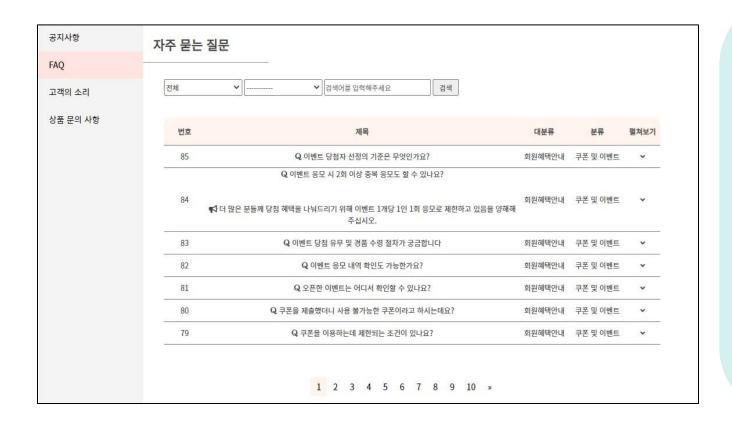

>> Responsibilities

(Employee)

-Enrollment, modifying, deleting

(Customer)

- Sign up (Daum API for korea Address)
- Searching

(Product)

- Rentcar

(Design)

- Popup
- Management main banner
- Product enrollemnt page by CK edior
- Floating banner for recent view

2-3. SPRING Project - function

Event, Board, Searching



(Event)

- Event enrollment, modifying, deleting
- seperated page by event time

(Board)

- Created customer's opinion board
- Connect every Board in customer websiteand Paging(FAQ DIV toggle)

(E,T,C,)

- Create packaging database for testing
- Main Searching (level 1, level2)

>> Codes (GIT)

- Entire codes

2-3. SPRING Project – code examples

Manager controller file upload codes

```
omerController.java
                   ManagerController.java 
 @ResponseBody
 @RequestMapping(value = "displayFile/(whichOne)", method = RequestMethod.GET)
 public ResponseEntity<br/>byte[]> displayFile(String filename,@PathVariable("whichOne") String choice,
     ResponseEntity<br/>byte[]> entity = null;
     String path = null;
     if(choice.equals("banner")) {
         path = uploadPathBanner;
     if (choice.equals("popup")) {
         path = uploadPathPopup;
     if (choice.contentEquals("event")) {
         path = uploadPathEvent;
     if (choice.contentEquals ("product") || choice.contentEquals ("productSmall")) {
         path = uploadPathProduct;
     if (choice.equals("practice")) {
         path= "/tourland/resources/images/practice";
     System.out.println("displayFile-----"+ filename);
     InputStream in = null;
     try (
         System.out.println("path=="+path);
         if (choice.contentEquals ("productSmall")) {
             if(filename!="") filename = filename.substring(0, 12) + "s " + filename.substring(12);
```

```
tomerController.iava
                  in = new FileInputStream(path + filename); // 파일개체는 오류처리하라고..
         String format = filename.substring(filename.lastIndexOf(".") + 1); // 파일 확장자 뽑아내기 점 빼고
         MediaType mType = null;
         if (format.equalsIgnoreCase("png")) {
             mType = MediaType. IMAGE PNG;
         } else if (format.equalsIgnoreCase("jpg") || format.equalsIgnoreCase("jpeg")) {
             mType = MediaType. IMAGE JPEG;
         } else if (format.equalsIgnoreCase("GIF")) {
             mType = MediaType. IMAGE GIF;
         HttpHeaders headers = new HttpHeaders();
         headers.setContentType(mType);
         entity = new ResponseEntity<byte[]>(IOUtils.toByteArray(in), headers, HttpStatus.OK);
         in.close();
     } catch (Exception e)
         e.printStackTrace();
         entity = new ResponseEntity<br/>
byte[]>(HttpStatus.BAD REQUEST);
     return entity;
```

2-3. SPRING Project – code examples

Popup cookie codes

```
entList.isp
            🖹 tourlandMain.jsp 🔀
                                                                          🞵 CustomerController.java 💢 🎵 ManagerController.java
 $(function() {
                                                                            204@ @RequestMapping(value="tourlandMain", method=RequestMethod.GET)
                                                                                  public String tourlandMain (Model model, HttpServletResponse response, HttpSer
     if ($.cookie("popup1") != null) {
                                                                                  //쿠키불러오기
         $("#popup1").css("display", "block");
                                                                            207
                                                                                      Cookie[] currentC = request.getCookies();
                                                                            208
                                                                                      if(currentC != null) {
                                                                            209
                                                                                      for(Cookie c : currentC) {
     if ($.cookie("popup2") != null) {
                                                                                           if(c.getName().contentEquals("currentProduct")) {
         $("#popup2").css("display", "block");
                                                                            211
                                                                                               ProductVO currentP = new ProductVO();
                                                                            212
                                                                                               currentP.setPno(Integer.parseInt(c.getValue()));
     // alert($.cookie("exeptFor3days"));
                                                                                               ProductVO dbcurrentP = productService.productByNo(currentP);
                                                                            213
     if ($.cookie("exeptFor3days") == "none") {
                                                                            214
                                                                                               model.addAttribute("currentProduct".dbcurrentP);
         $("#popup1").css("display", "none");
                                                                            215
                                                                                           }if(c.getName().contentEquals("currentProduct2")) {
                                                                                               ProductVO currentP = new ProductVO();
                                                                            216
     if ($.cookie("exeptFor3days2") == "none") {
                                                                                               currentP.setPno(Integer.parseInt(c.getValue()));
                                                                            217
         $("#popup2").css("display", "none");
                                                                            218
                                                                                               ProductVO dbcurrentP = productService.productBvNo(currentP);
     //팝업 버튼 누르면 팝업창 사라지기 popup1
                                                                            219
                                                                                               model.addAttribute("currentProduct2",dbcurrentP);
                                                                            220
                                                                                           }if(c.getName().contentEquals("currentProductPrice")) {
     $(".popupBtnClose").click(function() {
                                                                                               String currentProductPrice = c.getValue();
         if ($(".expireCK").prop("checked") == true) {
             $.cookie("exeptFor3days", "none", {
                                                                            222
                                                                                               model.addAttribute("currentProductPrice",currentProductPrice);
                                                                            223
                                                                                           }if(c.getName().contentEquals("currentProductPrice2")) {
                 expires : 3,
                                                                                               String currentProductPrice2 = c.getValue();
                 path : "/"
                                                                            225
                                                                                               model.addAttribute("currentProductPrice2",currentProductPrice2);
             1);
                                                                            226
                                                                            227
         $(this).parent().parent().css("display", "none");
                                                                            228
                                                                            229
     $(".popupBtnClose2").click(function() {
         if ($(".expireCK2").prop("checked") == true) {
                                                                            230
                                                                            231
                                                                                      PopupVO popup1 = popupService.setPopup("L");
             $.cookie("exeptFor3days2", "none", {
                                                                            232
                                                                                      if (popupl != null) {
                 expires : 3,
                                                                            233
                                                                                          long settingDays = (popupl.getEnddate().getTime()- popupl.getStartdat
                 path : "/"
                                                                            234
                                                                                          long settingDays2 = Math.abs(settingDays/(24*60*60*1000));
             1);
                                                                                          Cookie cookie = new Cookie ("nonun1" nonun1 get Dic()):
```

3-1. Frontend-HTML, CSS

move to website




```
sephora.html 🔀
                                                                         sephora.css 🔀
118⊖
        <section>
                                                                           79 ul {
119⊖
        <nav id="nav2">
                                                                               list-style: none;
120⊖
             <l
                                                                           9 }
1210
                                                                          100 ul a {
                    id="li1"><a href="#"><b>SHOP</b></a>
1220
                        d="li1sub">
                                                                                text-decoration: none;
123
                            <a href="#">MAKEUP</a>
                                                                                color: white:
124
                            <a href="#">SKINCARE</a>
                                                                          13 }
125
                            <a href="#">HAIR</a>
                                                                          14@ img#top{
126
                                                                               display:block;
                             <a href="#">TOOLS & BRUSHES</a>
127
                            <a href="#">FRAGRANCE</a>
                                                                               margin: 0 auto;
128
                                                                          17 1
                            <a href="#">BATH & BODY</a>
129
                            <a href="#">GIFTS</a>
                                                                          180 #fnav {
130
                                                                                background: black;
                            <a href="#">SALE</a>
131
                            <a href="#">MEN</a>
                                                                                height: 40px;
132
                            <a href="#">MINI SIZE</a>
                                                                          21
133
                            <a href="#">SEPHORA COLLECTION</a>
                                                                          22 1
134
                            <a href="#">BEAUTY OFFERS</a>
                                                                          23⊕ #fnav> ul{
135
                        width: 580px;
136
                     </1i>
                                                                               margin: 0 auto;
137⊕
                     id="li2"><a href="#">NEW</a></a>
                                                                               margin-left: 750px;
138⊕
                        <div id="second">
                                                                               min-width: 580px;
139@
                          d="li2sub">
                                                                          28 }
140
                            <a href="#"><b>Just Arrived</b></a>
                                                                          290 #fnav ul li{
141
                            <a href="#">Makeup</a>
                                                                                float:left;
                             .... 1 5 848 611
                                                                                    . . . . . . .
```

3-2. Frontend-JavaScript

```
<script>
      $("#file").change(function(){
         // var file = $(this)[0]; //$(this)[0] : javascript객체를 의미 제미쿼리의 0번째 정보는 자바스크립트가 가지고 있음
          console.log(file);
          //파일 정보를 끄집어 내자
          var file = $(this)[0].files[0]; //files가 배열이라 0을 넣어줌 배너 등록 페이지에서 필요한 건 단일 파일이기 때문
          console.log(file);
          var reader = new FileReader();
          reader.readAsDataURL(file);
          reader.onload = function(e){ //.addEventListener("load",function(){}) - 여러개 이벤트를 넣을 수 있음
var $img = $("<img class='previewImg'>").attr("src",e.target.result); // == reader.result 같은 값이 넘어온다
                  $("#previewDiv").html($img);
      })
        //리스트로 버튼 눌렀을 때 리스트로 돌아가기
$("#btnReturnToList").click(function(){
                         location.href="${pageContext.request.contextPath}/eventList";
                })
  </script>
<%@ include file="../../include/footer.isp"%>
```

3-3. Backend-Database

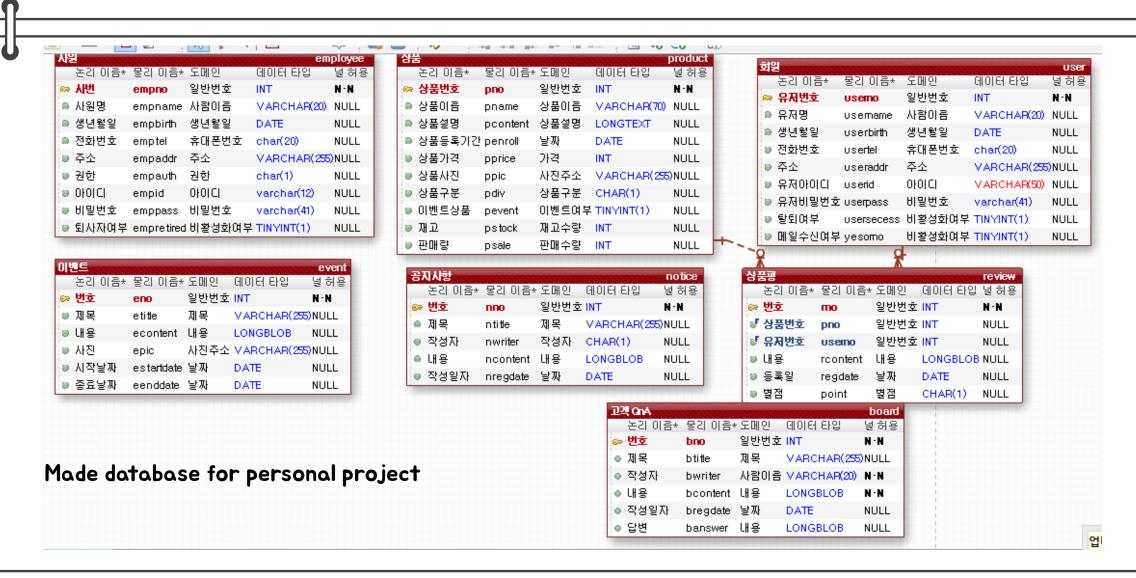

4. Wanna be A developer likes..

diligent

enthusiastically


Self- motivated

learn

collaborated

positive

BACKEND D

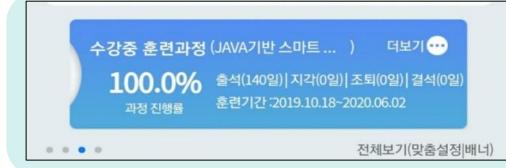

>> attendance record for about 8months IT program
NO Absence, NO lateness with any reason
I Do Never Ghosting for sure

시험일

2020-06-13

2020-06-13

한격여부

합격

82.5점

2020년 정기 기사 1,2회 (필기) - 정보처리기사			종목	회차	차수
종목(자격)	합격여부	25			
정보처리기사	합격	소프트	리눅스마스터 2급	2002회	2
		소프트		7501	
		데이터베이스구축		95	
		프로그래밍언어활용		80	
		정보시스템구축관리		80	
81		총점			

>> Obtain some certificates

시험구분 수험번호

정기

LMS-2002-

002434

