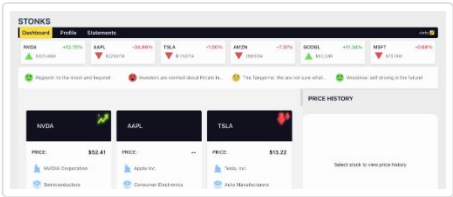


Performance

Values are estimated and may vary. The [performance score is calculated](#) directly from these metrics. [See calculator.](#)

▲ 0–49      50–89      90–100



METRICS

Expand view

First Contentful Paint

0.9 s

▲ Largest Contentful Paint

2.7 s

Total Blocking Time

0 ms


Cumulative Layout Shift

0

Speed Index

1.3 s

[View Treemap](#)



Show audits relevant to: All [FCP](#) [LCP](#) [TBT](#) [CLS](#)

DIAGNOSTICS

▲ Enable text compression — Potential savings of 1,172 KiB

Text-based resources should be served with compression (gzip, deflate or brotli) to minimize total network bytes. [Learn more about text compression.](#) FCP LCP

| URL                                                       | Transfer Size | Potential Savings |
|-----------------------------------------------------------|---------------|-------------------|
| localhost <span>1st Party</span>                          | 1,722.0 KiB   | 1,172.1 KiB       |
| ...deps/recharts.js?v=842a2a81 (localhost)                | 607.1 KiB     | 445.8 KiB         |
| ...deps/chunk-BAPTTBYI.js?v=842a2a81 (localhost)          | 308.8 KiB     | 212.9 KiB         |
| ...deps/react-use.js?v=842a2a81 (localhost)               | 86.3 KiB      | 58.7 KiB          |
| /@vite/client (localhost)                                 | 76.7 KiB      | 51.9 KiB          |
| ...deps/react-router-dom.js?v=842a2a81 (localhost)        | 73.2 KiB      | 48.7 KiB          |
| ...deps/chunk-6NCZU2Z3.js?v=842a2a81 (localhost)          | 50.3 KiB      | 32.3 KiB          |
| ...deps/@reduxjs_toolkit_query.js?v=842a2a81 (localhost)  | 40.9 KiB      | 26.5 KiB          |
| ...deps/chunk-N2CENUCC.js?v=842a2a81 (localhost)          | 28.7 KiB      | 18.2 KiB          |
| ...StockCardList/index.tsx (localhost)                    | 24.5 KiB      | 16.4 KiB          |
| /@react-refresh (localhost)                               | 21.9 KiB      | 15.5 KiB          |
| ...deps/react-redux.js?v=842a2a81 (localhost)             | 19.8 KiB      | 12.7 KiB          |
| ...PriceChart/index.tsx (localhost)                       | 17.5 KiB      | 11.9 KiB          |
| ...deps/@tanstack_react-virtual.js?v=842a2a81 (localhost) | 14.6 KiB      | 9.9 KiB           |
| ...stocks/usePullToRefresh.ts (localhost)                 | 12.4 KiB      | 8.6 KiB           |
| ...StockCard/index.tsx (localhost)                        | 13.2 KiB      | 8.4 KiB           |
| ...deps/react_jsx-dev-runtime.js?v=842a2a81 (localhost)   | 13.6 KiB      | 8.1 KiB           |
| ...router/index.tsx (localhost)                           | 11.6 KiB      | 7.5 KiB           |
| ...SymbolGrid/index.tsx (localhost)                       | 11.4 KiB      | 7.4 KiB           |
| ...deps/chunk-SCSCP4VK.js?v=842a2a81 (localhost)          | 9.9 KiB       | 6.2 KiB           |
| ...assets/market_cap.svg?import (localhost)               | 10.9 KiB      | 6.1 KiB           |

| URL                                           | Transfer Size | Potential Savings |
|-----------------------------------------------|---------------|-------------------|
| ...assets/industry.svg?import (localhost)     | 10.1 KiB      | 5.5 KiB           |
| ...animation/useStockAnimation.ts (localhost) | 8.2 KiB       | 5.3 KiB           |
| ...assets/company.svg?import (localhost)      | 8.7 KiB       | 5.3 KiB           |
| ...LoadingCard/index.tsx (localhost)          | 7.3 KiB       | 5.0 KiB           |
| ...utils/assetPreloader.ts (localhost)        | 7.9 KiB       | 4.8 KiB           |
| ...SymbolsView/index.tsx (localhost)          | 7.9 KiB       | 4.7 KiB           |
| ...stocks/useStockData.ts (localhost)         | 7.5 KiB       | 4.4 KiB           |
| ...CompanyDetails/index.tsx (localhost)       | 7.2 KiB       | 4.4 KiB           |
| ...StockCardInfo/index.tsx (localhost)        | 7.2 KiB       | 4.4 KiB           |
| ...HighlightedSymbols/index.tsx (localhost)   | 7.2 KiB       | 4.3 KiB           |
| ...TrendLabel/index.tsx (localhost)           | 6.5 KiB       | 3.9 KiB           |
| ...PerformanceInfo/index.tsx (localhost)      | 6.2 KiB       | 3.7 KiB           |
| ...StockCardHeader/index.tsx (localhost)      | 6.4 KiB       | 3.7 KiB           |
| ...PerformanceEmoji/index.tsx (localhost)     | 6.2 KiB       | 3.6 KiB           |
| ...TopHeadlines/index.tsx (localhost)         | 6.2 KiB       | 3.6 KiB           |
| /src/App.tsx (localhost)                      | 6.1 KiB       | 3.5 KiB           |
| ...PriceDisplay/index.tsx (localhost)         | 6.1 KiB       | 3.5 KiB           |
| ...Navbar/index.tsx (localhost)               | 5.9 KiB       | 3.5 KiB           |
| ...store/priceHistorySlice.ts (localhost)     | 5.9 KiB       | 3.4 KiB           |
| ...store/stocksSlice.ts (localhost)           | 5.8 KiB       | 3.3 KiB           |
| ...ToggleCardInfo/index.tsx (localhost)       | 5.7 KiB       | 3.2 KiB           |
| ...PerformanceCard/index.tsx (localhost)      | 5.6 KiB       | 3.2 KiB           |
| ...PriceChartSection/index.tsx (localhost)    | 5.3 KiB       | 3.2 KiB           |

| URL                                                   | Transfer Size | Potential Savings |
|-------------------------------------------------------|---------------|-------------------|
| ...AppErrorFallback/index.tsx (localhost)             | 5.2 KiB       | 3.1 KiB           |
| ...StockCardListFallback/index.tsx (localhost)        | 5.2 KiB       | 3.1 KiB           |
| /src/main.tsx (localhost)                             | 5.0 KiB       | 3.0 KiB           |
| ...ErrorBoundary/index.tsx (localhost)                | 5.3 KiB       | 2.9 KiB           |
| ...TopHeadline/index.tsx (localhost)                  | 4.9 KiB       | 2.8 KiB           |
| ...DetailsRow/index.tsx (localhost)                   | 4.6 KiB       | 2.7 KiB           |
| ...HeaderInfo/index.tsx (localhost)                   | 4.6 KiB       | 2.7 KiB           |
| ...Tooltip/index.tsx (localhost)                      | 4.7 KiB       | 2.7 KiB           |
| ...ChartToolTip/index.tsx (localhost)                 | 4.8 KiB       | 2.6 KiB           |
| ...SymbolsGridSection/index.tsx (localhost)           | 4.4 KiB       | 2.5 KiB           |
| ...NavLinkItem/index.tsx (localhost)                  | 4.5 KiB       | 2.5 KiB           |
| ...StockCardList/StockCardList.module.css (localhost) | 3.6 KiB       | 2.5 KiB           |
| ...utils/performanceMonitor.ts (localhost)            | 4.3 KiB       | 2.3 KiB           |
| ...CardContent/index.tsx (localhost)                  | 4.2 KiB       | 2.3 KiB           |
| /src/index.css (localhost)                            | 3.8 KiB       | 2.3 KiB           |
| ...Card/index.tsx (localhost)                         | 4.3 KiB       | 2.3 KiB           |
| ...Loading/index.tsx (localhost)                      | 4.2 KiB       | 2.3 KiB           |
| ...CardHeader/index.tsx (localhost)                   | 4.1 KiB       | 2.3 KiB           |
| ...StockCard/StockCard.module.css (localhost)         | 3.0 KiB       | 2.2 KiB           |
| ...SymbolGrid/SymbolsGrid.module.css (localhost)      | 3.2 KiB       | 2.1 KiB           |
| ...Loading/Loading.module.css (localhost)             | 2.7 KiB       | 1.9 KiB           |
| ...deps/chunk-ASTB4Q54.js?v=842a2a81 (localhost)      | 3.2 KiB       | 1.9 KiB           |
| ...utils/currencyFormatter.ts (localhost)             | 3.6 KiB       | 1.9 KiB           |

| URL                                                   | Transfer Size | Potential Savings |
|-------------------------------------------------------|---------------|-------------------|
| ...store/index.ts (localhost)                         | 3.6 KiB       | 1.8 KiB           |
| ...client/env.mjs (localhost)                         | 3.2 KiB       | 1.7 KiB           |
| /api/stocks (localhost)                               | 2.4 KiB       | 1.7 KiB           |
| ...router/routes.ts (localhost)                       | 2.9 KiB       | 1.5 KiB           |
| ...ErrorBoundary/ErrorBoundary.module.css (localhost) | 2.2 KiB       | 1.5 KiB           |

▲ Largest Contentful Paint element — 2,660 ms

This is the largest contentful element painted within the viewport. [Learn more about the Largest Contentful Paint element](#)

LCP

Element



span.TopHeadline-module\_\_text\_\_Fj0P9

| Phase        | % of LCP | Timing   |
|--------------|----------|----------|
| TTFB         | 5%       | 120 ms   |
| Load Delay   | 0%       | 0 ms     |
| Load Time    | 0%       | 0 ms     |
| Render Delay | 95%      | 2,540 ms |

▲ Minify JavaScript — Potential savings of 244 KiB

Minifying JavaScript files can reduce payload sizes and script parse time. [Learn how to minify JavaScript.](#)

FCP

LCP

| URL                            | Transfer Size | Potential Savings |
|--------------------------------|---------------|-------------------|
| localhost <div>1st Party</div> | 383.1 KiB     | 244.0 KiB         |
| /@vite/client (localhost)      | 76.7 KiB      | 63.4 KiB          |

about:blank

5/37

| URL                                           | Transfer Size | Potential Savings |
|-----------------------------------------------|---------------|-------------------|
| ...StockCardList/index.tsx (localhost)        | 24.5 KiB      | 16.3 KiB          |
| /@react-refresh (localhost)                   | 21.9 KiB      | 10.8 KiB          |
| ...PriceChart/index.tsx (localhost)           | 17.5 KiB      | 10.3 KiB          |
| ...stocks/usePullToRefresh.ts (localhost)     | 12.4 KiB      | 9.6 KiB           |
| ...StockCard/index.tsx (localhost)            | 13.2 KiB      | 8.2 KiB           |
| ...router/index.tsx (localhost)               | 11.6 KiB      | 6.5 KiB           |
| ...SymbolGrid/index.tsx (localhost)           | 11.4 KiB      | 6.3 KiB           |
| ...utils/assetPreloader.ts (localhost)        | 7.9 KiB       | 6.3 KiB           |
| ...animation/useStockAnimation.ts (localhost) | 8.2 KiB       | 6.1 KiB           |
| ...stocks/useStockData.ts (localhost)         | 7.5 KiB       | 5.7 KiB           |
| ...store/priceHistorySlice.ts (localhost)     | 5.9 KiB       | 4.7 KiB           |
| ...store/stocksSlice.ts (localhost)           | 5.8 KiB       | 4.6 KiB           |
| ...SymbolsView/index.tsx (localhost)          | 7.9 KiB       | 4.2 KiB           |
| ...HighlightedSymbols/index.tsx (localhost)   | 7.2 KiB       | 4.0 KiB           |
| ...ErrorBoundary/index.tsx (localhost)        | 5.3 KiB       | 3.9 KiB           |
| ...StockCardInfo/index.tsx (localhost)        | 7.2 KiB       | 3.8 KiB           |
| ...CompanyDetails/index.tsx (localhost)       | 7.2 KiB       | 3.6 KiB           |
| ...utils/performanceMonitor.ts (localhost)    | 4.3 KiB       | 3.3 KiB           |
| ...TopHeadlines/index.tsx (localhost)         | 6.2 KiB       | 3.3 KiB           |
| ...LoadingCard/index.tsx (localhost)          | 7.3 KiB       | 3.2 KiB           |
| ...StockCardHeader/index.tsx (localhost)      | 6.4 KiB       | 3.2 KiB           |
| /src/App.tsx (localhost)                      | 6.1 KiB       | 3.2 KiB           |
| ...PerformanceEmoji/index.tsx (localhost)     | 6.2 KiB       | 3.2 KiB           |

| URL                                            | Transfer Size | Potential Savings |
|------------------------------------------------|---------------|-------------------|
| ...TrendLabel/index.tsx (localhost)            | 6.5 KiB       | 3.0 KiB           |
| ...PerformanceInfo/index.tsx (localhost)       | 6.2 KiB       | 2.9 KiB           |
| ...Navbar/index.tsx (localhost)                | 5.9 KiB       | 2.9 KiB           |
| ...utils/currencyFormatter.ts (localhost)      | 3.6 KiB       | 2.9 KiB           |
| ...PriceDisplay/index.tsx (localhost)          | 6.1 KiB       | 2.8 KiB           |
| /src/main.tsx (localhost)                      | 5.0 KiB       | 2.8 KiB           |
| ...store/index.ts (localhost)                  | 3.6 KiB       | 2.8 KiB           |
| ...ToggleCardInfo/index.tsx (localhost)        | 5.7 KiB       | 2.8 KiB           |
| ...client/env.mjs (localhost)                  | 3.2 KiB       | 2.7 KiB           |
| ...PerformanceCard/index.tsx (localhost)       | 5.6 KiB       | 2.7 KiB           |
| ...ChartToolTip/index.tsx (localhost)          | 4.8 KiB       | 2.4 KiB           |
| ...StockCardListFallback/index.tsx (localhost) | 5.2 KiB       | 2.3 KiB           |
| ...PriceChartSection/index.tsx (localhost)     | 5.3 KiB       | 2.3 KiB           |
| ...AppErrorFallback/index.tsx (localhost)      | 5.2 KiB       | 2.3 KiB           |
| ...socket/index.ts (localhost)                 | 2.8 KiB       | 2.3 KiB           |
| ...Tooltip/index.tsx (localhost)               | 4.7 KiB       | 2.2 KiB           |
| ...TopHeadline/index.tsx (localhost)           | 4.9 KiB       | 2.1 KiB           |
| ...router/routes.ts (localhost)                | 2.9 KiB       | 2.1 KiB           |

Reduce unused JavaScript

Potential savings of 692 KiB

Reduce unused JavaScript and defer loading scripts until they are required to decrease bytes consumed by network activity. [Learn how to reduce unused JavaScript.](#)

FCP

LCP

| URL                            | Transfer Size | Potential Savings |
|--------------------------------|---------------|-------------------|
| localhost <div>1st Party</div> | 1,166.6 KiB   | 692.1 KiB         |

| URL                                                         | Transfer Size | Potential Savings |
|-------------------------------------------------------------|---------------|-------------------|
| ...deps/recharts.js?v=842a2a81 (localhost)                  | 607.1 KiB     | 420.7 KiB         |
| ...recharts/es6/chart/generateCategoricalChart.js           | 34.1 KiB      | 28.6 KiB          |
| ...reduce-css-calc/dist/parser.js                           | 26.2 KiB      | 19.8 KiB          |
| ...recharts/es6/util/ChartUtils.js                          | 15.4 KiB      | 13.8 KiB          |
| ...decimal.js-light/decimal.mjs                             | 13.0 KiB      | 9.8 KiB           |
| ...recharts/es6/chart/Sankey.js                             | 13.2 KiB      | 9.7 KiB           |
| ...deps/chunk-BAPTTBYI.js?v=842a2a81 (localhost)            | 308.8 KiB     | 92.5 KiB          |
| ...react-dom/cjs/react-dom.development.js                   | 301.8 KiB     | 91.6 KiB          |
| ...scheduler/cjs/scheduler.development.js                   | 5.6 KiB       | 1.0 KiB           |
| ...deps/react-use.js?v=842a2a81 (localhost)                 | 86.3 KiB      | 66.9 KiB          |
| ...tslib/tslib.js                                           | 11.8 KiB      | 9.0 KiB           |
| ...react-use/esm/factory/createHTMLMediaHook.js             | 2.5 KiB       | 2.5 KiB           |
| ...react-use/esm/useScratch.js                              | 2.0 KiB       | 1.9 KiB           |
| ...copy-to-clipboard/index.js                               | 1.8 KiB       | 1.6 KiB           |
| ...react-use/esm/useSlider.js                               | 1.6 KiB       | 1.5 KiB           |
| ...deps/react-router-dom.js?v=842a2a81 (localhost)          | 73.2 KiB      | 49.4 KiB          |
| ...@remix-run/router/router.ts                              | 26.0 KiB      | 24.5 KiB          |
| ...react-router-dom/index.tsx                               | 11.1 KiB      | 6.6 KiB           |
| ...@remix-run/router/utils.ts                               | 10.5 KiB      | 5.3 KiB           |
| ...react-router/lib/hooks.tsx                               | 9.1 KiB       | 3.9 KiB           |
| ...react-router/lib/components.tsx                          | 5.4 KiB       | 3.1 KiB           |
| ...deps/@reduxjs/toolkit_query.js?v=842a2a81 (localhost)    | 40.9 KiB      | 37.2 KiB          |
| ...src/query/core/buildThunks.ts                            | 5.4 KiB       | 5.3 KiB           |
| ...src/query/core/buildSlice.ts                             | 5.2 KiB       | 5.1 KiB           |
| ...src/query/core/buildInitiate.ts                          | 3.6 KiB       | 3.4 KiB           |
| ...src/query/fetchBaseQuery.ts                              | 3.2 KiB       | 3.1 KiB           |
| ...src/query/core/module.ts                                 | 2.1 KiB       | 2.0 KiB           |
| ...deps/chunk-6NCZU2Z3.js?v=842a2a81 (localhost)            | 50.3 KiB      | 25.4 KiB          |
| ...@reduxjs/toolkit/src/listenerMiddleware/index.ts         | 4.3 KiB       | 3.9 KiB           |
| ...immer/src/plugins/patches.ts                             | 2.4 KiB       | 2.4 KiB           |
| ...@reduxjs/toolkit/src/matchers.ts                         | 2.0 KiB       | 1.8 KiB           |
| ...immer/src/plugins/es5.ts                                 | 1.9 KiB       | 1.8 KiB           |
| ...@reduxjs/toolkit/src/entities/unordered_state_adapter.ts | 1.6 KiB       | 1.6 KiB           |



▲ Remove duplicate modules in JavaScript bundles — Potential savings of 89 KiB

Remove large, duplicate JavaScript modules from bundles to reduce unnecessary bytes consumed by network activity.

FCP LCP

| Source                                         | Transfer Size | Potential Savings |
|------------------------------------------------|---------------|-------------------|
| index.tsx                                      |               | 90 KiB            |
| ...StockCardList/index.tsx (localhost)         | 10 KiB        |                   |
| ...PriceChart/index.tsx (localhost)            | 10 KiB        |                   |
| ...router/index.tsx (localhost)                | 0 KiB         |                   |
| ...StockCard/index.tsx (localhost)             | 0 KiB         |                   |
| ...SymbolGrid/index.tsx (localhost)            | 0 KiB         |                   |
| ...LoadingCard/index.tsx (localhost)           | 0 KiB         |                   |
| ...StockCardInfo/index.tsx (localhost)         | 0 KiB         |                   |
| ...SymbolsView/index.tsx (localhost)           | 0 KiB         |                   |
| ...CompanyDetails/index.tsx (localhost)        | 0 KiB         |                   |
| ...PriceChartSection/index.tsx (localhost)     | 0 KiB         |                   |
| ...TopHeadlines/index.tsx (localhost)          | 0 KiB         |                   |
| ...AppErrorFallback/index.tsx (localhost)      | 0 KiB         |                   |
| ...TrendLabel/index.tsx (localhost)            | 0 KiB         |                   |
| ...StockCardListFallback/index.tsx (localhost) | 0 KiB         |                   |
| ...TopHeadline/index.tsx (localhost)           | 0 KiB         |                   |
| ...DetailsRow/index.tsx (localhost)            | 0 KiB         |                   |
| ...HeaderInfo/index.tsx (localhost)            | 0 KiB         |                   |
| ...PerformanceInfo/index.tsx (localhost)       | 0 KiB         |                   |
| ...HighlightedSymbols/index.tsx (localhost)    | 0 KiB         |                   |
| ...Tooltip/index.tsx (localhost)               | 0 KiB         |                   |
| ...StockCardHeader/index.tsx (localhost)       | 0 KiB         |                   |
| ...PriceDisplay/index.tsx (localhost)          | 0 KiB         |                   |
| ...Navbar/index.tsx (localhost)                | 0 KiB         |                   |
| ...NavLinkItem/index.tsx (localhost)           | 0 KiB         |                   |
| ...SymbolsGridSection/index.tsx (localhost)    | 0 KiB         |                   |
| ...PerformanceEmoji/index.tsx (localhost)      | 0 KiB         |                   |
| ...CardContent/index.tsx (localhost)           | 0 KiB         |                   |
| ...PerformanceCard/index.tsx (localhost)       | 0 KiB         |                   |
| ...Loading/index.tsx (localhost)               | 0 KiB         |                   |
| ...ToggleCardInfo/index.tsx (localhost)        | 0 KiB         |                   |
| ...CardHeader/index.tsx (localhost)            | 0 KiB         |                   |

| Source                                 | Transfer Size | Potential Savings |
|----------------------------------------|---------------|-------------------|
| ...Card/index.tsx (localhost)          | 0 KiB         |                   |
| ...ErrorBoundary/index.tsx (localhost) | 0 KiB         |                   |
| ...ChartToolTip/index.tsx (localhost)  | 0 KiB         |                   |

▲ Page prevented back/forward cache restoration — 2 failure reasons

Many navigations are performed by going back to a previous page, or forwards again. The back/forward cache (bfcache) can speed up these return navigations. [Learn more about the bfcache](#)

| Failure reason                                                                                                                                      | Failure type            |
|-----------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| Pages with WebSocket cannot enter back/forward cache.<br><br>http://localhost:5173                                                                  | Pending browser support |
| Back/forward cache is disabled by flags. Visit chrome://flags/#back-forward-cache to enable it locally on this device.<br><br>http://localhost:5173 | Not actionable          |

Does not use passive listeners to improve scrolling performance

Consider marking your touch and wheel event listeners as passive to improve your page's scroll performance. [Learn more about adopting passive event listeners.](#)

Source



localhost 1st Party

:5173/src/hooks/stoc...PullToRefresh.ts:92

Properly size images — Potential savings of 36 KiB

Serve images that are appropriately-sized to save cellular data and improve load time. [Learn how to size images.](#) FCP  
LCP

| URL                 | Resource Size | Potential Savings |
|---------------------|---------------|-------------------|
| localhost 1st Party | 41.9 KiB      | 35.8 KiB          |

| URL                                                                                                                                                                  | Resource Size | Potential Savings |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-------------------|
| <br>img.StockCardHeader-module__trendIcon__Q0fFr<br>...assets/up.webp (localhost)   | 26.1 KiB      | 22.7 KiB          |
| <br>img.StockCardHeader-module__trendIcon__Q0fFr<br>...assets/down.webp (localhost) | 15.8 KiB      | 13.1 KiB          |

Avoid serving legacy JavaScript to modern browsers — Potential savings of 1 KiB

Polyfills and transforms enable legacy browsers to use new JavaScript features. However, many aren't necessary for modern browsers. For your bundled JavaScript, adopt a modern script deployment strategy using module/nomodule feature detection to reduce the amount of code shipped to modern browsers, while retaining support for legacy browsers. [Learn how to use modern JavaScript](#) FCP LCP


| URL                                        | Potential Savings |
|--------------------------------------------|-------------------|
| localhost <span>1st Party</span>           | 0.7 KiB           |
| ...deps/recharts.js?v=842a2a81 (localhost) | 0.7 KiB           |

:5173/node\_modules/....ts.js?v=842a2a81:32

@babel/plugin-transform-classes

Avoid an excessive DOM size — 923 elements

A large DOM will increase memory usage, cause longer [style calculations](#), and produce costly [layout reflows](#). [Learn how to avoid an excessive DOM size](#). TBT


| Statistic          | Element                                                                                  | Value |
|--------------------|------------------------------------------------------------------------------------------|-------|
| Total DOM Elements |                                                                                          | 923   |
| Maximum DOM Depth  |  path | 22    |

Statistic

Element

Value

Maximum Child Elements





svg

12


Avoid large layout shifts — 2 layout shifts found

These are the largest layout shifts observed on the page. Each table item represents a single layout shift, and shows the element that shifted the most. Below each item are possible root causes that led to the layout shift. Some of these layout shifts may not be included in the CLS metric value due to [windowing](#). [Learn how to improve CLS](#) CLS

| Element                                                                                                                                                         | Layout shift score |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|
| <div><div>span.PriceDisplay-module__value__KfHln</div></div> <div>0.000</div>  |                    |
| <div><div>span.PriceDisplay-module__value__KfHln</div></div> <div>0.000</div> |                    |

Avoid non-composited animations — 2 animated elements found

Animations which are not composited can be janky and increase CLS. [Learn how to avoid non-composited animations](#) CLS

| Element                                                                                                                                                                                                                                                                                                                                                        | Name                                                                                   |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|
| <div><div>div.Card-module__root__c9KvZ.StockCard-module__root__cq-l2.accelerated</div><div>Unsupported CSS Property: box-shadow</div><div>div.Card-module__root__c9KvZ.StockCard-module__root__cq-l2.accelerated</div><div>Unsupported CSS Property: box-shadow</div></div> | <div>StockCard-module__priceDown__D2L0M</div> <div>StockCard-module__priceDown__</div> |

Element

Name

\_D2L0M

Initial server response time was short

— Root document took 10 ms

^

Keep the server response time for the main document short because all other requests depend on it. [Learn more about the Time to First Byte metric.](#) FCP LCP

| URL                              | Time Spent |
|----------------------------------|------------|
| localhost <span>1st Party</span> | 10 ms      |
| http://localhost:5173            | 10 ms      |

Avoids enormous network payloads

— Total size was 1,862 KiB

^

Large network payloads cost users real money and are highly correlated with long load times. [Learn how to reduce payload sizes.](#)

| URL                                                      | Transfer Size |
|----------------------------------------------------------|---------------|
| localhost <span>1st Party</span>                         | 1,325.3 KiB   |
| ...deps/recharts.js?v=842a2a81 (localhost)               | 607.3 KiB     |
| ...deps/chunk-BAPTTBYI.js?v=842a2a81 (localhost)         | 309.0 KiB     |
| ...deps/react-use.js?v=842a2a81 (localhost)              | 86.6 KiB      |
| /@vite/client (localhost)                                | 77.0 KiB      |
| ...deps/react-router-dom.js?v=842a2a81 (localhost)       | 73.5 KiB      |
| ...deps/chunk-6NCZU2Z3.js?v=842a2a81 (localhost)         | 50.6 KiB      |
| ...deps/@reduxjs_toolkit_query.js?v=842a2a81 (localhost) | 41.2 KiB      |
| ...deps/chunk-N2CENUCC.js?v=842a2a81 (localhost)         | 28.9 KiB      |
| ...assets/up.webp (localhost)                            | 26.3 KiB      |
| ...StockCardList/index.tsx (localhost)                   | 24.8 KiB      |

Avoid chaining critical requests

— 74 chains found

^

The Critical Request Chains below show you what resources are loaded with a high priority. Consider reducing the length of chains, reducing the download size of resources, or deferring the download of unnecessary resources to improve page load. [Learn how to avoid chaining critical requests](#).

Maximum critical path latency: **276.892 ms**

#### Initial Navigation

http://localhost:5173

/@vite/client (localhost)

...client/env.mjs (localhost) - **4.696 ms, 3.41 KiB**

/src/main.tsx (localhost)

...\_\_x00\_\_react/jsx-dev-runtime (localhost)

...deps/react\_jsx-dev-runtime.js?v=842a2a81 (localhost) - **8.226 ms, 13.85 KiB**

...deps/react.js?v=842a2a81 (localhost)

...deps/chunk-N2CENUCC.js?v=842a2a81 (localhost) - **17.839 ms, 28.93 KiB**

...deps/chunk-EFEG4PR6.js?v=842a2a81 (localhost) - **14.29 ms, 1.30 KiB**

...deps/react-dom\_client.js?v=842a2a81 (localhost)

...deps/chunk-BAPTTBYI.js?v=842a2a81 (localhost) - **24.493 ms, 309.05 KiB**

/src/App.tsx (localhost)

/src/App.css (localhost) - **24.6 ms, 2.32 KiB**

...router/index.tsx (localhost)

...Loading/index.tsx (localhost)

...Loading/Loading.module.css (localhost) - **5.63 ms, 2.95 KiB**

...router/routes.ts (localhost)

...SymbolsView/index.tsx (localhost)

...SymbolsView/SymbolsView.module.css (localhost) - **1.764 ms, 2.07 KiB**

...\_components/index.ts (localhost)

...SymbolsGridSection/index.tsx (localhost) - **5.241 ms, 4.68 KiB**

...PriceChartSection/index.tsx (localhost)

...PriceChart/index.tsx (localhost)

...PriceChart/PriceChart.module.css (localhost) - **4.488 ms, 2.29 KiB**

...deps/recharts.js?v=842a2a81 (localhost) - **7.784 ms, 607.34 KiB**

...utils/date.ts (localhost) - **7.928 ms, 0.92 KiB**

...\_components/index.ts (localhost)

...ChartToolTip/index.tsx (localhost)

...Tooltip/index.tsx (localhost)

...Tooltip/Tooltip.module.css (localhost) - **7.339 ms, 1.58 KiB**

...HeaderInfo/index.tsx (localhost)

...HighlightedSymbols/index.tsx (localhost)

...HighlightedSymbols/HighlightedSymbols.module.css (localhost) - **8.838 ms, 1.62 KiB**

...PerformanceCard/index.tsx (localhost)

...PerformanceCard/PerformanceCard.module.css (localhost) - **8.066 ms, 1.41 KiB**

...utils/currencyFormatter.ts (localhost) - **15.73 ms, 3.89 KiB**

```
..._components/index.ts (localhost)
...PerformanceInfo/index.tsx (localhost)
...PerformanceInfo/PerformanceInfo.module.css (localhost) - 7.144 ms, 1.8'
...utils/formatSymbolChange.ts (localhost) - 7.993 ms, 1.20 KiB
...TrendLabel/index.tsx (localhost)
...TrendLabel/TrendLabel.module.css (localhost) - 8.797 ms, 1.60 KiB
...TopHeadlines/index.tsx (localhost)
...TopHeadlines/TopHeadlines.module.css (localhost) - 9.682 ms, 1.55 KiB
..._components/index.ts (localhost)
...PerformanceEmoji/index.tsx (localhost)
...PerformanceEmoji/PerformanceEmoji.module.css (localhost) - 8.244 ms, 1.29
...assets/useAsset.ts (localhost) - 8.059 ms, 1.31 KiB
...TopHeadline/index.tsx (localhost)
...TopHeadline/TopHeadline.module.css (localhost) - 7.582 ms, 1.55 KiB
...SymbolGrid/index.tsx (localhost)
...deps/classnames.js?v=842a2a81 (localhost) - 5.275 ms, 1.34 KiB
...SymbolGrid/SymbolsGrid.module.css (localhost) - 5.755 ms, 3.41 KiB
...StockCardList/index.tsx (localhost)
...deps/@tanstack_react-virtual.js?v=842a2a81 (localhost) - 16.125 ms, 14.86 KiB
...deps/react-use.js?v=842a2a81 (localhost) - 10.65 ms, 86.58 KiB
...StockCard/index.tsx (localhost)
...StockCard/StockCard.module.css (localhost) - 13.921 ms, 3.27 KiB
...animation/useStockAnimation.ts (localhost) - 8.917 ms, 8.46 KiB
...Card/index.tsx (localhost)
...Card/Card.module.css (localhost) - 6.239 ms, 0.92 KiB
..._components/index.ts (localhost)
...CardHeader/index.tsx (localhost)
...CardHeader/CardHeader.module.css (localhost) - 3.178 ms, 1.12 KiB
...CardContent/index.tsx (localhost)
...CardContent/CardContent.module.css (localhost) - 6.216 ms, 1.11 K
...LoadingCard/index.tsx (localhost)
...LoadingCard/LoadingCard.module.css (localhost) - 3.439 ms, 2.30 K
..._components/index.ts (localhost)
...StockCardHeader/index.tsx (localhost)
...StockCardHeader/StockCardHeader.module.css (localhost) - 6.563 ms, 1
...StockCardInfo/index.tsx (localhost)
...StockCardInfo/StockCardInfo.module.css (localhost) - 9.704 ms, 1.94 Kil
...PriceDisplay/index.tsx (localhost)
...PriceDisplay/PriceDisplay.module.css (localhost) - 3.643 ms, 1.77 KiB
...CompanyDetails/index.tsx (localhost)
...CompanyDetails/CompanyDetails.module.css (localhost) - 5.962 ms, 1.6
...DetailsRow/index.tsx (localhost)
```

...DetailsRow/DetailsRow.module.css (localhost) - **2.716 ms, 1.56 KiB**

...StockCardList/StockCardList.module.css (localhost) - **13.462 ms, 3.89 KiB**

...stocks/useStockData.ts (localhost) - **11.826 ms, 7.71 KiB**

...stocks/usePullToRefresh.ts (localhost) - **6.15 ms, 12.69 KiB**

...hooks/redux.ts (localhost) - **10.535 ms, 1.17 KiB**

...Navbar/index.tsx (localhost)

...Navbar/Navbar.module.css (localhost) - **7.345 ms, 1.40 KiB**

...\_components/index.ts (localhost)

...NavLinkItem/index.tsx (localhost)

...NavLinkItem/NavLinkItem.module.css (localhost) - **7.137 ms, 1.78 KiB**

...ToggleCardInfo/index.tsx (localhost)

...ToggleCardInfo/ToggleCardInfo.module.css (localhost) - **6.471 ms, 1.38 KiB**

...performance/usePerformanceTracking.ts (localhost) - **26.975 ms, 1.78 KiB**

...utils/assetPreloader.ts (localhost)

...assets/index.tsx (localhost)

...assets/up-arrow.svg?import (localhost) - **3.884 ms, 1.06 KiB**

...assets/down-arrow.svg?import (localhost) - **4.211 ms, 1.08 KiB**

...assets/company.svg?import (localhost) - **4.792 ms, 8.97 KiB**

...assets/industry.svg?import (localhost) - **2.255 ms, 10.37 KiB**

...assets/market\_cap.svg?import (localhost) - **2.506 ms, 11.19 KiB**

...assets/happy.svg?import (localhost) - **7.191 ms, 1.63 KiB**

...assets/neutral.svg?import (localhost) - **5.111 ms, 1.36 KiB**

...assets/sad.svg?import (localhost) - **5.668 ms, 1.35 KiB**

...assets/down.webp?import (localhost) - **5.957 ms, 0.29 KiB**

...assets/up.webp?import (localhost) - **6.322 ms, 0.29 KiB**

/src/index.css (localhost) - **21.581 ms, 4.02 KiB**

...deps/react-redux.js?v=842a2a81 (localhost)

...deps/chunk-ASTB4Q54.js?v=842a2a81 (localhost) - **24.201 ms, 3.49 KiB**

...store/index.ts (localhost)

...deps/@reduxjs\_toolkit.js?v=842a2a81 (localhost)

...deps/chunk-6NCZU2Z3.js?v=842a2a81 (localhost) - **23.44 ms, 50.61 KiB**

...deps/chunk-TKGXMIHF.js?v=842a2a81 (localhost) - **23.492 ms, 0.64 KiB**

...deps/chunk-SCSCP4VK.js?v=842a2a81 (localhost) - **23.449 ms, 10.22 KiB**

...deps/@reduxjs\_toolkit\_query.js?v=842a2a81 (localhost) - **14.645 ms, 41.19 KiB**

...store/pricesSlice.ts (localhost) - **15.924 ms, 1.57 KiB**

...deps/redux-thunk.js?v=842a2a81 (localhost) - **27.333 ms, 0.46 KiB**

...store/stocksSlice.ts (localhost) - **16.362 ms, 6.02 KiB**

...store/priceHistorySlice.ts (localhost) - **18.841 ms, 6.16 KiB**

...store/dashboardOptionsSlice.ts (localhost) - **20.326 ms, 2.75 KiB**

...socket/index.ts (localhost) - **11.541 ms, 3.11 KiB**

...deps/react-router-dom.js?v=842a2a81 (localhost) - **10.63 ms, 73.47 KiB**

...ErrorBoundary/index.tsx (localhost)



...ErrorBoundary/ErrorBoundary.module.css (localhost) - **30.825 ms, 2.46 KiB**

...utils/performanceMonitor.ts (localhost) - **15.037 ms, 4.51 KiB**

...Errors/index.tsx (localhost)

...AppErrorFallback/index.tsx (localhost) - **30.094 ms, 5.48 KiB**

...StockCardListFallback/index.tsx (localhost)

...StockCardListFallback/StockCardListFallback.module.css (localhost) - **4.01 ms, 1.63 KiB**

/@react-refresh (localhost) - **17.389 ms, 22.17 KiB**

JavaScript execution time — 0.1 s

Consider reducing the time spent parsing, compiling, and executing JS. You may find delivering smaller JS payloads helps with this. [Learn how to reduce Javascript execution time.](#) TBT

| URL                                              | Total CPU Time | Script Evaluation | Script Parse |
|--------------------------------------------------|----------------|-------------------|--------------|
| localhost <span>1st Party</span>                 | 206 ms         | 84 ms             | 0 ms         |
| http://localhost:5173                            | 127 ms         | 14 ms             | 0 ms         |
| ...deps/chunk-BAPTTBYI.js?v=842a2a81 (localhost) | 79 ms          | 70 ms             | 0 ms         |
| Unattributable                                   | 90 ms          | 16 ms             | 0 ms         |
| Unattributable                                   | 90 ms          | 16 ms             | 0 ms         |

Minimizes main-thread work — 0.3 s

Consider reducing the time spent parsing, compiling and executing JS. You may find delivering smaller JS payloads helps with this. [Learn how to minimize main-thread work](#) TBT

| Category                     | Time Spent |
|------------------------------|------------|
| Other                        | 152 ms     |
| Script Evaluation            | 104 ms     |
| Style & Layout               | 30 ms      |
| Rendering                    | 21 ms      |
| Garbage Collection           | 7 ms       |
| Script Parsing & Compilation | 3 ms       |

| Category         | Time Spent |
|------------------|------------|
| Parse HTML & CSS | 0 ms       |

More information about the performance of your application. These numbers don't [directly affect](#) the Performance score.

PASSED AUDITS (21)

Hide

|                                                                                                                                                                                                                                               |   |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| Eliminate render-blocking resources                                                                                                                                                                                                           | ^ |
| Resources are blocking the first paint of your page. Consider delivering critical JS/CSS inline and deferring all non-critical JS/styles. <a href="#">Learn how to eliminate render-blocking resources.</a> <span>FCP</span> <span>LCP</span> |   |
| Defer offscreen images                                                                                                                                                                                                                        | ^ |
| Consider lazy-loading offscreen and hidden images after all critical resources have finished loading to lower time to interactive. <a href="#">Learn how to defer offscreen images.</a> <span>FCP</span> <span>LCP</span>                     |   |
| Minify CSS                                                                                                                                                                                                                                    | ^ |
| Minifying CSS files can reduce network payload sizes. <a href="#">Learn how to minify CSS.</a> <span>FCP</span> <span>LCP</span>                                                                                                              |   |
| Reduce unused CSS                                                                                                                                                                                                                             | ^ |
| Reduce unused rules from stylesheets and defer CSS not used for above-the-fold content to decrease bytes consumed by network activity. <a href="#">Learn how to reduce unused CSS.</a> <span>FCP</span> <span>LCP</span>                      |   |
| Efficiently encode images                                                                                                                                                                                                                     | ^ |
| Optimized images load faster and consume less cellular data. <a href="#">Learn how to efficiently encode images.</a> <span>FCP</span> <span>LCP</span>                                                                                        |   |
| Serve images in next-gen formats                                                                                                                                                                                                              | ^ |
| Image formats like WebP and AVIF often provide better compression than PNG or JPEG, which means faster downloads and less data consumption. <a href="#">Learn more about modern image formats.</a> <span>FCP</span> <span>LCP</span>          |   |
| Preconnect to required origins                                                                                                                                                                                                                | ^ |
| Consider adding preconnect or dns-prefetch resource hints to establish early connections to important third-party origins. <a href="#">Learn how to preconnect to required origins.</a> <span>LCP</span> <span>FCP</span>                     |   |
| Avoid multiple page redirects                                                                                                                                                                                                                 | ^ |
| Redirects introduce additional delays before the page can be loaded. <a href="#">Learn how to avoid page redirects.</a> <span>LCP</span> <span>FCP</span>                                                                                     |   |

|                                                                                                                                                                                                                                                                             |   |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| Use HTTP/2                                                                                                                                                                                                                                                                  | ^ |
| HTTP/2 offers many benefits over HTTP/1.1, including binary headers and multiplexing. <a href="#">Learn more about HTTP/2.</a> <span>LCP</span> <span>FCP</span>                                                                                                            |   |
| Use video formats for animated content                                                                                                                                                                                                                                      | ^ |
| Large GIFs are inefficient for delivering animated content. Consider using MPEG4/WebM videos for animations and PNG/WebP for static images instead of GIF to save network bytes. <a href="#">Learn more about efficient video formats</a> <span>FCP</span> <span>LCP</span> |   |
| <input type="radio"/> Preload Largest Contentful Paint image                                                                                                                                                                                                                | ^ |
| If the LCP element is dynamically added to the page, you should preload the image in order to improve LCP. <a href="#">Learn more about preloading LCP elements.</a> <span>LCP</span>                                                                                       |   |
| Uses efficient cache policy on static assets — 0 resources found                                                                                                                                                                                                            | ^ |
| A long cache lifetime can speed up repeat visits to your page. <a href="#">Learn more about efficient cache policies.</a>                                                                                                                                                   |   |
| <input type="radio"/> User Timing marks and measures                                                                                                                                                                                                                        | ^ |
| Consider instrumenting your app with the User Timing API to measure your app's real-world performance during key user experiences. <a href="#">Learn more about User Timing marks.</a>                                                                                      |   |
| All text remains visible during webfont loads                                                                                                                                                                                                                               | ^ |
| Leverage the font-display CSS feature to ensure text is user-visible while webfonts are loading. <a href="#">Learn more about font-display.</a>                                                                                                                             |   |
| <input type="radio"/> Minimize third-party usage                                                                                                                                                                                                                            | ^ |
| Third-party code can significantly impact load performance. Limit the number of redundant third-party providers and try to load third-party code after your page has primarily finished loading. <a href="#">Learn how to minimize third-party impact.</a> <span>TBT</span> |   |
| <input type="radio"/> Lazy load third-party resources with facades                                                                                                                                                                                                          | ^ |
| Some third-party embeds can be lazy loaded. Consider replacing them with a facade until they are required. <a href="#">Learn how to defer third-parties with a facade.</a> <span>TBT</span>                                                                                 |   |
| <input type="radio"/> Largest Contentful Paint image was not lazily loaded                                                                                                                                                                                                  | ^ |
| Above-the-fold images that are lazily loaded render later in the page lifecycle, which can delay the largest contentful paint. <a href="#">Learn more about optimal lazy loading.</a> <span>LCP</span>                                                                      |   |
| Avoids <code>document.write()</code>                                                                                                                                                                                                                                        | ^ |
| For users on slow connections, external scripts dynamically injected via <code>document.write()</code> can delay page load by tens                                                                                                                                          |   |

|                                                                                                                                                                                                                                           |   |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| of seconds. <a href="#">Learn how to avoid document.write()</a> .                                                                                                                                                                         |   |
| <input type="radio"/> Avoid long main-thread tasks                                                                                                                                                                                        | ^ |
| Lists the longest tasks on the main thread, useful for identifying worst contributors to input delay. <a href="#">Learn how to avoid long main-thread tasks</a> <span>TBT</span>                                                          |   |
| Image elements have explicit <a href="#">width</a> and <a href="#">height</a>                                                                                                                                                             | ^ |
| Set an explicit width and height on image elements to reduce layout shifts and improve CLS. <a href="#">Learn how to set image dimensions</a> <span>CLS</span>                                                                            |   |
| Has a <code>&lt;meta name="viewport"&gt;</code> tag with <a href="#">width</a> or <a href="#">initial-scale</a>                                                                                                                           | ^ |
| A <code>&lt;meta name="viewport"&gt;</code> not only optimizes your app for mobile screen sizes, but also prevents <a href="#">a 300 millisecond delay to user input</a> . <a href="#">Learn more about using the viewport meta tag</a> . |   |




## Accessibility

These checks highlight opportunities to [improve the accessibility of your web app](#). Automatic detection can only detect a subset of issues and does not guarantee the accessibility of your web app, so [manual testing](#) is also encouraged.

### CONTRAST

|                                                                                                                                       |  |   |
|---------------------------------------------------------------------------------------------------------------------------------------|--|---|
| Background and foreground colors do not have a sufficient contrast ratio.                                                             |  | ^ |
| Low-contrast text is difficult or impossible for many users to read. <a href="#">Learn how to provide sufficient color contrast</a> . |  |   |
| Failing Elements                                                                                                                      |  |   |
|                                                                                                                                       |  |   |
| div.PerformanceInfo-module__value__h0DS-.PerformanceInfo-module__valueUp__DCPOV                                                       |  |   |
|                                                                                                                                       |  |   |
| div.PerformanceCard-module__root__1ID9r                                                                                               |  |   |


Failing Elements



div.PerformanceInfo-module\_\_value\_\_h0DS-.PerformanceInfo-module\_\_valueDown\_\_uH01t




div.PerformanceCard-module\_\_root\_\_1ID9r



div.PerformanceInfo-module\_\_value\_\_h0DS-.PerformanceInfo-module\_\_valueDown\_\_uH01t




div.PerformanceCard-module\_\_root\_\_1ID9r



div.PerformanceInfo-module\_\_value\_\_h0DS-.PerformanceInfo-module\_\_valueDown\_\_uH01t




div.PerformanceCard-module\_\_root\_\_1ID9r



div.PerformanceInfo-module\_\_value\_\_h0DS-.PerformanceInfo-module\_\_valueUp\_\_DCPOV



div.PerformanceCard-module\_\_root\_\_1ID9r



div.PerformanceInfo-module\_\_value\_\_h0DS-.PerformanceInfo-module\_\_valueDown\_\_uH01t



div.PerformanceCard-module\_\_root\_\_1ID9r

|                  |
|------------------|
| Failing Elements |
|------------------|

These are opportunities to improve the legibility of your content.

ADDITIONAL ITEMS TO MANUALLY CHECK (10)

Hide

|                                                                                                                                                                                                                      |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <div><div></div>Interactive controls are keyboard focusable<div></div></div>                                                                                                                                         |
| Custom interactive controls are keyboard focusable and display a focus indicator. <a href="#">Learn how to make custom controls focusable.</a>                                                                       |
| <div><div></div>Interactive elements indicate their purpose and state<div></div></div>                                                                                                                               |
| Interactive elements, such as links and buttons, should indicate their state and be distinguishable from non-interactive elements. <a href="#">Learn how to decorate interactive elements with affordance hints.</a> |
| <div><div></div>The page has a logical tab order<div></div></div>                                                                                                                                                    |
| Tabbing through the page follows the visual layout. Users cannot focus elements that are offscreen. <a href="#">Learn more about logical tab ordering.</a>                                                           |
| <div><div></div>Visual order on the page follows DOM order<div></div></div>                                                                                                                                          |
| DOM order matches the visual order, improving navigation for assistive technology. <a href="#">Learn more about DOM and visual ordering.</a>                                                                         |
| <div><div></div>User focus is not accidentally trapped in a region<div></div></div>                                                                                                                                  |
| A user can tab into and out of any control or region without accidentally trapping their focus. <a href="#">Learn how to avoid focus traps.</a>                                                                      |
| <div><div></div>The user's focus is directed to new content added to the page<div></div></div>                                                                                                                       |
| If new content, such as a dialog, is added to the page, the user's focus is directed to it. <a href="#">Learn how to direct focus to new content.</a>                                                                |
| <div><div></div>HTML5 landmark elements are used to improve navigation<div></div></div>                                                                                                                              |
| Landmark elements (<main>, <nav>, etc.) are used to improve the keyboard navigation of the page for assistive technology. <a href="#">Learn more about landmark elements.</a>                                        |
| <div><div></div>Offscreen content is hidden from assistive technology<div></div></div>                                                                                                                               |
| Offscreen content is hidden with display: none or aria-hidden=true. <a href="#">Learn how to properly hide offscreen content.</a>                                                                                    |
| <div><div></div>Custom controls have associated labels<div></div></div>                                                                                                                                              |

Custom interactive controls have associated labels, provided by aria-label or aria-labelledby. [Learn more about custom controls and labels.](#)

☐ Custom controls have ARIA roles

Custom interactive controls have appropriate ARIA roles. [Learn how to add roles to custom controls.](#)

These items address areas which an automated testing tool cannot cover. Learn more in our guide on [conducting an accessibility review.](#)

## PASSED AUDITS (21)

Hide

`[aria-*` attributes match their roles

Each ARIA role supports a specific subset of `aria-*` attributes. Mismatching these invalidates the `aria-*` attributes. [Learn how to match ARIA attributes to their roles.](#)

`[aria-hidden="true"]` is not present on the document `<body>`

Assistive technologies, like screen readers, work inconsistently when `aria-hidden="true"` is set on the document `<body>`. [Learn how `aria-hidden` affects the document body.](#)

`[role]`s have all required `[aria-*` attributes

Some ARIA roles have required attributes that describe the state of the element to screen readers. [Learn more about roles and required attributes.](#)

`[aria-*` attributes have valid values

Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. [Learn more about valid values for ARIA attributes.](#)

`[aria-*` attributes are valid and not misspelled

Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. [Learn more about valid ARIA attributes.](#)

`[user-scalable="no"]` is not used in the `<meta name="viewport">` element and the `[maximum-scale]` attribute is not less than 5.

Disabling zooming is problematic for users with low vision who rely on screen magnification to properly see the contents of a web page. [Learn more about the viewport meta tag.](#)

ARIA attributes are used as specified for the element's role

Some ARIA attributes are only allowed on an element under certain conditions. [Learn more about conditional ARIA attributes.](#)

|                                                                                                                                                                                                                                                                                                                                                   |   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| [aria-hidden="true"] elements do not contain focusable descendents                                                                                                                                                                                                                                                                                | ^ |
| Focusable descendents within an [aria-hidden="true"] element prevent those interactive elements from being available to users of assistive technologies like screen readers. <a href="#">Learn how aria-hidden affects focusable elements.</a>                                                                                                    |   |
| Elements use only permitted ARIA attributes                                                                                                                                                                                                                                                                                                       | ^ |
| Using ARIA attributes in roles where they are prohibited can mean that important information is not communicated to users of assistive technologies. <a href="#">Learn more about prohibited ARIA roles.</a>                                                                                                                                      |   |
| [role] values are valid                                                                                                                                                                                                                                                                                                                           | ^ |
| ARIA roles must have valid values in order to perform their intended accessibility functions. <a href="#">Learn more about valid ARIA roles.</a>                                                                                                                                                                                                  |   |
| Document has a <title> element                                                                                                                                                                                                                                                                                                                    | ^ |
| The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. <a href="#">Learn more about document titles.</a>                                                                                                                                     |   |
| <html> element has a [lang] attribute                                                                                                                                                                                                                                                                                                             | ^ |
| If a page doesn't specify a lang attribute, a screen reader assumes that the page is in the default language that the user chose when setting up the screen reader. If the page isn't actually in the default language, then the screen reader might not announce the page's text correctly. <a href="#">Learn more about the lang attribute.</a> |   |
| <html> element has a valid value for its [lang] attribute                                                                                                                                                                                                                                                                                         | ^ |
| Specifying a valid <a href="#">BCP 47 language</a> helps screen readers announce text properly. <a href="#">Learn how to use the lang attribute.</a>                                                                                                                                                                                              |   |
| Form elements have associated labels                                                                                                                                                                                                                                                                                                              | ^ |
| Labels ensure that form controls are announced properly by assistive technologies, like screen readers. <a href="#">Learn more about form element labels.</a>                                                                                                                                                                                     |   |
| Links have a discernible name                                                                                                                                                                                                                                                                                                                     | ^ |
| Link text (and alternate text for images, when used as links) that is discernible, unique, and focusable improves the navigation experience for screen reader users. <a href="#">Learn how to make links accessible.</a>                                                                                                                          |   |
| Lists contain only <li> elements and script supporting elements (<script> and <template>).                                                                                                                                                                                                                                                        | ^ |
| Screen readers have a specific way of announcing lists. Ensuring proper list structure aids screen reader output. <a href="#">Learn more about proper list structure.</a>                                                                                                                                                                         |   |
| List items (<li>) are contained within <ul>, <ol> or <menu> parent elements                                                                                                                                                                                                                                                                       | ^ |



|                                                                                                                                                                                                                             |   |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| Screen readers require list items (<li>) to be contained within a parent <ul>, <ol> or <menu> to be announced properly. <a href="#">Learn more about proper list structure.</a>                                             |   |
| Touch targets have sufficient size and spacing.                                                                                                                                                                             | ^ |
| Touch targets with sufficient size and spacing help users who may have difficulty targeting small controls to activate the targets. <a href="#">Learn more about touch targets.</a>                                         |   |
| Heading elements appear in a sequentially-descending order                                                                                                                                                                  | ^ |
| Properly ordered headings that do not skip levels convey the semantic structure of the page, making it easier to navigate and understand when using assistive technologies. <a href="#">Learn more about heading order.</a> |   |
| Uses ARIA roles only on compatible elements                                                                                                                                                                                 | ^ |
| Many HTML elements can only be assigned certain ARIA roles. Using ARIA roles where they are not allowed can interfere with the accessibility of the web page. <a href="#">Learn more about ARIA roles.</a>                  |   |
| Deprecated ARIA roles were not used                                                                                                                                                                                         | ^ |
| Deprecated ARIA roles may not be processed correctly by assistive technology. <a href="#">Learn more about deprecated ARIA roles.</a>                                                                                       |   |

NOT APPLICABLE (35)

Hide

|                                                                                                                                                                                                                               |   |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| <input type="radio"/> <a href="#">[accesskey]</a> values are unique                                                                                                                                                           | ^ |
| Access keys let users quickly focus a part of the page. For proper navigation, each access key must be unique. <a href="#">Learn more about access keys.</a>                                                                  |   |
| <input type="radio"/> <a href="#">button</a> , <a href="#">link</a> , and <a href="#">menuitem</a> elements have accessible names                                                                                             | ^ |
| When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. <a href="#">Learn how to make command elements more accessible.</a> |   |
| <input type="radio"/> Elements with <code>role="dialog"</code> or <code>role="alertdialog"</code> have accessible names.                                                                                                      | ^ |
| ARIA dialog elements without accessible names may prevent screen readers users from discerning the purpose of these elements. <a href="#">Learn how to make ARIA dialog elements more accessible.</a>                         |   |
| <input type="radio"/> ARIA input fields have accessible names                                                                                                                                                                 | ^ |
| When an input field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. <a href="#">Learn more about input field labels.</a>            |   |
| <input type="radio"/> ARIA <a href="#">meter</a> elements have accessible names                                                                                                                                               | ^ |
|                                                                                                                                                                                                                               |   |

|                                                                                                                                                                                                                                                     |   |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| When a meter element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. <a href="#">Learn how to name meter elements.</a>                                    |   |
| <input type="radio"/> ARIA <code>progressbar</code> elements have accessible names                                                                                                                                                                  | ^ |
| When a <code>progressbar</code> element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. <a href="#">Learn how to label progressbar elements.</a>          |   |
| <input type="radio"/> Elements with an ARIA <code>[role]</code> that require children to contain a specific <code>[role]</code> have all required children.                                                                                         | ^ |
| Some ARIA parent roles must contain specific child roles to perform their intended accessibility functions. <a href="#">Learn more about roles and required children elements.</a>                                                                  |   |
| <input type="radio"/> <code>[role]</code> s are contained by their required parent element                                                                                                                                                          | ^ |
| Some ARIA child roles must be contained by specific parent roles to properly perform their intended accessibility functions. <a href="#">Learn more about ARIA roles and required parent element.</a>                                               |   |
| <input type="radio"/> Elements with the <code>role=text</code> attribute do not have focusable descendents.                                                                                                                                         | ^ |
| Adding <code>role=text</code> around a text node split by markup enables VoiceOver to treat it as one phrase, but the element's focusable descendents will not be announced. <a href="#">Learn more about the <code>role=text</code> attribute.</a> |   |
| <input type="radio"/> ARIA toggle fields have accessible names                                                                                                                                                                                      | ^ |
| When a toggle field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. <a href="#">Learn more about toggle fields.</a>                                       |   |
| <input type="radio"/> ARIA <code>tooltip</code> elements have accessible names                                                                                                                                                                      | ^ |
| When a tooltip element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. <a href="#">Learn how to name tooltip elements.</a>                                |   |
| <input type="radio"/> ARIA <code>treeitem</code> elements have accessible names                                                                                                                                                                     | ^ |
| When a <code>treeitem</code> element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. <a href="#">Learn more about labeling treeitem elements.</a>         |   |
| <input type="radio"/> Buttons have an accessible name                                                                                                                                                                                               | ^ |
| When a button doesn't have an accessible name, screen readers announce it as "button", making it unusable for users who rely on screen readers. <a href="#">Learn how to make buttons more accessible.</a>                                          |   |
| <input type="radio"/> The page contains a heading, skip link, or landmark region                                                                                                                                                                    | ^ |
| Adding ways to bypass repetitive content lets keyboard users navigate the page more efficiently. <a href="#">Learn more about bypass blocks.</a>                                                                                                    |   |

|                                                                                                                                                                                                                                                                                                         |   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| <input type="radio"/> <code>&lt;dl&gt;</code> 's contain only properly-ordered <code>&lt;dt&gt;</code> and <code>&lt;dd&gt;</code> groups, <code>&lt;script&gt;</code> , <code>&lt;template&gt;</code> or <code>&lt;div&gt;</code> elements.                                                            | ^ |
| When definition lists are not properly marked up, screen readers may produce confusing or inaccurate output. <a href="#">Learn how to structure definition lists correctly.</a>                                                                                                                         |   |
| <input type="radio"/> Definition list items are wrapped in <code>&lt;dl&gt;</code> elements                                                                                                                                                                                                             | ^ |
| Definition list items ( <code>&lt;dt&gt;</code> and <code>&lt;dd&gt;</code> ) must be wrapped in a parent <code>&lt;dl&gt;</code> element to ensure that screen readers can properly announce them. <a href="#">Learn how to structure definition lists correctly.</a>                                  |   |
| <input type="radio"/> ARIA IDs are unique                                                                                                                                                                                                                                                               | ^ |
| The value of an ARIA ID must be unique to prevent other instances from being overlooked by assistive technologies. <a href="#">Learn how to fix duplicate ARIA IDs.</a>                                                                                                                                 |   |
| <input type="radio"/> No form fields have multiple labels                                                                                                                                                                                                                                               | ^ |
| Form fields with multiple labels can be confusingly announced by assistive technologies like screen readers which use either the first, the last, or all of the labels. <a href="#">Learn how to use form labels.</a>                                                                                   |   |
| <input type="radio"/> <code>&lt;frame&gt;</code> or <code>&lt;iframe&gt;</code> elements have a title                                                                                                                                                                                                   | ^ |
| Screen reader users rely on frame titles to describe the contents of frames. <a href="#">Learn more about frame titles.</a>                                                                                                                                                                             |   |
| <input type="radio"/> <code>&lt;html&gt;</code> element has an <code>[xml:lang]</code> attribute with the same base language as the <code>[lang]</code> attribute.                                                                                                                                      | ^ |
| If the webpage does not specify a consistent language, then the screen reader might not announce the page's text correctly. <a href="#">Learn more about the lang attribute.</a>                                                                                                                        |   |
| <input type="radio"/> Image elements have <code>[alt]</code> attributes                                                                                                                                                                                                                                 | ^ |
| Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. <a href="#">Learn more about the alt attribute.</a>                                                                                                              |   |
| <input type="radio"/> Image elements do not have <code>[alt]</code> attributes that are redundant text.                                                                                                                                                                                                 | ^ |
| Informative elements should aim for short, descriptive alternative text. Alternative text that is exactly the same as the text adjacent to the link or image is potentially confusing for screen reader users, because the text will be read twice. <a href="#">Learn more about the alt attribute.</a> |   |
| <input type="radio"/> Input buttons have discernible text.                                                                                                                                                                                                                                              | ^ |
| Adding discernable and accessible text to input buttons may help screen reader users understand the purpose of the input button. <a href="#">Learn more about input buttons.</a>                                                                                                                        |   |
| <input type="radio"/> <code>&lt;input type="image"&gt;</code> elements have <code>[alt]</code> text                                                                                                                                                                                                     | ^ |

When an image is being used as an `<input>` button, providing alternative text can help screen reader users understand the purpose of the button. [Learn about input image alt text.](#)

- ☐ Links are distinguishable without relying on color. ^

Low-contrast text is difficult or impossible for many users to read. Link text that is discernible improves the experience for users with low vision. [Learn how to make links distinguishable.](#)

- ☐ The document does not use `<meta http-equiv="refresh">` ^

Users do not expect a page to refresh automatically, and doing so will move focus back to the top of the page. This may create a frustrating or confusing experience. [Learn more about the refresh meta tag.](#)

- ☐ `<object>` elements have alternate text ^

Screen readers cannot translate non-text content. Adding alternate text to `<object>` elements helps screen readers convey meaning to users. [Learn more about alt text for object elements.](#)

- ☐ Select elements have associated label elements. ^

Form elements without effective labels can create frustrating experiences for screen reader users. [Learn more about the select element.](#)

- ☐ Skip links are focusable. ^

Including a skip link can help users skip to the main content to save time. [Learn more about skip links.](#)

- ☐ No element has a `[tabindex]` value greater than 0 ^

A value greater than 0 implies an explicit navigation ordering. Although technically valid, this often creates frustrating experiences for users who rely on assistive technologies. [Learn more about the tabindex attribute.](#)

- ☐ Tables have different content in the summary attribute and `<caption>`. ^

The summary attribute should describe the table structure, while `<caption>` should have the onscreen title. Accurate table mark-up helps users of screen readers. [Learn more about summary and caption.](#)

- ☐ Cells in a `<table>` element that use the `[headers]` attribute refer to table cells within the same table. ^

Screen readers have features to make navigating tables easier. Ensuring `<td>` cells using the `[headers]` attribute only refer to other cells in the same table may improve the experience for screen reader users. [Learn more about the headers attribute.](#)

- ☐ `<th>` elements and elements with `[role="columnheader"/"rowheader"]` have data cells they describe. ^

Screen readers have features to make navigating tables easier. Ensuring table headers always refer to some set of cells may improve the experience for screen reader users. [Learn more about table headers.](#)

[lang] attributes have a valid value

^

Specifying a valid [BCP 47 language](#) on elements helps ensure that text is pronounced correctly by a screen reader. [Learn how to use the lang attribute.](#)

<video> elements contain a <track> element with [kind="captions"]

^

When a video provides a caption it is easier for deaf and hearing impaired users to access its information. [Learn more about video captions.](#)




Best Practices



USER EXPERIENCE

Displays images with incorrect aspect ratio

^

Image display dimensions should match natural aspect ratio. [Learn more about image aspect ratio.](#)

| URL                                                                                                               | Aspect Ratio (Displayed) | Aspect Ratio (Actual) |
|-------------------------------------------------------------------------------------------------------------------|--------------------------|-----------------------|
| localhost <a href="#">1st Party</a>                                                                               |                          |                       |
|  ...assets/up.webp (localhost) | 50 x 50 (1.00)           | 310 x 251 (1.24)      |
| img.StockCardHeader-module__trendIcon__Q0fFr                                                                      |                          |                       |
| img.StockCardHeader-module__trendIcon__Q0fFr ...assets/up.webp (localhost)                                        | 50 x 50 (1.00)           | 310 x 251 (1.24)      |
| img.StockCardHeader-module__trendIcon__Q0fFr ...assets/up.webp (localhost)                                        | 50 x 50 (1.00)           | 310 x 251 (1.24)      |
| img.StockCardHeader-module__trendIcon__Q0fFr ...assets/up.webp (localhost)                                        | 50 x 50 (1.00)           | 310 x 251 (1.24)      |

| URL                                                                               |                                 | Aspect Ratio (Displayed) | Aspect Ratio (Actual) |
|-----------------------------------------------------------------------------------|---------------------------------|--------------------------|-----------------------|
|  | ...assets/down.webp (localhost) | 50 x 50 (1.00)           | 273 x 213 (1.28)      |
| img.StockCardHeader-module__trendIcon__Q0fFr                                      |                                 |                          |                       |
|  | ...assets/down.webp (localhost) | 50 x 50 (1.00)           | 273 x 213 (1.28)      |
| img.StockCardHeader-module__trendIcon__Q0fFr                                      |                                 |                          |                       |
| img.StockCardHeader-module__trendIcon__Q0fFr                                      | ...assets/down.webp (localhost) | 50 x 50 (1.00)           | 273 x 213 (1.28)      |

TRUST AND SAFETY

Ensure CSP is effective against XSS attacks

A strong Content Security Policy (CSP) significantly reduces the risk of cross-site scripting (XSS) attacks. [Learn how to use a CSP to prevent XSS](#)

| Description                      | Directive | Severity |
|----------------------------------|-----------|----------|
| No CSP found in enforcement mode |           | High     |

PASSED AUDITS (13)

Hide

Uses HTTPS

All sites should be protected with HTTPS, even ones that don't handle sensitive data. This includes avoiding [mixed content](#), where some resources are loaded over HTTP despite the initial request being served over HTTPS. HTTPS prevents intruders from tampering with or passively listening in on the communications between your app and your users, and is a prerequisite for HTTP/2 and many new web platform APIs. [Learn more about HTTPS.](#)

Avoids deprecated APIs

Deprecated APIs will eventually be removed from the browser. [Learn more about deprecated APIs.](#)

Avoids third-party cookies

|                                                                                                                                                                                                                                                                         |   |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| Chrome is moving towards a new experience that allows users to choose to browse without third-party cookies. <a href="#">Learn more about third-party cookies.</a>                                                                                                      |   |
| Allows users to paste into input fields                                                                                                                                                                                                                                 | ^ |
| Preventing input pasting is a bad practice for the UX, and weakens security by blocking password managers. <a href="#">Learn more about user-friendly input fields.</a>                                                                                                 |   |
| Avoids requesting the geolocation permission on page load                                                                                                                                                                                                               | ^ |
| Users are mistrustful of or confused by sites that request their location without context. Consider tying the request to a user action instead. <a href="#">Learn more about the geolocation permission.</a>                                                            |   |
| Avoids requesting the notification permission on page load                                                                                                                                                                                                              | ^ |
| Users are mistrustful of or confused by sites that request to send notifications without context. Consider tying the request to user gestures instead. <a href="#">Learn more about responsibly getting permission for notifications.</a>                               |   |
| Serves images with appropriate resolution                                                                                                                                                                                                                               | ^ |
| Image natural dimensions should be proportional to the display size and the pixel ratio to maximize image clarity. <a href="#">Learn how to provide responsive images.</a>                                                                                              |   |
| Has a <code>&lt;meta name="viewport"&gt;</code> tag with <code>width</code> or <code>initial-scale</code>                                                                                                                                                               | ^ |
| A <code>&lt;meta name="viewport"&gt;</code> not only optimizes your app for mobile screen sizes, but also prevents <a href="#">a 300 millisecond delay to user input</a> . <a href="#">Learn more about using the viewport meta tag.</a>                                |   |
| Page has the HTML doctype                                                                                                                                                                                                                                               | ^ |
| Specifying a doctype prevents the browser from switching to quirks-mode. <a href="#">Learn more about the doctype declaration.</a>                                                                                                                                      |   |
| Properly defines charset                                                                                                                                                                                                                                                | ^ |
| A character encoding declaration is required. It can be done with a <code>&lt;meta&gt;</code> tag in the first 1024 bytes of the HTML or in the Content-Type HTTP response header. <a href="#">Learn more about declaring the character encoding.</a>                   |   |
| No browser errors logged to the console                                                                                                                                                                                                                                 | ^ |
| Errors logged to the console indicate unresolved problems. They can come from network request failures and other browser concerns. <a href="#">Learn more about this errors in console diagnostic audit</a>                                                             |   |
| No issues in the <b>Issues</b> panel in Chrome Devtools                                                                                                                                                                                                                 | ^ |
| Issues logged to the Issues panel in Chrome Devtools indicate unresolved problems. They can come from network request failures, insufficient security controls, and other browser concerns. Open up the Issues panel in Chrome DevTools for more details on each issue. |   |

Page has valid source maps ^

Source maps translate minified code to the original source code. This helps developers debug in production. In addition, Lighthouse is able to provide further insights. Consider deploying source maps to take advantage of these benefits. [Learn more about source maps.](#)

| URL                                                      | Map URL                                           |
|----------------------------------------------------------|---------------------------------------------------|
| localhost <span>1st Party</span>                         |                                                   |
| ...deps/chunk-6NCZU2Z3.js?v=842a2a81 (localhost)         | ...deps/chunk-6NCZU2Z3.js.map (localhost)         |
| Warning: missing 1 item in `.sourcesContent`             |                                                   |
| ...deps/@reduxjs_toolkit_query.js?v=842a2a81 (localhost) | ...deps/@reduxjs_toolkit_query.js.map (localhost) |
| Warning: missing 1 item in `.sourcesContent`             |                                                   |
| ...SymbolsView/index.tsx (localhost)                     |                                                   |
| ...SymbolsGridSection/index.tsx (localhost)              |                                                   |
| ...SymbolGrid/index.tsx (localhost)                      |                                                   |
| ...PriceChartSection/index.tsx (localhost)               |                                                   |
| ..._components/index.ts (localhost)                      |                                                   |
| ...HeaderInfo/index.tsx (localhost)                      |                                                   |
| ...utils/performanceMonitor.ts (localhost)               |                                                   |
| ...utils/formatSymbolChange.ts (localhost)               |                                                   |
| ...utils/date.ts (localhost)                             |                                                   |
| ...utils/currencyFormatter.ts (localhost)                |                                                   |
| ...utils/assetPreloader.ts (localhost)                   |                                                   |
| ...store/stocksSlice.ts (localhost)                      |                                                   |
| ...store/pricesSlice.ts (localhost)                      |                                                   |
| ...store/priceHistorySlice.ts (localhost)                |                                                   |
| ...store/index.ts (localhost)                            |                                                   |
| ...store/dashboardOptionsSlice.ts (localhost)            |                                                   |



| URL                                                  | Map URL |
|------------------------------------------------------|---------|
| ...socket/index.ts (localhost)                       |         |
| ...router/routes.ts (localhost)                      |         |
| ...router/index.tsx (localhost)                      |         |
| /src/main.tsx (localhost)                            |         |
| ...stocks/useStockData.ts (localhost)                |         |
| ...stocks/usePullToRefresh.ts (localhost)            |         |
| ...hooks/redux.ts (localhost)                        |         |
| ...performance/usePerformanceTracking.ts (localhost) |         |
| ...assets/useAsset.ts (localhost)                    |         |
| ...animation/useStockAnimation.ts (localhost)        |         |
| ...TopHeadlines/index.tsx (localhost)                |         |
| ...TopHeadline/index.tsx (localhost)                 |         |
| ...PerformanceEmoji/index.tsx (localhost)            |         |
| ..._components/index.ts (localhost)                  |         |
| ...Tooltip/index.tsx (localhost)                     |         |
| ...StockCardList/index.tsx (localhost)               |         |
| ...StockCard/index.tsx (localhost)                   |         |
| ...StockCardInfo/index.tsx (localhost)               |         |
| ...StockCardHeader/index.tsx (localhost)             |         |
| ...PriceDisplay/index.tsx (localhost)                |         |
| ..._components/index.ts (localhost)                  |         |
| ...CompanyDetails/index.tsx (localhost)              |         |
| ...PriceChart/index.tsx (localhost)                  |         |

| URL                                            | Map URL |
|------------------------------------------------|---------|
| ..._components/index.ts (localhost)            |         |
| ...ChartToolTip/index.tsx (localhost)          |         |
| ...PerformanceCard/index.tsx (localhost)       |         |
| ...TrendLabel/index.tsx (localhost)            |         |
| ...PerformanceInfo/index.tsx (localhost)       |         |
| ..._components/index.ts (localhost)            |         |
| ...Navbar/index.tsx (localhost)                |         |
| ...ToggleCardInfo/index.tsx (localhost)        |         |
| ...NavLinkItem/index.tsx (localhost)           |         |
| ..._components/index.ts (localhost)            |         |
| ...Loading/index.tsx (localhost)               |         |
| ...HighlightedSymbols/index.tsx (localhost)    |         |
| ...StockCardListFallback/index.tsx (localhost) |         |
| ...Errors/index.tsx (localhost)                |         |
| ...AppErrorFallback/index.tsx (localhost)      |         |
| ...ErrorBoundary/index.tsx (localhost)         |         |
| ...DetailsRow/index.tsx (localhost)            |         |
| ...Card/index.tsx (localhost)                  |         |
| ...LoadingCard/index.tsx (localhost)           |         |
| ..._components/index.ts (localhost)            |         |
| ...CardHeader/index.tsx (localhost)            |         |
| ...CardContent/index.tsx (localhost)           |         |
| ...assets/index.tsx (localhost)                |         |

| URL                                                       | Map URL                                            |
|-----------------------------------------------------------|----------------------------------------------------|
| /src/App.tsx (localhost)                                  |                                                    |
| ...client/env.mjs (localhost)                             |                                                    |
| ...deps/redux-thunk.js?v=842a2a81 (localhost)             | ...deps/redux-thunk.js.map (localhost)             |
| ...deps/recharts.js?v=842a2a81 (localhost)                | ...deps/recharts.js.map (localhost)                |
| ...deps/react.js?v=842a2a81 (localhost)                   | ...deps/react.js.map (localhost)                   |
| ...deps/react-use.js?v=842a2a81 (localhost)               | ...deps/react-use.js.map (localhost)               |
| ...deps/react-router-dom.js?v=842a2a81 (localhost)        | ...deps/react-router-dom.js.map (localhost)        |
| ...deps/react-redux.js?v=842a2a81 (localhost)             | ...deps/react-redux.js.map (localhost)             |
| ...deps/react-dom_client.js?v=842a2a81 (localhost)        | ...deps/react-dom_client.js.map (localhost)        |
| ...deps/react_jsx-dev-runtime.js?v=842a2a81 (localhost)   | ...deps/react_jsx-dev-runtime.js.map (localhost)   |
| ...deps/classnames.js?v=842a2a81 (localhost)              | ...deps/classnames.js.map (localhost)              |
| ...deps/chunk-TKGXMIHF.js?v=842a2a81 (localhost)          | ...deps/chunk-TKGXMIHF.js.map (localhost)          |
| ...deps/chunk-SCSCP4VK.js?v=842a2a81 (localhost)          | ...deps/chunk-SCSCP4VK.js.map (localhost)          |
| ...deps/chunk-N2CENUCC.js?v=842a2a81 (localhost)          | ...deps/chunk-N2CENUCC.js.map (localhost)          |
| ...deps/chunk-EFEG4PR6.js?v=842a2a81 (localhost)          | ...deps/chunk-EFEG4PR6.js.map (localhost)          |
| ...deps/chunk-BAPTTBYI.js?v=842a2a81 (localhost)          | ...deps/chunk-BAPTTBYI.js.map (localhost)          |
| ...deps/chunk-ASTB4Q54.js?v=842a2a81 (localhost)          | ...deps/chunk-ASTB4Q54.js.map (localhost)          |
| ...deps/@tanstack_react-virtual.js?v=842a2a81 (localhost) | ...deps/@tanstack_react-virtual.js.map (localhost) |
| ...deps/@reduxjs_toolkit.js?v=842a2a81 (localhost)        | ...deps/@reduxjs_toolkit.js.map (localhost)        |
| /@vite/client (localhost)                                 |                                                    |

NOT APPLICABLE (3)

Hide

Redirects HTTP traffic to HTTPS

Make sure that you redirect all HTTP traffic to HTTPS in order to enable secure web features for all your users. [Learn more.](#)

|                                                                                                                                                                                                                           |   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| <input type="radio"/> Document uses legible font sizes                                                                                                                                                                    | ^ |
| Font sizes less than 12px are too small to be legible and require mobile visitors to “pinch to zoom” in order to read. Strive to have >60% of page text $\geq$ 12px. <a href="#">Learn more about legible font sizes.</a> |   |
| <input type="radio"/> Detected JavaScript libraries                                                                                                                                                                       | ^ |
| All front-end JavaScript libraries detected on the page. <a href="#">Learn more about this JavaScript library detection diagnostic audit.</a>                                                                             |   |



## SEO

These checks ensure that your page is following basic search engine optimization advice. There are many additional factors Lighthouse does not score here that may affect your search ranking, including performance on [Core Web Vitals](#). [Learn more about Google Search Essentials.](#)

### ADDITIONAL ITEMS TO MANUALLY CHECK (1)

[Hide](#)

|                                                                                                                                                                                    |   |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| <input type="radio"/> Structured data is valid                                                                                                                                     | ^ |
| Run the <a href="#">Structured Data Testing Tool</a> and the <a href="#">Structured Data Linter</a> to validate structured data. <a href="#">Learn more about Structured Data.</a> |   |

Run these additional validators on your site to check additional SEO best practices.

### PASSED AUDITS (7)

[Hide](#)

|                                                                                                                                                                                                               |   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| Page isn't blocked from indexing                                                                                                                                                                              | ^ |
| Search engines are unable to include your pages in search results if they don't have permission to crawl them. <a href="#">Learn more about crawler directives.</a>                                           |   |
| Document has a <code>&lt;title&gt;</code> element                                                                                                                                                             | ^ |
| The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. <a href="#">Learn more about document titles.</a> |   |
| Document has a meta description                                                                                                                                                                               | ^ |
| Meta descriptions may be included in search results to concisely summarize page content. <a href="#">Learn more about the meta description.</a>                                                               |   |

|                                                                                                                                                                                                                                                          |   |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| Page has successful HTTP status code                                                                                                                                                                                                                     | ^ |
| Pages with unsuccessful HTTP status codes may not be indexed properly. <a href="#">Learn more about HTTP status codes.</a>                                                                                                                               |   |
| Links have descriptive text                                                                                                                                                                                                                              | ^ |
| Descriptive link text helps search engines understand your content. <a href="#">Learn how to make links more accessible.</a>                                                                                                                             |   |
| Links are crawlable                                                                                                                                                                                                                                      | ^ |
| Search engines may use href attributes on links to crawl websites. Ensure that the href attribute of anchor elements links to an appropriate destination, so more pages of the site can be discovered. <a href="#">Learn how to make links crawlable</a> |   |
| Document has a valid hreflang                                                                                                                                                                                                                            | ^ |
| hreflang links tell search engines what version of a page they should list in search results for a given language or region. <a href="#">Learn more about hreflang.</a>                                                                                  |   |

## NOT APPLICABLE (3)

Hide

|                                                                                                                                                                                            |   |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| <input type="radio"/> robots.txt is valid                                                                                                                                                  | ^ |
| If your robots.txt file is malformed, crawlers may not be able to understand how you want your website to be crawled or indexed. <a href="#">Learn more about robots.txt.</a>              |   |
| <input type="radio"/> Image elements have [alt] attributes                                                                                                                                 | ^ |
| Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. <a href="#">Learn more about the alt attribute.</a> |   |
| <input type="radio"/> Document has a valid rel=canonical                                                                                                                                   | ^ |
| Canonical links suggest which URL to show in search results. <a href="#">Learn more about canonical links.</a>                                                                             |   |

Captured at Jan 28, 2025, 5:07  
PM GMT+1  
Initial page load

Emulated Desktop with  
Lighthouse 12.2.1  
Custom throttling

Single page session  
Using Chromium 132.0.0.0  
with devtools

Generated by **Lighthouse** 12.2.1 | [File an issue](#)