




“Build Your IT Skill”

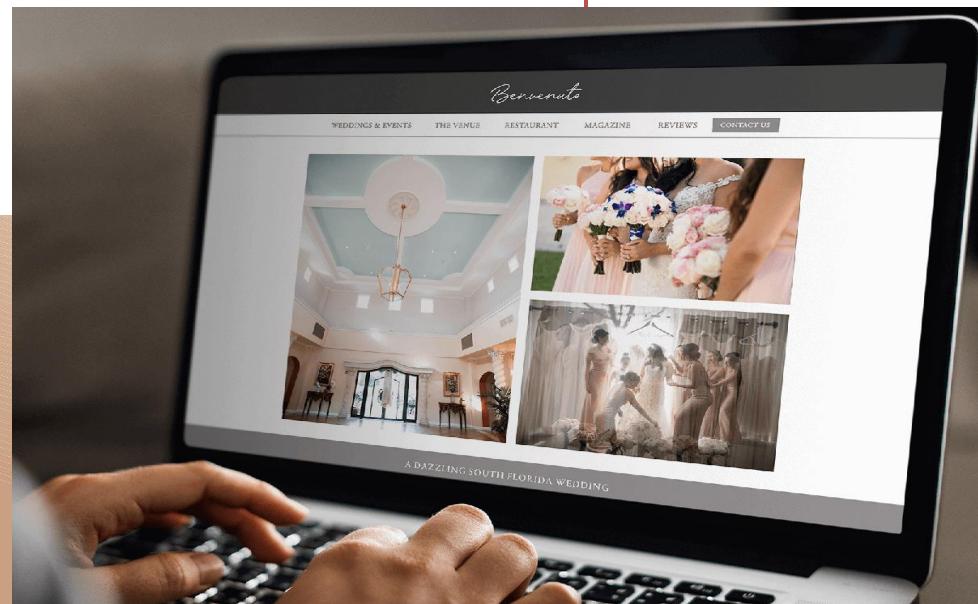

ណែនាំស្ថាល់ពី Table

HTML

រៀបរាល់លោកស្រី ក្រសួងយោប់
អនុបណ្ឌិត និស្សកម្មពេទ្យ
, អនុបណ្ឌិត ក្រសួងបច្ចេកទេស

RUPP , TKU

២០២៤

ទេបនាំនេយត្តត្រាល័តិ Table

HTML

I. ដូចម្រោចទៅដែលបោចា Table?

Table គឺជាការរៀបចំទិន្នន័យលើ Webមានលក្ខណៈ ជាពាណិជ្ជកម្ម ដែលមាន Row (ផ្ទាល់ដែក និង Column (ផ្ទាល់ឈរ ឬ (Table ត្រូវបានគេយកទៅ ប្រើប្រាស់ សំវាប់ការបង្ហាញពេញលេញ ជារាង Row និង Column ឬ គេយក ទៅប្រើប្រាស់សំវាប់បែងចែកជាលក្ខណៈ Layout ដើម្បីទទួលបាយការពារវិនិត្តន៍ ទិន្នន័យ។



ទម្រង់ក្នុងការបង្កើត Table:

```
1 <table border="..." width="...." align="left/right/center">
2   <tr>
3     <th>....</th>
4     <th>....</th>
5     <th>....</th>
6   </tr>
7   <tr>
8     <td>....</td>
9     <td>....</td>
10    <td>....</td>
11  </tr>
12  .....
13  .....
14 </table>
15
16
```

ឧចាយរណី ១

```
1  <!DOCTYPE html>
2  <html>
3
4      <head>
5          <title>HTML Table Header</title>
6      </head>
7
8      <body>
9          <table border = "1">
10         <tr>
11             <th>Name</th>
12             <th>Sex</th>
13             <th>Salary</th>
14             <th>Address</th>
15         </tr>
16         <tr>
17             <td>Sok Daravan</td>
18             <td>Male</td>
19             <td>130$</td>
20             <td>Phnom Penh</td>
21         </tr>
22
23         <tr>
24             <td>Dy Chenda</td>
25             <td>Female</td>
26             <td>230$</td>
27             <td>Kanda</td>
28         </tr>
29     </table>
30 </body>
31
32 </html>
```

លទ្ធផលទទួលបាននេះ

Name	Sex	Salary	Address
Sok Daravan	Male	130\$	Phnom Penh
Dy Chenda	Female	230\$	Kanda

“សិល្ងាយយ៉ានី ក្រុមហ៊ែន ព្រមទាំង IT មាន តម្លៃការងារខ្ពស់...!”



—ក្រុមហ៊ែន តិចតាមរបាយ

ឧចាយរណី ៤:

```
1 <!DOCTYPE html>
2 <html>
3
4     <head>
5         <title>HTML Table Header</title>
6     </head>
7
8     <body>
9         <table border = "1">
10            <tr>
11                <th>Name</th>
12                <td>Sok Daravan</td>
13                <td>Ly Chan Vertey</td>
14                <td>Sok Raksa</td>
15            </tr>
16            <tr>
17                <th>Address</th>
18                <td>Kanda</td>
19                <td>Phnom Penh</td>
20                <td>Takeo</td>
21            </tr>
22
23            <tr>
24                <th>Salary</th>
25                <td>250 USD</td>
26                <td>320 USD</td>
27                <td>450 USD</td>
28            </tr>
29        </table>
30    </body>
31 </html>
```

Name	Sok Daravan	Ly Chan Vertey	Sok Raksa
Address	Kanda	Phnom Penh	Takeo
Salary	250 USD	320 USD	450 USD

លទ្ធផលទទួលបាននេះ

“មិនមែនបានតែងចាំនៅក្នុង, តើមែនធ្វើអី ?

តើ ក្នុងបីមិនមែនអី.... ?”

នឡាត្រាក្សោយលោកស្រីយ និង ព្រៃនាថ្មីបំណាត់បានឡើង
នៅម៉ោង៨:៣០

—ព្រៃនាយកិត្តិផ្ទាល់



ឧទាហរណ៍ លទ្ធផល Merge Column ពីរបញ្ជូនត្រួតពិនិត្យ

```
1 <!DOCTYPE html>
2 <html>
3
4     <head>
5         <title>HTML Table Colspan/Rowspan</title>
6     </head>
7
8     <body>
9         <table border = "1">
10            <tr>
11                <th>Column 1</th>
12                <th>Column 2</th>
13                <th>Column 3</th>
14            </tr>
15            <tr>
16                <td rowspan = "2">Row 1 Cell 1</td>
17                <td>Row 1 Cell 2</td>
18                <td>Row 1 Cell 3</td>
19            </tr>
20            <tr>
21                <td>Row 2 Cell 2</td>
22                <td>Row 2 Cell 3</td>
23            </tr>
24            <tr>
25                <td colspan = "3">Row 3 Cell 1</td>
26            </tr>
27        </table>
28    </body>
29
30 </html>
```

លទ្ធផលទទួលបាន៖

Column 1	Column 2	Column 3
Row 1 Cell 1	Row 1 Cell 2	Row 1 Cell 3
Row 2 Cell 2	Row 2 Cell 3	
Row 3 Cell 1		



“**ក្រុម IT អគ្គស្រីនខេ , ក្រុមអគ្គស្រីនខេ**
ជួយចំណោមត្រួតពិនិត្យ”

ក្រុមអគ្គស្រីនខេ

ឧទាហរណ៍ ៣៖ ផ្តល់ព័ត៌មាន Tfooter, thead, tbody ពីរបញ្ជូនត្រូវ

```
1  <!DOCTYPE html>
2  <html>
3
4      <head>
5          <title>HTML Table</title>
6      </head>
7
8      <body>
9          <table border = "1" width = "100%">
10         <thead>
11             <tr>
12                 <td colspan = "4">This is the head of the table</td>
13             </tr>
14         </thead>
15
16         <tfoot>
17             <tr>
18                 <td colspan = "4">This is the foot of the table</td>
19             </tr>
20         </tfoot>
21
22         <tbody>
23             <tr>
24                 <td>Cell 1</td>
25                 <td>Cell 2</td>
26                 <td>Cell 3</td>
27                 <td>Cell 4</td>
28             </tr>
29         </tbody>
30
31     </table>
32 </body>
33
34 </html>
```

លទ្ធផលទទួលបាន៖

This is the head of the table			
Cell 1	Cell 2	Cell 3	Cell 4
This is the foot of the table			

ឧទាហរណី នៃ ការបង្រៀប្រាស់ Nested Table

```
1 <!DOCTYPE html>
2 <html>
3
4   <head>
5     <title>HTML Table</title>
6   </head>
7
8   <body>
9     <table border = "1" width = "100%">
10    <tr>
11      <td>
12        <table border = "1" width = "100%">
13          <tr>
14            <th>Name</th>
15            <th>Salary</th>
16          </tr>
17          <tr>
18            <td>Ramesh Raman</td>
19            <td>5000</td>
20          </tr>
21          <tr>
22            <td>Shabbir Hussein</td>
23            <td>7000</td>
24          </tr>
25        </table>
26      </td>
27    </tr>
28  </table>
29
30  </body>
31
32 </html>
```

លទ្ធផលទឹកលបាន៖

Name	Salary
Ramesh Raman	5000
Shabbir Hussein	7000

ឧទាហរណី នៃ ការបង្រៀប្រាស់ Cellpadding Table

```
1 <!DOCTYPE html>
2 <html>
3
4   <head>
5     <title>HTML Table Cellpadding</title>
6   </head>
7
8   <body>
9     <table border = "1" cellpadding = "5" cellspacing = "5">
10    <tr>
11      <th>Name</th>
12      <th>Salary</th>
13    </tr>
14    <tr>
15      <td>Ramesh Raman</td>
16      <td>5000</td>
17    </tr>
18    <tr>
19      <td>Shabbir Hussein</td>
20      <td>7000</td>
21    </tr>
22  </table>
23
24 </body>
25
26 </html>
```

Name	Salary
Ramesh Raman	5000
Shabbir Hussein	7000

លំហាត់អនុវត្តន៍ ៣

Time Table					
Hours	Mon	Tue	Wed	Thu	Fri
	Science	Maths	Science	Maths	Arts
	Social	History	English	Social	Sports
	Lunch				
	Science	Maths	Science	Maths	Project
	Social	History	English	Social	

លំហាត់អនុវត្តន៍ ២

Purchased Equipments (June, 2006)			
Item Num#	Item Picture	Item Description	Price
		Shipping Handling, Installation, etc	Expense
1.		IBM Clone Computer.	\$ 400.00
		Shipping Handling, Installation, etc	\$ 20.00
2.		1GB RAM Module for Computer.	\$ 50.00
		Shipping Handling, Installation, etc	\$ 14.00



“ເຮືອງສິນສູນໃຫຍ່, ຖົບກົດຕົວລາຍເຊັ່ນເທົ່ານີ້,

ສົນຍົບີໂຄ, ຖະໜົນ, ຂອບເຂດ, ດັບຕາມ ເວັະເຈ...!"

—ក្រសួងយោប់និត្យ

ក្រោមក្រុងដោយសាស្ត្រចារេរៀប: ហេង ភកិលា អនុបណ្ឌិតតីមានវិទ្យា ឯកទេសបន្ទើតកកម្មវិធី

H/P: 096 226 888 4/ 077358884

លំហាត់នវរត្សិនី ៣

EXPERIENCES MAP ARTICLES BOOKS ACTIVITIES IN DETAIL COMMUNITY

Cambodia activities



Angkor Temples Small-Group Tour

We start our adventure with a visit to Angkor Wat temple, easily the most...



Siem Reap Phare: The Cambodian Circus Show Admission Ticket

Phare Ponleu Selpak (PPS), a non-



Phnom Penh Small-Group Tour:
Genocide Museum, Killing Fields

The day starts by learning about the tragic and fascinating recent history of...



Angkor Wat , The Royal Temples Private Day Tour from Siem Reap

Reap
After hatching in air-conditioned

លេខាត់អនុវត្តន៍ ៤



Build Your IT Skill



ផែនវំស្តាល់ពី Form

HTML

**រៀបចានដោយ: ក្រសួងយុទ្ធសាស្ត្រ
អគ្គនាយកសារ និងកម្មការនៃខេត្តពិភ័ណ្ឌ
, អគ្គនាយកសារ ប្រចាំប្រជាពលរដ្ឋ**

RUPP , TKU



មេរោគទី ៤

ការបង្កើត Form អ្នក HTML

1. ដូចម្វេចដែលប្រាជា Form?

Form គឺជាប្រភេទ Graphic User Interface (GUI) ដែលគេប្រើប្រាស់
សំវាប់រាយបញ្ហាលពីមានផ្លូវការ ពី Keyboard ឬ ប្រើប្រាស់សំវាប់បង្ហាញ នូវ ពីមាន មេរោគ

លម្អិតរបស់ Form មានដូចខាងក្រោម

- Text Input Controls
- Checkboxes Controls
- Radio Box Controls
- Select Box Controls
- File Select boxes
- Hidden Controls
- Clickable Buttons
- Submit and Reset Button

2. ទំនួរបស់ Form

```
1 <form action = "Script URL" method = "GET|POST">
2
3     form elements like input, textarea etc.
4
5 </form>
6
```



3. សមាសធាតុរបស់ Form

3.1. TextField: គឺជាប្រភេទ Control Box ដែលមានត្បូនាចិថញ្ចូលពាណិជ្ជកម្ម។ Keyboard ចោត្តិន System ឬ បញ្ហាលទៀតការណ៍ Server នៃ TextField ត្រូវ HTML តែបែងចែកជាតា ពាប្រភេទគឺ Text, password និង Hidden fields ។

ឧទាហរណ៍ ១

```
<!DOCTYPE html>
<html>
<body>

<h2>HTML Forms</h2>

<form action="/action_page.php">
    First name:<br>
    <input type="text" name="firstname"
    value="Mickey">
    <br>
    Last name:<br>
    <input type="text" name="lastname"
    value="Mouse">
    <br><br>
    <input type="submit" value="Submit">
</form>

<p>If you click the "Submit" button, the form-
data will be sent to a page called
"/action_page.php".</p>

</body>
</html>
```

លទ្ធផលទទួលបាន៖ **HTML Forms**

First name:
ETec

Last name:
IT Training Center

If you click the "Submit" button, the form-data will be sent to a page called "/action_page.php".



ឧចាយរណី ៤

```
<!DOCTYPE html>
<html>
<body>

<h2>Log In form</h2>

<form action="/action_page.php">
    User Name:<br>
    <input type="text" name="firstname"
value="Mickey">
    <br>
    Password:<br>
    <input type="password" name="lastname"
value="Mouse"><br/>
    Confirm password:<br>
    <input type="password" name="firstname"
value="Mickey">
    <br><br>
    <input type="submit" value="Submit">
    <input type="reset" value="Reset">
</form>

<p>If you click the "Submit" button, the form-
data will be sent to a page called
"/action_page.php".</p>

</body>
</html>
```

លទ្ធផលទូលបាលនេះ

Log In form

User Name:

Password:

Confirm password:

If you click the "Submit" button, the form-data will be sent to a page called "/action_page.php".

3.2. Button: គឺជាប្រភេទ Control Box ដែលមានតម្លៃថ្មីចុចបញ្ជា ឬ ចញ្ចាយការងារ នៅកាល Server ឬ នៅកាល Database។ Button មាន ព្រម នូវការ គឺ Button, Submit និង reset។

ឧទាហរណ៍ ៩

```
<!DOCTYPE html>
<html>
<body>

<h2>HTML Forms</h2>

<form action="/action_page.php">
    Input Value A:<br>
    <input type="text" name="tfa" value="0">
    <br>
    Input Value B:<br>
    <input type="text" name="tfb" value="0">
    <br>
    Result A+B:<br>
    <input type="text" name="tfr" value="0">
    <br><br>
    <input type="submit" value="Submit">
    <input type="reset" value="Reset">
    <input type="button" value="View">
</form>

<p>If you click the "Submit" button, the form-data will be sent to a page called "/action_page.php".</p>

</body>
</html>
```

លទ្ធផលទឹកស្ថាន៖

HTML Forms

Input Value A:

Input Value B:

Result A+B:

If you click the "Submit" button, the form-data will be sent to a page called "/action_page.php".

3.3. RadioButton គឺជាប្រភេទ Control box ដែលអាចធ្វើការ បង្កើតនឹងការសម្រេចឡើងបានត្រូវបានត្រួតពិនិត្យថាទីតាំងនៃបញ្ជីរឿងមួយនៅក្នុងប្រព័ន្ធដែលបានបង្កើតឡើង។



The screenshot shows a simple HTML form for gender selection. The code in the left pane is:

```
<!DOCTYPE html>
<html>
<body>


<h2>Gener:</h2>

<form>
  <input type="radio" name="gender" value="male" checked> Male<br>
  <input type="radio" name="gender" value="female"> Female<br>
  <input type="radio" name="gender" value="other"> Other
</form>

</body>
</html>
```

The right pane shows the result of running the code. It displays the heading "Gener:" followed by three radio buttons labeled "Male", "Female", and "Other". The "Male" option is selected.

3.4. CheckBox: គឺជាប្រភេទ Control box ដែលអាចធ្វើការបង្កើតនឹងការសម្រេចឡើងបាន បង្កើតឡើងនៅក្នុងប្រព័ន្ធ។

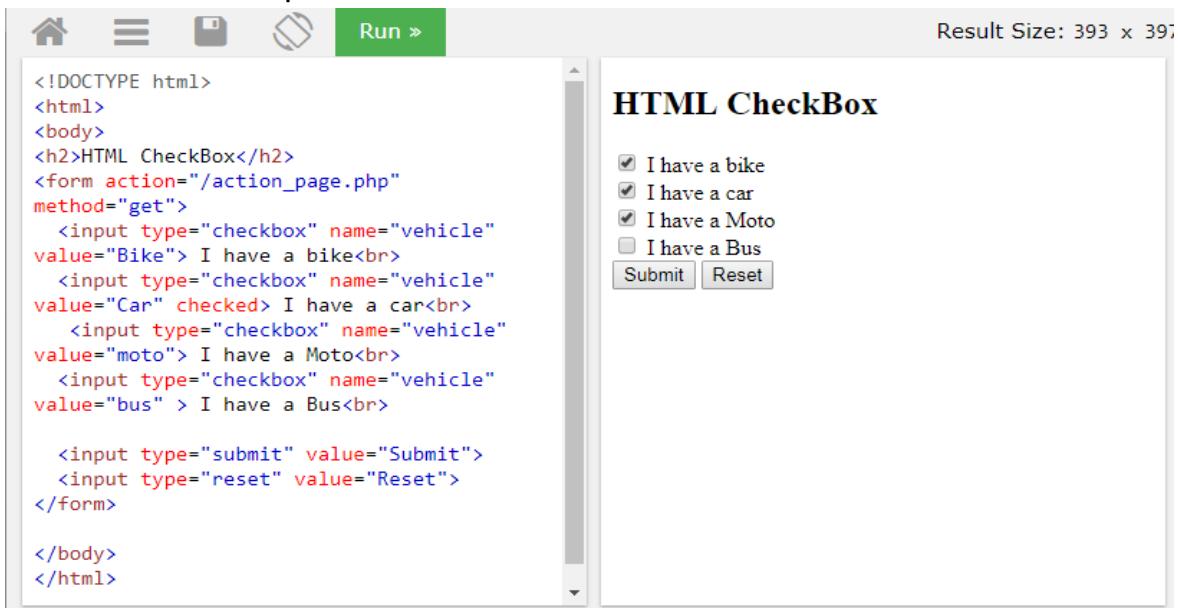

The screenshot shows a vehicle selection form using checkboxes. The code in the left pane is:

```
<!DOCTYPE html>
<html>
<body>
<h2>HTML CheckBox</h2>
<form action="/action_page.php" method="get">
  <input type="checkbox" name="vehicle" value="Bike"> I have a bike<br>
  <input type="checkbox" name="vehicle" value="Car" checked> I have a car<br>
  <input type="checkbox" name="vehicle" value="moto"> I have a Moto<br>
  <input type="checkbox" name="vehicle" value="bus"> I have a Bus<br>

  <input type="submit" value="Submit">
  <input type="reset" value="Reset">
</form>

</body>
</html>
```

The right pane shows the result of running the code. It displays the heading "HTML CheckBox" followed by four checkboxes labeled "I have a bike", "I have a car", "I have a Moto", and "I have a Bus". The "I have a car" option is selected. Below the checkboxes are two buttons: "Submit" and "Reset".



3.5. DropDownList គីជាប្រភេទ List ដើម្បីលទ្ធផលរបស់លក្ខណៈជាចំនួន List Item

The screenshot shows a web development interface with a toolbar at the top and a code editor below. The code editor contains the following HTML and PHP code:

```
<!DOCTYPE html>
<html>
<body>

<h2>The select Element</h2>
<p>The select element defines a drop-down list:</p>

<form action="/action_page.php">
<select name="school">
<option value="volvo">ETEC CENTER</option>
<option value="saab">RUPP</option>
<option value="fiat">AUPP</option>
<option value="audi">Zaman</option>
</select>
<br><br>
<input type="submit">
</form>

</body>
</html>
```

To the right, a preview window shows the resulting page with the heading "The select Element" and a dropdown menu containing the options "ETEC CENTER", "RUPP", "AUPP", and "Zaman". A "Submit" button is also visible.

3.6. SelectionList គីជាប្រភេទ List ដើម្បីលទ្ធផលរបស់លក្ខណៈជាចិន្ទីលីយុទ្ធទាក់ ទាំងអស់ជាន់ List ដើម្បីលទ្ធផលរបស់លក្ខណៈជាចិន្ទីលីយុទ្ធទាក់ ទាំងអស់ជាន់

The screenshot shows a web development interface with a toolbar at the top and a code editor below. The code editor contains the following HTML and PHP code:

```
<!DOCTYPE html>
<html>
<body>

<h2>Allow Multiple Selections</h2>
<p>Use the multiple attribute to allow the user to select more than one value.</p>

<form action="/action_page.php">
<select name="cars" size="4" multiple>
<option value="volvo">Volvo</option>
<option value="saab">Saab</option>
<option value="fiat">Fiat</option>
<option value="audi">Audi</option>
</select>
<br><br>
<input type="submit">
</form>

<p>Hold down the Ctrl (windows) / Command (Mac) button to select multiple options.</p>
```

To the right, a preview window shows the heading "Allow Multiple Selections" and a note: "Use the multiple attribute to allow the user to select more than one value." Below this is a dropdown menu with the options "Volvo", "Saab", "Fiat", and "Audi", each preceded by a small square checkbox. A "Submit" button is also visible. A note at the bottom says: "Hold down the Ctrl (windows) / Command (Mac) button to select multiple options."

ផ្សេងៗដោយសារតាមរបៀប: ហេង កាតិឈរ អនុបណ្ឌិតពីមានវិញ្ញា ឯកទេសបញ្ជីតកម្មវិធី

3.7. TextArea: គឺជាប្រភេទ ControlBox ដែលបញ្ចូល បង្ហាញឡើងនៃយុទ្ធសាស្ត្រ

The screenshot shows a code editor with the following HTML code:

```

<!DOCTYPE html>
<html>
<body>

<h2>Textarea</h2>
<p>The textarea element defines a multi-line input field.</p>

<form action="/action_page.php">
    <textarea name="message" rows="10"
    cols="30">The cat was playing in the garden.
    </textarea>
    <br>
    <input type="submit">
</form>

</body>
</html>

```

To the right, there is a preview window titled "Textarea". It contains the text "The cat was playing in the garden." inside a multi-line input field. Below the input field is a "Submit" button.

3.8. Datalist: គឺជាប្រភេទ List ដែលវាទេរាយអ្នកបញ្ចូលពីមាន បន្ថែមទាំងអស់

The screenshot shows a code editor with the following HTML code:

```

<!DOCTYPE html>
<html>
<body>

<h2>The datalist Element</h2>
<p>The datalist element specifies a list of pre-defined options for an input element.</p>

<form action="/action_page.php">
    <input list="browsers" name="browser">
    <datalist id="browsers">
        <option value="Internet Explorer">
        <option value="Firefox">
        <option value="Chrome">
        <option value="Opera">
        <option value="Safari">
    </datalist>
    <input type="submit">
</form>

<p><b>Note:</b> The datalist tag is not supported in Safari or IE9 (and earlier).</p>

</body>
</html>

```

To the right, there is a preview window titled "The datalist Element". It shows a dropdown menu with the following options: Internet Explorer, Firefox, Chrome, Opera, and Safari. Below the dropdown is a "Submit" button.

3.9. Range

```
1 <!DOCTYPE html>
2 <html>
3 <body>
4
5 <h2>The output Element</h2>
6 <p>The output element represents the result of a calculation.</p>
7
8 <form action="/action_page.php"
9 oninput="x.value=parseInt(a.value)+parseInt(b.value)">
10   0
11   <input type="range" id="a" name="a" value="50">
12   100 +
13   <input type="number" id="b" name="b" value="50">
14   =
15   <output name="x" for="a b"></output>
16   <br><br>
17   <input type="submit">
18 </form>
19 <br/><br/>
20 <form action="/action_page.php"
21 oninput="x.value=parseInt(a.value)-parseInt(b.value)">
22   0
23   <input type="range" id="a" name="a" value="50">
24   100 -
25   <input type="number" id="b" name="b" value="10">
26   =
27   <output name="x" for="a b"></output>
28   <br><br>
29   <input type="submit">
30 </form>
31 <p><strong>Note:</strong> The output element is not supported in Edge 12 or
32 Internet Explorer and earlier versions.</p>
33 </body>
34 </html>
35
```

The output Element

The output element represents the result of a calculation.

0 100 + =

0 100 - = 54

Note: The output element is not supported in Edge 12 or Internet Explorer and earlier versions.

4.1. Date

```
1 <!DOCTYPE html>
2 <html>
3 <body>
4
5 <h2>Date Field Restrictions</h2>
6 <p>Use the min and max attributes to add restrictions to dates:</p>
7
8 <form action="/action_page.php">
9 Enter a date before 1980-01-01:<br>
10 <input type="date" name="bday" max="1979-12-31"><br><br>
11 Enter a date after 2000-01-01:<br>
12 <input type="date" name="bday" min="2000-01-02"><br><br>
13 <input type="submit">
14 </form>
15
16 <p><strong>Note:</strong> type="date" is not supported in Safari or Internet
17 Explorer 11 and earlier versions.</p>
18
19 </body>
20 </html>
21
```

Date Field Restrictions

Use the min and max attributes to add restrictions to dates:

Enter a date before 1980-01-01:


05 - December - 1979

Enter a date after 2000-01-01:

01 - May - 2019

Submit

Note: type="date" is not supported in Safari or Internet Explorer 11 and earlier versions.

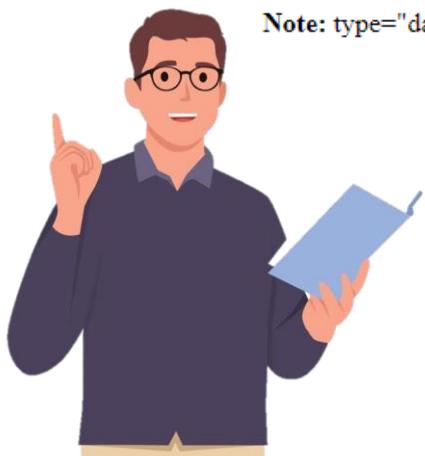

“**មើល និង ត្រូវដោះស្រាយ: កុំអត់សាន្តរីម្ចាស់ទៅ**
ជំណើរដោរអូរកុំយក ដែលបានបង្កើត”

ក្រសួងយុវជន



4.2. Time

```
1 <!DOCTYPE html>
2 <html>
3 <body>
4
5 <h2>Time Field</h2>
6 <p>The <strong>input type="time"</strong> allows the user
7 to select a time (no time zone):</p>
8
9 <p>Depending on browser support:<br>A time picker might pop-up
10 when you enter the input field.</p>
11
12 <form action="/action_page.php">
13   Select a time:
14   <input type="time" name="usr_time">
15   <input type="submit">
16 </form>
17
18 <p><strong>Note:</strong> type="time" is not supported in Safari or
19 Internet Explorer 12 and earlier versions.</p>
20
21 </body>
22 </html>
23
```

Time Field

The `input type="time"` allows the user to select a time (no time zone):

Depending on browser support:
A time picker might pop-up when you enter the input field.

Select a time:

Note: `type="time"` is not supported in Safari or Internet Explorer 12 and earlier versions.

ကုန်ပြောဆုံးမှုပါယ် နှင့် File upload Field

The screenshot shows a web development interface with two main sections. On the left, the code editor contains the following HTML:

```
<!DOCTYPE html>
<html>
<body>
  <h2> File Upload </h2>
  <form action="myform.cgi"> <input type="file" name="fileupload" value="fileupload" id="fileupload"> <label for="fileupload">
  Select a file to upload</label><br/><br/>
  <input type="submit" value="submit"> </form>
</body>
</html>
```

On the right, the results pane displays the output of the uploaded code. It shows a "File Upload" heading and a form with a file input field labeled "Choose File". The status message "No file chosen" is shown next to the input field. Below the input field is a "Select a file to upload" label and a "submit" button.



ការប្រើប្រាស់នូវ Legend Field

```
<!DOCTYPE html>
<html>
<body>

<form>
<fieldset>
<legend>Personalia:</legend>
Name: <input type="text"><br>
Email: <input type="text"><br>
Date of birth: <input type="text">
</fieldset>
</form>

</body>
</html>
```

ការប្រើប្រាស់ជាមួយ និង OptionGroup

```
<!DOCTYPE html>
<html>
<body>

<select>
<optgroup label="Swedish Cars">
<option value="volvo">Volvo</option>
<option value="saab">Saab</option>
</optgroup>
<optgroup label="German Cars">
<option
value="mercedes">Mercedes</option>
<option value="audi">Audi</option>
</optgroup>
</select>


```



“ទាំងនាគ ព្រៀនខ្ពស់ តែមិនបានអាចលោកលីយ៉ែខ្ពស់
លោកលីយ៉ែបាននាយកស៊ីយ៉ែនឹង គារប្រើប្រាស់បច្ចុប្បន្ន ការអ៊ូតន្លេ
និងការបាត់ខ្លួន...!”

ក្រុមរាយដីឥតខ្ចោះ

លំហាត់អនុវត្តន៍ ១

ទំព័រង់ ទូរស័ព្ទ និង Tablets កំពុង ទូរស័ព្ទ ទីតាំង

ម៉ាស៊ីនបាកដោកអារមានទ្វារបៀកខាងមុខ និងបានបាកទីនេះ បាកបាន 8.5Kgប្រើបច្ចនាបាកដោយឡើយ Curoa ដំណើរការបានណូ

ម៉ាស៊ីនបាកដោកអារមាន 6 កម្មវិធីបាកយ៉ាងទាំងនេះ

លេក្ខិនបច្ចុល 1200 ដី/នាទី ដំណើរការណូ បាកបានស្ថាតបច្ចុកវិញ្ញា Greatwave ផ្តល់កន្លែងទឹកខ្សោំងូកកែលបាកការងបញ្ហាប្រើប្រាស់យ៉ាងងាយស្រួល



Contact Us

Name	<input style="width: 100%; height: 1.5em; border: 1px solid #ccc; padding: 2px;" type="text"/>
Email	<input style="width: 100%; height: 1.5em; border: 1px solid #ccc; padding: 2px;" type="text"/>
Password	<input style="width: 100%; height: 1.5em; border: 1px solid #ccc; padding: 2px;" type="text"/>
Website	<input style="width: 100%; height: 1.5em; border: 1px solid #ccc; padding: 2px;" type="text"/>
Message	<input style="width: 100%; height: 10em; border: 1px solid #ccc; padding: 2px;" type="text"/>



**អ្នករាជក្រឹត គូវិធ - ១៩
គូវិធ - ១៩ មិនក្រុមអ្នកនៅយ៍**



“រៀលមិនបានឡើងទេ, តែបើមិនរៀល អ្នកនេះតែបានឡើងទេ”

ក្រុមយោងជិត្យឯក

ផ្សេងៗនៃដោយសាស្ត្រាថារ៉ា: ហេង ភាគីធម៌ អនុបណ្ឌិតតីមានវិញ្ញា ឯកទេសបង្កើតកម្មវិធី

H/P: 096 226 888 4/ 077358884

លំហាត់អនុរត្តិវ ២

The image shows a screenshot of the Khmer Classifieds website. At the top left is the logo for "សូមកិត្តិយាយ" (SOM KITTY) with three circular icons above it. The main title "អ្នករាជក្រឹង គុណីធ - ១៥" and "គុណីធ - ១៥ ចិនភ្នំពេញ" is displayed prominently. On the right side, there are three circular icons: a hand pointing up, a handshake, and a person holding a phone. Below the title, there are five red-colored navigation links: "ទំនាក់នាក់", "ទូរសព្ទ និង Tablets", "កំពុងផ្លូវ", "ទូរសព្ទ", and "ទិន្នន័យ". A sub-section "Register to post free ad" is visible. Below this, there are fields for "Phone Number" (with a placeholder "Phone Number"), "Password" (placeholder "Password"), "Confirm Password" (placeholder "Confirm Password"), and a large blue "Submit" button. At the bottom, there are four image thumbnails with captions: 1. A movie poster for "សាគល្អាច់" (Sakaloch) with a red circle highlighting a character. 2. Four women posing together. 3. A white power adapter and a black smartphone on a stand. 4. A white AirPods case and an iPhone displaying a screen. The footer contains links to "ទំនាក់នាក់", "ទូរសព្ទ និង Tablets", "កំពុងផ្លូវ", "ទូរសព្ទ", "ទិន្នន័យ", "Top News", "DAP Radio", and "ដើម្បី". The footer also includes the phone number "PHONE : 012 722 337" and email "EMAIL : soyvicheth@gmail.com".



លំហាត់អនុវត្តន៍ ៣

ទំនើស ទូរសព្ទ និង Tablets កំពុង ចំណោះនឹងទូទៅ វិញ្ញាសាស្ត្រ កម្មវិធី-ហេដ្ឋា

The advertisement banner at the top features logos for major computer brands: DELL, hp, lenovo, SONY, COMPAQ, acer, and SAMSUNG. Below the banner, there is a large Acer laptop displayed prominently, along with a desktop computer, monitor, keyboard, and mouse. Smaller images of other laptops are shown below the main display.

Laptop Lenovo Ideapad 3-14ITL6 (Sand) (i3-1115G4 / 8GB / SSD 256 PCIE / 14" FHD (2021). \$499.00	Laptop Acer Nitro 5 IND-AN517-4IR7RB (AMD R5-5600H / 8GB / 512 PCIE/ 17.3" FHD-144Hz / RTX 3060 -6GB / Win 10) (2021) Free Ram 8GB \$1,199.00	Laptop Acer Predator Helios 300 PH317-5278F3 (Black) (i7-8750H / 16GB /SSD 512 GB PCIE/ 17.3" FHD(144Hz) / GTX 10060 6GB / Win 10) \$889.00	Laptop TUF A17 FA706QM-HX028T (Elips Gray) (AMD R7-5800H / 16GB /512G PCIE/ RTX3060-6GB/17.3 "FHD IPS/Win10/144HZ) \$1,399.00
--	--	--	---

International Student Application Form

Please fill the form below correctly

Name *

First Name
Last Name

If yes, please specify from the following *

- Hearing
- Learning
- Mobility
- Visual
- Medical
- Other

Date of Birth *

Day
Month
Year

Other, Please specify

Age *

ex: 23

How did you hear about us? *

- Education Agent
- Career & Education Expo
- Careers Adviser
- Billboard
- Print / Newspaper
- Word of Mouth
- Google or other search engine
- Other

Gender *

- Male
- Female

Country of Birth *

Name of Education Recruiter *