

Morphometry landmarking using Deep Neural Network

Le Van Linh^{a,c,*}, Beurton-Aimar Marie^{a,1}, Zemmari Akka^a, Parisey Nicolas^{b,1}

^a*University of Bordeaux, 351, cours de la Libération, 33405 Talence, France*

^b*UMR 1349 IGEPP, BP 35327, 35653 Le Rheu, France*

^c*Dalat University, Dalat, Lamdong, Vietnam*

Abstract

Morphometry landmark is an important characteristic in the morphometric analysis which can use to appreciate the covariances between the ecological factors and the organisms. Mostly, the morphometry landmarks are defined manually or semi-automatically. In this study, we propose a convolutional neural network (CNN) to predict the landmarks on 2D anatomical biological images, specify beetle's images. The network has been trained and evaluated on a dataset includes the images of collecting from 293 beetles. During the experiments, the network has been tested in two ways: training from scratch and applying fine-tuning. The quality of predicted landmarks is evaluated by comparing with the manual landmarks which provided by the biologists. The obtained results are considered to be statistically good enough to replace the manual landmarks for the different morphometry analysis.

Keywords: Morphometry landmarks, deep learning, fine-tuning, morphometry analysis

1. Introduction

Morphometry analysis mentions to measure the topography of an object, *for example*, shape or size of the object. The biologists work with some properties of organisms such as lengths, widths, masses,... to analyze the interaction between

*Corresponding author

Email address: van-linh.le@labri.fr (Le Van Linh)

¹both authors contributed equally to this work.

5 environment and organism’s development. Besides these properties, *landmarks*
 are known as another property to analyze the shape of the organism. The shape
 can be determined if we have enough the landmarks instead of collecting all the
 information. Landmarks, or *points of interest*, are the points on the image that
 store important information about the shape of the object, *for example*, the left
 10 and right corners of eyes are two important points to detect the human eyes.
 Depending the object, the number of landmarks may different, as well as their
 position can be defined along the outline of the object or inside the object, i.e.
 the landmarks on *Drosophila* wings [1] are stayed on the veins of the wings, but
 the landmarks on human ears [2] can be located on the ear edge or inside the
 15 pimas of the ears.

Currently, the landmarks are set manually by the entomologist, one can note
 that this work is time-consuming and difficult to the procedure when the user
 change; or they can be set semi-automatically by applying the image processing
 techniques. However, it is really difficult applying for the complex images. In
 20 image processing, segmentation is most often the first and the most important
 step. This task remains a bottleneck to compute the features of an image. In
 some cases, the interested object is easy to extract and can be analyzed by
 applying the well-known image analysis procedures. Nevertheless, we can not
 apply the same procedure for un-segmentable images. Instead, we have to apply
 25 another method without segmentation step to analyze the object. Therefore, a
 method that can provide the automatic location of landmarks without segmen-
 tation could be interested.

This work concerns a method to automatically detect the landmarks on
 biological images without image processing techniques. The main idea consists
 30 of the designing and training a CNN [3] on a dataset with manual landmarks.
 The dataset includes the images which are taken from 293 beetles. For each
 beetle, the biologists have taken images of five parts: *left and right mandibles*,
head, *elytra*, and *thorax* (Fig. 1). All the images are presented in the RGB
 color model with two dimensions. Along with each image, a set of landmarks
 35 has been marked by experts which can be used as ground truth to evaluate the

predicted landmarks. During the experiments, the proposed network has been trained on the dataset by applying two strategies. In the first strategy, the network is trained from scratch on each dataset; while in the second strategy, the training process has been modified to include a fine-tuning [4] stage.

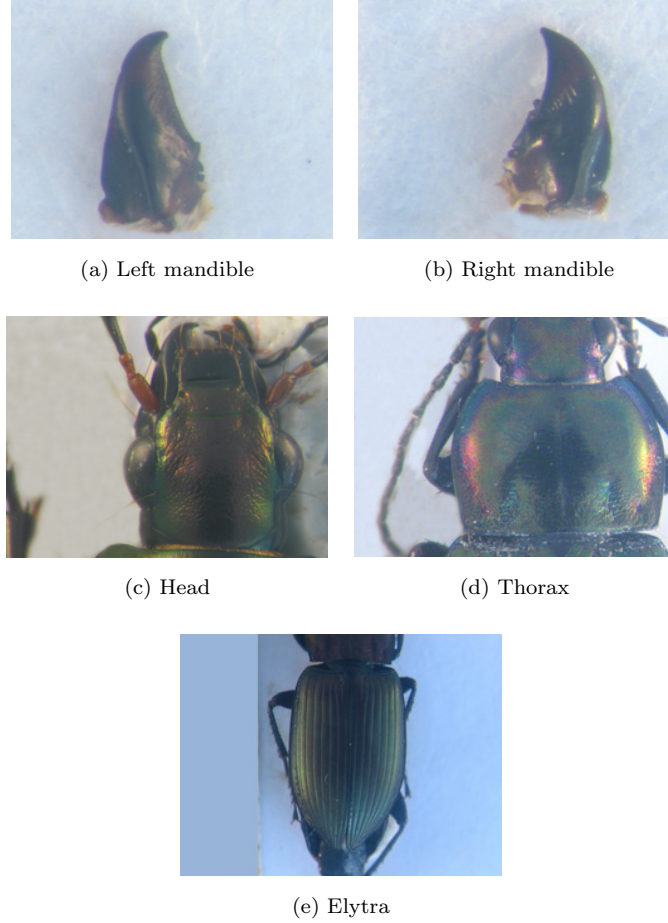


Figure 1: The anatomical images of beetle are taken into account.

40 The rest of this paper is organized as followed: Section ?? discusses the related works about determining the landmarks on 2D images. Section ?? shows the procedure of designing the network model. Section ?? gives another approaches to augment the dataset. The first experiment of the network on each dataset is

presented in Section ?? . Section ?? presents a modification of training process
45 and its experiment on datasets. Finally, the conclusion is given in Section ?? .

2. Related works

In geometric morphometry, landmarks (or points of interest) are important features to describe the shape. Depending on the complicity of the objects in the image, setting automatic landmarks can rely on different methods. When
50 the object can be segmented, the image processing techniques may applied to predict the landmarks. Lowe et al. [5] have proposed SIFT method to identify the keypoints on 2D images by extracting the distinctive features from the images. It is composed by four steps: (1) scale space extrema detection: a difference of Gaussian (DoG) function is applied to identify the interested points at all
55 scales; (2) keypoint localization: the keypoint candidates are localized and refined by deleting the points which have the low contrast or not localized along the edge; (3) orientation assignment: for each keypoint candidates, the orientation and gradient magnitude are computed by considering their 4-neighborhoods; (4) keypoint descriptor are computed for each keypoint from its orientation and
60 gradient magnitude. From the descriptors of the keypoints, they can be used to find the corresponding points between two images. SURF is another method which has been proposed by Herbert Bay et al. [6]. The SURF algorithm is the same principles with SIFT but details in each step are different. This algorithm mainly has three steps: (1) keypoints detection, (2) local neighborhood
65 description and (3) matching. Different with SIFT, SURF uses a blob detector base on the Hessian matrix $\begin{bmatrix} \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot \end{bmatrix}$ to find the keypoints. The Hessian matrix is used as a measure of local change around the point and chooses the points where this determinant is maximal. Then, the descriptors are computed around the key points by describing the intensity distribution of keypoint's neighborhoods.
70 The matching points from different images are obtained by comparing the descriptors of the key points. Palaniswamy et al. [7] have proposed a method to automatically detect the landmarks on 2D images of *Drosophila* wings (Fig. ??).

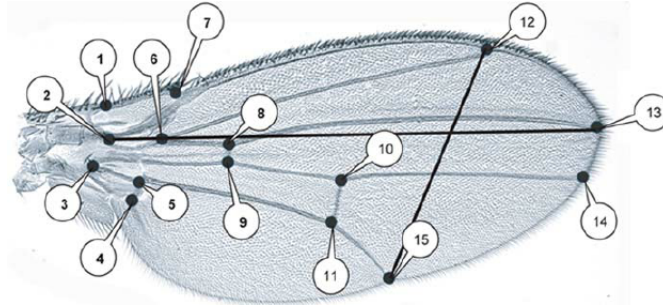


Figure 2: A Drosophila wing and its landmarks

The method is mainly based on probabilistic Hough Transform. It includes four steps: (1) features detection of the fly wing structure (segmentation); (2) using pairwise geometric histogram (PGH) to record the compact invariant shape descriptor; (3) estimating the global pose of wing using the probabilistic Hough transform; (4) and finally a template matching is applied to refine the correctly of individual features.

In recent years, deep learning [8] is known as a solution for the tasks in computer vision, especially for image analysis. Deep learning has been introduced in the middle of the previous century for artificial intelligence application but it has encountered several problems to take real-world cases. Luckily, the improvement of computing capacities, both in memory size and computing time with GPU programming, has opened a new perspective for deep learning. Many deep learning architectures have been proposed to solve the problems of classification [9, 10], image recognition [11, 12, 13], speech recognition [14, 15], language translation [16, 17], Using deep learning, specifically CNN, to predict the landmarks on 2D images has achieved better results even if the images that can not segment. Yi Sun et al. [18] have proposed a cascaded CNNs to predict the facial points on the human face. Their model includes the networks which have separated into three levels of the cascade. The networks recognize the human face from the global to the local view to increasing the accuracy of predicted key points. Zhanpeng Zhang et al. [19] proposed a *Tasks-Constrained Deep Convolutional Network* to optimize facial landmarks detection. Their model detected

the facial landmarks with a set of related tasks such as head pose estimation, gender classification, age estimation, or facial attribute inference. Cintas et al. [2] has introduced a network to predict the landmarks on human ears (Fig. ??). After training, the network has the ability to detect 45 landmarks on human ears.

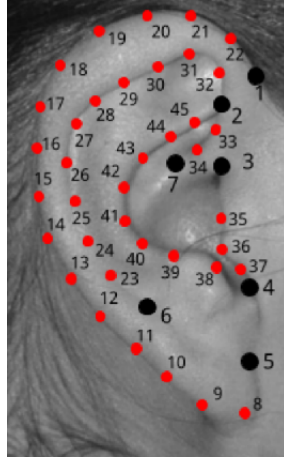


Figure 3: Landmarks on human ear in study of Cintas et al. [2]

As an association with the biologist, we study to develop an automatic method for predicting the landmarks on beetle's anatomical (Fig. ??). As we can see in this section, the methods for landmarking can be divided into two groups by considering the techniques that they have used. Most of the methods in the first group choose the image processing techniques while other methods are used deep learning for landmarking. In a previous work [20], we have applied a series of algorithms to detect the landmarks automatically on beetles mandibles which are considered as the easied objects to segment (with an quality enough good for our need). In that work, the landmarks have been detected by registering two segmentations of images and then, using SIFT descriptor to refine the location of predicted landmarks. After the experiment, we have obtained good enough results on mandibles. Unfortunately, we have observed that the method did not provide good results when the segmentation is not precise,

i.e. on thorax or elytra images. This is explained why we have turned the automatically landmarking into another stage without any segmentation step. Using
115 CNN for landmarking seems that a good choice for un-segmentable images.

3. Network architectures designing

In the process, we have tried three network models before deciding the final architecture for detecting the landmarks on beetle images. Like other CNN models, we have employed the classical layers to construct the models, i.e.,
120 convolutional layers, maximum pooling layers, dropout layers and full-connected layers.

The first architecture is very classical one, it receives an image with the size of $(1 \times 192 \times 256)$ as the input. Then, the network consists on three repeated strucutre of a convolutional layers followed by a maximum pooling layers. Most
125 CNNs, the hyperparameters of convolutional layers have been set to increase the depth of the images from the first layer to the last layer. That is reflected in the setting of the number of filters at each convolutional layer. So, the depths of convolutional layers increase from 32, 64, and 128 with different size of the kernels: (3×3) , (2×2) and (2×2) , respectively. Inserting pooling layers after
130 a convolutional layers is a common periodcally. The pooling layer effects to progressively reduce the spatial size of the representation to reduce the number of parameters, computation in the network, and it also controls over-fitting. The operations of pooling layers independent on every depth slice of the input. The most common form is a pooling layer with filters of size (2×2) and a stride
135 of 2. It downsamples every depth by 2 along width and height of the input. Therefore, all the kernels of maximum pooling layers have the same size of (2×2) with a stride of 2 as usual. At the end of the model, three full-connected layers have been added to extract the global relationship between the features and to procedure the outputs. The first of two full-connected layers are set to non-
140 linearity to make sure these nodes interact well and take into account all possible dependencies at the feature level. The outputs of the full-connected layers

are 500, 500 and 16. The output of the last full-connected layer corresponds to the coordinates (x and y) of 8 landmarks which we would like to predict. Fig. 4 shows details of the first model: The orange rectangles represent for convolutional layers while the yellow rectangles represent for maximum pooling layers and three full-connected layers with their parameters are presented at the end of the model.

145

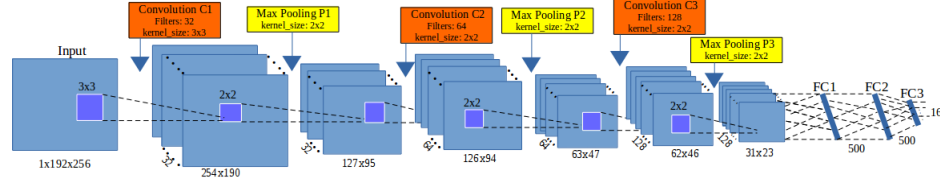


Figure 4: The architecture of the first model

The second architecture is modified from the first model. The layers are kept the same as the first one but the outputs of the first of two full-connected layers are changed from 500 (in the first model) to 1000 (Fig. 5). Increasing the value at full-connected layers is hoping to obtain more features from convolutional layer and to prevent the over-fitting.

150

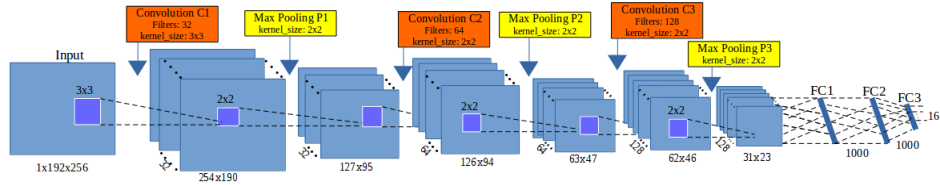


Figure 5: The architecture of the second model

To build the third architecture, we have used the definition of *elementary block*. An elementary block is defined as a sequence of convolution (C_i), maximum pooling (P_i) and dropout (D_i) layers. This significantly reduces overfitting and gives major improvements over other regularization methods [21]. The idea of dropout is to include some variations between different runs. During training phase, dropout samples are done from an exponential number of different

155

“thinned” network. At test phase, it is easy to approximate the effect of averaging the prediction of all thinned networks by simply using a single unthinned network with smaller weights. So, we have modified the architecture by combining some *elementary blocks*. Fig. 6 illustrates the layers in the third architecture. For our purpose, we have assembled **3 elementary blocks**. The parameters for each layer in each elementary block are as below, the list of values follows the order of elementary blocks ($i = [1..3]$):

- CONV layers:
 - Number of filters: 32, 64, and 128
 - Kernel filter sizes: (3×3) , (2×2) , and (2×2)
 - Stride values: 1, 1, and 1
 - No padding is used for CONV layers
- POOL layers:
 - Kernel filter sizes: (2×2) , (2×2) , and (2×2)
 - Stride values: 2, 2, and 2
 - No padding is used for POOL layers
- DROP layers:
 - Probabilites: 0.1, 0.2, and 0.3

Three full-connected layers (FC) are kept the same as the second architecture: FC1 and FC2 have 1000 outputs, the last full-connected layer (FC3) has 16 outputs. As usual, a dropout layer is inserted between FC1 and FC2 with a probability equal to 0.5.

The core of neural network is training over iteration. There are many ways to optimize the learning algorithm, but gradient descent [22] is currently a good choice to establish the way of optimizing the loss in neural network. The core idea is following the gradient until we statify with the results will remain the same. So, we have chosen gradient descent in the backward phase to update the

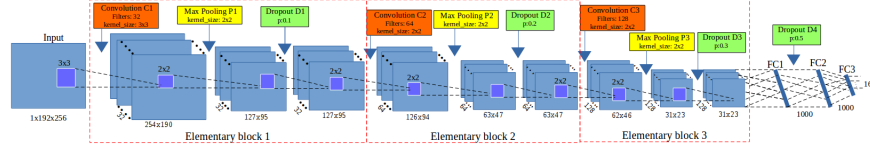


Figure 6: The architecture of the third model

values of learnable parameters and to increase the accuracy of the network. The networks are designed with a small sharing learning rate and a momentum. The learning rate is initialized at 0.03 and stopped at 0.00001, while the momentum is updated from 0.9 to 0.9999. Their values are updated over training time to fit with the number of epochs ². The implementation of the architectures have been done on Lasagne framework [23] by Python.

4. Data augmentation

A characteristic of machine learning and deep learning is using a volume dataset to train the model. Of course, we are not always have enough data for training in practice. One way to solve this problem is to create the fake data from real data and to add it to the training set. Dataset augmentation has been a particularly effective technique for a specific problem. For example, in images classification problem, the operations like translating, rotating or scaling the images have also effective. The fake images may be generated by translating (rotating or scaling) in each direction. Besides, injecting noise in the input can also see as a form of data augmentation.

Our dataset includes 293 images of beetles (for each anatomical part). All the images are taken with the same camera in the same condition with a resolution of (3264×2448) . Each image has a set of manual landmarks provided by biologists, i.e, each thorax has 8 landmarks, each head has 10 landmarks. Applying CNNs to train each part with a small number of images to reach good results is impossible. So, we need to augment the dataset before training

²An epoch is a single pass through the full training set

the networks. Firstly, we have found that the original solution of the images
 (3264 \times 2448) are heavy for the neural network. For performance considera-
 210 tions, in most of CNNs [2, 3, 18], the size of the input is limited to (256 \times 256)
 pixels, so we have decided to down-sampling the images to a new resolution
 (256 \times 192) (to respect the ratio between x and y). Of course, the coordinates
 of manual landmarks have been also scaled to fit with the new resolution of
 the images. In usual way, the transformations have been used to augment the
 215 dataset (i.e rotation, translation, . . .) but the analysis of image by CNN is most
 often translation and rotation invariant. Therefore, two other procedures have
 been imaged to increase the number of images in the dataset (256 \times 192).

The first procedure is to change the value of a color channel in the original
 image to generate a new image. According to that, a constant is added to one
 220 of the RGB channels each time it is used for training. Each constant is sampled
 in a uniform distribution $\in [1, N]$ to obtain a new value caped at 255. For
 example, Fig. 7 shows an example when we added a constant $c = 10$ to each
 channel of an original image. Following this way, we can generate three version
 from an image.

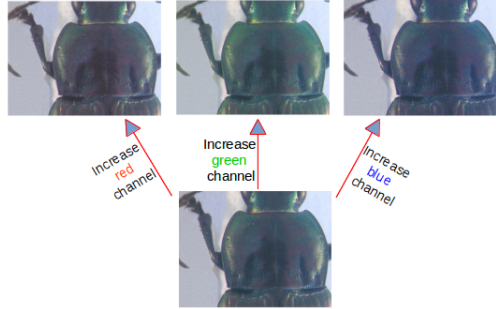


Figure 7: A constant $c = 10$ has been added to each channel of an original image

225 In the second procedure, we have applied the opposite procedure to the first
 one. Instead of adding the value, we separate the channels of RGN into three
 gray-scale images as the network works on single channel images (Fig. 8). At
 the end of the processes, we are able generate six versions from an original

image. In total, we have $293 \times 7 = 2051$ images for each anatomical part of
 230 beetle (an original image and six generated images). However, we have not used
 all images for training and validation. So, we have chosen 260 original images
 and their generations (1820 images) of each dataset for training and validation
 processes, the remaining images (33 original images) are used for test process.

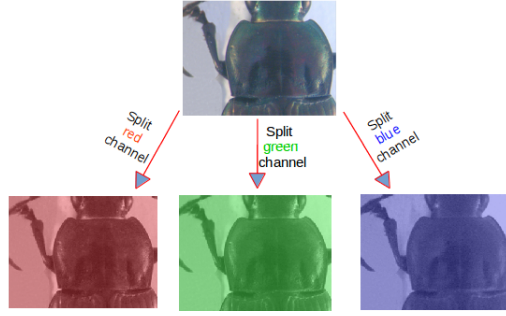


Figure 8: Three channels (red, green, blue) are separated from original image

In practical, to obtain a fast convergence during the computing, it is useful
 235 to normalize the brightness of the images to $[0, 1]$ instead of $[0, 255]$ and the
 coordinates of the landmarks have been also normalized [22].

5. Experiments and results

Before widely applying to all anatomical parts, we have firstly tried with
 thorax part to evaluate the performance. The networks have been trained in
 240 5,000 epochs on Ubuntu machine by using NVIDIA TITAN X cards. The set
 of images that used for training and validation are merged together. During
 the training, the images are chosen randomly from the dataset with a ratio of
 60% for training and 40% for validation. The training step takes into account
 a pair of information (*images, manual landmarks coordinates*) as training data.
 245 In the context of deep learning, landmark prediction can be seen as a regression
 problem. So, we have used Root Mean Square Error (RMSE) to compute the
 loss of implemented architectures.

At the test phase, images without landmarks are given to the trained network

to produce output coordinates of the predicted landmarks. The results then
 250 evaluated by comparing with the manual landmarks coordinates provided by
 biologists which have been seen as ground truth. Fig. 9 shows the training
 errors and the validation errors during traning phase of the first architecture.
 The blue curve presents the RMSE errors of training process, the green curve
 presents the validation errors. Clearly, over-fitting has appeared in the first
 255 model. The training losses are able to decrease but the validation losses are
 stable. In the second model (section ??), we have modified the parameters of
 full-connected layers to prevent the over-fitting but it seems that this solution
 is still not suitable. The over-fitting is also appeared as the first model.

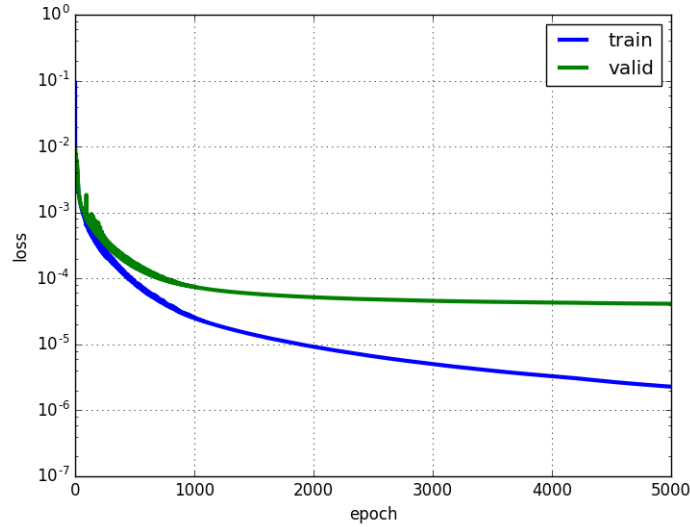


Figure 9: The training and validation losses of the first model

Then, we have continued to train the third model on the same dataset of
 260 thorax images. Fig. 10 illustrates the losses during the training of the third
 model. Like the previous figure (Fig. 9), the blue line is training losses, the
 green line is validation losses. In the opposite with two previous models, the
 losses are different (far) from the beginning but after several epochs, the values
 become more proximate and the over-fitting problem has been solved. This

265 proves that adding dropout layers to build the elementary blocks have been effects to prevent over-fitting and contributory improve the accuracy of the model. *So, we have decided to keep the architecture of the third model for our landmarking problem.*

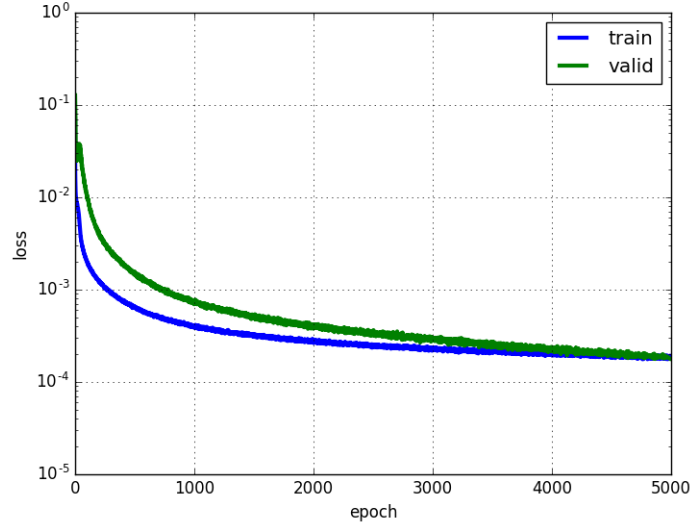


Figure 10: The training and validation losses of the third model

In order to have the predicted landmarks for all thorax images (instead of
 270 only 33 images), we have applied *cross-validation* to choose the test images, called *round*. For each time, we have chosen a different fold of 33 images as testing images, the remaining images are used as training and validation images (293/33 \approx 9 rounds). Following that, the network will be trained with different datasets, then the trained model will be used to predicted the lanmarks on the
 275 images in the corresponding test set. Table. 1 resumes the losses of 9 rounds when we trained the third model on thorax images.

To evaluate the coordinates of predicted landmarks, the correlation metrics have been computed the correlation between the manual landmarks and their corresponding predicted one. Table. 2 shows the correlation scores of 3 metrics
 280 (using *scikit-learn* [24]), i.e, coefficient of determination (r^2), explained variance

Round	Training loss	Validation loss
1	0.00018	0.00019
2	0.00019	0.00021
3	0.00019	0.00026
4	0.00021	0.00029
5	0.00021	0.00029
6	0.00019	0.00018
7	0.00018	0.00018
8	0.00018	0.00021
9	0.00020	0.00027

Table 1: The losses during training the third model on thorax images

(EV), and Pearson correlation. All of three metrics have the same possibility. The best score is 1.0 if the correlation data is good, lower values are worse. It means that our predicted coordinates are very close with the ground truth. However, the measure is not enough good to provide a useful result to biologists. Moreover standing on the side of image processing, we are looking forward to seeing the predicted coordinates than the statistical results.

Metric	r^2	EV	Pearson
Score	0.9952	0.9951	0.9974

Table 2: Correlation scores between manual landmarks and predicted landmarks

The main goal of computing is to predict the coordinates of landmarks, so the distances (in pixels) between the coordinates of manual landmarks and corresponding predicted landmarks have been taken into account on all images. Then, the average of distances are computed by landmarks. Table. 3 shows the average distances by landmarks on all images of thorax dataset. With images of resolution 256×192 , we can consider that an error of 1% corresponds to 2 pixels that could be an acceptable error. Unhappily, our results exhibit

average distance of 4 pixels in the best case, landmark 1 and more than 5
 295 pixels, landmark 6. Other error distances are more than 2% pixels.

Landmark	Distance (in pixels)
1	4.002
2	4.4831
3	4.2959
4	4.3865
5	4.2925
6	5.3631
7	4.636
8	4.9363

Table 3: The average distances on all images per landmark on thorax images.

Fig. 11 shows the distribution of the distances on the first landmark of all
 images. The accuracy based on the distance in each image can be separated into
 three spaces: the images have the distance less than average value (4 pixels):
 56.66%; the images have the distance from average value to 10 pixels (average
 300 distance plus standard deviation): 40.27%; and the images have the distance
 greater than 10 pixels: 3.07%.

To illustrate this purpose, Fig. 12 shows the predicted landmarks on two
 test images. One can note that even some predicted landmarks (Fig. 12a) are
 closed to the manual ones, in some case (Fig. 12b) the predicted ones are far
 305 from the expect results. The next step has been dedicated to the improvement
 of these results.

From the success of the third architecture on thorax dataset, we apply the
 same procedures (data augmentation, training,...) on other parts of beetle:
left and right mandibles, elytra and head. However, we have modified the num-
 310 ber of the last full-connected layer to adapt with each dataset before training.
 Arcoding, the values at the last full-connected layer are set to 32, 36, 22 and
 20 outputs corresponds to 16, 18, 11 and 10 landmarks on left mandible, right

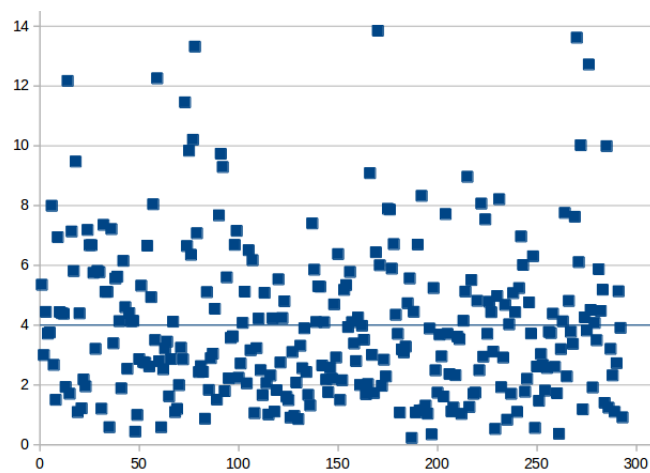


Figure 11: The distribution of the distances on the first landmark. The blue line is the average value of all distances.

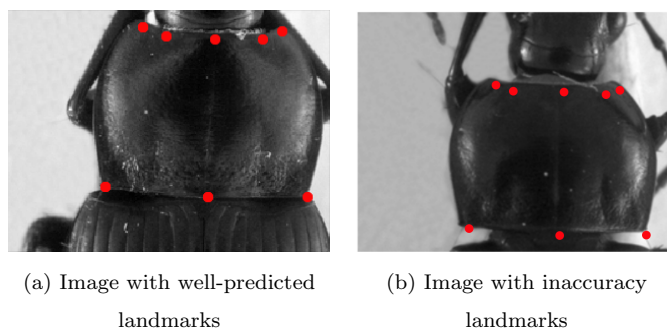


Figure 12: The predicted landmarks, in red, on the images in test set.

mandible, elytra and head, respectively. Of course, we have also applied *cross-validation* to select testing data to get all predicted landmarks for all images in each dataset. Then, the quality of predicted landmarks are evaluated by comparing with the corresponding manual landmarks (distance computation). Table. 4, 5, 6 and 7 show the average distances on each landmark of elytra, head, left and right mandibles anatomical, respectively. Comparing with the average distances on the thorax part, it seems that the proposed architecture provides more accurate predictions on the elytra dataset, but the results are opposite on head dataset.

Landmark	Distance (in pixels)
1	3.8669
2	3.9730
3	3.9166
4	3.8673
5	4.0151
6	4.8426
7	5.2125
8	5.4685
9	5.2692
10	4.0709
11	3.9896

Table 4: The average distance on all images per landmark on **elytra** images

Landmark	Distance (in pixels)
1	5.5280
2	5.1609
3	5.3827
4	5.0345
5	4.8393
6	4.4516
7	4.7937
8	4.5322
9	5.1412
10	5.0564

Table 5: The average distance on all images per landmark on **head** images

6. Resulting improvement by fine-tuning

The proposed network (third architecture) presented in Section ?? have been trained from scratch on three datasets (thorax, elytra, and head). At the first step, the network was able to predict the landmarks on the images. But as

Landmark	Distance (in pixels)
1	9.1267
2	6.7198
3	6.8704
4	6.7719
5	7.1250
6	6.9441
7	7.3158
8	7.4142
9	7.5846
10	7.6349
11	7.6873
12	8.4248
13	7.9983
14	7.4919
15	7.7903
16	8.5198

Table 6: The average distance on all images per landmark on **left mandible** images

Landmark	Distance (in pixels)
1	9.4981
2	7.1657
3	7.2420
4	7.0436
5	7.1599
6	7.5699
7	7.4251
8	7.6636
9	7.7906
10	8.0197
11	8.3140
12	8.1564
13	8.8879
14	9.1842
15	8.7875
16	8.3141
17	8.2866
18	8.8928

Table 7: The average distance on all images per landmark on **right mandible** images

we have discussed, even if the strength of the correlation seems to validate the results, when we display the predicted landmarks on the images, the quality of the predicted coordinates are also not enough precise, and the average error are also still high (of course, we have the distances are higher than the average
330 distances).

In order to reach more acceptable results for biologists, we have broadened model with another step of deep learning: **transfer learning**. That is a method enables to re-uses the model developed for a specific task/dataset to lead another task (called *target task*) with another dataset. This process allows rapid process
335 and improves the performance of the model on the target task [25]. The most popular example has been given with the project ImageNet of Google [26] which has labeled several millions of images. The obtained parameter values which can be used in another context to classify another dataset, eventually very different dataset [27]. The name of this procedure to re-use parameters to pretrain a
340 model is currently called **fine-tuning**.

Fine-tuning does not only replace and retrain the model on the new dataset but also fine-tunes the weights of a trained model by continuing the backpropagation. Unfortunately, some rapid tests have shown that re-using ImageNet features has not been relevant for our application. We have designed a way to
345 reproduce the method with our own data. It is worth noting that of course the size of data to pre-train has drastically decreased. For our pre-training step, the network has been trained on the whole dataset including the images of three parts of beetle *i.e thorax, elytra and head*. Then, the trained model has been used to fine-tune and test on each dataset.

350 6.1. Data preparation and training

The images training dataset is combined from the images of three sets: *thorax, elytra, and head* (after augmentation). When applying the training from the scratch, we have used cross-validation to select the data (9 folds). It means that for each dataset, we have some different training data and corresponding
355 testing data. So, the images that use to train the model are just select from one

of the folds in each dataset. Specifically, we have taken 1,820 images of each part. In total, it includes 5,460 images ($260 \times 7 \times 3$).

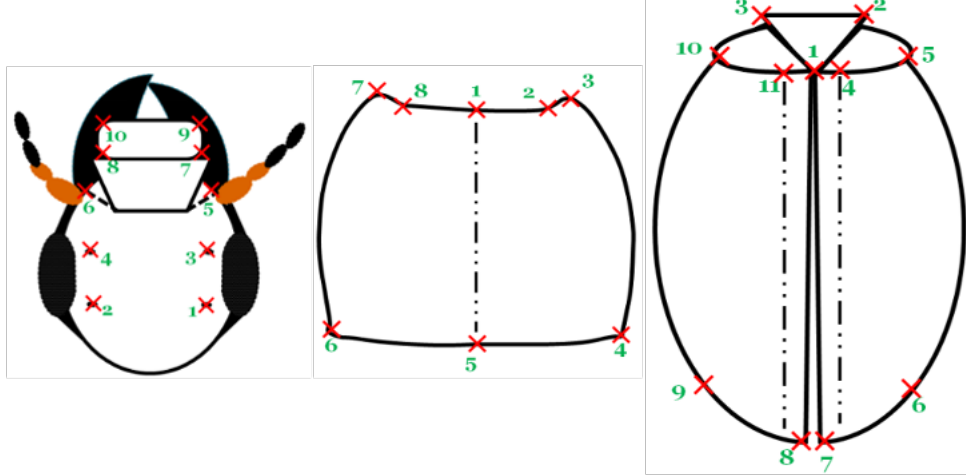


Figure 13: A presentation of head, thorax and elytra part with corresponding manual landmarks

However, another problem has been appeared when we combined the images from different dataset. That is the different number of landmarks on each part: 8 landmarks on thorax part, 10 landmarks on head part, and 11 landmarks on elytra part. Fig. 13 shows the position of the landmarks on each part. Because of the meaning of landmarks on each anatomical part for biologists, we cannot insert the landmarks arbitrary. So, we have decided to keep the landmarks on thorax as reference and to remove the landmarks on elytra and head parts instead of adding. We kept 8 (landmarks) as a reference number, then we have removed the supernumerary when it is unnecessary. Specifically, we have removed three landmarks on the elytra part (1^{st} , 6^{th} , 9^{th}), and two landmarks on the head part (5^{th} , 6^{th}).

During training the proposed architecture on the combined dataset, the parameters of the network (learning rate, momentum, ...) are kept the same as training from scratch but the number of epochs are increased to 10,000 instead of 5,000 to achieve better learning on the parameters (weights). Additional,

we have shuffled the training set. Because the neural network learns the faster from the most unexpected sample. It is advisable to choose a sample at each iteration that is the most unfamiliar to the system. Shuffling the examples will be helped the model works with different anatomical parts rather than the same anatomical samples in each training time.

6.2. Fine-tuning on each dataset

The combined dataset then used to train the third architecture with 16 outputs (8 landmarks). Then, the trained model is used to fine-tuning on each dataset. To compare the result with the previous one, we have also fine-tuned the trained model with different dataset by applying cross-validation. Firstly, we consider on the losses during fine-tuning. *For example*, Table. 8, 10, 12 show the losses during fine-tuning on thorax, elytra, and head dataset, respectively. Comparing with the losses when we trained the model from scratch, *i.e.* on thorax, the validation losses of all round in this scenario have been significantly decreased (around 40%).

On each part, the landmarks are predicted on the test images. Then, the average error based on the distances between predicted and corresponding manual landmarks have been also computed. Table. 9, 11, and 13 show the average distances per landmark on thorax, elytra, and head dataset, respectively. **From scratch** columns remind the previously average distances. **Fine-tune** columns present the new average distances after applying fine-tuning on each part. It is clearly shown that the result of predicted landmarks with the help of fine-tuning is more precise than training from scratch. For example, the average distance at each landmark has decreased. Additional, when comparing the average distances between two processes, the worse case of fine-tuning process is still better than the best case of training from scratch.

In other view, Figs. 14, 15, 16 shows the comparison of the average distance distribution on each dataset in two procedures (from scratch and fine-tuning). In which:

Round	Training loss	Validation loss
1	0.00019	0.00009
2	0.00018	0.00010
3	0.00018	0.00010
4	0.00019	0.00008
5	0.00019	0.00009
6	0.00018	0.00008
7	0.00019	0.00008
8	0.00018	0.00006
9	0.00018	0.00009

Table 8: The losses during fine-tuning model on thorax dataset

Round	Training loss	Validation loss
1	0.00020	0.00006
2	0.00020	0.00006
3	0.00021	0.00006
4	0.00021	0.00006
5	0.00019	0.00006
6	0.00019	0.00006
7	0.00018	0.00005
8	0.00020	0.00006
9	0.00019	0.00006

Table 10: The losses during fine-tuning model on elytra dataset

#LM	From scratch	Fine-tune
1	4.00	2.49
2	4.48	2.72
3	4.30	2.65
4	4.39	2.77
5	4.29	2.49
6	5.36	3.05
7	4.64	2.68
8	4.94	2.87

Table 9: The average error distance per landmark of two processes on thorax images

#LM	From scratch	Fine-tune
1	3.87	2.34
2	3.97	2.27
3	3.92	2.27
4	3.87	2.25
5	4.02	2.27
6	4.84	3.14
7	5.21	3.14
8	5.47	3.29
9	5.27	3.42
10	4.07	2.49
11	3.99	2.30

Table 11: The average error distance per landmark of two processes on elytra images

Round	Training loss	Validation loss
1	0.00022	0.00007
2	0.00022	0.00007
3	0.00023	0.00008
4	0.00023	0.00008
5	0.00022	0.00008
6	0.00023	0.00007
7	0.00022	0.00008
8	0.00023	0.00007
9	0.00024	0.00008

Table 12: The losses during fine-tuning model on head dataset

#LM	From scratch	Fine-tune
1	5.53	3.03
2	5.16	2.94
3	5.38	2.96
4	5.03	2.88
5	4.84	2.76
6	4.45	2.67
7	4.79	2.29
8	4.53	2.20
9	5.14	2.57
10	5.06	2.44

Table 13: The average error distance per landmark of two processes on head images

- **Blue** curves: present for the average distances on each landmarks when we train the model from scratch.
- **Orange** curves: describe for the average distance on each landmark when we fine-tune the trained model.
- **Green** curves: illustrate for the average distances **plus its standard deviation** on each landmark in fine-tuning case.

The fine-tuning process has improved the results of the proposed architecture on both 3 datasets: thorax, elytra and head. All the average distances are significantly decreased. Specially, the results have been improved $\approx 40.3\%$ on thorax, $\approx 39.8\%$ on elytra, and $\approx 46.4\%$ on head part based on considering the average distances per landmark. Addition, in the cases of thorax and head part, even if we plus the average distance and its standard deviation, the results are also less than the result when we trained the model from scratch.

To illustrate the final results, we display the distribution of the distances

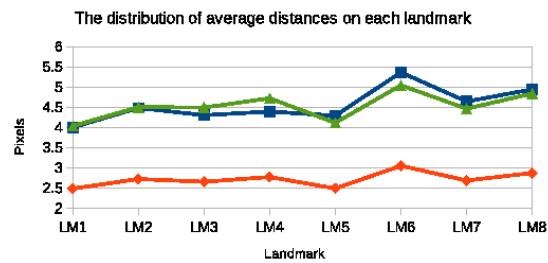


Figure 14: The distribution of average distances on each landmark of thorax part.

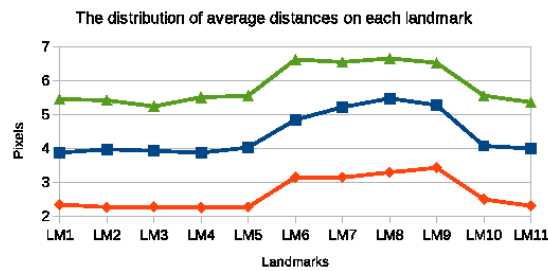


Figure 15: The distribution of average distances on each landmark of elytra part.

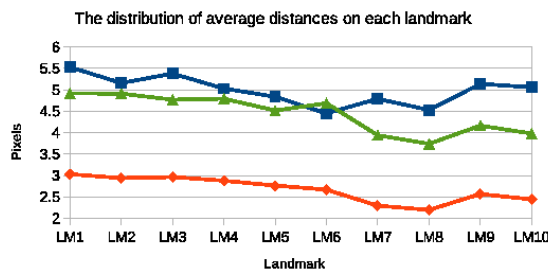


Figure 16: The distribution of average distances on each landmark of head part.

in both cases: the best and the worst results (resp. landmark 1 and 6 on thorax dataset) of three datasets (thorax, elytra, and head) in Fig. 17, 18 and 19, respectively. In these figures, the left images present for the results when we trained the model from scratch; while the right images shows the results after applying fine-tuning. Clearly, the results in the fine-tuning case have been improved significantly than training from scratch.

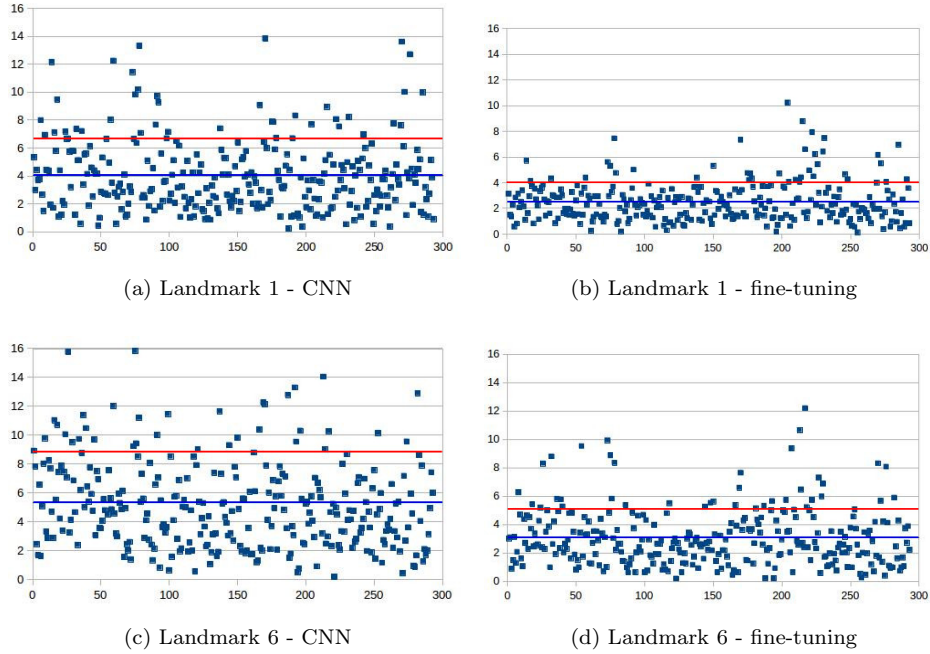


Figure 17: The distribution of distances on 1st and 6th landmarks of all images in two testing steps (CNN and fine-tuning) (on thorax dataset). The blue and red lines present the average distances and standard deviation values, respectively.

7. Conclusion

In this work, we have presented how to apply convolutional neural network to predict the landmark on 2D anatomical images of beetles. After testing several models, we have presented a convolutional neural network for automatic detection landmarks on anatomical images of beetles. The training and testing

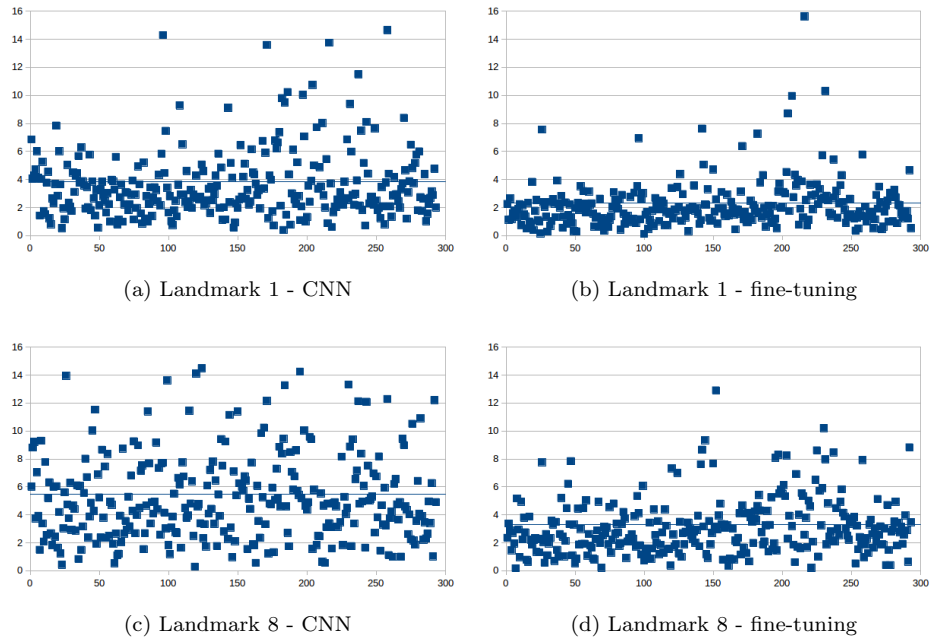


Figure 18: The distribution of distances on 1st and 8th landmarks of all images in two testing steps (CNN and fine-tuning) (on elytra dataset). The blue line presents the average distance value.

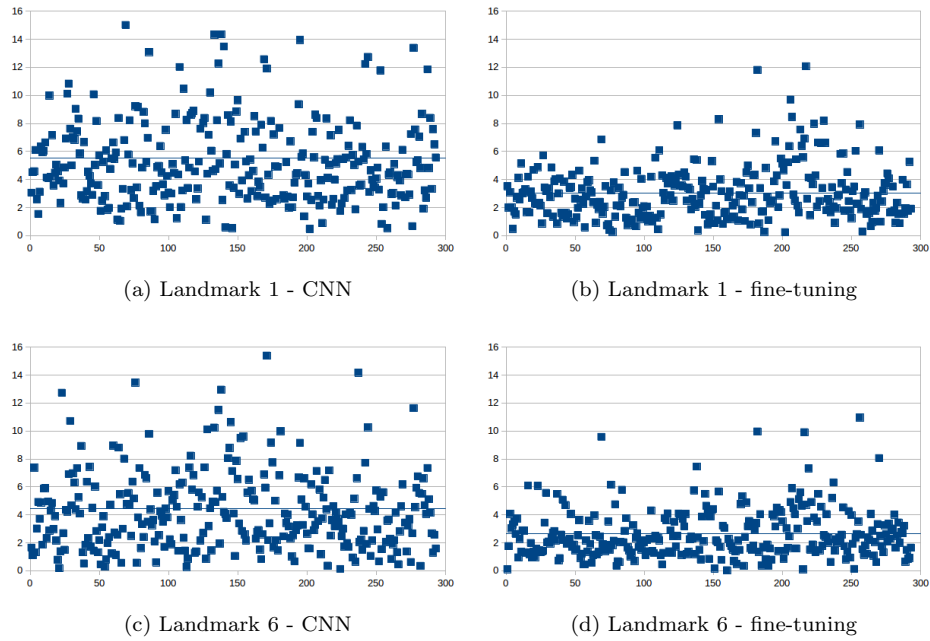


Figure 19: The distribution of distances on 1st and 6th landmarks of all images in two testing steps (CNN and fine-tuning) (on head dataset). The blue line presents the average distance value.

processes have been finished by using two strategies: *train from scratch* and *fine-tuning*.

In our case, the size of dataset is limited. Therefore, we have applied the
430 image processing techniques to augment dataset. The predicted landmarks have
been evaluated by calculating the distance between manual landmarks and cor-
responding predicted landmarks. Then, the average of distance errors on each
landmarks has been considered.

The results have been shown that using the convolutional network to predict
435 the landmarks on biological images leads to satisfying results without need for
segmentation step on the object of interest. The best set of estimated landmarks
has been obtained after a step of fine-tuning using the whole set of images that
we have for the project, i.e. about all beetle parts. The quality of prediction
allows using automatic landmarking to replace the manual ones.

440 References

- [1] A. Sonnenschein, D. VanderZee, W. R. Pitches, S. Chari, I. Dworkin,
Supporting material and data for "an image database of drosophila
melanogaster wings for phenomic and biometric analysis" (2015). doi:
10.5524/100141.
- 445 [2] C. Cintas, et al., Automatic ear detection and feature extraction using geo-
metric morphometrics and convolutional neural networks, IET Biometrics
6 (3) (2016) 211–223.
- [3] Y. LeCun, K. Kavukcuoglu, C. Farabet, Convolutional networks and appli-
cations in vision, in: Circuits and Systems (ISCAS), Proceedings of 2010
450 IEEE International Symposium on, IEEE, 2010, pp. 253–256.
- [4] J. Yosinski, J. Clune, Y. Bengio, H. Lipson, How transferable are features
in deep neural networks?, in: Advances in neural information processing
systems, 2014, pp. 3320–3328.

- 455 [5] D. G. Lowe, Distinctive image features from scale-invariant keypoints, *International journal of computer vision* 60 (2) (2004) 91–110.
- [6] H. Bay, T. Tuytelaars, L. Van Gool, Surf: Speeded up robust features, in: *European conference on computer vision*, Springer, 2006, pp. 404–417.
- [7] S. Palaniswamy, N. A. Thacker, C. P. Klingenberg, Automatic identification of landmarks in digital images, *IET Computer Vision* 4 (4) (2010) 247–260.
- 460 [8] Y. LeCun, Y. Bengio, G. Hinton, Deep learning, *Nature* 521 (7553) (2015) 436–444.
- [9] A. Krizhevsky, I. Sutskever, G. E. Hinton, Imagenet classification with deep convolutional neural networks, in: *Advances in neural information processing systems*, 2012, pp. 1097–1105.
- 465 [10] D. Ciregan, U. Meier, J. Schmidhuber, Multi-column deep neural networks for image classification, in: *Computer Vision and Pattern Recognition (CVPR)*, 2012 IEEE Conference on, IEEE, 2012, pp. 3642–3649.
- [11] C. Szegedy, et al., Going deeper with convolutions, *Cvpr*, 2015.
- [12] C. Farabet, C. Couprie, L. Najman, Y. LeCun, Learning hierarchical features for scene labeling, *IEEE transactions on pattern analysis and machine intelligence* 35 (8) (2013) 1915–1929.
- 470 [13] H. Li, Z. Lin, X. Shen, J. Brandt, G. Hua, A convolutional neural network cascade for face detection, in: *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2015, pp. 5325–5334.
- 475 [14] T. Mikolov, et al., Strategies for training large scale neural network language models, in: *Automatic Speech Recognition and Understanding (ASRU)*, 2011 IEEE Workshop on, IEEE, 2011, pp. 196–201.
- [15] G. Hinton, et al., Deep neural networks for acoustic modeling in speech recognition: The shared views of four research groups, *IEEE Signal Processing Magazine* 29 (6) (2012) 82–97.
- 480

- [16] S. Jean, K. Cho, R. Memisevic, Y. Bengio, On using very large target vocabulary for neural machine translation, arXiv preprint arXiv:1412.2007.
- [17] I. Sutskever, O. Vinyals, Q. V. Le, Sequence to sequence learning with neural networks, in: Advances in neural information processing systems, 2014, pp. 3104–3112.
- [18] Y. Sun, X. Wang, X. Tang, Deep convolutional network cascade for facial point detection, in: Proceedings of the IEEE conference on computer vision and pattern recognition, 2013, pp. 3476–3483.
- [19] Z. Zhang, et al., Facial landmark detection by deep multi-task learning, in: European Conference on Computer Vision, Springer, 2014, pp. 94–108.
- [20] V. L. Le, M. Beurton-Aimar, A. Krahenbuhl, N. Parisey, MAELab: a framework to automatize landmark estimation, in: WSCG 2017, Plzen, Czech Republic, 2017.
URL <https://hal.archives-ouvertes.fr/hal-01571440>
- [21] N. Srivastava, G. E. Hinton, A. Krizhevsky, I. Sutskever, R. Salakhutdinov, Dropout: a simple way to prevent neural networks from overfitting., Journal of machine learning research 15 (1) (2014) 1929–1958.
- [22] Y. A. LeCun, et al., Efficient backprop, in: Neural networks: Tricks of the trade, Springer, 2012, pp. 9–48.
- [23] S. Dieleman, et al., Lasagne: First release. (Aug. 2015). doi:10.5281/zenodo.27878.
URL <http://dx.doi.org/10.5281/zenodo.27878>
- [24] P. et al, Scikit-learn: Machine learning in python, Journal of machine learning research 12 (Oct) (2011) 2825–2830.
- [25] L. Torrey, J. Shavlik, Transfer learning, Handbook of Research on Machine Learning Applications and Trends: Algorithms, Methods, and Techniques 1 (2009) 242.

- [26] J. Deng, et al., ImageNet: A Large-Scale Hierarchical Image Database, in: CVPR09, 2009.
- 510 [27] J. Margeta, et al., Fine-tuned convolutional neural nets for cardiac mri acquisition plane recognition, Computer Methods in Biomechanics and Biomedical Engineering: Imaging & Visualization 5 (5) (2017) 339–349. arXiv:<https://doi.org/10.1080/21681163.2015.1061448>, doi:10.1080/21681163.2015.1061448.
- 515 URL <https://doi.org/10.1080/21681163.2015.1061448>