

Cognizant Academy

truYum

Java Specification Document

Version 1.0

	Prepared By / Last Updated By	Reviewed By	Approved By
Name	Chandrasekaran Janardhanan	Vimalathithan Krishnan	Ramadevanahalli Lingachar, Shashidhara Murthy
Role	Learning Solution Designer	Learning Solution Architect	Learning Solution Lead
Signature			
Date	21 May 2019	23 May 2019	17 Jun 2019

Table of Contents

1.0	Introduction	4
1.1	Purpose of this document	4
1.2	Definitions & Acronyms	4
1.3	Project Overview	4
1.4	Scope	4
1.5	Intended Audience	4
1.6	Hardware and Software Requirement	4
1.7	Eclipse Project Configuration	5
2.0	Class Diagram	5
2.1	Model package	5
2.2	Util Package	6
2.2.1	DateUtil.java	6
2.3	Dao package	6
3.0	Design for View Menu Item List Admin (TYUC001)	9
3.1	Class Diagram	9
3.2	MenuItemDao.java	9
3.3	MenuItemDaoCollectionImpl.java	10
3.4	MenuItemDaoCollectionImplTest.java	10
4.0	Design for View Menu Item List Customer (TYUC002)	11
4.1	Class Diagram	11
4.2	MenuItemDao.java	12
4.3	MenuItemDaoCollectionImpl.java	12
4.4	MenuItemDaoCollectionImplTest.java	12
5.0	Design for Edit Menu Item (TYUC003)	13
5.1	Class Diagram	13
5.2	MenuItemDao.java	13
5.3	MenuItemDaoCollectionImpl.java	14
5.4	MenuItemDaoCollectionImplTest.java	14
6.0	Design for Add to Cart (TYUC004)	15
6.1	Class Diagram	15
6.2	CartDao.java	15
6.3	CartDaoCollectionImpl.java	16
7.0	Design for View Cart (TYUC005)	17
7.1	Class Diagram	17

7.2	CartDao.java	17
7.3	CartEmptyException.java	17
7.4	CartDaoCollectionImpl.java	18
7.5	CartDaoCollectionImplTest.java	18
8.0	Design for Remove Cart Item (TYUC006)	19
8.1	Class Diagram	19
8.2	CartDao.java	19
8.3	CartDaoCollectionImpl.java	20
8.4	CartDaoCollectionImplTest.java	20
9.0	Standards and Guidelines	21
9.1	Java	21
10.0	Change Log	22

1.0 Introduction

1.1 Purpose of this document

The purpose of this document is to define the Java class related implementation for truYum project.

1.2 Definitions & Acronyms

Definition / Acronym	Description

1.3 Project Overview

Refer truYum-use-case-specification.docx for understanding the functionality and features.

1.4 Scope

Creation of model and data access object classes for truYum application

1.5 Intended Audience

- Product Owner
- Scrum Master
- Application Architect
- Project Manager
- Test Manager
- Development Team
- Testing Team

1.6 Hardware and Software Requirement

1. Hardware Requirement:
 - a. Developer PC with 4GB Ram
2. Software Requirement
 - a. JDK 1.8

1.7 Eclipse Project Configuration

Find below the steps to configure Eclipse for truYum project.


1. Open Eclipse
2. File > New > Java Project
3. Enter “truYum” as project name
4. Click “Next” and “Finish”.
5. Create packages and Java source files in the “src” folder of the project

2.0 Class Diagram

The classes specified in this document are the primary Java classes that are required for implementation of truYum application. Since JDBC module is covered later, the actual database implementation details are postponed to the respective module. The classes in this specification are implemented with hardcoded values.

2.1 Model package

Following are the real world objects identified for truYum application. Menu Item refers to a menu item available for sale in truYum. Cart will represent customer's cart to hold the selected menu items. Refer the diagram below and create classes accordingly.

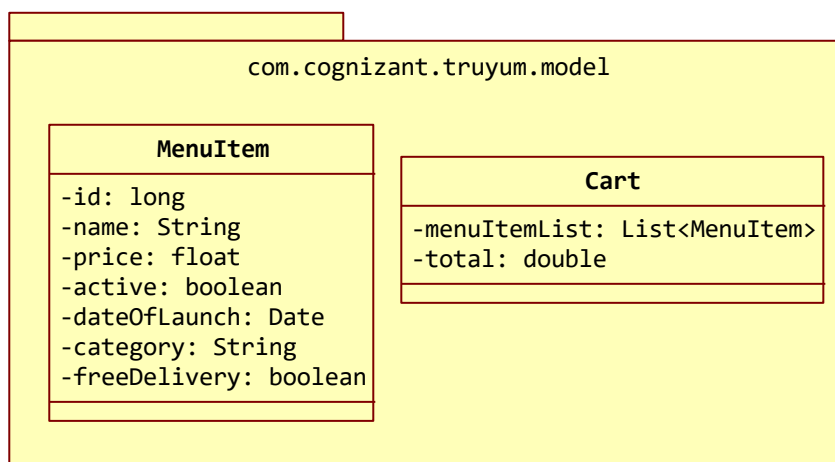


Guidelines for understanding the above class diagram:

1. “com.cognizant.truyum.model” represents the package

2. MenuItem and Cart are classes
3. The content within MenuItem are instance variables
4. The hyphen in each line represents private access specifier
5. For the sake of simplicity the constructors, getter and setter method are not included in the diagram. But it needs to be implemented in code. Code generation option in Eclipse can be used to generate code:
 - a. Constructor with option to set all instance variables
 - b. Getter and Setter method for each instance variable
 - c. Generate toString() method
 - d. Generate equals() method which checks for equality based on the 'id' attribute

2.2 Util Package

Common reusable classes and methods across truYum application will be included in this package.

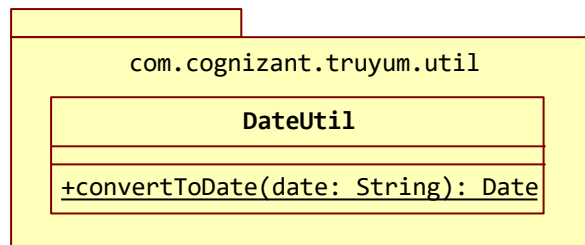

Guidelines for understanding the above class diagram:

1. “com.cognizant.truyum.util” represents the package
2. DateUtil is a class
3. Underline denotes static method.

2.2.1 DateUtil.java

convertToDate(date: String): Date


This method is used to convert date entered in a form to be converted into a Date object.

1. Using SimpleDateFormat and parse() method convert the input String in 'dd/MM/yyyy' format into java.util.Date type.

2.3 Dao package

This package contains the list of classes that will code to manage the data for truYum application. The methods in Dao classes will be tested using MenuItemDaoCollectionImplTest and CartDaoCollectionImplTest classes. The Dao interface classes will act as a contract for working with any database. In this

specification the implementation of MenuItemDaoCollectionImpl and CartDaoCollectionImpl will be Collection framework based implementation of Dao interfaces MenuItemDao and CartDao.

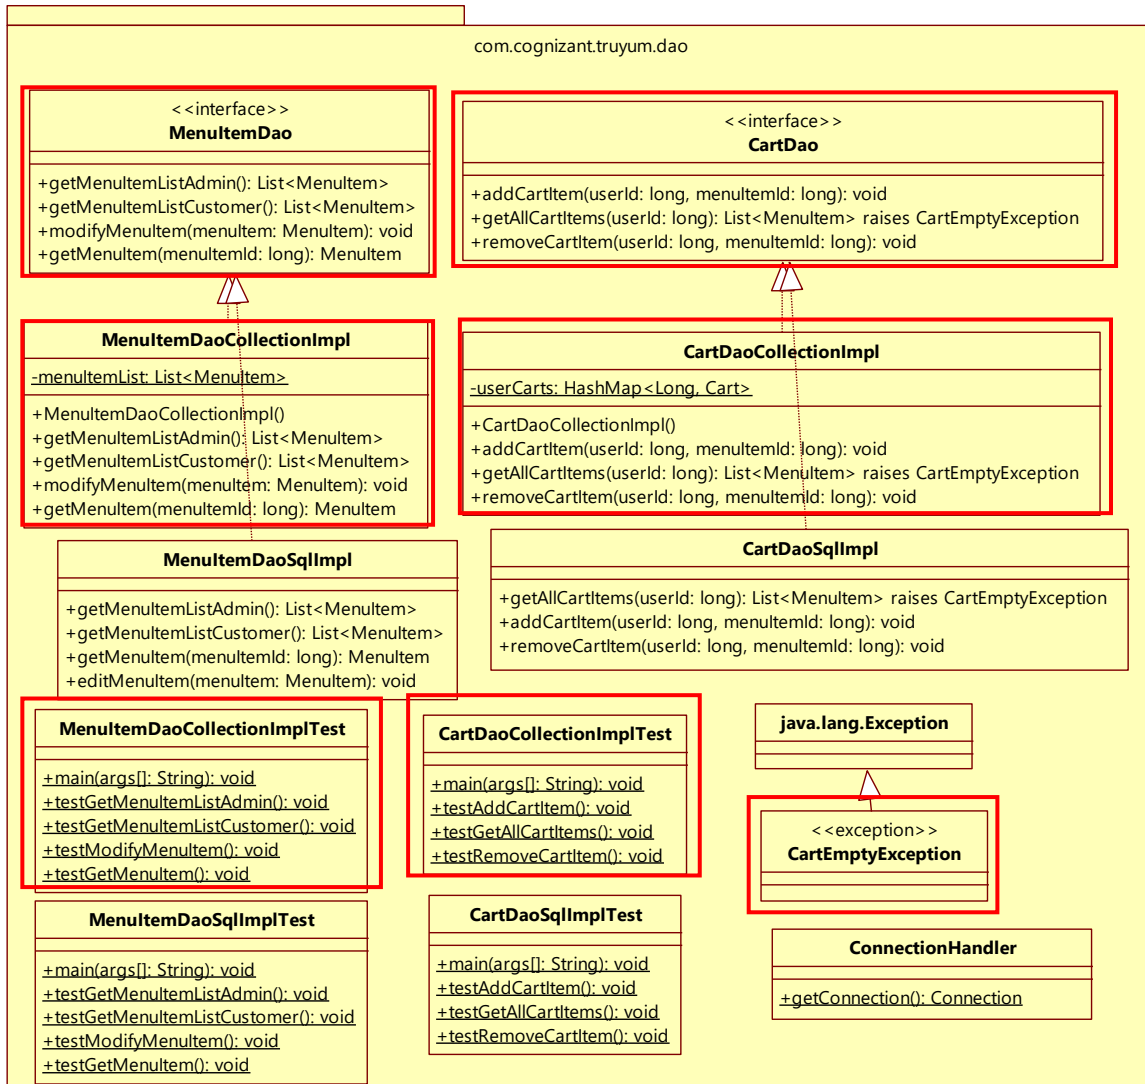

Guidelines for understanding the above class diagram:


1. Identify the package, classes, access modifiers, methods and static methods from the above diagram.
2. MenuItemDao and CartDao are interfaces
3. MenuItemDaoCollectionImpl and CartDaoCollectionImpl are implementation classes for the interfaces as denoted by the dotted arrow line.
4. MenuItemDaoCollectionImplTest and CartDaoCollectionImplTest are implementation classes for testing MenuItemDaoCollectionImpl and CartDaoCollectionImpl.
5. MenuItemDaoSqlImpl, CartDaoSqlImpl, MenuItemDaoSqlImplTest, CartDaoSqlImplTest classes will not be implemented in this module. Please ignore these classes for this module.

6. CartEmptyException is an exception class that extends exception.
7. Highlighted classes will be implemented in this module.

3.0 Design for View Menu Item List Admin (TYUC001)

3.1 Class Diagram

The below diagram denotes the methods that needs to be implemented for this use case. Method wise specification is defined after the diagram.

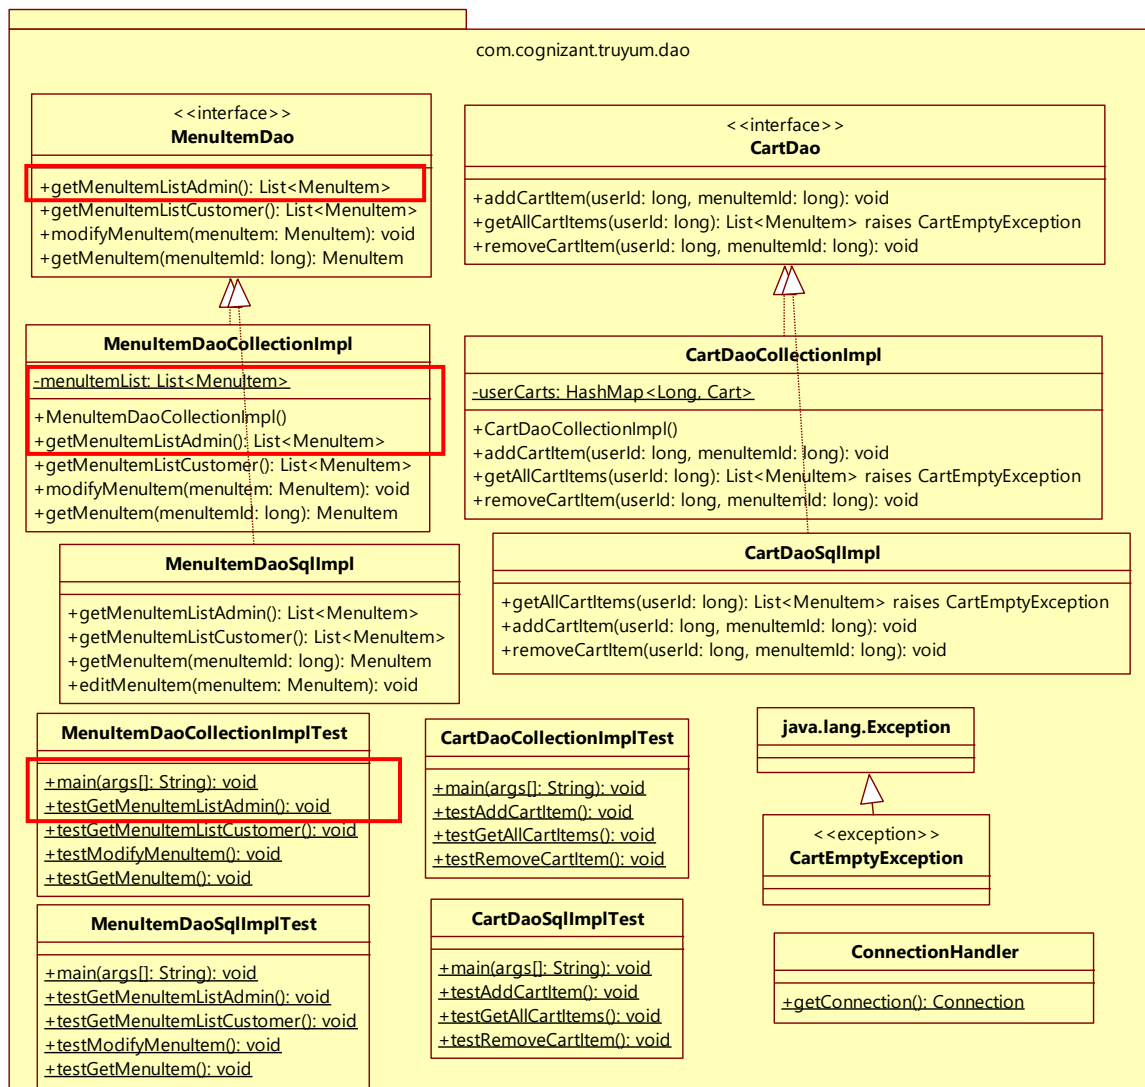

3.2 MenuItemDao.java

Add the method `getMenuItemListAdmin(): List<MenuItem>` in the interface.

3.3 MenuItemDaoCollectionImpl.java

Class for managing data of menu items using Java Collections Framework.

Constructor

The objective of this constructor is to initialize the menu item data that will be displayed in MenuItem listing screen of Admin.

1. Check if menuItemList static variable is null or not
2. If it is null perform the steps below:
 - a. Create an instance of ArrayList with MenuItem type
 - b. Create multiple MenuItem instances and add them to menuItemList. Refer Menu Item List Admin screen shot from web interface specification and include sample data for menuItemList based on this sample data.

truYum 

Menu

Menu Items

Name	Price	Active	Date of Launch	Category	Free Delivery	Action
Sandwich	₹ 99.00	Yes	15/03/2017	Main Course	Yes	Edit
Burger	₹ 129.00	Yes	23/12/2017	Main Course	No	Edit
Pizza	₹ 149.00	Yes	21/08/2018	Main Course	No	Edit
French Fries	₹ 57.00	No	02/07/2017	Starters	Yes	Edit
Chocolate Brownie	₹ 32.00	Yes	02/11/2022	Dessert	Yes	Edit

Copyright © 2019

getMenuItemListAdmin(): List<MenuItem>

This method returns the list of menu items that will be displayed in the MenuItem listing screen for Admin.

1. Return the menuItemList

3.4 MenuItemDaoCollectionImplTest.java

main(args[]: String): void

1. Invoke testGetMenuItemListAdmin()


testGetMenuItemListAdmin(): void

1. Instantiate MenuItemDaoCollectionImpl and assign it MenuItemDao reference variable menuItemDao.
2. Invoke menuItemDao.getMenuItemListAdmin() and obtain the menuItemList
3. Iterate through the menuItemList and display all attributes of each menu item.

4.0 Design for View Menu Item List Customer (TYUC002)

4.1 Class Diagram

The below diagram denotes the methods that needs to be implemented for this use case. Method wise specification is defined after the diagram.

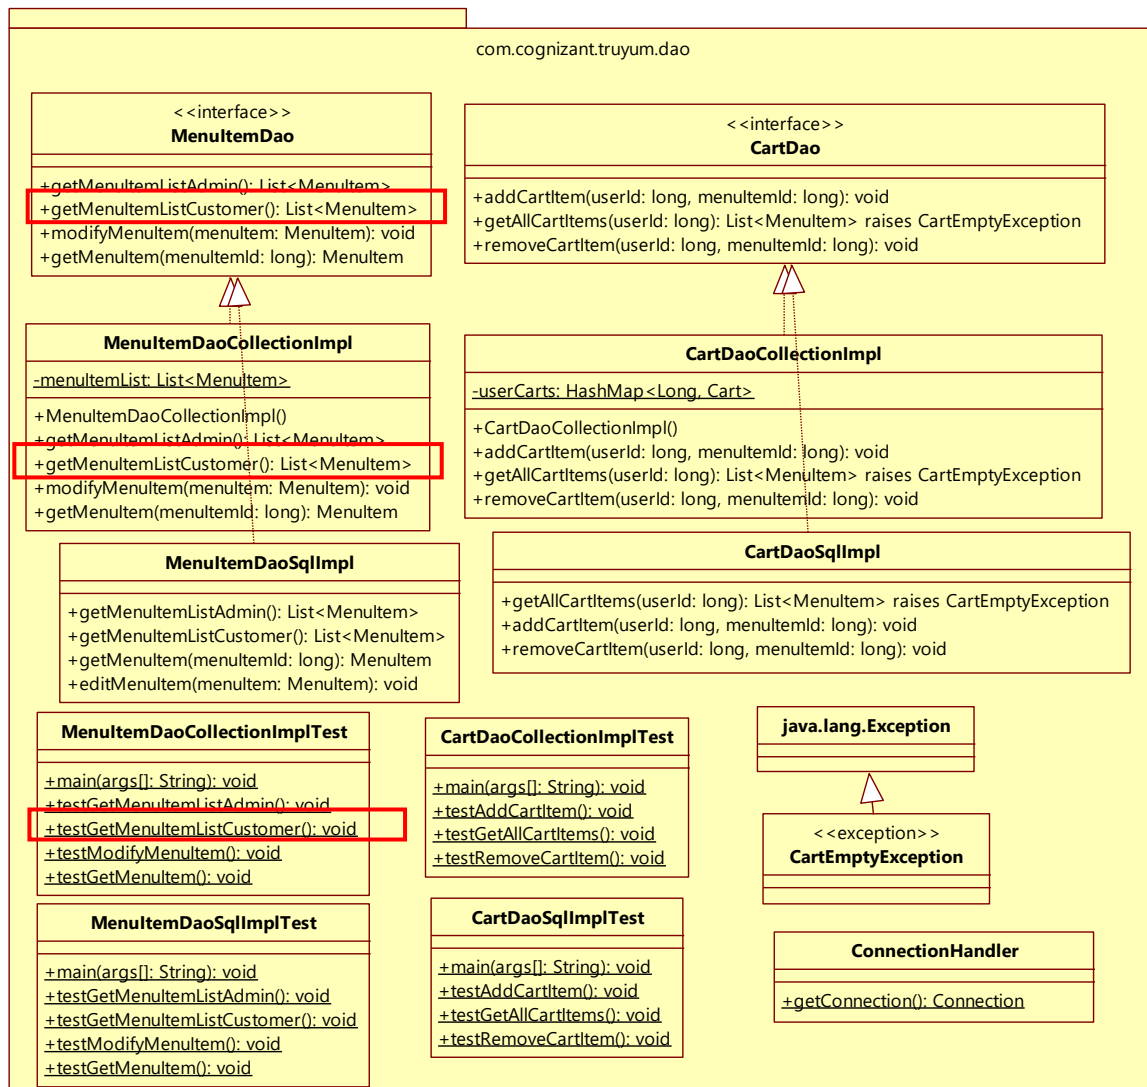

4.2 MenuItemDao.java

Add the method `getMenuItemListCustomer(): List<MenuItem>` in the interface.

4.3 MenuItemDaoCollectionImpl.java

This class manages the data related to Menu Items of truYum application. A new method needs to be added for this use case.

getMenuItemListCustomer(): List<MenuItem>

This method returns the list of menu items that will be displayed in the Menu Item listing screen for Customer.

1. Initialize an ArrayList for type MenuItem
2. Iterate through menuItemList and perform the following steps:
 - a. Is the launch date of the menu item is today or before today?
 - b. Is the menu item available is active?
 - c. If the above conditions satisfy, add the menu item into the ArrayList created in the first step.
3. Return the filtered ArrayList

4.4 MenuItemDaoCollectionImplTest.java

main(args[]: String): void

1. Invoke `testGetMenuItemListCustomer()`


testGetMenuItemListCustomer(): void

1. Instantiate MenuItemDaoCollectionImpl and assign it MenuItemDao reference variable menuItemDao.
2. Invoke `menuItemDao.getMenuItemListCustomer()` and obtain the menuItemList
3. Iterate through the menuItemList and display all attributes of each menu item.

5.0 Design for Edit Menu Item (TYUC003)

5.1 Class Diagram

The below diagram denotes the methods that needs to be implemented for this use case. Method wise specification is defined after the diagram.

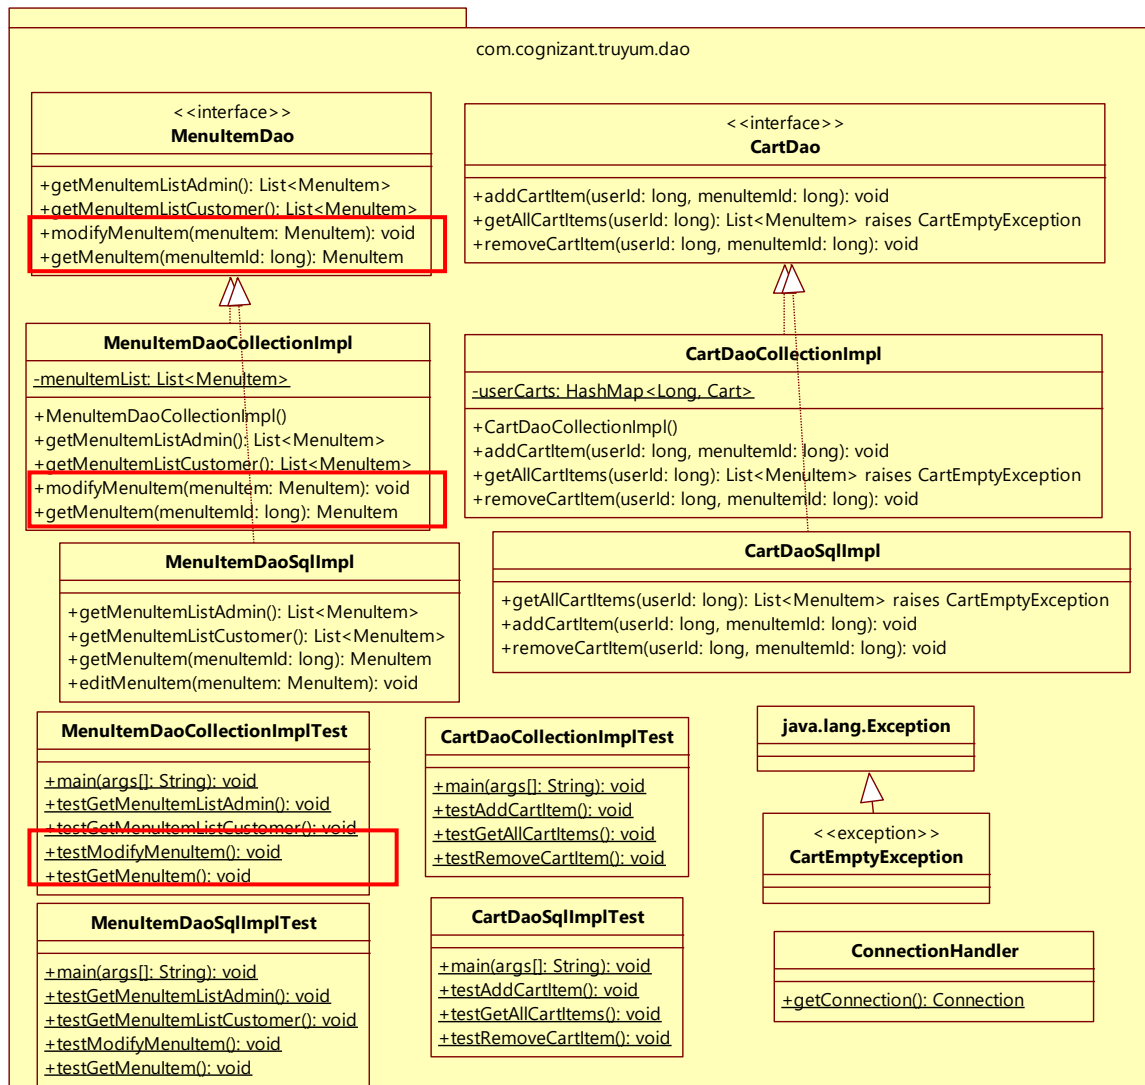

5.2 MenuItemDao.java

1. Add method `modifyMenuItem(menuItem: MenuItem): void` in the interface.
2. Add method `getMenuItem(menuItemId: long): MenuItem` in the interface.

5.3 MenuItemDaoCollectionImpl.java

This class manages the data related to Menu Items of truYum application. A new method needs to be added for this use case.

modifyMenuItem(menuItem: MenuItem): void

This method will be used to change the menu item data in the list of menu items. This method will be invoked when Customer submits the user form.

1. Iterate through the menuItemList and find the matching menu item
2. Update the matching menuItem in the ArrayList

getMenuItem(menuItemId: long): MenuItem

This method is used to retrieve a particular menu item's detail from the menu item list. This method will be invoked when user click on Edit link in menu item listing screen of Admin.

1. Iterate through menuItemList and find the matching menu item
2. Return the matching menuItem from the menuItemList

5.4 MenuItemDaoCollectionImplTest.java

main(args[]: String): void

1. Invoke testModifyMenuItem()


testModifyMenuItem(): void

1. Create an instance for Menu Item with id matching with one of the menu item already added to the menuItemList.
2. Instantiate MenuItemDaoCollectionImpl and assign it MenuItemDao reference variable menuItemDao.
3. Invoke MenuItemDao.modifyMenuItem(menuItem) by passing the menu item created in the first step.
4. Invoke menuItemDao.getMenuItem(producedId) to read and check if the menu item details are modified.

6.0 Design for Add to Cart (TYUC004)

6.1 Class Diagram

The below diagram denotes the methods that needs to be implemented for this use case. Method wise specification is defined after the diagram.

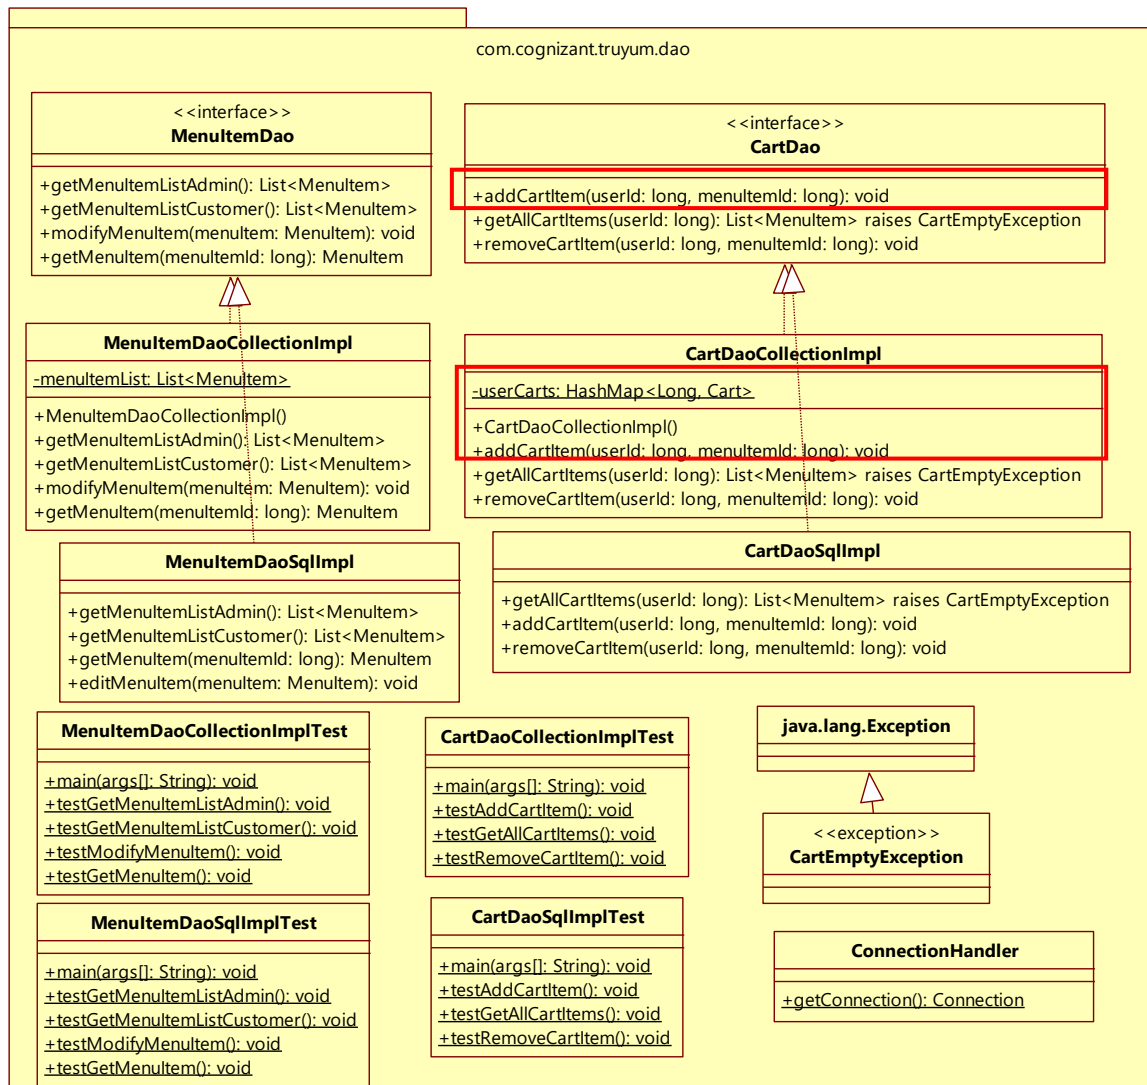

6.2 CartDao.java

1. Add method `addCartItem(userId: long, menuItemId: long): void` in the interface.

6.3 CartDaoCollectionImpl.java

This class manages the data related to Cart of all users of truYum application. A new method needs to be added for this use case.

Constructor CartDaoCollectionImpl()

Data for all users will be stored in the HashMap available in Cart instance. This constructor initialized the Cart as well as the HashMap within the Cart, so that the class instance is ready to store values in the HashMap when Customer adds items into the Cart.

1. Check if the userCarts instance variable is null or not
2. If userCarts is null then create a new instance of HasMap with type Long and Cart and assign it to userCarts instance variable.
3. The userCarts instance variable will hold the cart details for each user in a HashMap. The key of this HashMap will have the userId. Each value in the HashMap will be an ArrayList of MenuItem.

addCartItem(userId: long, menuItemId: long): void


This method is invoked when Customer clicks Add to Cart link in menu item listing screen. This method gets the menu item list from the HashMap for the specific user and adds the menu item into the menu item list. If there is no such user in the HashMap, then a new entry needs to be added in the HashMap with userId as key and new ArrayList of Menu Items as value.

1. Instantiate MenuItemDaoCollectionImpl and assign it MenuItemDao reference variable menuItemDao.
2. Get the menuItem using menuItemDao.getMenuItem(menuItemId) method
3. Check existence of user in userCarts based on userId
4. If user exists in userCarts, perform the steps below:
 - a. Get the menuItemList from the userCarts
 - b. Add the menuItem obtained in previous step into menuItemList
5. If user does not exist in userCarts, perform the steps below:
 - a. Create a new Cart instance with new ArrayList
 - b. Add the menu item obtained in step one and add it to menuItemList created in previous step
 - c. Put the userId and ArrayList of MenuItem into the userCarts

7.0 Design for View Cart (TYUC005)

7.1 Class Diagram

The below diagram denotes the methods that needs to be implemented for this use case. Method wise specification is defined after the diagram.

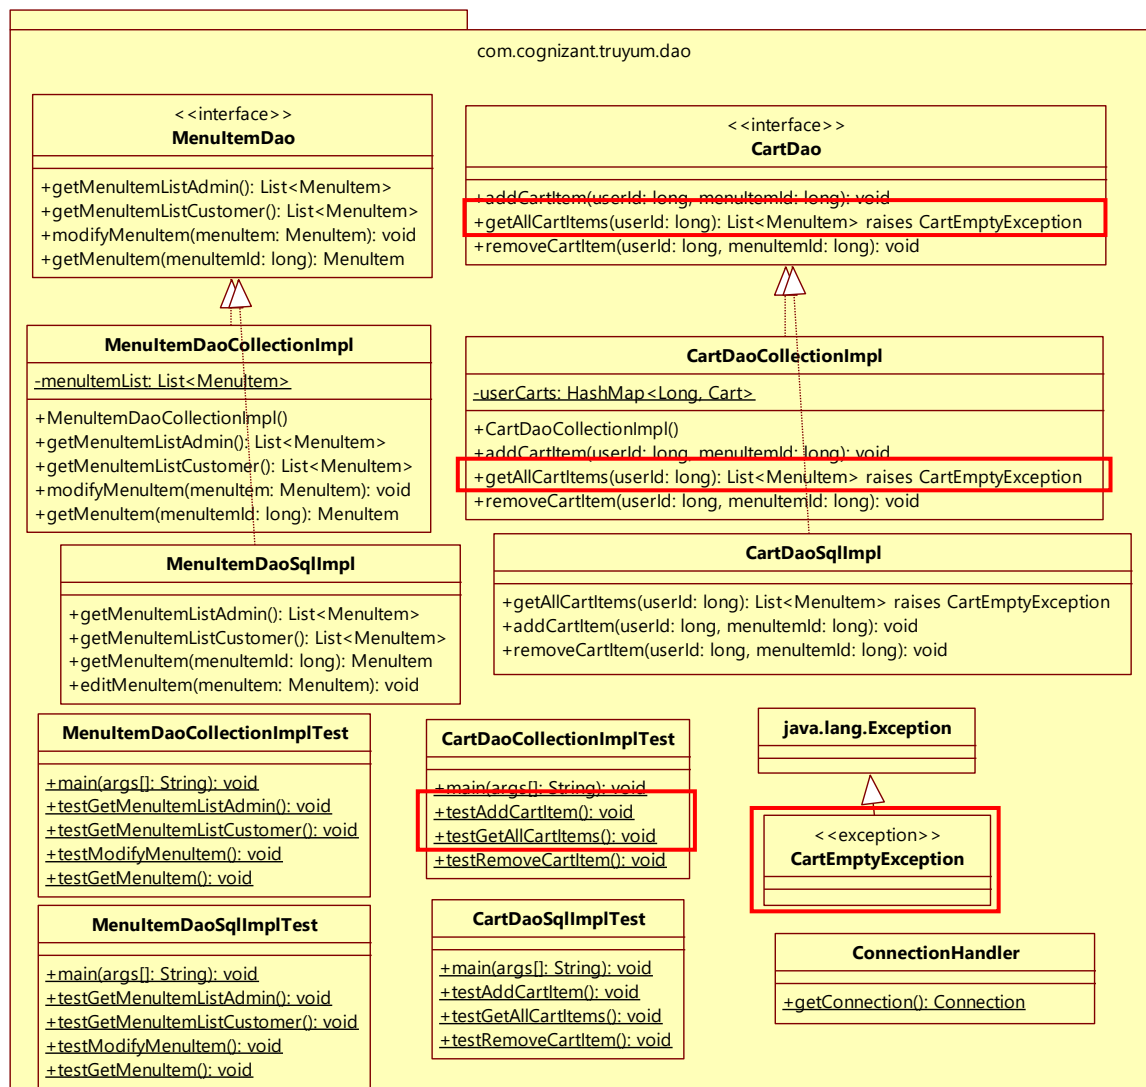

7.2 CartDao.java

1. Add method `getAllCartItems(userid: long): List<MenuItem>` in the interface.

7.3 CartEmptyException.java

1. Extend this class from `java.lang.Exception` and include an empty constructor.

7.4 CartDaoCollectionImpl.java

This class manages the data related to Cart of all users of truYum application. A new method needs to be added for this use case.

getAllCartItems(userId: long): Cart throws CartEmptyException

Method to get list of menu items added by a customer to Cart.

1. Get the menuItemList based on userId from the HashMap of userCarts
2. If the returned list is empty
 - a. Create new CartEmptyException and throw it
3. If the returned list is not empty
 - a. Iterate through the menuItemList and add up the prices.
 - b. Set the total instance variable of cart with the added up menu item prices.
 - c. return cart

7.5 CartDaoCollectionImplTest.java

main(args[]: String): void

1. Invoke testAddCartItem()

testAddCartItem(): void

1. Instantiate CartDaoCollectionImpl and assign it to CartDao reference variable cartDao.
2. Invoke cartDao.addCartItem() method with following parameters
 - a. userId: 1
 - b. menuItemId: one of existing menuItemId in MenuItemDaoCollectionImpl
3. Invoke cartDao.getAllCartItems() with userId as 1
4. Display the contents of MenuItemList returned in previous step and check if the added cart item is present or not.


testGetAllCartItems(): void

5. Instantiate CartDaoCollectionImpl and assign it to CartDao reference variable cartDao.
6. Invoke cartDao.getAllCartItems() method passing the userId as 1 and display the resulting list of menu items.

8.0 Design for Remove Cart Item (TYUC006)

8.1 Class Diagram

The below diagram denotes the methods that needs to be implemented for this use case. Method wise specification is defined after the diagram.

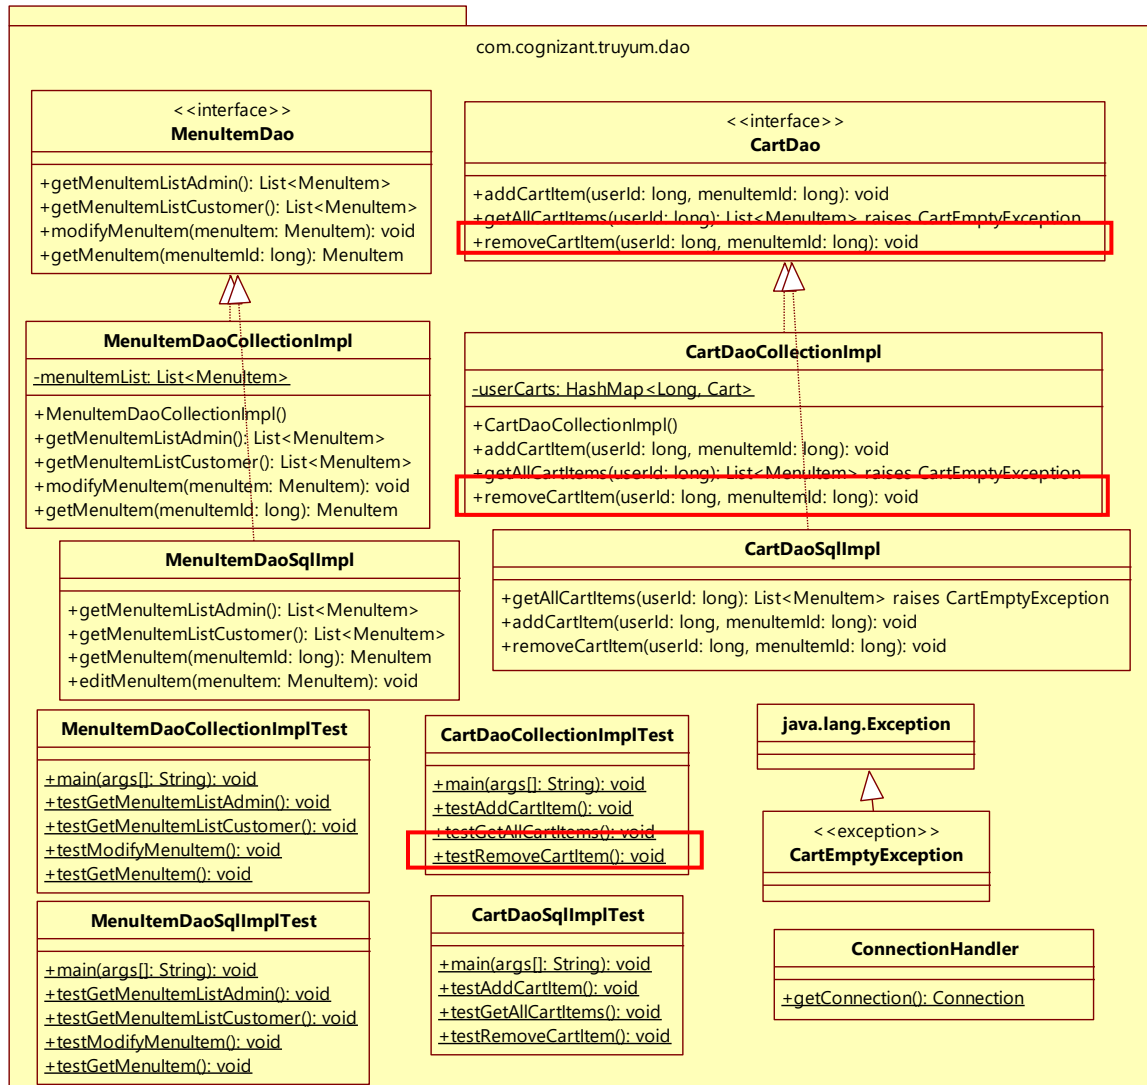

8.2 CartDao.java

1. Add method removeCartItem(userId: long, menuItemId: long): void in the interface.

8.3 CartDaoCollectionImpl.java

This class manages the data related to Cart of all users of truYum application. A new method needs to be added for this use case.

removeCartItem(userId: long, menuItemId: long): void

Method to remove a menu item from the cart. This will be invoked when Customer clicks Delete link in the Cart screen.

1. Get the List<MenuItem> from userCarts based on userId
2. Iterate through the List of MenuItem and perform the below steps
 - a. Check if the menuItemId of each menu item from the list matches with this methods input parameter
 - b. If menuItemId matches then remove the menu item from the list

8.4 CartDaoCollectionImplTest.java

main(args[]: String): void

1. Invoke testRemoveCartItem()

testRemoveCartItem(): void

1. Instantiate CartDaoCollectionImpl and assign it CartDao reference variable cartDao.
2. Invoke cartDao.removeCartItem() method with following parameters
 - a. userId: 1
 - b. menuItemId: Same menuItemId as what was provided when testing add cart item.
3. Invoke cartDao.getAllCartItems() with userId as 1
4. Enclose the above method within try catch block with catch block handling CartEmptyException. Check if the catch block is executed, which means that the cart item added during testAddCartItem() is removed now and the cart is empty, due to which the CartEmptyException is thrown.

9.0 Standards and Guidelines

9.1 Java

1. Ensure that the class names, method names and variable names are followed exactly as specified in the class diagram
2. Ensure that access modifier are in line with the class diagram specification
3. Naming standards to be followed:
 - a. Variable
 - i. Should be in mixed case with the first letter lowercase and with the first letter of each internal word capitalized (Example: firstName, dateOfBirth)
 - ii. Variable names should be short, but meaningful
 - iii. Variable name defined should indicate the purpose to a casual observer
 - iv. Single character variable names should be avoided except for temporary variables
 - v. Temporary variables include i, j, k and m
 - b. Class
 - i. Class name should be a noun
 - ii. Class name should be in mixed case with the first letter uppercase and with the first letter of each internal word capitalized
 - iii. Must use whole words and should not have acronyms or abbreviationsExamples: Employee, TaxCalculator
 - c. Method
 - i. Method names should be verbs
 - ii. Method names should be in mixed case with the first letter lowercase and with the first letter of each internal word capitalizedExample: changeGear(), calculateBalance()
4. Code Formatting
 - a. Class Structure
 - i. Place the elements of a class in the following order:
 1. Static variables
 2. Instance variables
 3. Constructors
 4. Methods and Getter/Setters
 5. hashCode(), equals(), toString,
 - b. Spacing

- i. A space before and after an operator is required
 - ii. A space before curly braces is required
 - iii. A space after a comma is required
 - iv. A space after semicolon in for loop is required
 - v. A single line space after a method is required
- c. Curly braces position
 - i. Opening curly braces should be in the same line
 - ii. Closing curly braces should always be in a new line
- d. Tab spacing
 - i. Use 4 spaces instead of tab character
 - ii. Increase a tab character in the lines after opening curly braces
 - iii. Reduce a tab character on the of closing curly braces
 - iv. Include one more tab in the wrapped line
- e. Line Width
 - i. Width of a line should not exceed 100 characters

10.0 Change Log

	Changes Made			
V1.0.0	Initial baseline created on <dd-Mon-yy> by <Name of Author>			
Vx.y.z	<Please refer the configuration control tool / change item status form if the details of changes are maintained separately. If not, the template given below needs to be followed>			
	Section No.	Changed By	Effective Date	Changes Effected