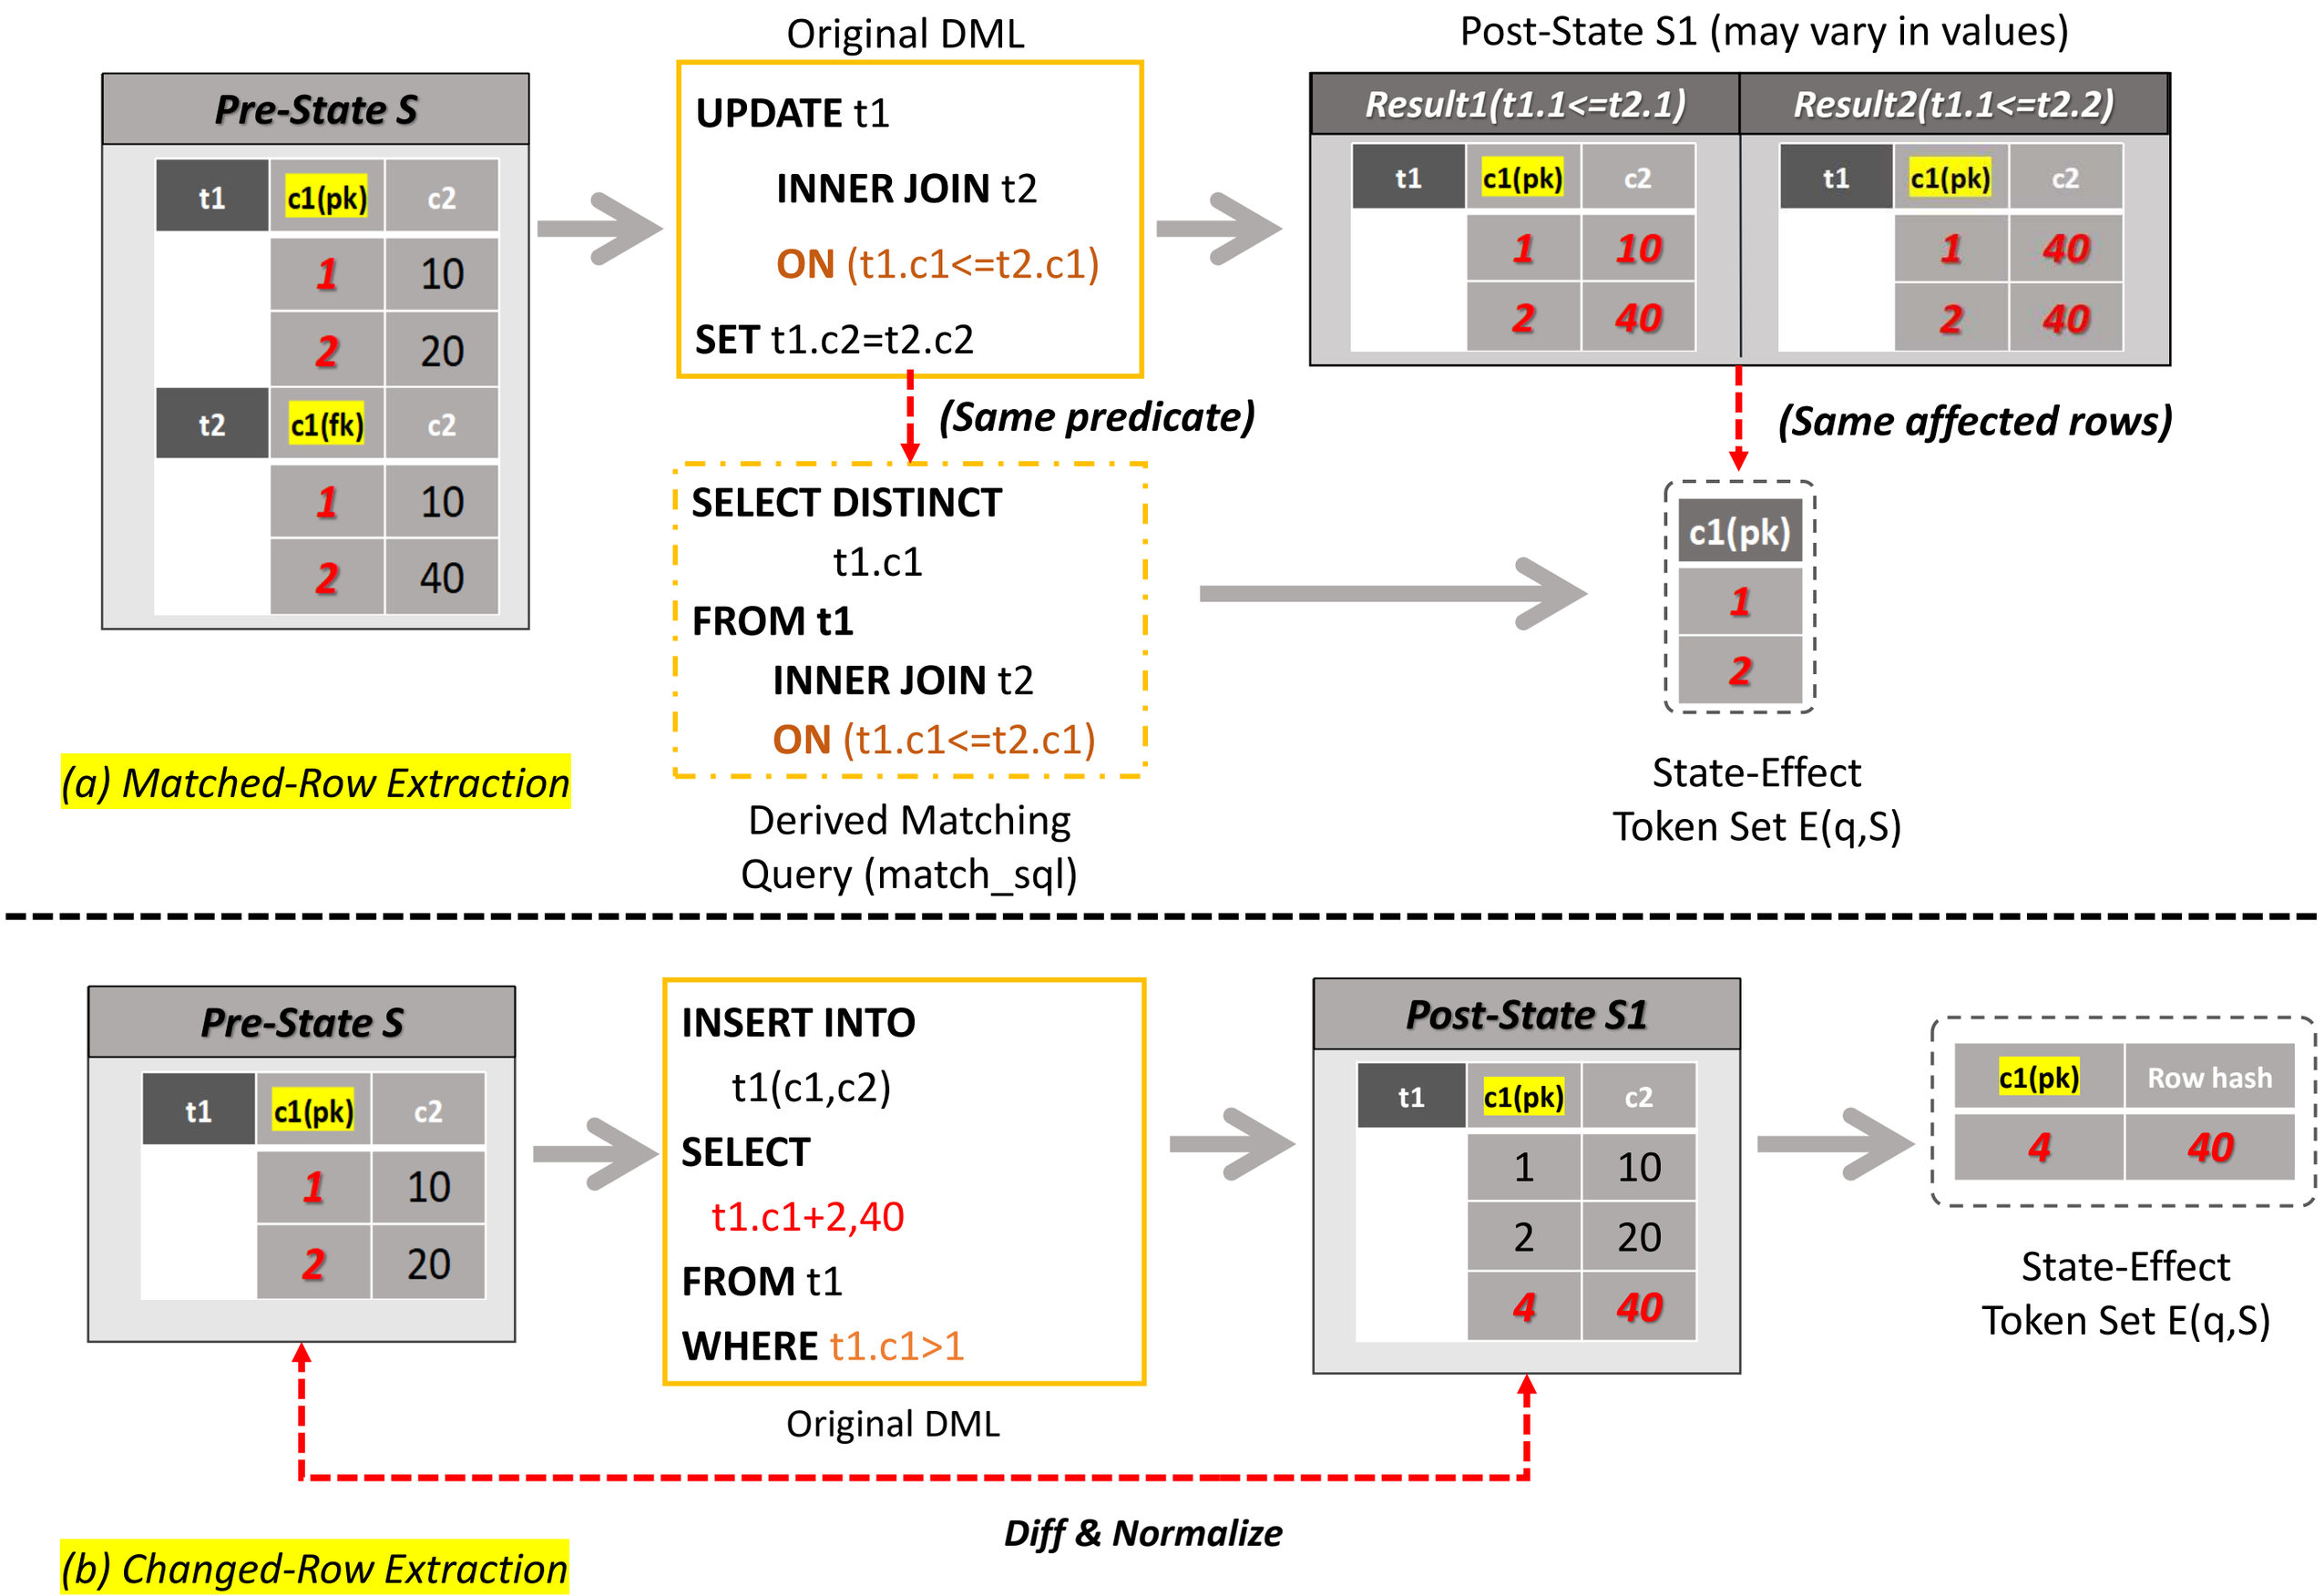
Original DML
Post-State S1 (may vary in values)
Pre-State S
t1 c1(pk) c2
1 10
2 20
t2 c1(fk) c2
1 10
2 40
UPDATE t1
INNER JOIN t2
ON (t1.c1<=t2.c1)
SET t1.c2=t2.c2
Result1(t1.1<=t2.1)
t1 c1(pk) c2
1 10
2 40
Result2(t1.1<=t2.2)
t1 c1(pk) c2
1 40
2 40
(Same predicate)
(Same affected rows)
SELECT DISTINCT
t1.c1
FROM t1
INNER JOIN t2
ON (t1.c1<=t2.c1)
c1(pk)
1
2
State-Effect
Token Set E(q,S)
(a) Matched-Row Extraction
Derived Matching
Query (match_sql)
Pre-State S
t1 c1(pk) c2
1 10
2 20
INSERT INTO
t1(c1,c2)
SELECT
t1.c1+2,40
FROM t1
WHERE t1.c1>1
Original DML
Post-State S1
t1 c1(pk) c2
1 10
2 20
4 40
c1(pk) Row hash
4 40
State-Effect
Token Set E(q,S)
Diff & Normalize
(b) Changed-Row Extraction