

https://github.com/linlin-husky/DAMG6210_Group8

Based on Professor's feedback, We added SEASON, COACHASSIGN PLAYERASSIGN entities to ensure the player and coaches can be arranged flexibly for a team in a certain match. We also added one SEASON entity to ensure it can be shared by both PLAYERASSIGN and COACHASSIGN. Besides, by connecting the two COACHASSIGN PLAYERASSIGN with the SEASON, it can also represent the concept of The concept of timing and changes mentioned by the professor. The above changes ensured a team can only have not only one coach and a player can play for different teams during different seasons.

Based on Professor's feedback, we changed the relationship between the venue and match is one to many. That is to say a match can only take place in one venue. But the venue can hold different matches.

Based on Professor's feedback, we changed the relationship between ticket and seat to one to many: The seat can be booked by many tickets and the ticket can contain many seats.

Based on Professor's feedback, We deleted the subtypes including HOMEVENUE and AWAYVENUE because they are connected to the match. Instead we changed them to OUTDOOR VENUE and INDOOR VENUE.

We deleted the TOURNAMENTQUEUE entity since it is redundant and just keeping TOURNAMENT and QUEUE are enough to capture all relationships and data. Each queue belongs to one tournament. Each tournament can contain many queues

We deleted the PLAY_MATCH_STATS and changed it to PLAYERSTATS to record the performance of the player in a match.


We connect MATCH and REFEREE with RECORD to demonstrate the record about the match from the point of view of a Referee.

We added TEAM_HISTORIC_STATS to record the team performance such as total wins, total losses, ranking positions. This will facilitate us in tracking the team performance trends.

We have added a STRATEGY_PLAN entity to analyze data for each time-based situation during a match. Additionally, we can retrieve TEAM_HISTORIC_STATS by teamID to access historical data for each team, including data from previous matches for individual players. By combining these data sources, we can identify patterns over time by comparing the team against their opponent.

We also modify the positions of entities to make the logic structure flow naturally. So you can analyze the logical data model from the left to right. On the left half side, it is mainly about

1. make sure every entity if connected, there is foreign key in their relationship at least one FK;
2. add a note below for any explanation mentioning few points
3. We should not have composite attribute no many to many relationship in logic data model.
4. We can add more attributes, try to mention 3 or more attributes in the entity. Since if an entity has very few attributes, there is more point in making it as an entity and putting it into database.

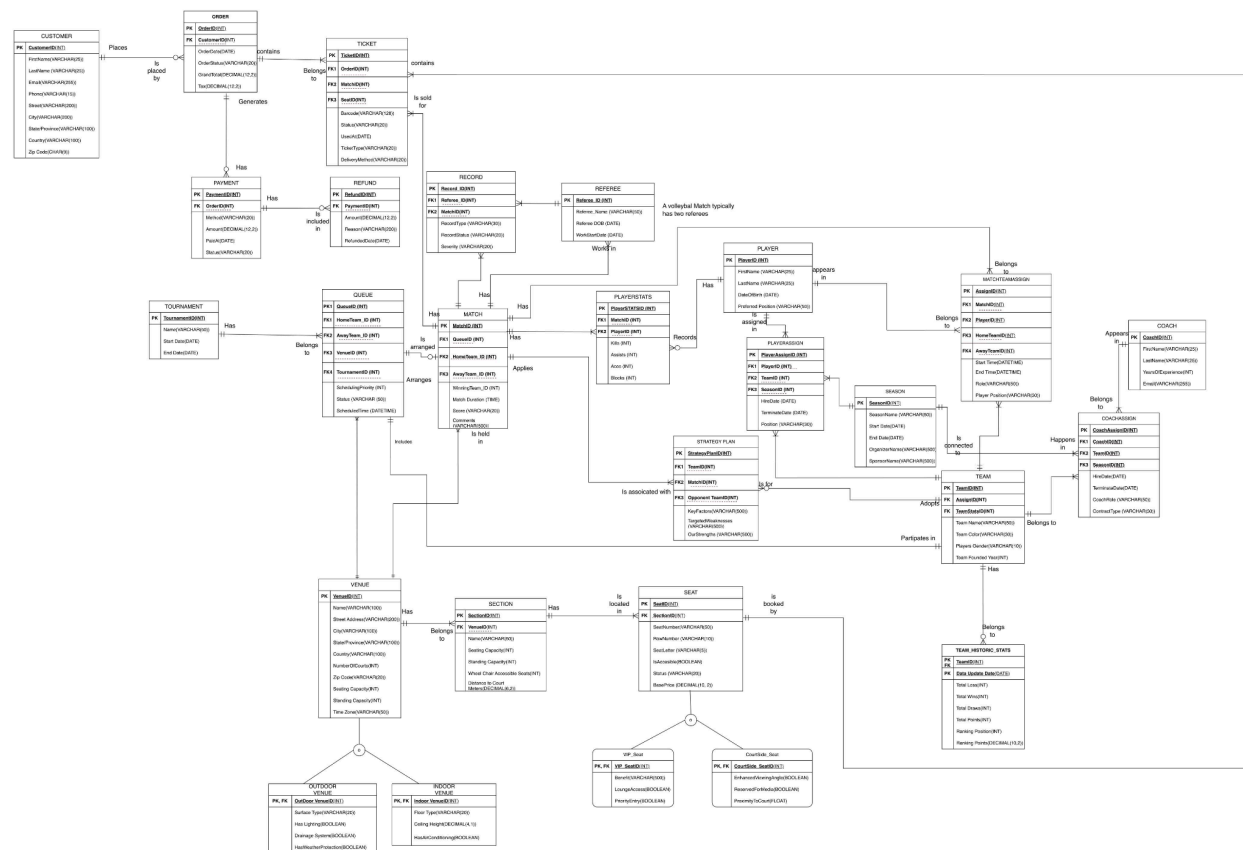

<https://app.diagrams.net/#G10acMGbkgWJRRVsQWe2CGlvRhzhNygLt8#%7B%22pageId%22%3A%22CQReCo5fqBLi9tCP4P8s%22%7D>

Note:

A seat can be either VIP seat or CourtSide seat or both. Apart from these two seats, there may be other seats such as wheelchair accessible premium seat.

TextHomeTeam_ID and AwayTeam_ID in QUEUE are two teams as arranged. But HomeTeam_ID and AwayTeam_ID in Match are the two teams that actually participated in a Match in reality

RECORD tracks which referee officiated which match