

AppliedEx15

February 21, 2025

1 Applied: Exercise 15

1.1 Import notebook functions

```
[1]: from notebookfuncs import *
```

1.2 Exercise 15

This problem involves writing functions.

1.2.1 (a)

Write a function, `Power()`, that prints out the result of raising 2 to the 3_{rd} power. In other words, your function should compute 2^3 and print out the results.

Hint: Recall that x^a raises x to the power a . Use the `print()` function to display the result.

```
[2]: def Power():  
      print(2 ** 3)
```

```
Power()
```

8

1.3 (b)

Create a new function, `Power2()`, that allows you to pass any two numbers, x and a , and prints out the value of x^a . You can do this by beginning your function with the line

```
def Power2(x, a):
```

You should be able to call your function by entering, for instance, `Power2(3, 8)` on the command line. This should output the value of 3^8 , namely, 6,561.

```
[3]: def Power2(x, a):  
      print(x ** a)
```

```
Power2(3, 8)
```

6561

1.3.1 (c)

Using the `Power2()` function that you just wrote, compute 10^3 , 8^{17} , and 131^3 .

```
[4]: Power2(10,3)
      Power2(8,17)
      Power2(131, 3)

1000
2251799813685248
2248091
```

1.3.2 (d)

Now create a new function, `Power3()`, that actually returns the result x^a as a Python object, rather than simply printing it to the screen. That is, if you store the value x^a in an object called `result` within your function, then you can simply return this result, using the following line:

```
return result
```

Note that the line above should be the last line in your function, and it should be indented 2 or 4 spaces, based on your preference.

```
[5]: def Power3(x, a):
      result = x ** a
      return result
```

1.3.3 (e)

Now using the `Power3()` function, create a plot of $f(x) = x^2$. The x-axis should display a range of integers from 1 to 10, and the y-axis should display x^2 . Label the axes appropriately, and use an appropriate title for the figure. Consider displaying either the x-axis, the y-axis, or both on the log-scale. You can do this by using the `ax.set_xscale()` and `ax.set_yscale()` methods of the axes you are plotting to.

```
[6]: import matplotlib.pyplot as plt
      import numpy as np
      scales = ["linear", "linear-log", 'log-linear', 'log-log']
      fig, axs = plt.subplot_mosaic([scales[0:2],
                                     scales[2:]], layout='tight')

      fig.suptitle("Power3() plot")
      fig.subplots_adjust(hspace=0.5)
      fig.subplots_adjust(wspace=0.5)
      x = np.arange(1, 11, 1)
      y = Power3(x, 2)

      def get_labels(scales):
          if scales is None:
              return None
```

```


labels = []
for scale in scales:
    arr = scale.split('-')
    if len(arr) == 1:
        labels.append(tuple((arr[0], arr[0])))
    else:
        labels.append(tuple((arr[0], arr[1])))
return labels

labels = get_labels(scales)

for ax, scale, label in zip(axes.values(), scales, labels):
    ax = axes[scale]
    ax.plot(x, y)
    ax.set_xlabel(label[0])
    ax.set_ylabel(label[1])
    ax.set_xscale(label[0])
    ax.set_yscale(label[1])

```

Power3() plot

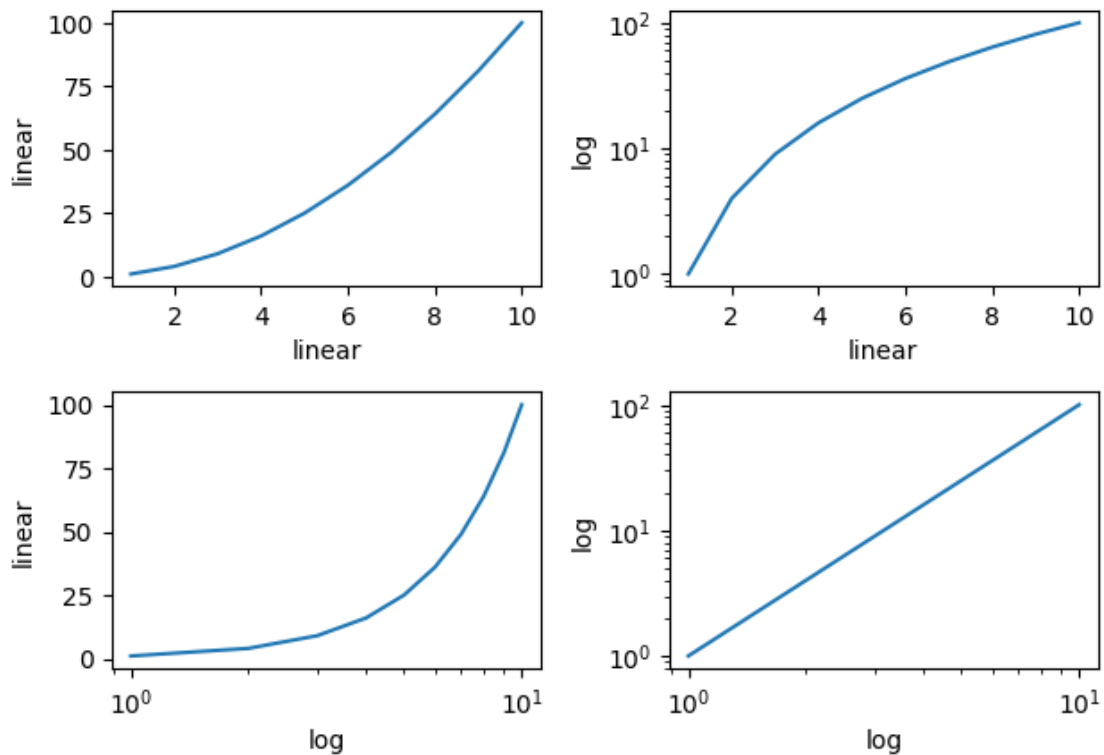


1.3.4 (f)

Create a function, `PlotPower()`, that allows you to create a plot of x against x^a for a fixed a and a sequence of values of x . For instance, if you call

```
PlotPower(np.arange(1, 11),3)
```

then a plot should be created with an x-axis taking on values 1, 2, . . . , 10, and a y-axis taking on values $1^3, 2^3, \dots, 10^3$.

```
[7]: def PlotPower(X, a):  
    if X is None or a is None:  
        return None  
    Y = Power3(X, a)  
    fig, ax = plt.subplots(1)  
    ax.plot(X,Y)  
    ax.set_title(f"PlotPower ({a})")  
  
PlotPower(np.arange(1,11), 3)
```

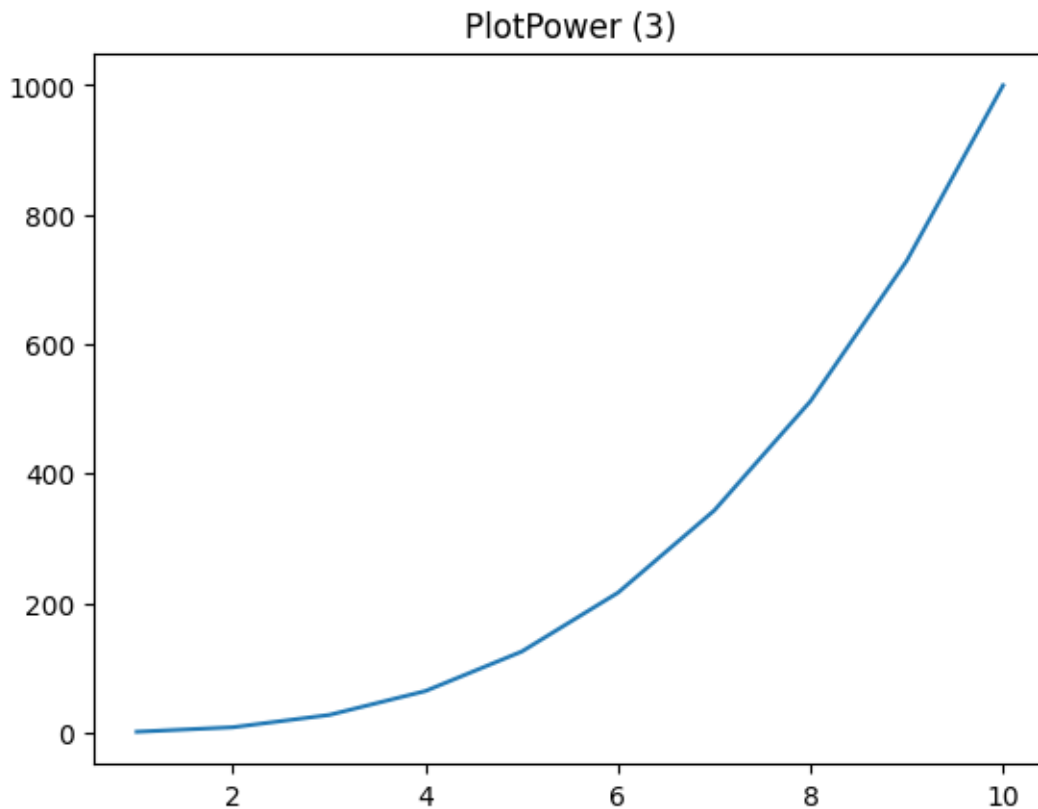

```
[8]: allDone();
```

<IPython.lib.display.Audio object>