

## Lab: Linear Regression

# Table of contents

Set up IPython libraries for customizing notebook display . . . . .	2
Import standard libraries . . . . .	2
New imports . . . . .	2
Import statsmodels objects . . . . .	2
Import ISLP objects . . . . .	2
Import User Functions . . . . .	3
Inspecting objects and namespaces . . . . .	3
Simple Linear Regression . . . . .	8
We will use the Boston housing dataset which is in the package ISLP . . . . .	8
Use sm.OLS to fit a simple linear regression . . . . .	8
Extract the response and fit the model. . . . .	9
Summarize the results using the ISLP method summarize . . . . .	9
Using Transformations: Fit and Transform . . . . .	9
Full and exhaustive summary of the fit . . . . .	10
Fitted coefficients can be retrieved as the <i>params</i> attribute of results . . . . .	10
Computing predictions . . . . .	10
We can predict confidence intervals for the predicted values. . . . .	11
We can obtain prediction intervals for the values which are wider than the confidence intervals since they're for a specific instance of lstat by setting obs=True. . . . .	11
Plot medv and lstat using DataFrame.plot.scatter() and add the regression line to the resulting plot. . . . .	11
Find the fitted values and residuals of the fit as attributes of the results object as <i>results.fittedvalues</i> and <i>results.resid</i> . . . . .	12
Leverage statistics can be computed for any number of predictors using the <i>hat_matrix_diag</i> attribute of the value returned by the <i>get_influence()</i> method. . . . .	13
For a more conservative cutoff values for <i>hat_diag</i> , we have the following influence point(s):	18
Using DFFITS cutoff, we have the following influential points . . . . .	18
Using Cooks Distance, we have the following influential points . . . . .	19
Using Cooks Distance p-values, we have the following influential points . . . . .	19
Using DFBeta for intercept, we have the following influential points . . . . .	19
Using DFBeta for lstat, we have the following influential points . . . . .	20
Multiple linear regression . . . . .	20
Multivariate Goodness of Fit . . . . .	25

We can access the individual components of results by name. . . . .	25
Compute VIFs and List Comprehension . . . . .	28
Interaction terms . . . . .	28
Non-linear transformation of the predictors . . . . .	29
Questions: . . . . .	29
We can further plot the residuals of the regression against the fitted values to check of there still is a pattern discernible. . . . .	30
We can also try and add the interaction term (lstat, age) to the regression and check the results. . . . .	31
Qualitative Predictors . . . . .	32
Carseats data . . . . .	32
Below we fit a multiple regression model with interaction terms. . . . .	33

## Set up IPython libraries for customizing notebook display

```
from notebookfuncs import *
```

## Import standard libraries

```
import numpy as np
import pandas as pd
from matplotlib.pyplot import subplots
```

## New imports

```
import statsmodels.api as sm
```

## Import statsmodels objects

```
from statsmodels.stats.outliers_influence import variance_inflation_factor as VIF
from statsmodels.stats.anova import anova_lm
```

## Import ISLP objects

```
from ISLP import load_data
from ISLP.models import ModelSpec as MS, summarize, poly
```

## Import User Functions

```
from userfuncs import *
```

## Inspecting objects and namespaces

```
dir()
```

```
['Audio',  
 'In',  
 'InteractiveShell',  
 'Latex',  
 'MS',  
 'Markdown',  
 'Math',  
 'Out',  
 'VIF',  
 '__builtin__',  
 '__builtins__',  
 '__name__',  
 '__spec__',  
 '_dh',  
 '_i',  
 '_i1',  
 '_i2',  
 '_i3',  
 '_i4',  
 '_i5',  
 '_i6',  
 '_i7',  
 '_ih',  
 '_ii',  
 '_iii',  
 '_oh',  
 'allDone',  
 'anova_lm',  
 'calculate_VIFs',  
 'check_symmetric',  
 'display',  
 'display_DFFITS_plot',  
 'display_cooks_distance_plot',  
 'display_hat_leverage_cutoffs',  
 'display_hat_leverage_plot',  
 'display_residuals_plot',
```

```

'display_studentized_residuals',
'dmatrices',
'exit',
'get_influence_points',
'get_ipython',
'get_results_df',
'identify_highest_VIF_feature',
'identify_least_significant_feature',
'influence_plot',
'is_numeric_dtype',
'is_pos_def',
'is_symmetric_pos_def',
'load_data',
'np',
'ojs_define',
'open',
'pd',
'perform_analysis',
'poly',
'printlatex',
'printmd',
'px',
'quit',
'sm',
'smf',
'standardize',
'stats',
'subplots',
'summarize']

```

```

A = np.array([3, 5, 11])
dir(A)

```

```

['T',
 '__abs__',
 '__add__',
 '__and__',
 '__array__',
 '__array_finalize__',
 '__array_function__',
 '__array_interface__',
 '__array_prepare__',
 '__array_priority__',
 '__array_struct__',
 '__array_ufunc__',
 '__array_wrap__',
 '__bool__',

```

```
'__buffer__',
'__class__',
'__class_getitem__',
'__complex__',
'__contains__',
'__copy__',
'__deepcopy__',
'__delattr__',
'__delitem__',
'__dir__',
'__divmod__',
'__dlpack__',
'__dlpack_device__',
'__doc__',
'__eq__',
'__float__',
'__floordiv__',
'__format__',
'__ge__',
'__getattr__',
'__getitem__',
'__getstate__',
'__gt__',
'__hash__',
'__iadd__',
'__iand__',
'__ifloordiv__',
'__ilshift__',
'__imatmul__',
'__imod__',
'__imul__',
'__index__',
'__init__',
'__init_subclass__',
'__int__',
'__invert__',
'__ior__',
'__ipow__',
'__irshift__',
'__isub__',
'__iter__',
'__itruediv__',
'__ixor__',
'__le__',
'__len__',
'__lshift__',
```

```
'__lt__',
'__matmul__',
'__mod__',
'__mul__',
'__ne__',
'__neg__',
'__new__',
'__or__',
'__pos__',
'__pow__',
'__radd__',
'__rand__',
'__rdivmod__',
'__reduce__',
'__reduce_ex__',
'__repr__',
'__rfloordiv__',
'__rlshift__',
'__rmatmul__',
'__rmod__',
'__rmul__',
'__ror__',
'__rpow__',
'__rrshift__',
'__rshift__',
'__rsub__',
'__rtruediv__',
'__rxor__',
'__setattr__',
'__setitem__',
'__setstate__',
'__sizeof__',
'__str__',
'__sub__',
'__subclasshook__',
'__truediv__',
'__xor__',
'all',
'any',
'argmax',
'argmin',
'argpartition',
'argsort',
'astype',
'base',
'byteswap',
```

'choose',  
'clip',  
'compress',  
'conj',  
'conjugate',  
'copy',  
'ctypes',  
'cumprod',  
'cumsum',  
'data',  
'diagonal',  
'dot',  
'dtype',  
'dump',  
'dumps',  
'fill',  
'flags',  
'flat',  
'flatten',  
'getfield',  
'imag',  
'item',  
'itemset',  
'itemsizes',  
'max',  
'mean',  
'min',  
'nbytes',  
'ndim',  
'newbyteorder',  
'nonzero',  
'partition',  
'prod',  
'ptp',  
'put',  
'ravel',  
'real',  
'repeat',  
'reshape',  
'resize',  
'round',  
'searchsorted',  
'setfield',  
'setflags',  
'shape',  
'size',



```
'sort',
'squeeze',
'std',
'strides',
'sum',
'swapaxes',
'take',
'tobytes',
'tofile',
'tolist',
'tostring',
'trace',
'transpose',
'var',
'view']
```

```
A.sum()
```

```
19
```

## Simple Linear Regression

We will use the Boston housing dataset which is in the package ISLP

```
Boston = load_data("Boston")
Boston.columns
```

```
Index(['crim', 'zn', 'indus', 'chas', 'nox', 'rm', 'age', 'dis', 'rad', 'tax',
      'ptratio', 'lstat', 'medv'],
      dtype='object')
```

```
len(Boston.columns)
```

```
13
```

```
# Boston?
```

Use sm.OLS to fit a simple linear regression

```
X = pd.DataFrame({"intercept": np.ones(Boston.shape[0]), "lstat": Boston["lstat"]})
X.head()
```

	intercept	lstat
0	1.0	4.98
1	1.0	9.14

	intercept	lstat
2	1.0	4.03
3	1.0	2.94
4	1.0	5.33

**Extract the response and fit the model.**

```
y = Boston["medv"]
model = sm.OLS(y, X)
results = model.fit()
```

<statsmodels.regression.linear\_model.RegressionResultsWrapper at 0x7d9a3255e810>

**Summarize the results using the ISLP method summarize**

```
summarize(results)
```

	coef	std err	t	P> t
intercept	34.5538	0.563	61.415	0.0
lstat	-0.9500	0.039	-24.528	0.0

**Using Transformations: Fit and Transform**

```
design = MS(["lstat"])
design = design.fit(Boston)
X = design.transform(Boston)
X.head()
```

	intercept	lstat
0	1.0	4.98
1	1.0	9.14
2	1.0	4.03
3	1.0	2.94
4	1.0	5.33

```
design = MS(["lstat"])
design = design.fit_transform(Boston)
X.head()
```

	intercept	lstat
0	1.0	4.98
1	1.0	9.14
2	1.0	4.03
3	1.0	2.94
4	1.0	5.33

## Full and exhaustive summary of the fit

```
results.summary()
```

Dep. Variable:	medv	R-squared:	0.544			
Model:	OLS	Adj. R-squared:	0.543			
Method:	Least Squares	F-statistic:	601.6			
Date:	Tue, 25 Feb 2025	Prob (F-statistic):	5.08e-88			
Time:	14:38:50	Log-Likelihood:	-1641.5			
No. Observations:	506	AIC:	3287.			
Df Residuals:	504	BIC:	3295.			
Df Model:	1					
Covariance Type:	nonrobust					
	coef	std err	t	P>  t	[0.025	0.975]
intercept	34.5538	0.563	61.415	0.000	33.448	35.659
lstat	-0.9500	0.039	-24.528	0.000	-1.026	-0.874
Omnibus:	137.043	Durbin-Watson:	0.892			
Prob(Omnibus):	0.000	Jarque-Bera (JB):	291.373			
Skew:	1.453	Prob(JB):	5.36e-64			
Kurtosis:	5.319	Cond. No.	29.7			

Notes:

[1] Standard Errors assume that the covariance matrix of the errors is correctly specified.

## Fitted coefficients can be retrieved as the *params* attribute of results

```
results.params
```

```
intercept    34.553841
lstat        -0.950049
dtype: float64
```

## Computing predictions

```
design = MS(["lstat"])
new_df = pd.DataFrame({"lstat": [5, 10, 15]})
```

```
print(new_df)
design = design.fit(new_df)
newX = design.transform(new_df)
newX
```

```
lstat
0      5
1     10
2     15
```

	intercept	lstat
0	1.0	5
1	1.0	10
2	1.0	15

```
new_predictions = results.get_prediction(newX)
new_predictions.predicted_mean
```

```
array([29.80359411, 25.05334734, 20.30310057])
```

We can predict confidence intervals for the predicted values.

```
new_predictions.conf_int(alpha=0.05)
```

```
array([[29.00741194, 30.59977628],
       [24.47413202, 25.63256267],
       [19.73158815, 20.87461299]])
```

We can obtain prediction intervals for the values which are wider than the confidence intervals since they're for a specific instance of lstat by setting `obs=True`.

```
new_predictions.conf_int(obs=True, alpha=0.05)
```


```
array([[17.56567478, 42.04151344],
       [12.82762635, 37.27906833],
       [ 8.0777421 , 32.52845905]])
```

Plot `medv` and `lstat` using `DataFrame.plot.scatter()` and add the regression line to the resulting plot.

```

ax = Boston.plot.scatter("lstat", "medv")
ax.axline(
    (ax.get_xlim()[0], results.params.iloc[0]),
    slope=results.params.iloc[1],
    color="r",
    linewidth=3,
)

```

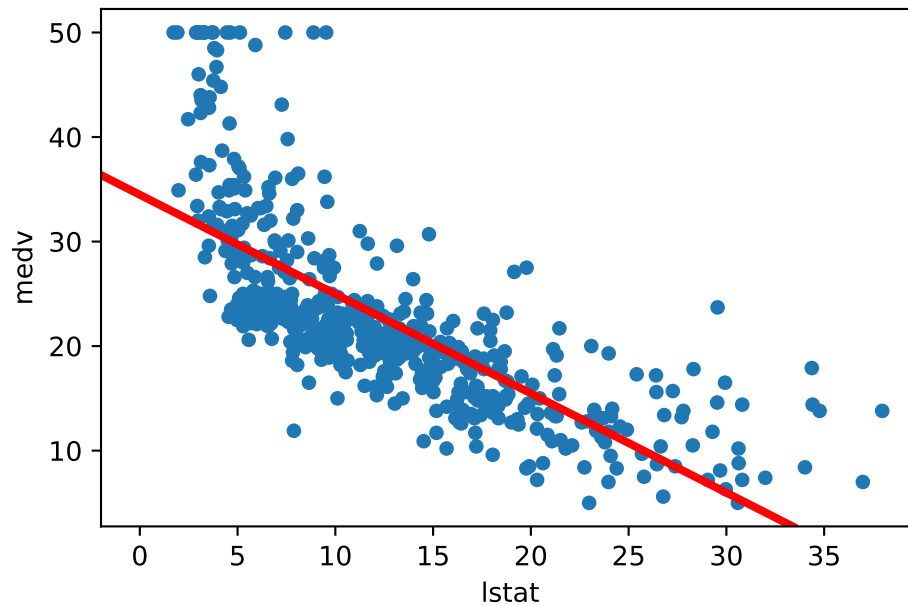

- There is some evidence of non-linearity in the relationship b/w lstat and medv.


Find the fitted values and residuals of the fit as attributes of the results object as *results.fittedvalues* and *results.resid*.

- The `get_influence()` method computes various influence measures of the regression.

```

_, ax = subplots(figsize=(8, 8))
ax.scatter(results.fittedvalues, results.resid)
ax.set_xlabel("Fitted values")
ax.set_ylabel("Residuals")
ax.axhline(0, c="k", ls="--")


```

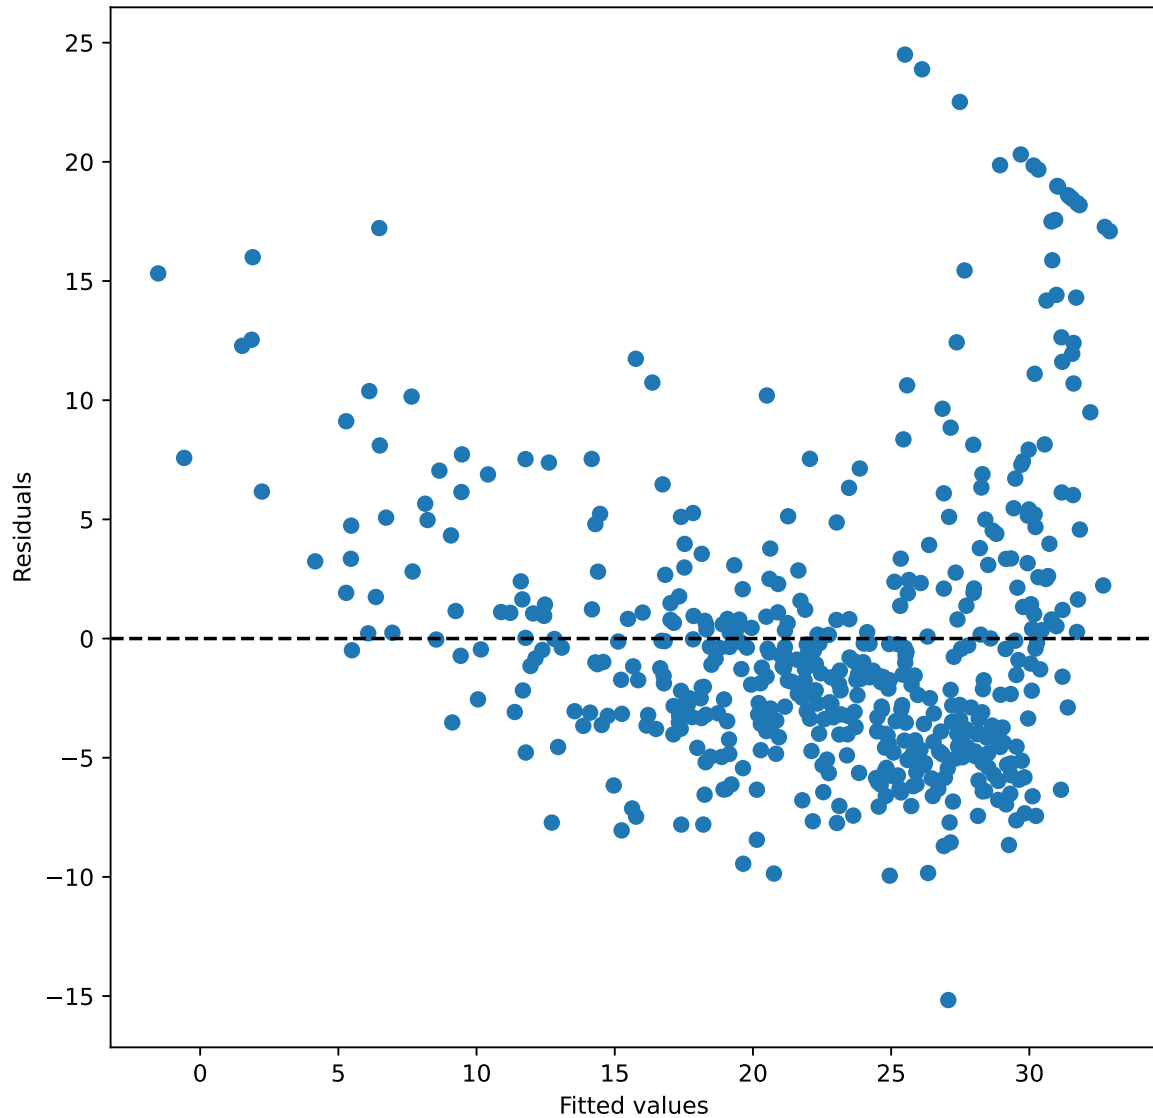

- On the basis of the residual plot, there is some evidence of non-linearity.

Leverage statistics can be computed for any number of predictors using the `hat_matrix_diag` attribute of the value returned by the `get_influence()` method.

```
display_hat_leverage_cutoffs(results)
```


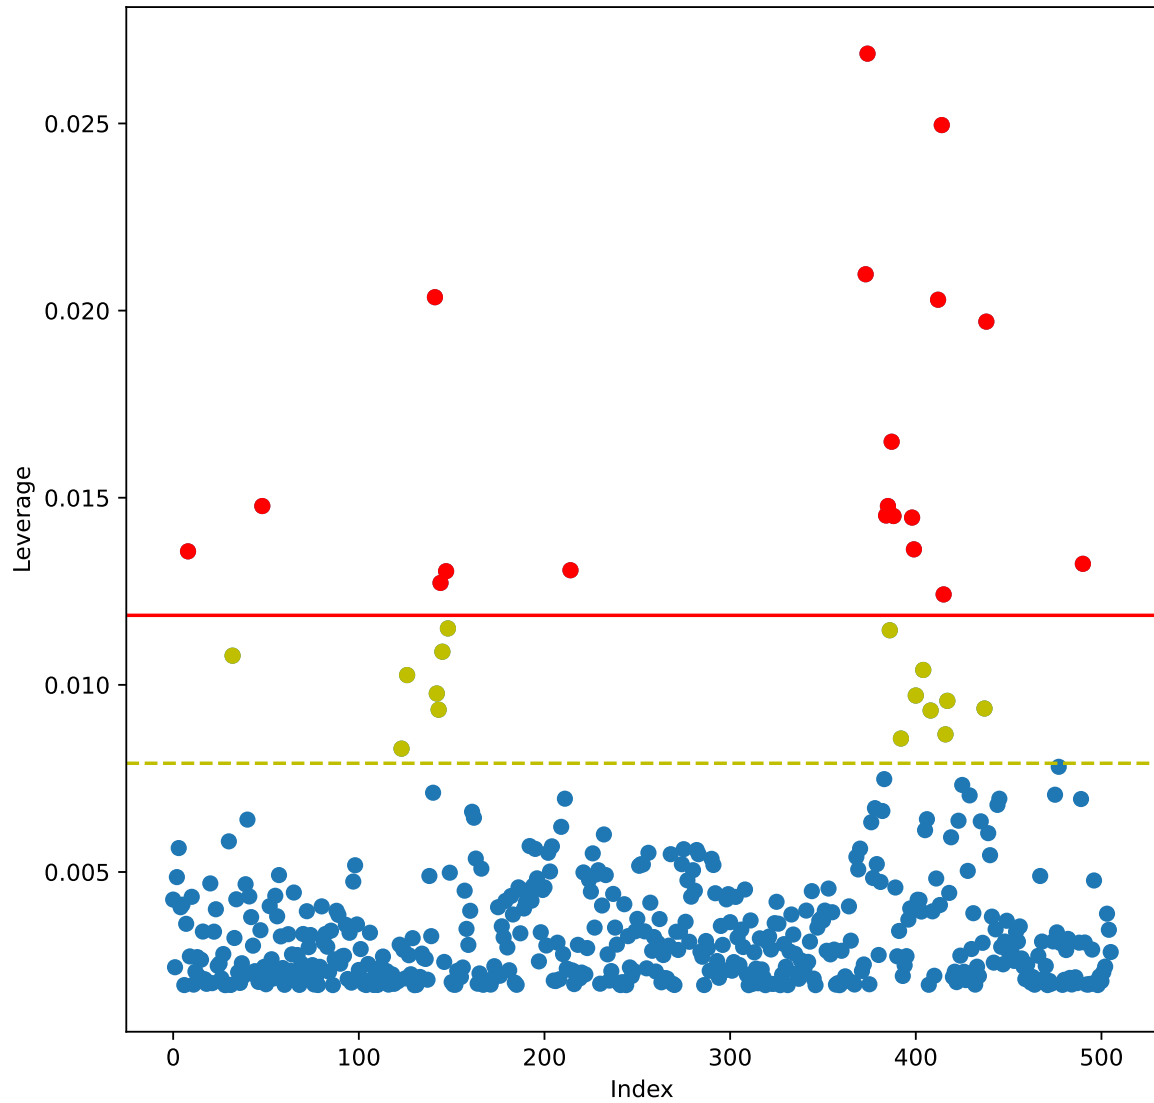


```
display_hat_leverage_plot(results)
```

Unable to display output for mime type(s): text/html


Unable to display output for mime type(s): text/html


```
display_cooks_distance_plot(results)
```

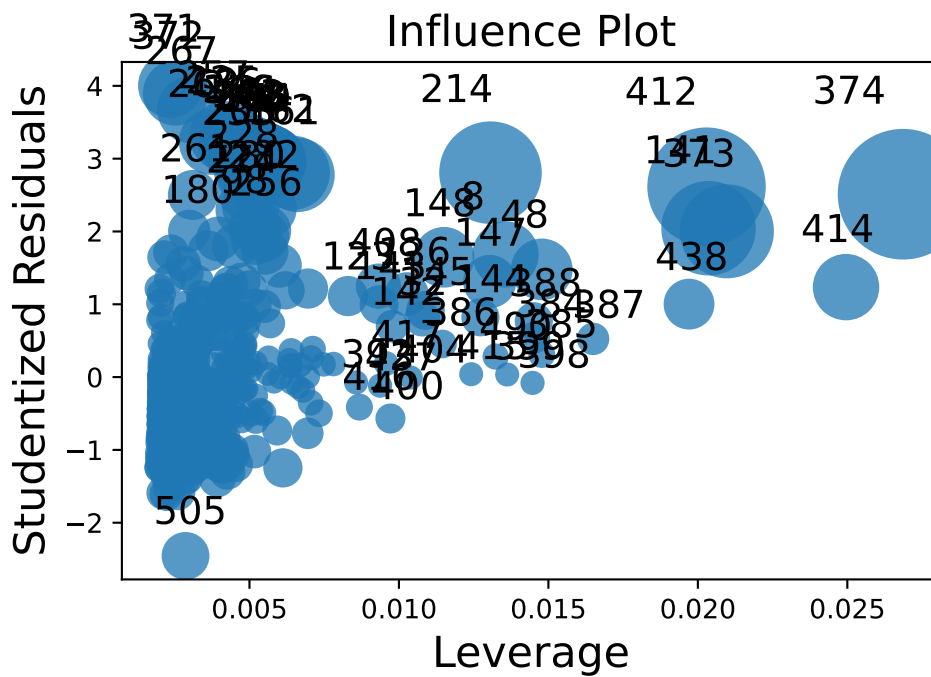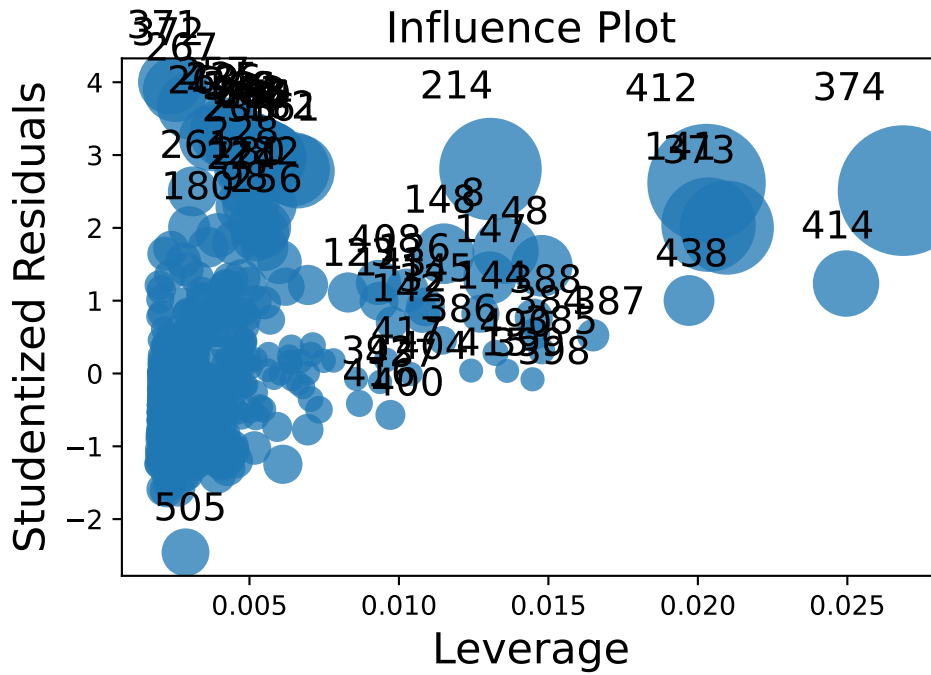



```
display_DFFITS_plot(results)
```

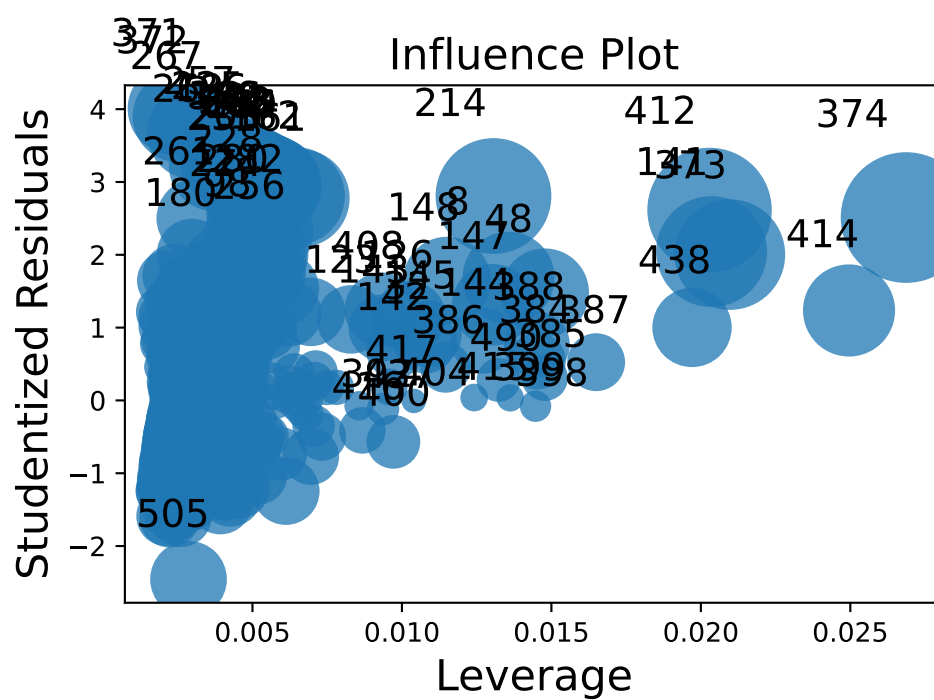

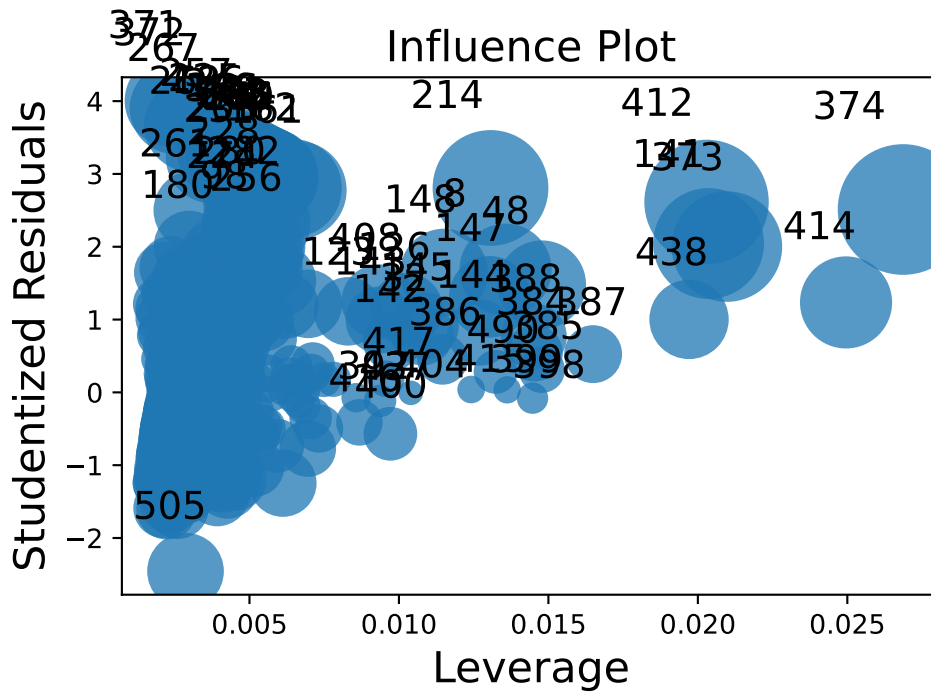

```
inf_df, _ = get_influence_points(results)
inf_df
```

n = 506.0, p = 2  
Average Hat Leverage: 0.003952569169960474  
Hat Leverage Cutoff = 2 \* Average Hat Leverage = 0.007905138339920948  
DFBetas Cutoff = 3 / sqrt(n) = 0.1333662673423161  
DFFITS Cutoff = 2 \* sqrt(p/n) = 0.1257389226923863  
Cooks Distance Cutoff = 1.0  
Cooks Distance p-value Cutoff = 0.05  
Studentized Residuals Cutoff = 3.0  
Studentized Residuals p-value Cutoff = 0.01

	dfb_intercept	dfb_lstat	cooks_d	hat_diag	student_resid	dffits	student_resid_pvalue	hat_influence
161	0.226022	-0.189640	0.025315	0.006609	2.776857	0.226503	0.002847	0.018353
162	0.225506	-0.188310	0.025219	0.006450	2.806416	0.226112	0.002602	0.018100
163	0.219862	-0.176384	0.024252	0.005359	3.024654	0.222011	0.001308	0.016208
166	0.217770	-0.172500	0.023921	0.005089	3.084034	0.220566	0.001077	0.015694
186	0.212939	-0.164025	0.023201	0.004589	3.201426	0.217377	0.000727	0.014692
195	0.221577	-0.179716	0.024534	0.005617	2.970018	0.223224	0.001560	0.016683
203	0.199749	-0.157618	0.020220	0.005013	2.853126	0.202515	0.002254	0.014302
204	0.221985	-0.180535	0.024602	0.005685	2.955977	0.223517	0.001632	0.016805

	dfb_intercept	dfb_lstat	cooks_d	hat_diag	student_resid	dffits	student_resid_pvalue	hat_influence
214	-0.197509	0.297576	0.051465	0.013063	2.807647	0.323011	0.002592	0.036676
225	0.211641	-0.161830	0.023017	0.004476	3.229640	0.216554	0.000660	0.014455
228	0.178647	-0.140414	0.016255	0.004938	2.573814	0.181309	0.005172	0.012709
233	0.196791	-0.154507	0.019680	0.004918	2.841931	0.199782	0.002333	0.013975
257	0.207834	-0.155541	0.022502	0.004180	3.306527	0.214221	0.000506	0.013821
261	0.128039	-0.084194	0.009646	0.003106	2.501385	0.139616	0.006344	0.007769
262	0.189166	-0.136023	0.019246	0.003742	3.231093	0.198020	0.000657	0.012090
267	0.184377	-0.119477	0.020008	0.003032	3.672331	0.202505	0.000133	0.011133
280	0.164168	-0.129770	0.013717	0.005047	2.335776	0.166365	0.009947	0.011789
283	0.220671	-0.177936	0.024384	0.005476	2.999671	0.222580	0.001418	0.016425
368	0.220170	-0.176971	0.024302	0.005402	3.015284	0.222227	0.001349	0.016290
369	0.217594	-0.172182	0.023894	0.005068	3.088724	0.220447	0.001061	0.015654
370	0.221623	-0.179808	0.024542	0.005625	2.968458	0.223257	0.001568	0.016697
371	0.155509	-0.078029	0.018381	0.002355	4.004703	0.194572	0.000036	0.009431
372	0.165278	-0.091836	0.018763	0.002529	3.901020	0.196431	0.000054	0.009866
374	-0.294291	0.401657	0.086162	0.026865	2.511537	0.417300	0.006166	0.067473
412	-0.253809	0.357605	0.070029	0.020290	2.615542	0.376405	0.004588	0.053070

For a more conservative cutoff values for hat\_diag, we have the following influence point(s):

```
inf_df[inf_df["hat_diag"] > (3 * np.mean(inf_df["hat_diag"]))]
```

	dfb_intercept	dfb_lstat	cooks_d	hat_diag	student_resid	dffits	student_resid_pvalue	hat_influence
374	-0.294291	0.401657	0.086162	0.026865	2.511537	0.417300	0.006166	0.067473
412	-0.253809	0.357605	0.070029	0.020290	2.615542	0.376405	0.004588	0.053070

Using DFFITS cutoff, we have the following influential points

```
inf_df[inf_df["dffits"] > 2 * np.sqrt(len(results.params) / results.nobs)]
```

	dfb_intercept	dfb_lstat	cooks_d	hat_diag	student_resid	dffits	student_resid_pvalue	hat_influence
161	0.226022	-0.189640	0.025315	0.006609	2.776857	0.226503	0.002847	0.018353
162	0.225506	-0.188310	0.025219	0.006450	2.806416	0.226112	0.002602	0.018100
163	0.219862	-0.176384	0.024252	0.005359	3.024654	0.222011	0.001308	0.016208
166	0.217770	-0.172500	0.023921	0.005089	3.084034	0.220566	0.001077	0.015694
186	0.212939	-0.164025	0.023201	0.004589	3.201426	0.217377	0.000727	0.014692
195	0.221577	-0.179716	0.024534	0.005617	2.970018	0.223224	0.001560	0.016683
203	0.199749	-0.157618	0.020220	0.005013	2.853126	0.202515	0.002254	0.014302
204	0.221985	-0.180535	0.024602	0.005685	2.955977	0.223517	0.001632	0.016805

	dfb_intercept	dfb_lstat	cooks_d	hat_diag	student_resid	dffits	student_resid_pvalue	hat_influence
214	-0.197509	0.297576	0.051465	0.013063	2.807647	0.323011	0.002592	0.036676
225	0.211641	-0.161830	0.023017	0.004476	3.229640	0.216554	0.000660	0.014455
228	0.178647	-0.140414	0.016255	0.004938	2.573814	0.181309	0.005172	0.012709
233	0.196791	-0.154507	0.019680	0.004918	2.841931	0.199782	0.002333	0.013975
257	0.207834	-0.155541	0.022502	0.004180	3.306527	0.214221	0.000506	0.013821
261	0.128039	-0.084194	0.009646	0.003106	2.501385	0.139616	0.006344	0.007769
262	0.189166	-0.136023	0.019246	0.003742	3.231093	0.198020	0.000657	0.012090
267	0.184377	-0.119477	0.020008	0.003032	3.672331	0.202505	0.000133	0.011133
280	0.164168	-0.129770	0.013717	0.005047	2.335776	0.166365	0.009947	0.011789
283	0.220671	-0.177936	0.024384	0.005476	2.999671	0.222580	0.001418	0.016425
368	0.220170	-0.176971	0.024302	0.005402	3.015284	0.222227	0.001349	0.016290
369	0.217594	-0.172182	0.023894	0.005068	3.088724	0.220447	0.001061	0.015654
370	0.221623	-0.179808	0.024542	0.005625	2.968458	0.223257	0.001568	0.016697
371	0.155509	-0.078029	0.018381	0.002355	4.004703	0.194572	0.000036	0.009431
372	0.165278	-0.091836	0.018763	0.002529	3.901020	0.196431	0.000054	0.009866
374	-0.294291	0.401657	0.086162	0.026865	2.511537	0.417300	0.006166	0.067473
412	-0.253809	0.357605	0.070029	0.020290	2.615542	0.376405	0.004588	0.053070

Using Cooks Distance, we have the following influential points

```
inf_df[inf_df["cooks_d"] > 1.0]
```

	dfb_intercept	dfb_lstat	cooks_d	hat_diag	student_resid	dffits	student_resid_pvalue	hat_influence
--	---------------	-----------	---------	----------	---------------	--------	----------------------	---------------

Using Cooks Distance p-values, we have the following influential points

```
inf_df[inf_df["cooks_d_pvalue"] < 0.05]
```

	dfb_intercept	dfb_lstat	cooks_d	hat_diag	student_resid	dffits	student_resid_pvalue	hat_influence
--	---------------	-----------	---------	----------	---------------	--------	----------------------	---------------

Using DFBeta for intercept, we have the following influential points

```
inf_df[inf_df["dfb_intercept"] > (3 / np.sqrt(results.nobs))]
```

	dfb_intercept	dfb_lstat	cooks_d	hat_diag	student_resid	dffits	student_resid_pvalue	hat_influence
161	0.226022	-0.189640	0.025315	0.006609	2.776857	0.226503	0.002847	0.018353
162	0.225506	-0.188310	0.025219	0.006450	2.806416	0.226112	0.002602	0.018100
163	0.219862	-0.176384	0.024252	0.005359	3.024654	0.222011	0.001308	0.016208

	dfb_intercept	dfb_lstat	cooks_d	hat_diag	student_resid	dffits	student_resid_pvalue	hat_influence
166	0.217770	-0.172500	0.023921	0.005089	3.084034	0.220566	0.001077	0.015694
186	0.212939	-0.164025	0.023201	0.004589	3.201426	0.217377	0.000727	0.014692
195	0.221577	-0.179716	0.024534	0.005617	2.970018	0.223224	0.001560	0.016683
203	0.199749	-0.157618	0.020220	0.005013	2.853126	0.202515	0.002254	0.014302
204	0.221985	-0.180535	0.024602	0.005685	2.955977	0.223517	0.001632	0.016805
225	0.211641	-0.161830	0.023017	0.004476	3.229640	0.216554	0.000660	0.014455
228	0.178647	-0.140414	0.016255	0.004938	2.573814	0.181309	0.005172	0.012709
233	0.196791	-0.154507	0.019680	0.004918	2.841931	0.199782	0.002333	0.013975
257	0.207834	-0.155541	0.022502	0.004180	3.306527	0.214221	0.000506	0.013821
262	0.189166	-0.136023	0.019246	0.003742	3.231093	0.198020	0.000657	0.012090
267	0.184377	-0.119477	0.020008	0.003032	3.672331	0.202505	0.000133	0.011133
280	0.164168	-0.129770	0.013717	0.005047	2.335776	0.166365	0.009947	0.011789
283	0.220671	-0.177936	0.024384	0.005476	2.999671	0.222580	0.001418	0.016425
368	0.220170	-0.176971	0.024302	0.005402	3.015284	0.222227	0.001349	0.016290
369	0.217594	-0.172182	0.023894	0.005068	3.088724	0.220447	0.001061	0.015654
370	0.221623	-0.179808	0.024542	0.005625	2.968458	0.223257	0.001568	0.016697
371	0.155509	-0.078029	0.018381	0.002355	4.004703	0.194572	0.000036	0.009431
372	0.165278	-0.091836	0.018763	0.002529	3.901020	0.196431	0.000054	0.009866

Using DFBeta for lstat, we have the following influential points


```
inf_df[inf_df["dfb_lstat"] > (3 / np.sqrt(results.nobs))]
```

	dfb_intercept	dfb_lstat	cooks_d	hat_diag	student_resid	dffits	student_resid_pvalue	hat_influence
214	-0.197509	0.297576	0.051465	0.013063	2.807647	0.323011	0.002592	0.036676
374	-0.294291	0.401657	0.086162	0.026865	2.511537	0.417300	0.006166	0.067473
412	-0.253809	0.357605	0.070029	0.020290	2.615542	0.376405	0.004588	0.053070

## Multiple linear regression


```
Boston.plot.scatter("age", "medv")
X = MS(["lstat", "age"]).fit_transform(Boston)
model1 = sm.OLS(y, X)
results1 = model1.fit()
summarize(results1)
```

	coef	std err	t	P> t
intercept	33.2228	0.731	45.458	0.000
lstat	-1.0321	0.048	-21.416	0.000
age	0.0345	0.012	2.826	0.005

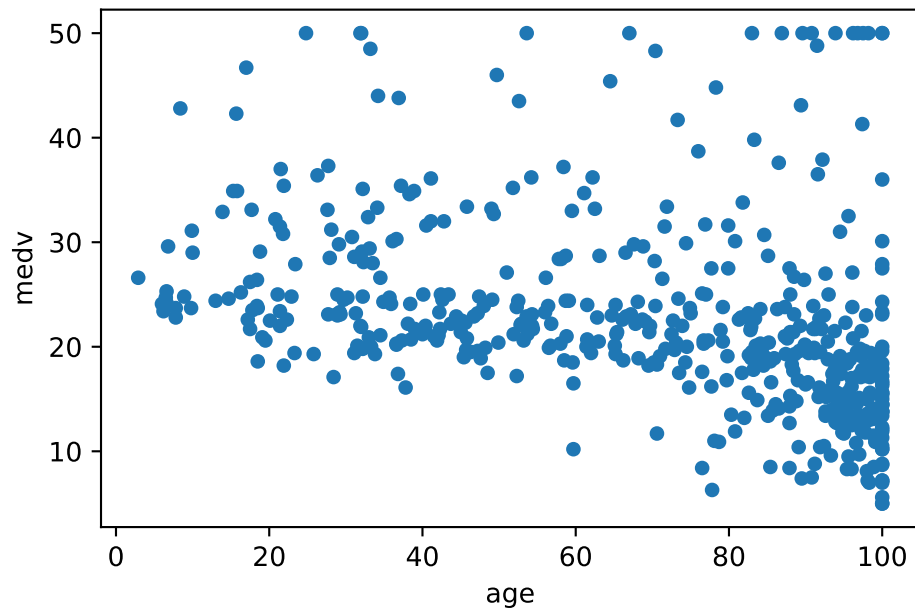


```
Boston["logage"] = np.log(Boston["age"])
Boston.plot.scatter("logage", "medv")
X = MS(["lstat", "logage"]).fit_transform(Boston)
model1 = sm.OLS(y, X)
resultslog = model1.fit()
print(summarize(resultslog))
```

	coef	std err	t	P> t
intercept	30.2143	1.947	15.517	0.00
lstat	-1.0051	0.045	-22.213	0.00
logage	1.2312	0.529	2.327	0.02

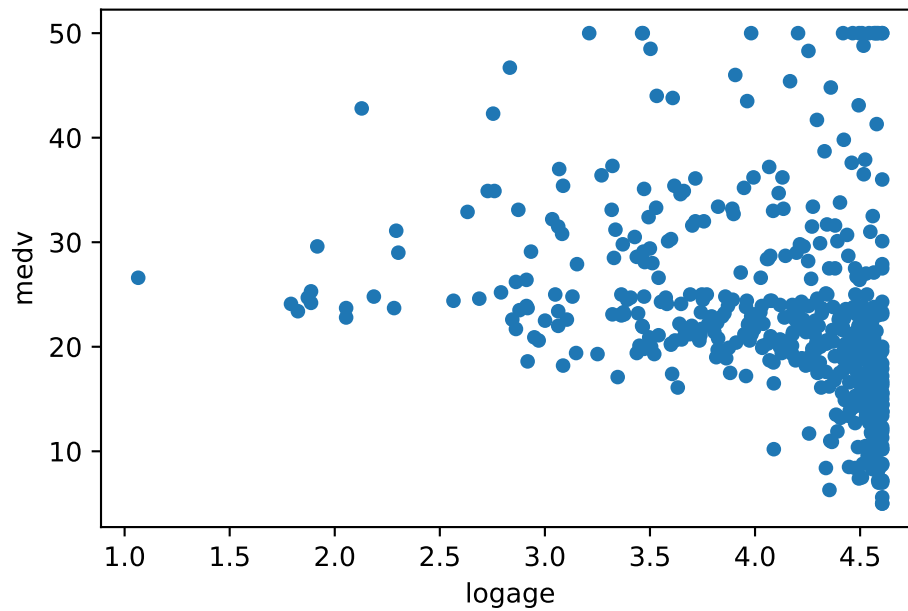

```
Boston["sqrtage"] = np.sqrt(Boston["age"])
Boston.plot.scatter("sqrtage", "medv")
X = MS(["lstat", "sqrtage"]).fit_transform(Boston)
model1 = sm.OLS(y, X)
resultssqrt = model1.fit()
summarize(resultssqrt)
```

	coef	std err	t	P> t
intercept	31.8635	1.174	27.139	0.000
lstat	-1.0203	0.047	-21.703	0.000
sqrtage	0.4450	0.171	2.606	0.009

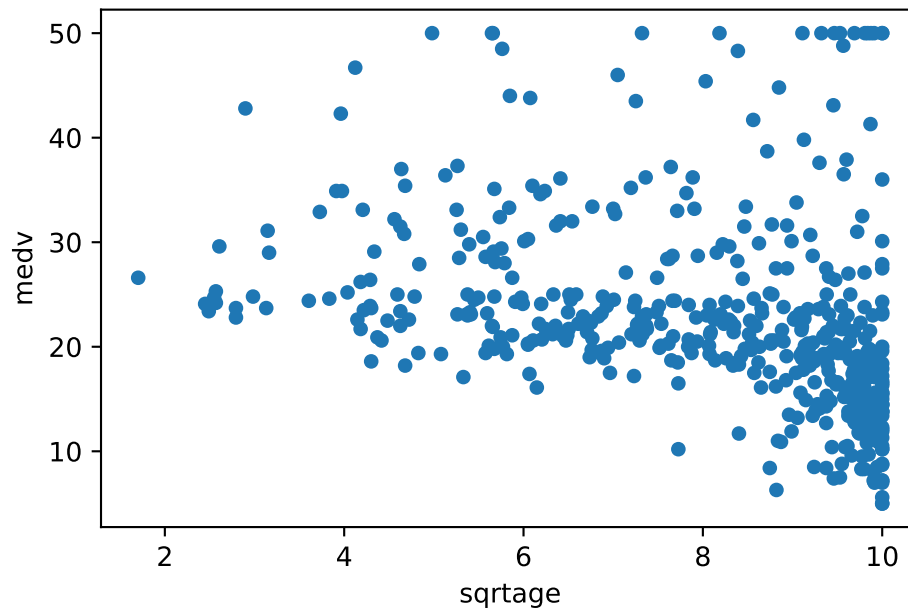

```
Boston = Boston.drop(columns=["logage", "sqrtage"])
```

	crim	zn	indus	chas	nox	rm	age	dis	rad	tax	ptratio	lstat	medv
0	0.00632	18.0	2.31	0	0.538	6.575	65.2	4.0900	1	296	15.3	4.98	24.0
1	0.02731	0.0	7.07	0	0.469	6.421	78.9	4.9671	2	242	17.8	9.14	21.6
2	0.02729	0.0	7.07	0	0.469	7.185	61.1	4.9671	2	242	17.8	4.03	34.7
3	0.03237	0.0	2.18	0	0.458	6.998	45.8	6.0622	3	222	18.7	2.94	33.4
4	0.06905	0.0	2.18	0	0.458	7.147	54.2	6.0622	3	222	18.7	5.33	36.2
...	...	...	...	...	...	...	...	...	...	...	...	...	...
501	0.06263	0.0	11.93	0	0.573	6.593	69.1	2.4786	1	273	21.0	9.67	22.4
502	0.04527	0.0	11.93	0	0.573	6.120	76.7	2.2875	1	273	21.0	9.08	20.6
503	0.06076	0.0	11.93	0	0.573	6.976	91.0	2.1675	1	273	21.0	5.64	23.9
504	0.10959	0.0	11.93	0	0.573	6.794	89.3	2.3889	1	273	21.0	6.48	22.0
505	0.04741	0.0	11.93	0	0.573	6.030	80.8	2.5050	1	273	21.0	7.88	11.9

```
terms = Boston.columns.drop("medv")
terms
```

```
Index(['crim', 'zn', 'indus', 'chas', 'nox', 'rm', 'age', 'dis', 'rad', 'tax',
      'ptratio', 'lstat'],
      dtype='object')
```

```
X = MS(terms).fit_transform(Boston)
model = sm.OLS(y, X)
```



```
results = model.fit()
summarize(results)
```

	coef	std err	t	P> t
intercept	41.6173	4.936	8.431	0.000
crim	-0.1214	0.033	-3.678	0.000
zn	0.0470	0.014	3.384	0.001
indus	0.0135	0.062	0.217	0.829
chas	2.8400	0.870	3.264	0.001
nox	-18.7580	3.851	-4.870	0.000
rm	3.6581	0.420	8.705	0.000
age	0.0036	0.013	0.271	0.787
dis	-1.4908	0.202	-7.394	0.000
rad	0.2894	0.067	4.325	0.000
tax	-0.0127	0.004	-3.337	0.001
ptratio	-0.9375	0.132	-7.091	0.000
lstat	-0.5520	0.051	-10.897	0.000

- Age has a high p-value. So how about we drop it from the predictors?

```
minus_age = Boston.columns.drop(["medv", "age"])
Xma = MS(minus_age).fit_transform(Boston)
model1 = sm.OLS(y, Xma)
summarize(model1.fit())
```

	coef	std err	t	P> t
intercept	41.5251	4.920	8.441	0.000
crim	-0.1214	0.033	-3.683	0.000
zn	0.0465	0.014	3.379	0.001
indus	0.0135	0.062	0.217	0.829
chas	2.8528	0.868	3.287	0.001
nox	-18.4851	3.714	-4.978	0.000
rm	3.6811	0.411	8.951	0.000
dis	-1.5068	0.193	-7.825	0.000
rad	0.2879	0.067	4.322	0.000
tax	-0.0127	0.004	-3.333	0.001
ptratio	-0.9346	0.132	-7.099	0.000
lstat	-0.5474	0.048	-11.483	0.000

```
np.unique(Boston["indus"])
```

```
array([ 0.46,  0.74,  1.21,  1.22,  1.25,  1.32,  1.38,  1.47,  1.52,
        1.69,  1.76,  1.89,  1.91,  2.01,  2.02,  2.03,  2.18,  2.24,
```

```

2.25, 2.31, 2.46, 2.68, 2.89, 2.93, 2.95, 2.97, 3.24,
3.33, 3.37, 3.41, 3.44, 3.64, 3.75, 3.78, 3.97, 4. ,
4.05, 4.15, 4.39, 4.49, 4.86, 4.93, 4.95, 5.13, 5.19,
5.32, 5.64, 5.86, 5.96, 6.06, 6.07, 6.09, 6.2 , 6.41,
6.91, 6.96, 7.07, 7.38, 7.87, 8.14, 8.56, 9.69, 9.9 ,
10.01, 10.59, 10.81, 11.93, 12.83, 13.89, 13.92, 15.04, 18.1 ,
19.58, 21.89, 25.65, 27.74])

```

Similarly, indus has a high p-value. Let's drop it as well.

```

minus_age_indus = Boston.columns.drop(["medv", "age", "indus"]) Xmai = MS(minus_age_indus).fit_transform(Boston)
model1 = sm.OLS(y, Xmai) results1 = model1.fit() summarize(results1)

```

We can also observe the F-statistic for the regression.

```

(results1.fvalue, results1.f_pvalue)

```

```

(308.9693351215988, 2.9820335524722154e-88)

```

## Multivariate Goodness of Fit

We can access the individual components of results by name.

```

dir(results1)

```

```

['HCO_se',
 'HC1_se',
 'HC2_se',
 'HC3_se',
 '_HCCM',
 '__class__',
 '__delattr__',
 '__dict__',
 '__dir__',
 '__doc__',
 '__eq__',
 '__format__',
 '__ge__',
 '__getattribute__',
 '__getstate__',
 '__gt__',
 '__hash__',
 '__init__',
 '__init_subclass__',
 '__le__',
 '__lt__',
 '__module__',
 '__ne__',

```

```

'__new__',
'__reduce__',
'__reduce_ex__',
'__repr__',
'__setattr__',
'__sizeof__',
'__str__',
'__subclasshook__',
'__weakref__',
'_abat_diagonal',
'_cache',
'_data_attr',
'_data_in_cache',
'_get_robustcov_results',
'_get_wald_nonlinear',
'_is_nested',
'_transform_predict_exog',
'_use_t',
'_wexog_singular_values',
'aic',
'bic',
'bse',
'centered_tss',
'compare_f_test',
'compare_lm_test',
'compare_lr_test',
'condition_number',
'conf_int',
'conf_int_el',
'cov_HC0',
'cov_HC1',
'cov_HC2',
'cov_HC3',
'cov_kwds',
'cov_params',
'cov_type',
'df_model',
'df_resid',
'diagn',
'eigenvals',
'el_test',
'ess',
'f_pvalue',
'f_test',
'fittedvalues',
'fvalue',

```

```

'get_influence',
'get_prediction',
'get_robustcov_results',
'info_criteria',
'initialize',
'k_constant',
'llf',
'load',
'model',
'mse_model',
'mse_resid',
'mse_total',
'nobs',
'normalized_cov_params',
'outlier_test',
'params',
'predict',
'pvalues',
'remove_data',
'resid',
'resid_pearson',
'rsquared',
'rsquared_adj',
'save',
'scale',
'ssr',
'summary',
'summary2',
't_test',
't_test_pairwise',
'tvalues',
'uncentered_tss',
'use_t',
'wald_test',
'wald_test_terms',
'wresid']

```

- results.rsquared gives us the R2 and np.sqrt(results.scale) gives us the RSE.

```
print("RSE", np.sqrt(results1.scale))
```

```
RSE 6.173136281359115
```

```
("R", results1.rsquared)
```

```
('R', 0.5512689379421002)
```

- Variance Inflation Factors are sometimes useful to assess the collinearity effect in our regression

model.

## Compute VIFs and List Comprehension

```
vals = [VIF(X, i) for i in range(1, X.shape[1])]
print(vals)
```

```
[1.7674859154310127, 2.2984589077358097, 3.9871806307570994, 1.071167773758404,
4.369092622844793, 1.9125324374368868, 3.0882320397311966, 3.954036641628298,
7.445300760069838, 9.002157663471797, 1.7970595931297786, 2.8707765008417514]
```

```
vif = pd.DataFrame({"vif": vals}, index=X.columns[1:])
print(vif)
("VIF Range:", np.min(vif), np.max(vif))
```

	vif
crim	1.767486
zn	2.298459
indus	3.987181
chas	1.071168
nox	4.369093
rm	1.912532
age	3.088232
dis	3.954037
rad	7.445301
tax	9.002158
ptratio	1.797060
lstat	2.870777

```
('VIF Range:', 1.071167773758404, 9.002157663471797)
```

- The VIFs are not very large.

## Interaction terms

```
X = MS(["lstat", "age", ("lstat", "age")]).fit_transform(Boston)
model2 = sm.OLS(y, X)
results2 = model2.fit()
summarize(results2)
```

	coef	std err	t	P> t
intercept	36.0885	1.470	24.553	0.000
lstat	-1.3921	0.167	-8.313	0.000
age	-0.0007	0.020	-0.036	0.971
lstat:age	0.0042	0.002	2.244	0.025

```
(results2.rsquared, " > ", results1.rsquared)
```

```
(0.5557265450993936, ' > ', 0.5512689379421002)
```

- The interaction terms `lstat:age` are not statistically significant at 0.01 level of significance, and `R2` does not significantly explain the variation in the model. Suffice to say, the interaction term can be dropped.

## Non-linear transformation of the predictors

- The `poly()` function specifies the first argument term to be added to the model matrix

```
X = MS([poly("lstat", degree=2), "age"]).fit_transform(Boston)
model3 = sm.OLS(y, X)
results3 = model3.fit()
summarize(results3)
```

	coef	std err	t	P> t
intercept	17.7151	0.781	22.681	0.0
poly(lstat, degree=2)[0]	-179.2279	6.733	-26.620	0.0
poly(lstat, degree=2)[1]	72.9908	5.482	13.315	0.0
age	0.0703	0.011	6.471	0.0

The effectively 0 p-value associated with the quadratic term suggests an improved model. The `R2` confirms it

```
print(results3.rsquared, " > ", results2.rsquared)
```

```
0.6683791720749932 > 0.5557265450993936
```

- By default, `poly()` creates a basis matrix for inclusion in the model matrix whose columns are orthogonal polynomials which are designed for stable least squares computations. If we had included another argument, `raw = True`, the basis matrix would consist of `lstat` and `lstat ** 2`. Both represent quadratic polynomials. The fitted values would not change. Just the polynomial coefficients. The columns created by `poly()` do not include an intercept column. These are provided by `MS()`.

## Questions:

- What are orthogonal polynomials?
- <http://home.iitk.ac.in/~shalab/regression/Chapter12-Regression-PolynomialRegression.pdf>
- <https://stats.stackexchange.com/questions/258307/raw-or-orthogonal-polynomial-regression>

```
X = MS([poly("lstat", degree=2, raw=True), "age"]).fit_transform(Boston)
model3 = sm.OLS(y, X)
```

```
results3 = model3.fit()
summarize(results3)
```

	coef	std err	t	P> t
intercept	41.2885	0.873	47.284	0.0
poly(lstat, degree=2, raw=True)[0]	-2.6883	0.131	-20.502	0.0
poly(lstat, degree=2, raw=True)[1]	0.0495	0.004	13.315	0.0
age	0.0703	0.011	6.471	0.0

```
print(results3.rsquared, " > ", results1.rsquared)
```

0.6683791720749932 > 0.5512689379421002

- Use the `anova_lm()` function to further quantify the superiority of the quadratic fit.


```
anova_lm(results1, results3)
```

	df_resid	ssr	df_diff	ss_diff	F	Pr(>F)
0	503.0	19168.128609	0.0	NaN	NaN	NaN
1	502.0	14165.613251	1.0	5002.515357	177.278785	7.468491e-35

- results1 corresponds to the linear model containing predictors lstat and age only.
- results3 includes the quadratic term in lstat.
- The `anova_lm()` function performs a hypothesis test on the two models.
- H0: The quadratic term in the model is not needed.
- Ha: The larger model including the quadratic term is superior.
- Here, the F-statistic is 177.28 and the associated p-value is 0.
- The F-statistic is the t-statistic squared for the quadratic term in results3.
- These nested models differ by 1 degree of freedom.
- This provides very clear evidence that the quadratic term improves the model.
- The `anova_lm()` function can take more than two models as input.
- The comparison is successive pair-wise.
- That explains the NaNs in the first row of the output above, since there is no previous model with which to compare the output.

**We can further plot the residuals of the regression against the fitted values to check if there still is a pattern discernible.**

```
_, ax = subplots(figsize=(8, 8))
ax.scatter(results3.fittedvalues, results3.resid)
ax.set_xlabel("Fitted values")
ax.set_ylabel("Residuals")
ax.axhline(0, c="k", ls="--")
```

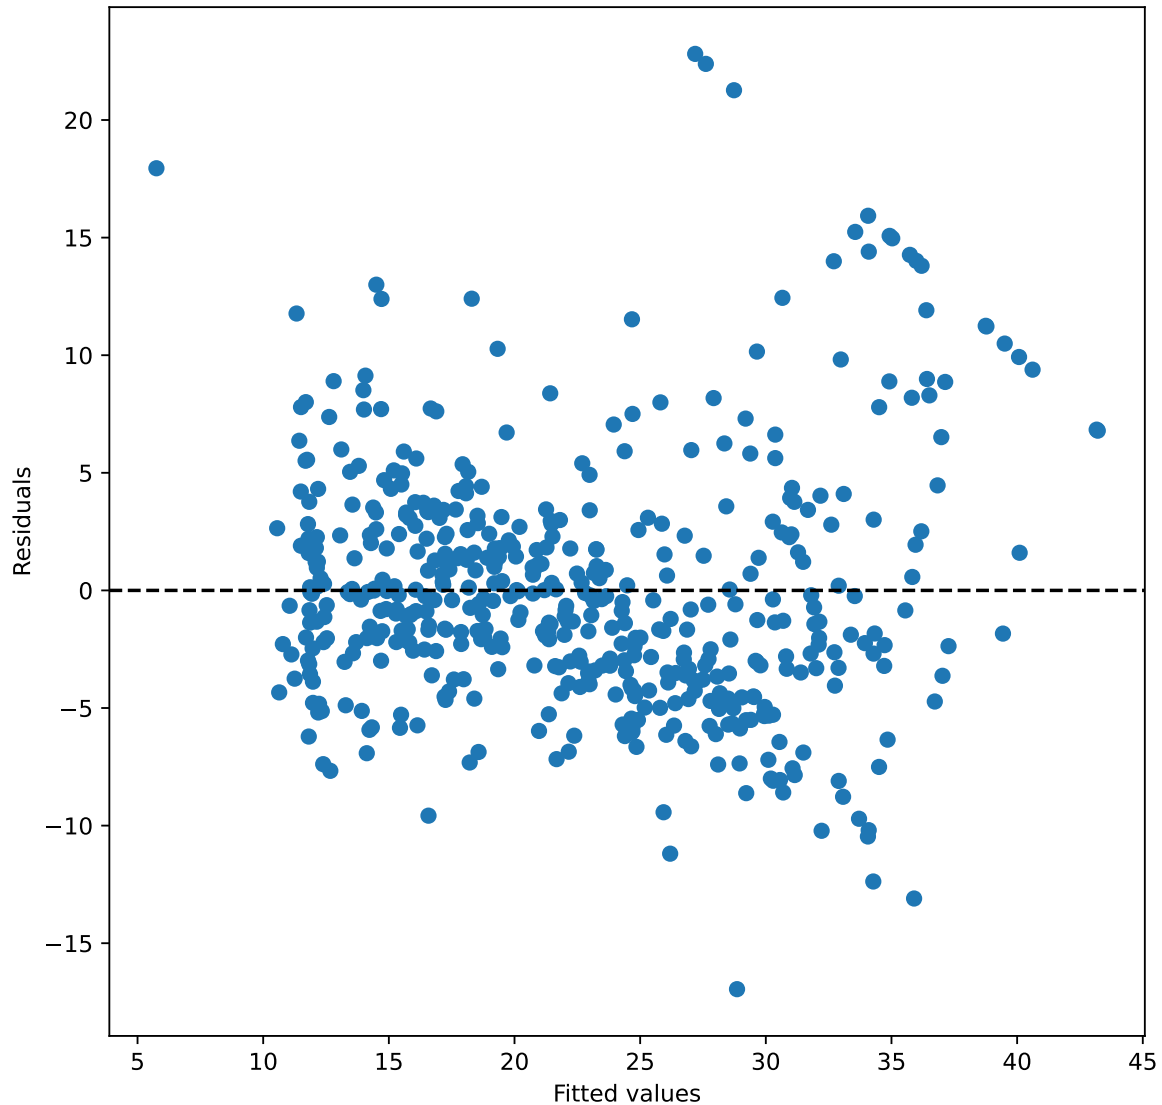

We can also try and add the interaction term (lstat, age) to the regression and check the results.

```
X = MS([poly("lstat", degree=2, raw=True), "age", ("lstat", "age")]).fit_transform(
    Boston
)
model4 = sm.OLS(y, X)
results4 = model4.fit()
summarize(results4)
```



	coef	std err	t	P> t
intercept	37.2658	1.250	29.816	0.0
poly(lstat, degree=2, raw=True)[0]	-2.2980	0.156	-14.723	0.0
poly(lstat, degree=2, raw=True)[1]	0.0584	0.004	14.015	0.0
age	0.1439	0.020	7.279	0.0
lstat:age	-0.0079	0.002	-4.424	0.0

```
print(results4.rsquared, " > ", results3.rsquared)
```

```
0.6808467217930462 > 0.6683791720749932
```

- The R2 in the interaction model again does not exceedingly explain the variance in the model compared to simply having the quadratic term.

## Qualitative Predictors

### Carseats data

```
Carseats = load_data("Carseats")
Carseats.columns
```

```
Index(['Sales', 'CompPrice', 'Income', 'Advertising', 'Population', 'Price',
      'ShelveLoc', 'Age', 'Education', 'Urban', 'US'],
      dtype='object')
```

```
Carseats.shape
```

```
(400, 11)
```

```
Carseats.describe()
```

	Sales	CompPrice	Income	Advertising	Population	Price	Age	Education
count	400.000000	400.000000	400.000000	400.000000	400.000000	400.000000	400.000000	400.000000
mean	7.496325	124.975000	68.657500	6.635000	264.840000	115.795000	53.322500	13.900000
std	2.824115	15.334512	27.986037	6.650364	147.376436	23.676664	16.200297	2.620528
min	0.000000	77.000000	21.000000	0.000000	10.000000	24.000000	25.000000	10.000000
25%	5.390000	115.000000	42.750000	0.000000	139.000000	100.000000	39.750000	12.000000
50%	7.490000	125.000000	69.000000	5.000000	272.000000	117.000000	54.500000	14.000000
75%	9.320000	135.000000	91.000000	12.000000	398.500000	131.000000	66.000000	16.000000
max	16.270000	175.000000	120.000000	29.000000	509.000000	191.000000	80.000000	18.000000

- ModelSpec() generates dummy variables for categorical columns automatically. This is termed a one-hot encoding of the categorical feature.

- Their columns sum to one. To avoid collinearity with the intercept, the first column is dropped.

Below we fit a multiple regression model with interaction terms.

```
allvars = list(Carseats.columns.drop("Sales"))
y = Carseats["Sales"]
final = allvars + [("Income", "Advertising"), ("Price", "Age")]
X = MS(final).fit_transform(Carseats)
model = sm.OLS(y, X)
summarize(model.fit())
```

	coef	std err	t	P> t
intercept	6.5756	1.009	6.519	0.000
CompPrice	0.0929	0.004	22.567	0.000
Income	0.0109	0.003	4.183	0.000
Advertising	0.0702	0.023	3.107	0.002
Population	0.0002	0.000	0.433	0.665
Price	-0.1008	0.007	-13.549	0.000
ShelveLoc[Good]	4.8487	0.153	31.724	0.000
ShelveLoc[Medium]	1.9533	0.126	15.531	0.000
Age	-0.0579	0.016	-3.633	0.000
Education	-0.0209	0.020	-1.063	0.288
Urban[Yes]	0.1402	0.112	1.247	0.213
US[Yes]	-0.1576	0.149	-1.058	0.291
Income:Advertising	0.0008	0.000	2.698	0.007
Price:Age	0.0001	0.000	0.801	0.424

- It can be seen that ShelvLoc is significant and a good shelving location is associated with high sales (relative to a bad location). Medium has a smaller coefficient than Good leading us to believe that it leads to higher sales than a bad location, but lesser than a good location.

```
allDone()
```

```
<IPython.lib.display.Audio object>
```