XSuM: a generative surrogate of the SBND reconstruction chain trained on the BNB Monte Carlo — technical note

L. Wan*

October 16, 2026 (work in progress)

Abstract

XSuM is a per-event surrogate of the SBND simulation and reconstruction chain: given the true neutrino vertex and the post-FSI final-state particles of an interaction, it samples the record that the cafpyana analysis dataframes hold for that interaction (whether and how many Pandora slices are truth-matched to it, the slice-level block of about fifty reconstructed quantities, and later the set of particle-flow objects), in the same dataframe format as the production. Analyses then run unchanged on the surrogated dataframes. The model is trained on the 2026 gen2 BNB + cosmics central-value Monte Carlo (v10_14_02_03) processed with a selection-free cafpyana configuration written for this purpose. This note documents the data, the inputs and outputs, the baseline and flow-matching models, and their closure on held-out files. It is updated as the production and the models progress.

Contents

1 Purpose and scope **2**

2 Data **2**

3 Inputs and targets **3**

4 M1 baselines **3**

5 M2: flow-matching surrogate of the slice block **7**

6 Outlook **9**

*lwan@fnal.gov

1 Purpose and scope

The physics case is forward folding without re-simulation: a cross-section model that was never run through Geant4, Pandora and cafpyana (another generator, a modified FSI model, a new kinematic region) is transported to reconstruction level by the surrogate and compared with data or with the nominal MC at that level. The surrogate does not fix data/MC disagreement; it reproduces the MC detector response, including its flaws, for new inputs.

Scope decisions (2026-10-16): XSuM generates the complete reconstruction record, not analysis quantities. Selection flags, BDT scores and derived kinematics such as $|t|$ are recomputed downstream by the analysers (CC coherent pion: S. Oh; charged kaons: T. Wester) from the generated variables. Cosmic-only slices do not depend on the neutrino model and are reused from the MC. Generator-internal labels (interaction mode, CC/NC, W, Q^2, E_ν, signal flags) are never inputs; they are kept in a separate label table for holdout tests.

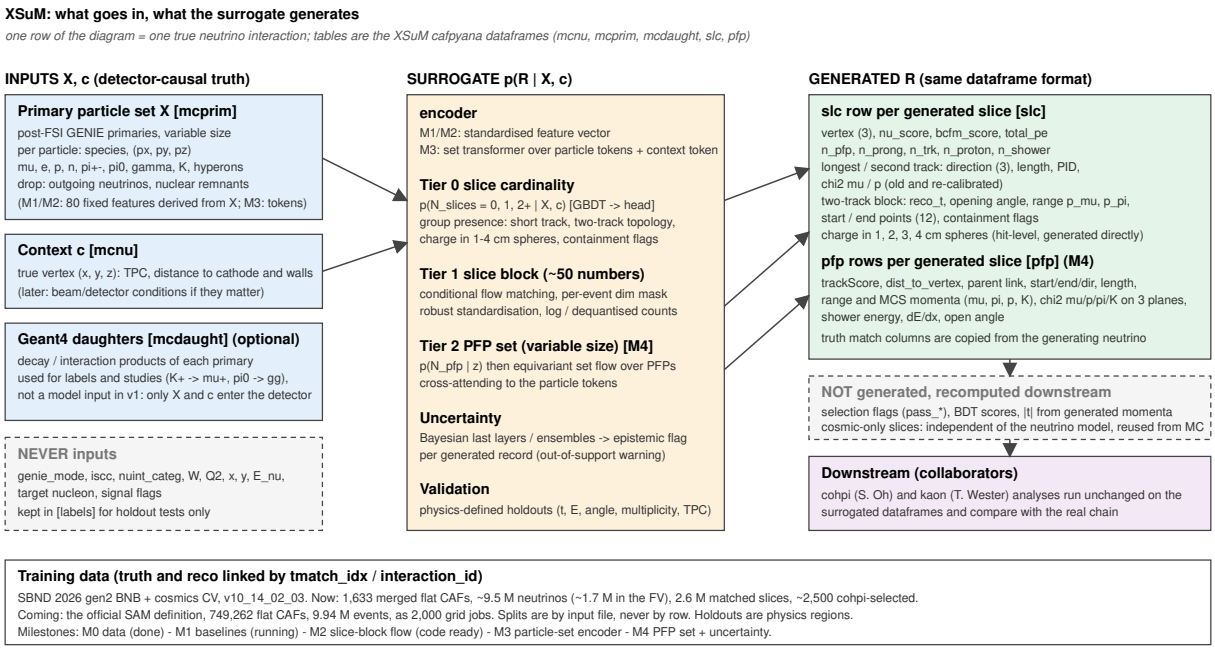


Figure 1: Inputs, surrogate, generated record and downstream use. One row of the diagram is one true neutrino interaction.

2 Data

Production. A cafpyana df-maker configuration (`analysis_village/xsum/`) writes, per flat CAF: `mcnu` (every true neutrino with the full `make_mcdf` truth, the cohpi kinematics and category), `mcprim` (every post-FSI primary), `mcdaught` (the Geant4 daughters of every primary), `slc` (every non-clear-cosmic slice with the cohpi variables and each selection stage as a flag), `pfp` (every PFP of those slices with track, shower and PID variables, kaon PID on all planes, parent links and truth match), `hdr` and POT tables. Two productions:

- **scratch1633**: the 1,633 merged flat CAFs (2.5 GB, about 3,300 triggers each) still present on the dCache scratch area referenced by the cafpyana sample list (1,363 of the 2,996 had

been purged), run in pool mode on `sbndbuild03` with 30 workers in about 3.5 h: 15.5 GB of dataframes, 8,145,755 neutrinos in the five chunks used here. This production predates the `mcdaught` table, the kaon PID branches and the removal of the 50 cm vertex-distance cut on PFPs.

- **official**: the SAM definition `aurora_SBND2026A_gen2_BNBLight_prodgenie_corsika_proton_rockbox0p1_sl` (749,262 flat CAFs, 9.94 M triggers, 7.9 TB), submitted as 2,000 grid jobs on 2026-10-16 after a 375-file pilot (21.5 s per file single-threaded, 4,500 CPU-hours in total).

Truth–reco link. A slice points to its truth-matched neutrino through `tmatch_idx`; a PFP points to the true particle it was matched to and, through `interaction_id`, to its neutrino. A neutrino can have zero, one or several matched slices; the table keeps the slice with the highest match efficiency and records the count.

Splits. Train / validation / test are 80 / 10 / 10 by input file, never by row. In the five scratch chunks: 6,514,860 / 814,028 neutrinos in train / test. Holdout tests use physics regions (momentum transfer, energy, angle, multiplicity, TPC), see Sec. 6.

3 Inputs and targets

Inputs. The post-FSI primary particles (species, (p_x, p_y, p_z); neutrinos and nuclear remnants dropped) and the true vertex. The M1 and M2 models use 80 fixed features derived from them: the vertex and its distances to the cathode and the walls; per species (mu, e, p, n, $\mathrm{pi}^{\pm}$, pi^{0}, gamma, $\mathrm{K}^{\pm}$, K^{0}, Lambda, Sigma) the multiplicity above the cohpi thresholds (27 / 30 / 20 MeV for mu / pi / p), the summed and maximum kinetic energy and the leading particle's momentum, $\cos\theta$ and p_T; and totals (charged multiplicity, visible and total kinetic energy, electromagnetic energy, longitudinal momentum). The particle-set encoder (M3) will consume the particles directly.

Targets. Tier 0: the number of matched slices and, per slice, which groups of variables exist (a second track, the two-track topology, hits within 1–4 cm of the vertex) and the two containment flags. Tier 1: the slice block (Table **??** lists the columns). Tier 2 (M4): the PFP set.

4 M1 baselines

Gradient-boosted classifiers for the discrete targets and mixture density networks (MDN, eight diagonal Gaussians, against a single Gaussian) for continuous responses, on the 80 features. Results on the test files of the five scratch chunks (reports/m1_scratch1633).

Slice efficiency. 32.1% of all true neutrinos (dirt and out-of-volume included) have a truth-matched slice. Log loss 0.1832 against a marginal 0.6270, AUC 0.976. The calibration against vertex z, muon momentum, visible energy and multiplicity is shown in Fig. 2.

cohpi selection as a yardstick. The full cohpi selection (including the sphere-charge and cathode-crossing cuts) keeps 0.035% of neutrinos. As a check of the production, the selected count per POT agrees with the technote cut flow within 10%. The classifier reaches log loss 0.00263 against 0.00313 (AUC 0.857); per true category:

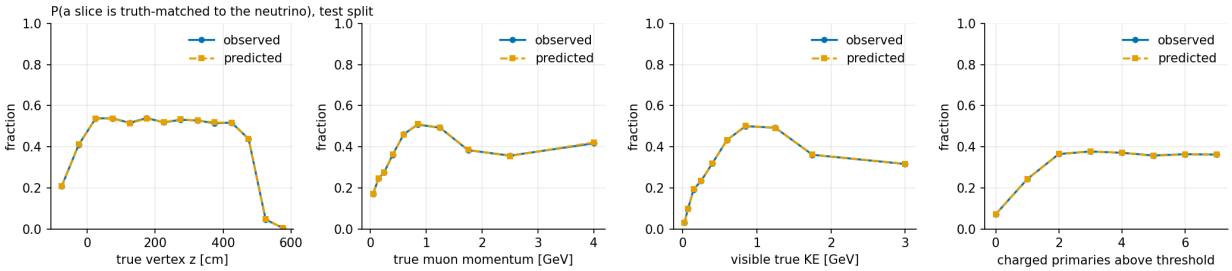


Figure 2: Observed and predicted probability that a slice is truth-matched to the neutrino, test files.

True category	test neutrinos	selected [%]	predicted [%]
out of FV	667,795	0.000	0.024
NC	41,319	0.063	0.040
signal	212	27.358	37.635
CCQE	55,425	0.020	0.021
2p2h	14,431	0.049	0.025
RES	29,189	0.483	0.500
DIS	5,657	0.672	0.815

PFP multiplicity of the matched slice: log loss 0.861 against 1.414, accuracy 66.7% against 39.0% (Fig. 3).

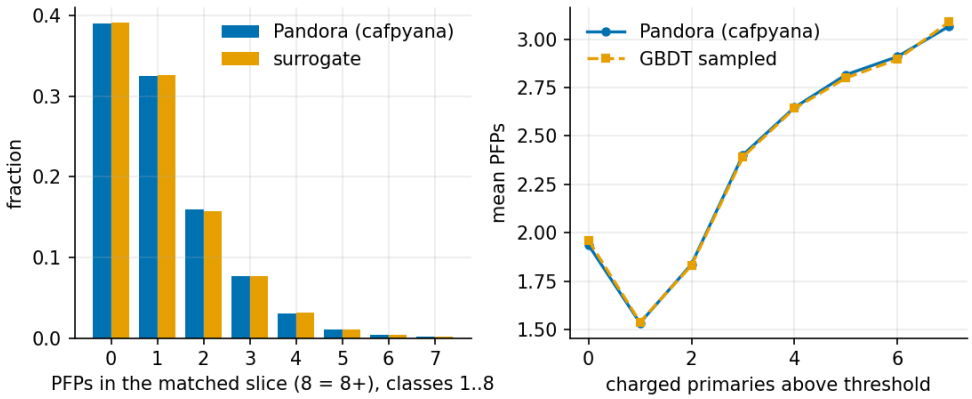


Figure 3: PFP multiplicity of the matched slice: marginal and mean versus charged primaries.

Continuous responses. Table 1 gives the test negative log-likelihood and Table 2 the marginals; Figs. 4–6 show them.

Target	training rows	Gaussian NLL	MDN ($K = 8$) NLL
vertex residual (3-d)	986,566	5.571	0.871
leading track: $\Delta \cos\theta$, log length	962,124	0.078	-2.648
two-track: log range-p ratios, $\Delta \cos\theta_\mu$	18,311	0.057	-1.710

Table 1: M1 MDN test NLL per target.

Variable	Pandora median [16%, 84%]	MDN median [16%, 84%]	W_1
dvtx_x [cm]	0.000 [-0.203, 0.210]	-0.000 [-0.207, 0.211]	2.3234
dvtx_y [cm]	0.001 [-0.381, 0.394]	0.002 [-0.359, 0.392]	2.9230
dvtx_z [cm]	-0.011 [-0.395, 0.479]	-0.010 [-0.378, 0.465]	3.9131
long_dirz - lead cos theta	-0.001 [-0.045, 0.060]	-0.002 [-0.048, 0.062]	0.0626
log(long track length [cm])	4.731 [3.669, 5.490]	4.733 [3.660, 5.495]	0.0074
log(range_p_mu / p_mu_true)	-0.013 [-0.615, 0.081]	-0.014 [-0.587, 0.157]	0.0241
log(range_p_cpi / p_pi_true)	-0.498 [-1.082, -0.136]	-0.509 [-1.060, -0.117]	0.0356
long_dirz - cos theta_mu	-0.000 [-0.030, 0.063]	0.000 [-0.027, 0.099]	0.0311

Table 2: Marginals of the MDN samples against Pandora, test files.

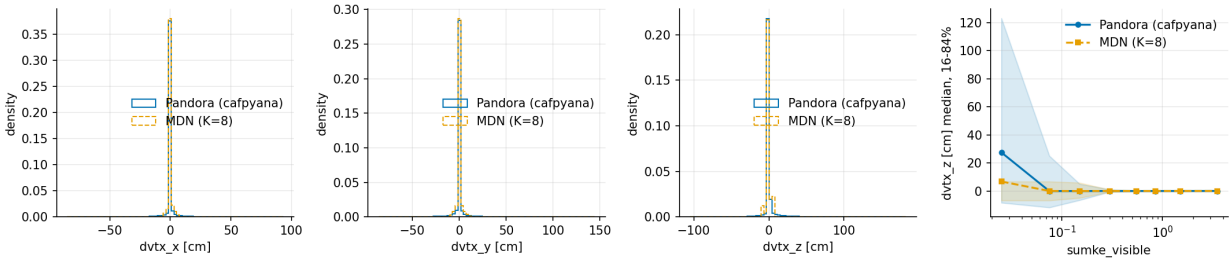


Figure 4: Vertex residual of the matched slice (FV neutrinos).

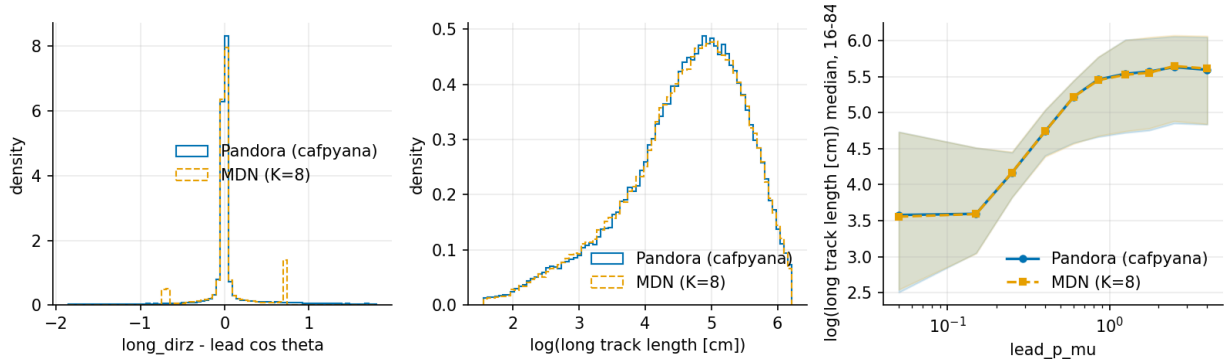


Figure 5: Longest track: direction relative to the leading charged primary and length.

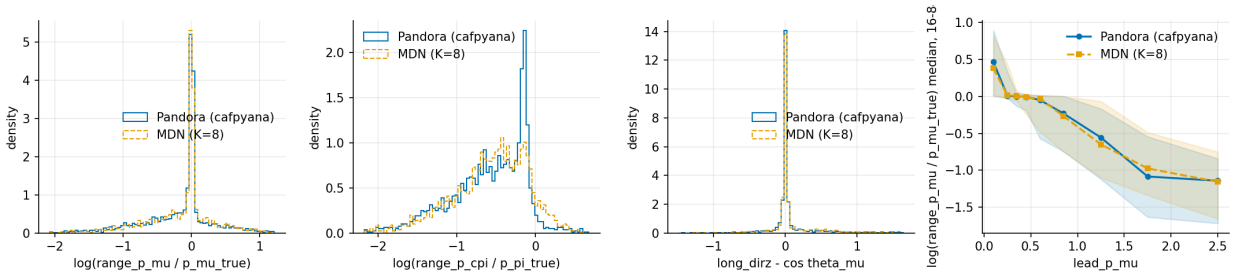


Figure 6: cohpi two-track response on 1mu1pi events passing the two-track topology.

5 M2: flow-matching surrogate of the slice block

A conditional flow-matching model (linear path, Gaussian source, velocity MLP) over the standardised slice block, with a per-event mask for the groups that do not exist in that slice (sim2reco `dim_mask`), and gradient-boosted heads for slice cardinality, group presence and the containment flags. Counts are dequantised, positive quantities enter as logarithms, standardisation is robust (median, MAD). Sampling proceeds presence → flow → inverse transforms → a dataframe with the production column names. Trained on 2,614,990 matched slices for 60 epochs.

Group / flag	rate [%]	log loss (marginal)	log loss (GBDT)	AUC
short	61.0	0.6688	0.3541	0.915
two	8.1	0.2804	0.2269	0.804
s1	86.7	0.3915	0.3475	0.736
s2	95.3	0.1889	0.1624	0.763
s3	97.3	0.1243	0.1039	0.776
s4	98.2	0.0913	0.0744	0.786
is_muon_contained	29.5	0.6064	0.3043	0.929
is_cpi_contained	56.2	0.6855	0.2862	0.948
spike_vtx_z	12.9	0.3848	0.1183	0.977
spike_vtx_x	5.6	0.2152	0.0619	0.985
spike_vtx_y	5.4	0.2108	0.0760	0.971
spike_opening_angle	3.0	0.1336	0.1002	0.862

Table 3: Group presence and containment heads, test files.

Closure on the test files. Table **??** compares every generated column with Pandora (fraction present and Wasserstein-1 in transformed units; median W_1 0.020, maximum 7.186). Table 4 recomputes the cohpi cut flow on the generated and the real test slices, for all slices and for true signal; this is the kind of comparison the analysers will make on the full surrogated sample.

Stage	all, Pandora	all, generated	signal, Pandora	signal, generated
pe_bcfm	205,571	205,143	190	187
2trk	17,334	14,943	88	74
dir	1,467	1,096	75	57
chi2	862	690	65	51
sphere	504	388	62	48
cathode	423	319	58	42
sr	220	163	55	35

Table 4: cohpi cut flow recomputed on real and generated test slices.

Column	present, real [%]	present, generated [%]	W_1 (transformed units)
vtx_x	100.0	100.0	0.5405
vtx_y	100.0	100.0	0.5069
vtx_z	100.0	100.0	0.6324

Column	present, real [%]	present, generated [%]	W_1 (transformed units)
nu_score	100.0	100.0	0.0009
bcfm_score	99.2	100.0	0.0029
total_pe	99.6	100.0	0.0040
n_pfp	100.0	100.0	0.0291
n_prong	100.0	100.0	0.0243
n_trk	100.0	100.0	0.0242
n_proton	100.0	100.0	0.0194
n_shower	100.0	100.0	0.0287
long_dirx	100.0	100.0	0.0032
long_diry	100.0	100.0	0.0067
long_dirz	100.0	100.0	0.0085
long_trk_len	100.0	100.0	0.0074
long_trk_pid	100.0	100.0	0.0010
long_trk_chi2_mu	100.0	100.0	0.0118
long_trk_chi2_pro	100.0	100.0	0.0153
long_trk_chi2_mu_new	100.0	100.0	0.0115
long_trk_chi2_pro_new	100.0	100.0	0.0151
short_dirx	61.0	60.9	0.0103
short_diry	61.0	60.9	0.0082
short_dirz	61.0	60.9	0.0185
short_trk_len	61.0	60.9	0.0395
short_trk_pid	61.0	60.9	0.0037
short_trk_chi2_mu	61.0	60.9	0.0190
short_trk_chi2_pro	61.0	60.9	0.0156
short_trk_chi2_mu_new	61.0	60.9	0.0201
short_trk_chi2_pro_new	61.0	60.9	0.0173
reco_t	8.1	8.0	0.0961
opening_angle	8.1	8.0	0.1248
range_p_mu	8.1	8.0	0.0094
range_p_cpi	8.1	8.0	0.0412
muon_start_x	8.1	8.0	2.0394
muon_start_y	8.1	8.0	1.3493
muon_start_z	8.1	8.0	4.4133
muon_end_x	8.1	8.0	3.3271
muon_end_y	8.1	8.0	2.6199
muon_end_z	8.1	8.0	7.1863
cpi_start_x	8.1	8.0	2.1899
cpi_start_y	8.1	8.0	1.2298
cpi_start_z	8.1	8.0	4.4534
cpi_end_x	8.1	8.0	2.6802
cpi_end_y	8.1	8.0	1.2814
cpi_end_z	8.1	8.0	4.5468
sum_integ_1cm	86.7	86.9	0.0177
sum_integ_2cm	95.3	95.3	0.0192
sum_integ_3cm	97.3	97.3	0.0190
sum_integ_4cm	98.2	98.1	0.0238

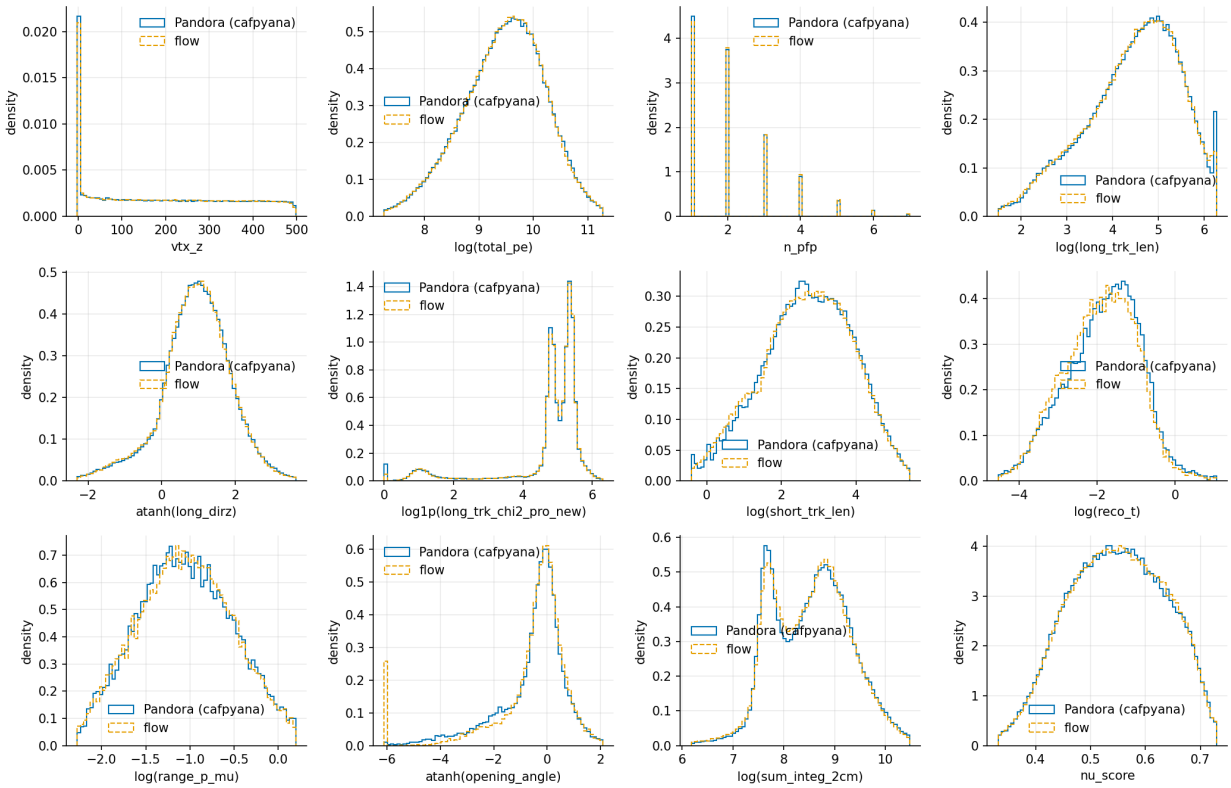


Figure 7: Marginals of generated (flow) against Pandora slice variables, test files.

6 Outlook

1. Official sample (9.94 M triggers): retrain M1/M2, add the `mcdaught` and full-PFP tables.
2. M3: particle-set encoder (transformer over primaries + vertex token) replacing the fixed features.
3. M4: PFP set generation (cardinality + equivariant set flow), Bayesian last layers for an epistemic flag.
4. Holdouts: train on $|t| < 0.1$, test the tail; low versus high E_ν; forward versus wide-angle muons; ≤ 2 versus ≥ 3 charged primaries; one TPC versus the other.
5. Surrogated dataframes written in the production format for the cohpi and kaon analysers.