

1    **MitoChime: A Machine-Learning Pipeline for**  
2            **Detecting PCR-Induced Chimeras in**  
3            **Mitochondrial Illumina Reads**

4                            A Special Project Proposal  
5                            Presented to  
6            the Faculty of the Division of Physical Sciences and Mathematics  
7                            College of Arts and Sciences  
8            University of the Philippines Visayas  
9                            Miag-ao, Iloilo

10                           In Partial Fulfillment  
11                           of the Requirements for the Degree of  
12            Bachelor of Science in Computer Science

13                           by

14                           Duranne Duran  
15                           Yvonne Lin  
16                           Daniella Pailden

17                           Adviser  
18                           Francis D. Dimzon, Ph.D.

19                           November 30, 2025

# Contents

|    |   |          |
|----|---|----------|
| 21 | <b>1 Introduction</b>                               | <b>1</b> |
| 22 | 1.1 Overview . . . . .                              | 1        |
| 23 | 1.2 Problem Statement . . . . .                     | 3        |
| 24 | 1.3 Research Objectives . . . . .                   | 4        |
| 25 | 1.3.1 General Objective . . . . .                   | 4        |
| 26 | 1.3.2 Specific Objectives . . . . .                 | 4        |
| 27 | 1.4 Scope and Limitations of the Research . . . . . | 5        |
| 28 | 1.5 Significance of the Research . . . . .          | 6        |
| 29 | <b>2 Review of Related Literature</b>               | <b>7</b> |
| 30 | 2.1 The Mitochondrial Genome . . . . .              | 7        |
| 31 | 2.1.1 Mitochondrial Genome Assembly . . . . .       | 8        |

|    |          |   |           |
|----|----------|---|-----------|
| 32 | 2.2      | PCR Amplification and Chimera Formation . . . . .               | 9         |
| 33 | 2.2.1    | Effects of Chimeric Reads on Organelle Genome Assembly          | 10        |
| 34 | 2.3      | Existing Traditional Approaches for Chimera Detection . . . . . | 11        |
| 35 | 2.3.1    | UCHIME . . . . .  | 12        |
| 36 | 2.3.2    | UCHIME2 . . . . .   | 14        |
| 37 | 2.3.3    | CATch . . . . .   | 16        |
| 38 | 2.3.4    | ChimPipe . . . . .  | 17        |
| 39 | 2.4      | Machine Learning Approaches for Chimera and Sequence Quality    |           |
| 40 |          | Detection . . . . .   | 18        |
| 41 | 2.4.1    | Feature-Based Representations of Genomic Sequences . . .        | 18        |
| 42 | 2.5      | Synthesis of Chimera Detection Approaches . . . . .             | 20        |
| 43 | <b>3</b> | <b>Research Methodology</b>                                     | <b>23</b> |
| 44 | 3.1      | Research Activities . . . . .                                   | 23        |
| 45 | 3.1.1    | Data Collection . . . . .                                       | 24        |
| 46 | 3.1.2    | Bioinformatics Tools Pipeline . . . . .                         | 26        |
| 47 | 3.1.3    | Machine-Learning Model Development . . . . .                    | 29        |
| 48 | 3.1.4    | Validation and Testing . . . . .                                | 30        |

|    |                                      |    |
|----|--------------------------------------|----|
| 49 | 3.1.5 Documentation . . . . .        | 30 |
| 50 | 3.2 Calendar of Activities . . . . . | 31 |

# 51 List of Figures

|                   |  |    |
|-------------------|--|----|
| <small>52</small> | 3.1 Process Diagram of Special Project . . . . . | 24 |
|-------------------|--|----|

# 53 List of Tables

|                   |   |    |
|-------------------|---|----|
| <small>54</small> | 2.1 Summary of Existing Methods and Research Gaps . . . . . | 21 |
| <small>55</small> | 3.1 Timetable of Activities . . . . .                       | 32 |

# Chapter 1

## Introduction

### 1.1 Overview

The rapid advancement of next-generation sequencing (NGS) technologies has transformed genomic research by enabling high-throughput and cost-effective DNA analysis (Metzker, 2010). Among current platforms, Illumina sequencing remains the most widely adopted, capable of producing millions of short reads that can be assembled into reference genomes or analyzed for genetic variation (Bentley et al., 2008; Glenn, 2011). Despite its high base-calling accuracy, Illumina sequencing is prone to artifacts introduced during library preparation, particularly polymerase chain reaction (PCR)-induced chimeras, which are artificial hybrid sequences that do not exist in the true genome (Judo, Wedel, & Wilson, 1998).

PCR chimeras form when incomplete extension products from one template

anneal to an unrelated DNA fragment and are extended, creating recombinant reads (Qiu et al., 2001). In mitochondrial genome assembly, such artifacts are especially problematic because the mitochondrial genome is small, circular, and often repetitive (Boore, 1999; Cameron, 2014). Even a small number of chimeric or misjoined reads can reduce assembly contiguity and introduce false junctions during organelle genome reconstruction (Dierckxsens, Mardulyn, & Smits, 2017; Hahn, Bachmann, & Chevreux, 2013; Jin et al., 2020). Existing assembly tools such as GetOrganelle and MITObim assume that input reads are largely free of such artifacts (Hahn et al., 2013; Jin et al., 2020). Consequently, undetected chimeras may produce fragmented assemblies or misidentified organellar boundaries. To ensure accurate reconstruction of mitochondrial genomes, a reliable method for detecting and filtering PCR-induced chimeras before assembly is essential.

This study focuses on mitochondrial sequencing data from the genus *Sardinella*, a group of small pelagic fishes widely distributed in Philippine waters. Among them, *Sardinella lemuru* (Bali sardinella) is one of the country’s most abundant and economically important species, providing protein and livelihood to coastal communities (Labrador, Agmata, Palermo, Ravago-Gotanco, & Pante, 2021; Willette, Bognot, Mutia, & Santos, 2011). Accurate mitochondrial assemblies are critical for understanding its population genetics, stock structure, and evolutionary history. However, assembly pipelines often encounter errors or fail to complete due to undetected chimeric reads. To address this gap, this research introduces MitoChime, a machine learning pipeline designed to detect and filter PCR-induced chimeric reads using both alignment-based and sequence-derived statistical features. The tool aims to provide bioinformatics laboratories, partic-



ularly the Philippine Genome Center Visayas (PGC Visayas), with an efficient solution for improving mitochondrial genome reconstruction.

## 1.2 Problem Statement

While NGS technologies have revolutionized genomic data acquisition, the accuracy of mitochondrial genome assembly remains limited by artifacts produced during PCR amplification. These chimeric reads can distort assembly graphs and cause misassemblies, with particularly severe effects in small, circular mitochondrial genomes (Boore, 1999; Cameron, 2014). Existing assembly pipelines such as GetOrganelle, MITObim, and NOVOPlasty assume that sequencing reads are free of such artifacts (Dierckxsens et al., 2017; Hahn et al., 2013; Jin et al., 2020). At PGC Visayas, several mitochondrial assemblies have failed or yielded incomplete contigs despite sufficient coverage, suggesting that undetected chimeric reads compromise assembly reliability. Meanwhile, existing chimera detection tools such as UCHIME and VSEARCH were developed primarily for amplicon-based community analysis and rely heavily on reference or taxonomic comparisons (Edgar, Haas, Clemente, Quince, & Knight, 2011; Rognes, Flouri, Nichols, Quince, & Mahé, 2016). These approaches are unsuitable for single-species organellar data, where complete reference genomes are often unavailable. Therefore, there is a pressing need for a reference-independent, data-driven tool capable of detecting and filtering PCR-induced chimeras in mitochondrial sequencing datasets.

## 115 1.3 Research Objectives

### 116 1.3.1 General Objective

117 This study aims to develop and evaluate a machine learning-based pipeline (Mi-  
118 toChime) that detects PCR-induced chimeric reads in *Sardinella lemuru* mito-  
119 chondrial sequencing data in order to improve the quality and reliability of down-  
120 stream mitochondrial genome assemblies.

### 121 1.3.2 Specific Objectives

122 Specifically, the study aims to:

- 123 1. construct simulated *Sardinella lemuru* Illumina paired-end datasets contain-  
124 ing both clean and PCR-induced chimeric reads,
- 125 2. extract alignment-based and sequence-based features such as k-mer compo-  
126 sition, junction complexity, and split-alignment counts from both clean and  
127 chimeric reads,
- 128 3. train, validate, and compare supervised machine-learning models for classi-  
129 fying reads as clean or chimeric,
- 130 4. determine feature importance and identify indicators of PCR-induced  
131 chimerism,
- 132 5. integrate the optimized classifier into a modular and interpretable pipeline  
133 deployable on standard computing environments at PGC Visayas.

## 1.4 Scope and Limitations of the Research

This study focuses on detecting PCR-induced chimeric reads in Illumina paired-end mitochondrial sequencing data from *Sardinella lemuru*. The decision to restrict the taxonomic scope to a single species is based on four considerations: (1) to limit interspecific variation in mitochondrial genome size, GC content, and repetitive regions so that differences in read patterns can be attributed more directly to PCR-induced chimerism; (2) to align the analysis with relevant *S. lemuru* sequencing projects at PGC Visayas; (3) to take advantage of the availability of *S. lemuru* mitochondrial assemblies and raw datasets in public repositories such as the National Center for Biotechnology Information (NCBI), which facilitates reference selection and benchmarking; and (4) to develop a tool that directly supports local studies on *S. lemuru* population structure and fisheries management.

The study emphasizes `wgsim`-based simulations and selected empirical mitochondrial datasets from *S. lemuru*. It excludes naturally occurring chimeras, nuclear mitochondrial pseudogenes (NUMTs), and large-scale assembly rearrangements in nuclear genomes. Feature extraction is restricted to low-dimensional alignment and sequence statistics, such as k-mer frequency profiles, GC content, read length, soft and hard clipping metrics, split-alignment counts, and mapping quality, rather than high-dimensional deep learning embeddings. This design keeps model behaviour interpretable and ensures that the pipeline can be run on standard workstations at PGC Visayas. Testing on long-read platforms (e.g., Nanopore, PacBio) and other taxa is outside the scope of this project; the implemented pipeline is evaluated only on short-read *S. lemuru* datasets.

## 157 1.5 Significance of the Research

158 This research provides both methodological and practical contributions to mi-  
159 tochondrial genomics and bioinformatics. First, MitoChime filters PCR-induced  
160 chimeric reads prior to genome assembly, with the goal of improving the con-  
161 tiguity and correctness of *Sardinella lemuru* mitochondrial assemblies. Second,  
162 it replaces informal manual curation with a documented workflow, improving au-  
163 tomation and reproducibility. Third, the pipeline is designed to run on computing  
164 infrastructures commonly available in regional laboratories, enabling routine use  
165 at facilities such as PGC Visayas. Finally, more reliable mitochondrial assemblies  
166 for *S. lemuru* provide a stronger basis for downstream applications in the field of  
167 fisheries and genomics.

## Chapter 2

# Review of Related Literature

This chapter presents an overview of the literature relevant to the study. It discusses the biological and computational foundations underlying mitochondrial genome analysis and assembly, as well as existing tools, algorithms, and techniques related to chimera detection and genome quality assessment. The chapter aims to highlight the strengths, limitations, and research gaps in current approaches that motivate the development of the present study.

## 2.1 The Mitochondrial Genome

Mitochondrial genome (mtDNA) is a small, typically circular molecule found in most eukaryotes. It encodes essential genes involved in oxidative phosphorylation and energy metabolism. Because of its conserved structure and maternal inheritance, mtDNA has become a valuable genetic marker for studies in evolution, population genetics, and phylogenetics (Anderson et al., 1981; Boore, 1999). In

182 animal species, the mitochondrial genome ranges from 15–20 kilobase and contains  
183 13 protein-coding genes, 22 tRNAs, and two rRNAs arranged compactly without  
184 introns (Gray, 2012). In comparison to nuclear DNA the ratio of the number  
185 of copies of mtDNA is higher and has relatively simple organization which make  
186 it particularly suitable for genome sequencing and assembly studies (Dierckxsens  
187 et al., 2017). Moreover, mitochondrial genomes provide crucial insights into evo-  
188 lutionary relationships among species and are increasingly used for testing new  
189 genomic assembly and analysis methods.

### 190 **2.1.1 Mitochondrial Genome Assembly**

191 Mitochondrial genome assembly refers to the reconstruction of the complete mito-  
192 chondrial DNA (mtDNA) sequence from raw or fragmented sequencing reads. It is  
193 conducted to obtain high-quality, continuous representations of the mitochondrial  
194 genome that can be used for a wide range of analyses, including species identi-  
195 fication, phylogenetic reconstruction, evolutionary studies, and investigations of  
196 mitochondrial diseases. Because mtDNA evolves relatively rapidly and is mater-  
197 nally inherited, its assembled sequence provides valuable insights into population  
198 structure, lineage divergence, and adaptive evolution across taxa (Boore, 1999).  
199 Compared to nuclear genome assembly, assembling the mitochondrial genome is  
200 often considered more straightforward but still encounters distinct technical chal-  
201 lenges such as sequencing errors, low coverage regions, and chimeric reads that can  
202 distort the final assembly, leading to incomplete or misassembled genomes. These  
203 errors can propagate into downstream analyses, emphasizing the need for robust  
204 chimera detection and sequence validation methods in mitochondrial genome re-

205 search.

## 206 **2.2 PCR Amplification and Chimera Formation**

207 Polymerase Chain Reaction (PCR) plays an important role in next-generation  
208 sequencing (NGS) library preparation, as it amplifies target DNA fragments for  
209 downstream analysis. However, the amplification process can also introduce arti-  
210 facts that affect data accuracy, one of them being the formation of chimeric se-  
211 quences. Chimeras typically arise when incomplete extension occurs during a PCR  
212 cycle. This causes the DNA polymerase to switch from one template to another  
213 and generate hybrid recombinant molecules (Judo et al., 1998). Artificial chimeras  
214 are produced through such amplification errors, whereas biological chimeras oc-  
215 cur naturally through genomic rearrangements or transcriptional events. These  
216 biological chimeras can have functional roles and may encode tissue-specific novel  
217 proteins that link to cellular processes or diseases (Frenkel-Morgenstern et al.,  
218 2012).

219 In the context of amplicon-based sequencing, PCR-induced chimeras can sig-  
220 nificantly distort analytical outcomes. Their presence artificially inflates estimates  
221 of genetic or microbial diversity and may cause misassemblies during genome re-  
222 construction. (Qin et al., 2023) has reported that chimeric sequences may account  
223 for more than 10% of raw reads in amplicon datasets. This artifact tends to be  
224 most prominent among rare operational taxonomic units (OTUs) or singletons,  
225 which are sometimes misinterpreted as novel diversity, which further causes the  
226 complication of microbial diversity analyses (Gonzalez, Zimmermann, & Saiz-

227 Jimenez, 2004). Moreover, the likelihood of chimera formation has been found to  
228 vary with the GC content of target sequences, with lower GC content generally  
229 associated with a reduced rate of chimera generation (Qin et al., 2023).

### 230 **2.2.1 Effects of Chimeric Reads on Organelle Genome As-** 231 **sembly**

232 In mitochondrial DNA (mtDNA) assembly workflows, PCR-induced chimeras pose  
233 additional challenges. Assembly tools such as GetOrganelle and MitoBeam, which  
234 operate under the assumption of organelle genome circularity, are vulnerable when  
235 chimeric reads disrupt this circular structure. Such disruptions can lead to assem-  
236 bly errors or misassemblies (Bi et al., 2024). These artificial sequences interfere  
237 with the assembly graph, which makes it more difficult to accurately reconstruct  
238 mitochondrial genomes. In addition, these artifacts propagate false variants and  
239 erroneous annotations in genomic data. Hence, determining and minimizing PCR-  
240 induced chimera formation is vital for improving the quality of mitochondrial  
241 genome assemblies, and ensuring the reliability of amplicon sequencing data.



## 2.3 Existing Traditional Approaches for Chimera Detection

Several computational tools have been developed to identify chimeric sequences in NGS datasets. These tools generally fall into two categories: reference-based and de novo approaches. Reference-based chimera detection, also known as database-dependent detection, is one of the earliest and most widely used computational strategies for identifying chimeric sequences in amplicon-based microbial community studies. These methods rely on the comparison of each query sequence against a curated, high-quality database of known, non-chimeric reference sequences to determine whether the query can be more plausibly explained as a composite or a mosaic of two or more reference sequences rather than as a genuine biological variant (Edgar et al., 2011).

On the other hand, the de novo chimera detection, also referred to as reference-free detection, represents an alternative computational paradigm that identifies chimeric sequences without reliance on external reference databases. Instead of comparing each query sequence to a curated collection of known, non-chimeric sequences, de novo methods infer chimeras based on internal relationships among the sequences present within the dataset itself. This approach is particularly advantageous in studies of novel, under explored, or taxonomically diverse microbial communities where comprehensive reference databases are unavailable or incomplete (Edgar, 2016; Edgar et al., 2011). The underlying assumption on this method operates on the key biological principle that true biological sequences are generally more abundant than chimeric artifacts. During PCR amplification, authentic sequences are amplified early and tend to dominate the read pool, while

266 chimeric sequences form later resulting in the tendency to appear at lower relative  
267 abundances compared to their true parental sequences. As such, the abundance  
268 hierarchy is formed by treating the most abundant sequences as supposed parents  
269 and testing whether less abundant sequences can be reconstructed as mosaics of  
270 these dominant templates. In addition to abundance, de novo algorithms assess  
271 compositional and structural similarity among sequences, examining whether cer-  
272 tain regions of a candidate sequence align more closely with one high-abundance  
273 sequence and other regions with a different one.

274 Both reference-based and de novo approaches are complementary rather than  
275 mutually exclusive. Reference-based methods provide stability and reproducibility  
276 when curated databases are available, whereas de novo methods offer flexibility  
277 and independence for novel or highly diverse communities. In practice, many  
278 modern bioinformatics pipelines combine both paradigms sequentially: an initial  
279 de novo step identifies dataset-specific chimeras, followed by a reference-based pass  
280 that removes remaining artifacts relative to established databases (Edgar, 2016).  
281 These two methods of detection form the foundation of tools such as UCHIME  
282 and later UCHIME2, exemplified by the dual capability of providing both modes  
283 within a unified computational framework.

### 284 **2.3.1 UCHIME**

285 Developed by Edgar et al. (Edgar et al., 2011), UCHIME is one of the most widely  
286 used computational tools for detecting chimeric sequences in amplicon sequencing  
287 data. The UCHIME algorithm detects chimeras by evaluating how well a query  
288 sequence (Q) can be explained as a mosaic of two parent sequences (A and B)

289 from a reference database. The query sequence is first divided into four non-  
290 overlapping segments or chunks. Each chunk is independently searched against a  
291 reference database that is assumed to be free of chimeras. The best matches to  
292 each segment are collected, and from these results, two candidate parent sequences  
293 are identified, typically the two sequences that best explain all chunks of the query.  
294 Then a three-way alignment among the query (Q) and the two parent candidates  
295 (A and B) is done. From this alignment, UCHIME attempts to find a chimeric  
296 model (M) which is a hypothetical recombinant sequence formed by concatenating  
297 fragments from A and B that best match the observed Q

## 298 **Chimeric Alignment and Scoring**

299 To decide whether a query is chimeric, UCHIME computes several alignment-  
300 based metrics between Q, its top hit (T, the most similar known sequence), and  
301 the chimeric model (M). The key differences are measured as: dQT or the number  
302 of mismatches between the query and the top hit as well as dQM or the number  
303 of mismatches between the query and the chimeric model. From these, a chimera  
304 score is calculated to quantify how much better the chimeric model fits the query  
305 compared to a single parent. If the model's similarity to Q exceeds a defined  
306 threshold (typically  $\geq 0.8\%$  better identity), the sequence is reported as chimeric.  
307 A higher score indicates stronger evidence of chimerism, while lower scores suggest  
308 that the sequence is more likely to be authentic.

309 In de novo mode, UCHIME applies an abundance-driven strategy. Only se-  
310 quences at least twice as abundant as the query are considered as potential parents.  
311 Non-chimeric sequences identified at each step are added iteratively to a growing

312 internal database for subsequent queries.

## 313 **Limitations of UCHIME**

314 Although UCHIME was a significant advancement in chimera detection, it has  
315 notable limitations. According to (Edgar, 2016) and the UCHIME practical notes  
316 (Edgar, n.d), many of the accuracy results reported in the original 2011 paper  
317 were overly optimistic due to unrealistic benchmark designs that assumed com-  
318 plete reference coverage and perfect sequence quality. In practice, UCHIME’s  
319 accuracy can decline when (1) the reference database is incomplete or contains  
320 erroneous entries; (2) low-divergence chimeras are present, as these closely resem-  
321 ble genuine biological variants; (3) sequence datasets include residual sequencing  
322 errors, leading to spurious alignments or misidentification; and (4) the abundance  
323 ratio between parent and chimera is distorted by amplification bias. Additionally,  
324 UCHIME tends to misclassify sequences as non-chimeric when parent sequences  
325 are missing from the database. These limitations motivated the development of  
326 UCHIME2.

## 327 **2.3.2 UCHIME2**

328 To overcome the limitations of its predecessor, UCHIME2 (Edgar, 2016) intro-  
329 duced several methodological and algorithmic refinements that significantly en-  
330 hanced the accuracy and reliability of chimera detection. One major improve-  
331 ment lies in its approach to uncertainty handling. In earlier versions, sequences  
332 with limited reference support were often incorrectly classified as non-chimeric,

333 increasing the likelihood of false negatives. UCHIME2 addresses this issue by  
334 designating such ambiguous sequences as “unknown,” thereby providing a more  
335 conservative and reliable classification framework.

336 Another notable advancement is the introduction of multiple application-  
337 specific modes that allow users to tailor the algorithm’s performance to the  
338 characteristics of their datasets. The following parameter presets: denoised,  
339 balanced, sensitive, specific, and high-confidence, enable researchers to optimize  
340 the balance between sensitivity and specificity according to the goals of their  
341 analysis.

342 In comparative evaluations, UCHIME2 demonstrated superior detection per-  
343 formance, achieving sensitivity levels between 93% and 99% and lower overall  
344 error rates than earlier versions or other contemporary tools such as DECIPHER  
345 and ChimeraSlayer. Despite these advances, the study also acknowledged a fun-  
346 damental limitation in chimera detection: complete error-free identification is  
347 theoretically unattainable. This is due to the presence of “perfect fake models,”  
348 wherein genuine non-chimeric sequences can be perfectly reconstructed from other  
349 reference fragments. This underscore the uncertainty in differentiating authentic  
350 biological sequences from artificial recombinants based solely on sequence similar-  
351 ity, emphasizing the need for continued methodological refinement and cautious  
352 interpretation of results.

### 353 2.3.3 CATCh

354 Early chimera detection programs such as UCHIME (Edgar et al., 2011) relied on  
355 alignment-based and abundance-based heuristics to identify hybrid sequences in  
356 amplicon data. However, researchers soon observed that different algorithms often  
357 produced inconsistent predictions. A sequence might be identified as chimeric by  
358 one tool but classified as non-chimeric by another, resulting in unreliable filtering  
359 outcomes across studies.

360 To address these inconsistencies, (Mysara, Saeys, Leys, Raes, & Monsieurs,  
361 2015) developed the Classifier for Amplicon Tool Chimeras (CATCh), which rep-  
362 resents the first ensemble machine learning system designed for chimera detection  
363 in 16S rRNA amplicon sequencing. Rather than depending on a single detec-  
364 tion strategy, CATCh integrates the outputs of several established tools, includ-  
365 ing UCHIME, ChimeraSlayer, DECIPHER, Pintail, and Perseus. The individual  
366 scores and binary decisions generated by these tools are used as input features for  
367 a supervised learning model. The algorithm employs a Support Vector Machine  
368 (SVM) with a Pearson VII Universal Kernel (PUK) to determine optimal weight-  
369 ings among the input features and to assign each sequence a probability of being  
370 chimeric.

371 Benchmarking in both reference-based and de novo modes demonstrated signif-  
372 icant performance improvements. CATCh achieved sensitivities of approximately  
373 85 percent in reference-based mode and 92 percent in de novo mode, with corre-  
374 sponding specificities of approximately 96 percent and 95 percent. These results  
375 indicate that CATCh detected 7 to 12 percent more chimeras than any individual  
376 algorithm while maintaining high precision. Integration of CATCh into amplicon-

377 processing pipelines also reduced operational taxonomic unit (OTU) inflation by  
378 23 to 35 percent, producing diversity estimates that more closely reflected true  
379 community composition.

### 380 **2.3.4 ChimPipe**

381 Among the available tools for chimera detection, ChimPipe is a bioinformat-  
382 ics pipeline developed to identify chimeric sequences such as fusion genes and  
383 transcription-induced chimeras from paired-end RNA sequencing data. It uses  
384 both discordant paired-end reads and split-read alignments to improve the ac-  
385 curacy and sensitivity of detecting fusion genes, trans-splicing events, and read-  
386 through transcripts (Rodriguez-Martin et al., 2017). By combining these two  
387 sources of information, ChimPipe achieves better precision than methods that  
388 depend on a single type of signal.

389 The pipeline works with many eukaryotic species that have available genome  
390 and annotation data, making it a versatile tool for studying chimera evolution  
391 and transcriptome structure (Rodriguez-Martin et al., 2017). It can also predict  
392 multiple isoforms for each gene pair and identify breakpoint coordinates that are  
393 useful for reconstructing and verifying chimeric transcripts. Tests using both  
394 simulated and real datasets have shown that ChimPipe maintains high accuracy  
395 and reliable performance.

396 ChimPipe’s modular design lets users adjust parameters to fit different se-  
397 quencing protocols or organism characteristics. Experimental results have con-  
398 firmed that many chimeric transcripts detected by the tool correspond to func-

399 tional fusion proteins, showing its value for understanding chimera biology and  
400 its potential applications in disease research (Rodriguez-Martin et al., 2017).

## 401 **2.4 Machine Learning Approaches for Chimera** 402 **and Sequence Quality Detection**

403 Traditional chimera detection tools rely primarily on heuristic or alignment-based  
404 rules. Recent advances in machine learning (ML) have demonstrated that mod-  
405 els trained on sequence-derived features can effectively capture compositional and  
406 structural patterns in biological sequences. Although most existing ML systems  
407 such as those used for antibiotic resistance prediction, taxonomic classification,  
408 or viral identification are not specifically designed for chimera detection, they  
409 highlight how data-driven models can outperform similarity-based heuristics by  
410 learning intrinsic sequence signatures. In principle, ML frameworks can inte-  
411 grate diverse indicators such as k-mer frequencies, GC-content variation, and  
412 split-alignment metrics to identify subtle anomalies that may indicate a chimeric  
413 origin (Arango et al., 2018; Liang, Bible, Liu, Zou, & Wei, 2020; Ren et al., 2020).

### 414 **2.4.1 Feature-Based Representations of Genomic Se-** 415 **quences**

416 In genomic analysis, feature extraction converts DNA sequences into numerical  
417 representations suitable for ML algorithms. A common approach is k-mer fre-  
418 quency analysis, where normalized k-mer counts form the feature vector (Vervier,



2015). These features effectively capture local compositional patterns that often differ between authentic and chimeric reads. In particular, deviations in k-mer profiles between adjacent read segments can serve as a compositional signature of template-switching events. Additional descriptors such as GC content and sequence entropy can further distinguish sequence types; in metagenomic classification and virus detection, k-mer-based features have shown strong performance and robustness to noise (Ren et al., 2020; Vervier, 2015). For chimera detection specifically, abrupt shifts in GC or k-mer composition along a read can indicate junctions between parental fragments. Windowed feature extraction enables models to capture these discontinuities that rule-based algorithms may overlook.

Machine learning models can also leverage alignment-derived features such as the frequency of split alignments, variation in mapping quality, and local coverage irregularities. Split reads and discordant read pairs are classical signatures of genomic junctions and have been formalized in probabilistic frameworks for structural-variant discovery that integrate multiple evidence types (Layer, Hall, & Quinlan, 2014). Similarly, long-read tools such as Sniffles employ split-alignment and coverage anomalies to accurately localize breakpoints (Sedlazeck et al., 2018). Modern aligners such as Minimap2 (Li, 2018) output supplementary (SA tags) and secondary alignments as well as chaining and alignment-score statistics that can be summarized into quantitative predictors for machine-learning models. These alignment-signal features are particularly relevant to PCR-induced mitochondrial chimeras, where template-switching events produce reads partially matching distinct regions of the same or related genomes. Integrating such cues within a supervised-learning framework enables artifact detection even in datasets lacking complete or perfectly assembled references.

444 A further biologically grounded descriptor is micro-homology length at puta-  
445 tive junctions. Micro-homology refers to short, shared sequences (often in the  
446 range of a few to tens of base pairs) that are near breakpoints and mediate  
447 non-canonical repair or template-switch mechanisms. Studies of double strand  
448 break repair and structural variation have demonstrated that the length of micro-  
449 homology correlates with the likelihood of micro-homology-mediated end joining  
450 (MMEJ) or fork-stalled template-switching pathways (Sfeir & Symington, 2015).  
451 In the context of PCR-induced chimeras, template switching during amplifica-  
452 tion often leaves short identical sequences at the junction of two concatenated  
453 fragments. Quantifying the longest exact suffix-prefix overlap at each candidate  
454 breakpoint thus provides a mechanistic signature of chimerism and complements  
455 both compositional (k-mer) and alignment (SA count) features.

## 456 2.5 Synthesis of Chimera Detection Approaches

457 To provide an integrated overview of the literature discussed in this chapter, Ta-  
458 ble 2.1 summarizes the major chimera detection studies, their methodological  
459 approaches, and their known limitations. This consolidated comparison brings to-  
460 gether reference-based approaches, de novo strategies, alignment-driven tools, en-  
461 semble machine-learning systems, and general ML-based sequence-quality frame-  
462 works. Presenting these methods side-by-side clarifies their performance bound-  
463 aries and highlights the unresolved challenges that persist in mitochondrial genome  
464 analysis and chimera detection.

Table 2.1: Summary of Existing Methods and Research Gaps

| Method/Study                      | Scope/Approach  | Limitations  |
|-----------------------------------|---|--|
| Reference-based Chimera Detection | Compares query sequences against curated, non-chimeric reference databases; identifies mosaic sequences by evaluating similarity to known templates.  | Depends heavily on completeness and quality of reference databases; often fails when novel taxa or missing parent sequences are present; reduced accuracy for low-divergence chimeras.             |
| De novo Chimera Detection         | Identifies chimeras using only internal dataset relationships; relies on abundance patterns and compositional similarity; reconstructs sequences as mosaics of high-abundance parents.            | Assumes true sequences are more abundant—fails when amplification bias distorts abundance; struggles with evenly abundant parental sequences; can misclassify highly similar true variants.        |
| UCHIME                            | Alignment-based chimera detection; segments query sequence, identifies parent candidates, performs 3-way alignment, and computes chimera scores; supports both reference-based and de novo modes. | Accuracy inflated in original benchmarks; suffers under incomplete databases; poor performance on low-divergence chimeras; sensitive to sequencing errors; misclassifies when parents are missing. |
| UCHIME2                           | Improved uncertainty handling; classifies ambiguous sequences as unknown; offers multiple sensitivity/specificity modes; more robust with incomplete references; higher sensitivity (93–99%).     | Cannot achieve perfect accuracy due to “perfect fake models”; genuine variants may be indistinguishable from artificial recombinants; theoretical detection limit remains.                         |
| CATCh                             | First ML ensemble tool for 16S chimera detection; integrates outputs of UCHIME, ChimeraSlayer, DECIPHER, Pintail, Perseus via SVM classifier; significantly improves sensitivity and specificity. | Depends on performance of underlying tools; ML model limited to features they output; ensemble can still misclassify in datasets with extreme novelty or low coverage.                             |
| ChimPipe                          | Pipeline for detecting fusion genes and transcript-derived chimeras in  | Designed for RNA-seq, not amplicons; needs high-quality genome   |

465 Across existing studies, no single approach reliably detects all forms of chimeric  
466 sequences, particularly those generated by PCR-induced template switching in  
467 mitochondrial genomes. Reference-based tools perform poorly when parental se-  
468 quences are absent; de novo methods rely strongly on abundance assumptions;  
469 alignment-based systems show reduced sensitivity to low-divergence chimeras; and  
470 ensemble methods inherit the limitations of their component algorithms. RNA-  
471 seq-oriented pipelines likewise do not generalize well to organelle data. Although  
472 machine learning approaches offer promising feature-based detection, they are  
473 rarely applied to mitochondrial genomes and are not trained specifically on PCR-  
474 induced organelle chimeras. These limitations indicate a clear research gap: the  
475 need for a specialized, feature-driven classifier tailored to mitochondrial PCR-  
476 induced chimeras that integrates k-mer composition, split-alignment signals, and  
477 micro-homology features to achieve more accurate detection than current heuristic  
478 or alignment-based tools.

## 479 Chapter 3

# 480 Research Methodology

### 481 3.1 Research Activities

482 As illustrated in Figure 3.1, this study will carry out a sequence of computa-  
483 tional procedures designed to detect PCR-induced chimeric reads in mitochon-  
484 drial genomes. The process begins with the collection of mitochondrial reference  
485 sequences from the NCBI database, which will serve as the foundation for gener-  
486 ating simulated chimeric reads. These datasets will then undergo bioinformatics  
487 pipeline development, which includes alignment, k-mer extraction, and homology-  
488 based filtering to prepare the data for model construction. The machine-learning  
489 model will subsequently be trained and tested using the processed datasets to  
490 assess its accuracy and reliability. Depending on the evaluation results, the model  
491 will either be refined and retrained to improve performance or, if the metrics meet  
492 the desired threshold, deployed for further validation and application.

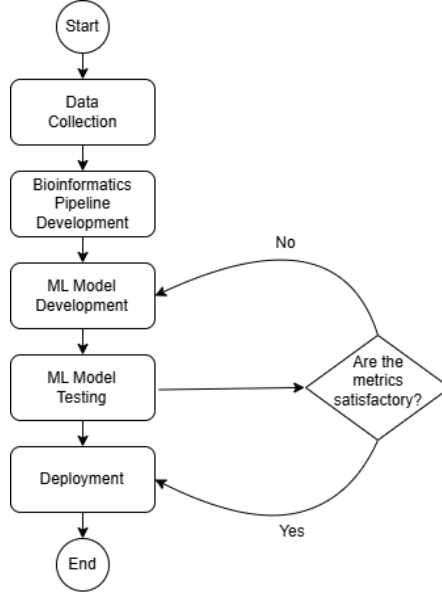


Figure 3.1: Process Diagram of Special Project

### 3.1.1 Data Collection

The mitochondrial genome reference sequences of *Sardinella lemuru* will be collected from the National Center for Biotechnology Information (NCBI) database. The downloaded files will be in FASTA format to ensure compatibility with bioinformatics tools and subsequent analysis. The gathered sequences will serve as the basis for generating simulated chimeric reads to be used in model development.

The expected outcome of this process is a comprehensive dataset of *Sardinella lemuru* mitochondrial reference sequences that will serve as the foundation for the succeeding stages of the study. This step is scheduled to start in the first week of November 2025 and is expected to be completed by the last week of November 2025, with a total duration of approximately one (1) month.

## 504 Data Preprocessing

505 Sequencing data will be simulated using the reference sequences collected from  
506 NCBI. Using `wgsim`, a total of 10,000 paired-end reads (R1 and R2) will be gen-  
507 erated from the reference genome and designated as clean reads. These reads will  
508 be saved in FASTQ (`.fastq`) format. From the same reference, a Bash script will  
509 be created to deliberately cut and reconnect portions of the sequence, introducing  
510 artificial junctions that mimic chimeric regions. The manipulated reference file,  
511 saved in FASTA (`.fasta`) format, will then be processed in `wgsim` to simulate  
512 an additional 10,000 paired-end chimeric reads, also stored in FASTQ (`.fastq`)  
513 format. The resulting read files will be aligned to the original reference genome  
514 using SAMtools, generating SAM (`.sam`) or BAM (`.bam`) alignment files. During  
515 this alignment process, clean reads will be labeled as “0,” while chimeric reads will  
516 be labeled as “1” in a corresponding CSV (`.tsv`) file. This results in a balanced  
517 dataset with an equal number of clean and chimeric reads. This is important to  
518 prevent model bias and ensure that the machine learning classifiers can learn to  
519 detect chimeras accurately.

520 The expected outcome of this process is a complete set of clean and chimeric  
521 paired-end reads prepared for subsequent analysis and model development. This  
522 step is scheduled to start in the first week of November 2025 and is expected  
523 to be completed by the last week of November 2025, with a total duration of  
524 approximately one (1) month.

### 525 3.1.2 Bioinformatics Tools Pipeline

526 A bioinformatics pipeline will be developed and implemented to extract the nec-  
527 essary analytical features. This pipeline will serve as a reproducible and modular  
528 workflow that accepts FASTQ and BAM inputs, processes these through a series  
529 of analytical stages, and outputs tabular feature matrices (TSV) for downstream  
530 machine learning. All scripts will be version-controlled through GitHub, and  
531 computational environments will be standardized using Conda to ensure cross-  
532 platform reproducibility. To promote transparency and replicability, the exact  
533 software versions, parameters, and command-line arguments used in each stage  
534 will be documented. To further ensure correctness and adherence to best practices,  
535 bioinformatics experts at the Philippine Genome Center Visayas will be consulted  
536 to validate the pipeline design, feature extraction logic, and overall data integrity.  
537 This stage of the study is scheduled to begin in the last week of November 2025  
538 and conclude by the last week of January 2026, with an estimated total duration  
539 of approximately two (2) months.

540 The bioinformatics pipeline focuses on three principal features from the sim-  
541 ulated and aligned sequencing data: (1) supplementary alignment count (SA  
542 count), (2) k-mer composition difference between read segments, and (3) micro-  
543 homology length at potential junctions. Each of these features captures a distinct  
544 biological or computational signature associated with PCR-induced chimeras.



## 545 Alignment and Supplementary Alignment Count

546 This will be derived through sequence alignment using Minimap2, with subsequent  
547 processing performed using SAMtools and `pysam` in Python. Sequencing reads  
548 will be aligned to the *Sardinella lemuru* mitochondrial reference genome using  
549 Minimap2 with the `-ax sr` preset (optimized for short reads). The output will  
550 be converted and sorted using SAMtools, producing an indexed BAM file which  
551 will be parsed using `pysam` to count the number of supplementary alignments  
552 (SA tags) per read. Each read's mapping quality, number of split segments,  
553 and alignment characteristics will be recorded in a corresponding TSV file. The  
554 presence of multiple alignment loci within a single read, as reflected by a nonzero  
555 SA count, serves as direct computational evidence of chimerism. Reads that  
556 contain supplementary alignments or soft-clipped regions are strong candidates  
557 for chimeric artifacts arising from PCR template switching or improper assembly  
558 during sequencing.

## 559 K-mer Composition Difference

560 Chimeric reads often comprise fragments from distinct genomic regions, resulting  
561 in a compositional discontinuity between segments. Comparing k-mer frequency  
562 profiles between the left and right halves of a read allows detection of such abrupt  
563 compositional shifts, independent of alignment information. This will be obtained  
564 using Jellyfish, a fast k-mer counting software. For each read, the sequence will  
565 be divided into two segments, either at the midpoint or at empirically determined  
566 breakpoints inferred from supplementary alignment data, to generate left and right  
567 sequence segments. Jellyfish will then compute k-mer frequency profiles (with  $k =$

568 5 or 6) for each segment. The resulting k-mer frequency vectors will be normalized  
569 and compared using distance metrics such as cosine similarity or Jensen–Shannon  
570 divergence to quantify compositional disparity between the two halves of the same  
571 read. The resulting difference scores will be stored in a structured TSV file.

## 572 **Micro-homology Length**

573 The micro-homology length will be computed using a custom Python script that  
574 detects the longest exact suffix–prefix overlap within  $\pm 30$  base pairs surround-  
575 ing a candidate breakpoint. This analysis identifies the number of consecutive  
576 bases shared between the end of one segment and the beginning of another. The  
577 presence and length of such micro-homology are classic molecular signatures of  
578 PCR-induced template switching, where short identical regions (typically 3–15  
579 base pairs) promote premature termination and recombination of DNA synthesis  
580 on a different template strand. Quantifying micro-homology allows assessment of  
581 whether the suspected breakpoint reflects PCR artifacts or true biological variants.  
582 Each read will therefore be annotated with its corresponding micro-homology  
583 length, overlap sequence, and GC content.

584 After extracting the three primary features, all resulting TSV files will be  
585 joined using the read identifier as a common key to generate a unified feature ma-  
586 trix. Additional read-level metadata such as read length, mean base quality, and  
587 number of clipped bases will also be included to provide contextual information.  
588 This consolidated dataset will serve as the input for subsequent machine-learning  
589 model development and evaluation.

### 590 3.1.3 Machine-Learning Model Development

591 This study will explore multiple machine-learning approaches to detect PCR-  
592 induced chimeras from mitochondrial Illumina reads: Support Vector Machines  
593 (SVM) to separate reads with complex patterns, decision trees to capture hier-  
594 archical interactions among SA count, k-mer composition, and micro-homology  
595 length, logistic regression as a linear baseline, Random Forest (RF) to improve  
596 stability and reduce variance, and gradient boosting (e.g., XGBoost) to model  
597 non-linear relationships among the extracted features. Using these approaches  
598 enables a balanced assessment of predictive performance and interpretability.

599 The dataset will be divided into training (80%) and testing (20%) subsets.  
600 The training data will be used for model fitting and hyperparameter optimization  
601 through five-fold cross-validation, in which the data are partitioned into five folds;  
602 four folds are used for training and one for validation in each iteration. Perfor-  
603 mance metrics will be averaged across folds, and the optimal parameters will be  
604 selected based on mean cross-validation accuracy. The final models will then be  
605 evaluated on the held-out test set to obtain unbiased performance estimates.

606 Model development and evaluation will be implemented in Python (ver-  
607 sion 3.11) using the `scikit-learn` and `xgboost` libraries. Standard metrics  
608 including accuracy, precision, recall, F1-score, and area under the ROC curve  
609 (AUC) will be computed to quantify predictive performance. Feature-importance  
610 analyses will be performed to identify the most discriminative variables contribut-  
611 ing to chimera detection.

### 612 **3.1.4 Validation and Testing**

613 Validation will involve both internal and external evaluations. Internal validation  
614 will be achieved through five-fold cross-validation on the training data to verify  
615 model generalization and reduce variance due to random sampling. External  
616 validation will be achieved through testing on the 20% hold-out dataset derived  
617 from the simulated reads, which will serve as an unbiased benchmark to evaluate  
618 how well the trained models generalize to unseen data. All feature extraction and  
619 preprocessing steps will be performed using the same bioinformatics pipeline to  
620 ensure consistency and comparability across validation stages.

621 Comparative evaluation across all candidate algorithms, including SVM, de-  
622 cision trees, logistic regression, Random Forest, gradient boosting, and others,  
623 will determine which models demonstrate the highest predictive performance and  
624 computational efficiency under identical data conditions. Their metrics will be  
625 compared to identify the which algorithms are most suitable for further refine-  
626 ment.

### 627 **3.1.5 Documentation**

628 Comprehensive documentation will be maintained throughout the study to en-  
629 sure transparency, reproducibility, and scientific integrity. All stages of the re-  
630 search—including data acquisition, preprocessing, feature extraction, model train-  
631 ing, and validation—will be systematically recorded. For each analytical step, the  
632 corresponding parameters, software versions, and command-line scripts will be  
633 documented to enable exact replication of results.

634 Version control and collaborative management will be implemented through  
635 GitHub, which will serve as the central repository for all project files, including  
636 Python scripts, configuration settings, and Jupyter notebooks. The repository  
637 structure will follow standard research data management practices, with clear  
638 directories for datasets, processed outputs, and analysis scripts. Changes will be  
639 tracked through commit histories to ensure traceability and accountability.

640 Computational environments will be standardized using Conda, with environ-  
641 ment files specifying dependencies and package versions to maintain consistency  
642 across systems. Experimental workflows and exploratory analyses will be con-  
643 ducted in Jupyter Notebooks, which facilitate real-time visualization, annotation,  
644 and incremental testing of results.

645 For the preparation of the final manuscript and supplementary materials,  
646 Overleaf (LaTeX) will be utilized to produce publication-quality formatting, con-  
647 sistent referencing, and reproducible document compilation. The documentation  
648 process will also include a project timeline outlining major milestones such as  
649 data collection, simulation, feature extraction, model evaluation, and reporting to  
650 ensure systematic progress and adherence to the research schedule.

## 651 **3.2 Calendar of Activities**

652 Table 3.1 presents the project timeline in the form of a Gantt chart, where each  
653 bullet point corresponds to approximately one week of planned activity.

Table 3.1: Timetable of Activities

| Activities (2025)              | Nov     | Dec     | Jan     | Feb     | Mar     | Apr     | May     |
|--------------------------------|---------|---------|---------|---------|---------|---------|---------|
| Data Collection and Simulation | • • • • |         |         |         |         |         |         |
| Bioinformatics Tools Pipeline  | • •     | • • • • | • • • • |         |         |         |         |
| Machine Learning Development   |         |         | • •     | • • • • | • • • • | • •     |         |
| Testing and Validation         |         |         |         |         |         | • •     | • • • • |
| Documentation                  | • • • • | • • • • | • • • • | • • • • | • • • • | • • • • | • • • • |

## References

- Anderson, S., Bankier, A., Barrell, B., Bruijn, M., Coulson, A., Drouin, J., ...  
Young, I. (1981, 04). Sequence and organization of the human mitochondrial  
genome. *Nature*, 290, 457-465. doi: 10.1038/290457a0
- Arango, G., Garner, E., Pruden, A., Heath, L., Vikesland, P., & Zhang, L. (2018,  
02). Deeparg: A deep learning approach for predicting antibiotic resistance  
genes from metagenomic data. *Microbiome*, 6. doi: 10.1186/s40168-018  
-0401-z
- Bentley, D. R., Balasubramanian, S., Swerdlow, H. P., Smith, G. P., Milton, J.,  
Brown, C. G., ... Smith, A. J. (2008). Accurate whole human genome  
sequencing using reversible terminator chemistry. *Nature*, 456(7218), 53–  
59. doi: 10.1038/nature07517
- Bi, C., Shen, F., Han, F., Qu, Y., Hou, J., Xu, K., ... Yin, T. (2024, 01).  
Pmat: an efficient plant mitogenome assembly toolkit using low-coverage  
hifi sequencing data. *Horticulture Research*, 11(3), uhae023. Retrieved  
from <https://doi.org/10.1093/hr/uhae023> doi: 10.1093/hr/uhae023
- Boore, J. L. (1999). Animal mitochondrial genomes. *Nucleic Acids Research*,  
27(8), 1767–1780. doi: 10.1093/nar/27.8.1767
- Cameron, S. L. (2014). Insect mitochondrial genomics: Implications for evolution

and phylogeny. *Annual Review of Entomology*, 59, 95–117. doi: 10.1146/annurev-ento-011613-162007

Dierckxsens, N., Mardulyn, P., & Smits, G. (2017). Novoplasty: de novo assembly of organelle genomes from whole genome data. *Nucleic Acids Research*, 45(4), e18. doi: 10.1093/nar/gkw955

Edgar, R. C. (2016). Uchime2: improved chimera prediction for amplicon sequencing. *bioRxiv*. Retrieved from <https://api.semanticscholar.org/CorpusID:88955007>

Edgar, R. C. (n.d). Uchime in practice. Retrieved from [https://www.drive5.com/usearch/manual7/uchime\\_practical.html](https://www.drive5.com/usearch/manual7/uchime_practical.html)

Edgar, R. C., Haas, B. J., Clemente, J. C., Quince, C., & Knight, R. (2011). Uchime improves sensitivity and speed of chimera detection. *Bioinformatics*, 27(16), 2194–2200. doi: 10.1093/bioinformatics/btr381

Frenkel-Morgenstern, M., Lacroix, V., Ezkurdia, I., Levin, Y., Gabashvili, A., Prilusky, J., ... Valencia, A. (2012, 05). Chimeras taking shape: Potential functions of proteins encoded by chimeric rna transcripts. *Genome research*, 22, 1231-42. doi: 10.1101/gr.130062.111

Glenn, T. C. (2011). Field guide to next-generation dna sequencers. *Molecular Ecology Resources*, 11(5), 759–769. doi: 10.1111/j.1755-0998.2011.03024.x

Gonzalez, J. M., Zimmermann, J., & Saiz-Jimenez, C. (2004, 09). Evaluating putative chimeric sequences from pcr-amplified products. *Bioinformatics*, 21(3), 333-337. Retrieved from <https://doi.org/10.1093/bioinformatics/bti008> doi: 10.1093/bioinformatics/bti008

Gray, M. W. (2012). Mitochondrial evolution. *Cold Spring Harbor perspectives in biology*, 4. Retrieved from <https://doi.org/10.1101/cshperspect.a011403> doi: 10.1101/cshperspect.a011403



699 Hahn, C., Bachmann, L., & Chevreux, B. (2013). Reconstructing mitochondrial  
700 genomes directly from genomic next-generation sequencing reads—a baiting  
701 and iterative mapping approach. *Nucleic Acids Research*, *41*(13), e129. doi:  
702 10.1093/nar/gkt371

703 Jin, J.-J., Yu, W.-B., Yang, J., Song, Y., dePamphilis, C. W., Yi, T.-S., & Li,  
704 D.-Z. (2020). Getorganelle: a fast and versatile toolkit for accurate de  
705 novo assembly of organelle genomes. *Genome Biology*, *21*(1), 241. doi:  
706 10.1186/s13059-020-02154-5

707 Judo, M. S. B., Wedel, W. R., & Wilson, B. H. (1998). Stimulation and sup-  
708 pression of pcr-mediated recombination. *Nucleic Acids Research*, *26*(7),  
709 1819–1825. doi: 10.1093/nar/26.7.1819

710 Labrador, K., Agmata, A., Palermo, J. D., Ravago-Gotanco, R., & Pante, M. J.  
711 (2021). Mitochondrial dna reveals genetically structured haplogroups of  
712 bali sardinella (*sardinella lemuru*) in philippine waters. *Regional Studies in*  
713 *Marine Science*, *41*, 101588. doi: 10.1016/j.rsma.2020.101588

714 Layer, R., Hall, I., & Quinlan, A. (2014, 10). Lumpy: A probabilistic framework  
715 for structural variant discovery. *Genome Biology*, *15*. doi: 10.1186/gb-2014-  
716 -15-6-r84

717 Li, H. (2018, 05). Minimap2: pairwise alignment for nucleotide sequences. *Bioin-*  
718 *formatics*, *34*(18), 3094-3100. Retrieved from [https://doi.org/10.1093/](https://doi.org/10.1093/bioinformatics/bty191)  
719 [bioinformatics/bty191](https://doi.org/10.1093/bioinformatics/bty191) doi: 10.1093/bioinformatics/bty191

720 Liang, Q., Bible, P. W., Liu, Y., Zou, B., & Wei, L. (2020, 02). Deepmi-  
721 crobes: taxonomic classification for metagenomics with deep learning. *NAR*  
722 *Genomics and Bioinformatics*, *2*(1), lqaa009. Retrieved from [https://](https://doi.org/10.1093/nargab/lqaa009)  
723 [doi.org/10.1093/nargab/lqaa009](https://doi.org/10.1093/nargab/lqaa009) doi: 10.1093/nargab/lqaa009

724 Metzker, M. L. (2010). Sequencing technologies — the next generation. *Nature*

725 *Reviews Genetics*, 11(1), 31–46. doi: 10.1038/nrg2626

726 Mysara, M., Saeys, Y., Leys, N., Raes, J., & Monsieurs, P. (2015). Catch,  
 727 an ensemble classifier for chimera detection in 16s rna sequencing stud-  
 728 ies. *Applied and Environmental Microbiology*, 81(5), 1573-1584. Retrieved  
 729 from <https://journals.asm.org/doi/abs/10.1128/aem.02896-14> doi:  
 730 10.1128/AEM.02896-14

731 Qin, Y., Wu, L., Zhang, Q., Wen, C., Nostrand, J. D. V., Ning, D., ... Zhou, J.  
 732 (2023). Effects of error, chimera, bias, and gc content on the accuracy of  
 733 amplicon sequencing. *mSystems*, 8(6), e01025-23. Retrieved from [https://](https://journals.asm.org/doi/abs/10.1128/msystems.01025-23)  
 734 [journals.asm.org/doi/abs/10.1128/msystems.01025-23](https://journals.asm.org/doi/abs/10.1128/msystems.01025-23) doi: 10.1128/  
 735 msystems.01025-23

736 Qiu, X., Wu, L., Huang, H., McDonel, P. E., Palumbo, A. V., Tiedje, J. M., &  
 737 Zhou, J. (2001). Evaluation of pcr-generated chimeras, mutations, and het-  
 738 eroduplexes with 16s rna gene-based cloning. *Applied and Environmental*  
 739 *Microbiology*, 67(2), 880–887. doi: 10.1128/AEM.67.2.880-887.2001

740 Ren, J., Song, K., Deng, C., Ahlgren, N., Fuhrman, J., Li, Y., ... Sun, F. (2020,  
 741 01). Identifying viruses from metagenomic data using deep learning. *Quan-*  
 742 *titative Biology*, 8. doi: 10.1007/s40484-019-0187-4

743 Rodriguez-Martin, B., Palumbo, E., Marco-Sola, S., Griebel, T., Ribeca, P.,  
 744 Alonso, G., ... Djebali, S. (2017, 01). Chimpipes: Accurate detection of  
 745 fusion genes and transcription-induced chimeras from rna-seq data. *BMC*  
 746 *Genomics*, 18. doi: 10.1186/s12864-016-3404-9

747 Rognes, T., Flouri, T., Nichols, B., Quince, C., & Mahé, F. (2016). Vsearch: a  
 748 versatile open source tool for metagenomics. *PeerJ*, 4, e2584. doi: 10.7717/  
 749 peerj.2584

750 Sedlazeck, F., Rescheneder, P., Smolka, M., Fang, H., Nattestad, M., von Haeseler,

751 A., & Schatz, M. (2018, 06). Accurate detection of complex structural  
 752 variations using single-molecule sequencing. *Nature Methods*, 15. doi: 10  
 753 .1038/s41592-018-0001-7  
 754 Sfeir, A., & Symington, L. S. (2015). Microhomology-mediated end joining: A  
 755 back-up survival mechanism or dedicated pathway? *Trends in Biochemical*  
 756 *Sciences*, 40(11), 701-714. Retrieved from [https://www.sciencedirect](https://www.sciencedirect.com/science/article/pii/S0968000415001589)  
 757 [.com/science/article/pii/S0968000415001589](https://www.sciencedirect.com/science/article/pii/S0968000415001589) doi: [https://doi.org/](https://doi.org/10.1016/j.tibs.2015.08.006)  
 758 [10.1016/j.tibs.2015.08.006](https://doi.org/10.1016/j.tibs.2015.08.006)  
 759 Vervier, M. P. T. M. V. J. B. . V. J. P., K. (2015). Large-scale machine learning  
 760 for metagenomics sequence classification. *Bioinformatics*, 32, 1023 - 1032.  
 761 Retrieved from <https://api.semanticscholar.org/CorpusID:9863600>  
 762 Willette, D., Bognot, E., Mutia, M. T., & Santos, M. (2011). *Biology and ecology*  
 763 *of sardines in the philippines: A review* (Vol. 13; Tech. Rep. No. 1). NFRDI  
 764 Technical Paper Series. Retrieved from [https://nfrdi.da.gov.ph/tpjf/](https://nfrdi.da.gov.ph/tpjf/etc/Willette%20et%20al.%20Sardines%20Review.pdf)  
 765 [etc/Willette%20et%20al.%20Sardines%20Review.pdf](https://nfrdi.da.gov.ph/tpjf/etc/Willette%20et%20al.%20Sardines%20Review.pdf)