

1     **MitoChime: A Machine-Learning Pipeline for**  
2             **Detecting PCR-Induced Chimeras in**  
3             **Mitochondrial Illumina Reads**

4                     A Special Project Proposal  
5                     Presented to  
6     the Faculty of the Division of Physical Sciences and Mathematics  
7                     College of Arts and Sciences  
8                     University of the Philippines Visayas  
9                     Miag-ao, Iloilo

10                    In Partial Fulfillment  
11                    of the Requirements for the Degree of  
12     Bachelor of Science in Computer Science

13                    by

14                    Duranne Duran  
15                    Yvonne Lin  
16                    Daniella Pailden

17                    Adviser  
18     Francis D. Dimzon, Ph.D.

19                    December 4, 2025

# Contents

21	<b>1 Introduction</b>	<b>1</b>
22	1.1 Overview . . . . .	1
23	1.2 Problem Statement . . . . .	3
24	1.3 Research Objectives . . . . .	4
25	1.3.1 General Objective . . . . .	4
26	1.3.2 Specific Objectives . . . . .	4
27	1.4 Scope and Limitations of the Research . . . . .	5
28	1.5 Significance of the Research . . . . .	6
29	<b>2 Review of Related Literature</b>	<b>7</b>
30	2.1 The Mitochondrial Genome . . . . .	7
31	2.1.1 Mitochondrial Genome Assembly . . . . .	8

32	2.2	PCR Amplification and Chimera Formation . . . . .	9
33	2.3	Existing Traditional Approaches for Chimera Detection . . . . .	10
34	2.3.1	UCHIME . . . . .	11
35	2.3.2	UCHIME2 . . . . .	13
36	2.3.3	CATch . . . . .	14
37	2.3.4	ChimPipe . . . . .	15
38	2.4	Machine Learning Approaches for Chimera and Sequence Quality	
39		Detection . . . . .	16
40	2.4.1	Feature-Based Representations of Genomic Sequences . . .	17
41	2.5	Synthesis of Chimera Detection Approaches . . . . .	18
42	<b>3</b>	<b>Research Methodology</b>	<b>22</b>
43	3.1	Research Activities . . . . .	22
44	3.1.1	Data Collection . . . . .	23
45	3.1.2	Bioinformatics Tools Pipeline . . . . .	27
46	3.1.3	Machine Learning Model Development . . . . .	30
47	3.1.4	Model Benchmarking, Hyperparameter Optimization, and	
48		Evaluation . . . . .	31
49	3.1.5	Feature Importance and Interpretation . . . . .	32

50	3.1.6 Validation and Testing . . . . .	34
51	3.1.7 Documentation . . . . .	34
52	3.2 Calendar of Activities . . . . .	35

## 53 List of Figures

<small>54</small>	3.1 Process Diagram of Special Project . . . . .	23
-------------------	--	----

# 55 List of Tables

56	2.1 Summary of Existing Methods and Research Gaps . . . . .	20
57	3.1 Timetable of Activities . . . . .	35

# Chapter 1

## Introduction

### 1.1 Overview

The rapid advancement of next-generation sequencing (NGS) technologies has transformed genomic research by enabling high-throughput and cost-effective DNA analysis (Metzker, 2010). Among current platforms, Illumina sequencing remains the most widely adopted, capable of producing millions of short reads that can be assembled into reference genomes or analyzed for genetic variation (Bentley et al., 2008; Glenn, 2011). Despite its high base-calling accuracy, Illumina sequencing is prone to artifacts introduced during library preparation, particularly polymerase chain reaction (PCR)-induced chimeras, which are artificial hybrid sequences that do not exist in the true genome (Judo, Wedel, & Wilson, 1998).

PCR chimeras form when incomplete extension products from one template

anneal to an unrelated DNA fragment and are extended, creating recombinant reads (Qiu et al., 2001). In mitochondrial genome assembly, such artifacts are especially problematic because the mitochondrial genome is small, circular, and often repetitive (Boore, 1999; Cameron, 2014). Even a small number of chimeric or misjoined reads can reduce assembly contiguity and introduce false junctions during organelle genome reconstruction (Dierckxsens, Mardulyn, & Smits, 2017; Hahn, Bachmann, & Chevreux, 2013; Jin et al., 2020). Existing assembly tools such as GetOrganelle and MITObim assume that input reads are largely free of such artifacts (Hahn et al., 2013; Jin et al., 2020). Consequently, undetected chimeras may produce fragmented assemblies or misidentified organellar boundaries. To ensure accurate reconstruction of mitochondrial genomes, a reliable method for detecting and filtering PCR-induced chimeras before assembly is essential.

This study focuses on mitochondrial sequencing data from the genus *Sardinella*, a group of small pelagic fishes widely distributed in Philippine waters. Among them, *Sardinella lemuru* (Bali sardinella) is one of the country’s most abundant and economically important species, providing protein and livelihood to coastal communities (Labrador, Agmata, Palermo, Ravago-Gotanco, & Pante, 2021; Willette, Bognot, Mutia, & Santos, 2011). Accurate mitochondrial assemblies are critical for understanding its population genetics, stock structure, and evolutionary history. However, assembly pipelines often encounter errors or fail to complete due to undetected chimeric reads. To address this gap, this research introduces MitoChime, a machine learning pipeline designed to detect and filter PCR-induced chimeric reads using both alignment-based and sequence-derived statistical features. The tool aims to provide bioinformatics laboratories, partic-



ularly the Philippine Genome Center Visayas (PGC Visayas), with an efficient solution for improving mitochondrial genome reconstruction.

## 1.2 Problem Statement

While NGS technologies have revolutionized genomic data acquisition, the accuracy of mitochondrial genome assembly remains limited by artifacts produced during PCR amplification. These chimeric reads can distort assembly graphs and cause misassemblies, with particularly severe effects in small, circular mitochondrial genomes (Boore, 1999; Cameron, 2014). Existing assembly pipelines such as GetOrganelle, MITObim, and NOVOPlasty assume that sequencing reads are free of such artifacts (Dierckxsens et al., 2017; Hahn et al., 2013; Jin et al., 2020). At PGC Visayas, several mitochondrial assemblies have failed or yielded incomplete contigs despite sufficient coverage, suggesting that undetected chimeric reads compromise assembly reliability. Meanwhile, existing chimera detection tools such as UCHIME and VSEARCH were developed primarily for amplicon-based community analysis and rely heavily on reference or taxonomic comparisons (Edgar, Haas, Clemente, Quince, & Knight, 2011; Rognes, Flouri, Nichols, Quince, & Mahé, 2016). These approaches are unsuitable for single-species organellar data, where complete reference genomes are often unavailable. Therefore, there is a pressing need for a reference-independent, data-driven tool capable of detecting and filtering PCR-induced chimeras in mitochondrial sequencing datasets.

## 117 1.3 Research Objectives

### 118 1.3.1 General Objective

119 This study aims to develop and evaluate a machine learning-based pipeline (Mi-  
120 toChime) that detects PCR-induced chimeric reads in *Sardinella lemuru* mito-  
121 chondrial sequencing data in order to improve the quality and reliability of down-  
122 stream mitochondrial genome assemblies.

### 123 1.3.2 Specific Objectives

124 Specifically, the study aims to:

- 125 1. construct simulated *Sardinella lemuru* Illumina paired-end datasets contain-  
126 ing both clean and PCR-induced chimeric reads,
- 127 2. extract alignment-based and sequence-based features such as k-mer compo-  
128 sition, junction complexity, and split-alignment counts from both clean and  
129 chimeric reads,
- 130 3. train, validate, and compare supervised machine-learning models for classi-  
131 fying reads as clean or chimeric,
- 132 4. determine feature importance and identify indicators of PCR-induced  
133 chimerism,
- 134 5. integrate the optimized classifier into a modular and interpretable pipeline  
135 deployable on standard computing environments at PGC Visayas.

## 1.4 Scope and Limitations of the Research

This study focuses on detecting PCR-induced chimeric reads in Illumina paired-end mitochondrial sequencing data from *Sardinella lemuru*. The decision to restrict the taxonomic scope to a single species is based on four considerations: (1) to limit interspecific variation in mitochondrial genome size, GC content, and repetitive regions so that differences in read patterns can be attributed more directly to PCR-induced chimerism; (2) to align the analysis with relevant *S. lemuru* sequencing projects at PGC Visayas; (3) to take advantage of the availability of *S. lemuru* mitochondrial assemblies and raw datasets in public repositories such as the National Center for Biotechnology Information (NCBI), which facilitates reference selection and benchmarking; and (4) to develop a tool that directly supports local studies on *S. lemuru* population structure and fisheries management.

The study emphasizes `wgsim`-based simulations and selected empirical mitochondrial datasets from *S. lemuru*. It excludes naturally occurring chimeras, nuclear mitochondrial pseudogenes (NUMTs), and large-scale assembly rearrangements in nuclear genomes. Feature extraction is restricted to low-dimensional alignment and sequence statistics, such as k-mer frequency profiles, GC content, read length, soft and hard clipping metrics, split-alignment counts, and mapping quality, rather than high-dimensional deep learning embeddings. This design keeps model behaviour interpretable and ensures that the pipeline can be run on standard workstations at PGC Visayas. Testing on long-read platforms (e.g., Nanopore, PacBio) and other taxa is outside the scope of this project; the implemented pipeline is evaluated only on short-read *S. lemuru* datasets.

## 159 1.5 Significance of the Research

160 This research provides both methodological and practical contributions to mi-  
161 tochondrial genomics and bioinformatics. First, MitoChime filters PCR-induced  
162 chimeric reads prior to genome assembly, with the goal of improving the con-  
163 tiguity and correctness of *Sardinella lemuru* mitochondrial assemblies. Second,  
164 it replaces informal manual curation with a documented workflow, improving au-  
165 tomation and reproducibility. Third, the pipeline is designed to run on computing  
166 infrastructures commonly available in regional laboratories, enabling routine use  
167 at facilities such as PGC Visayas. Finally, more reliable mitochondrial assemblies  
168 for *S. lemuru* provide a stronger basis for downstream applications in the field of  
169 fisheries and genomics.

## 170 Chapter 2

### 171 Review of Related Literature

172 This chapter presents an overview of the literature relevant to the study. It  
173 discusses the biological and computational foundations underlying mitochondrial  
174 genome analysis and assembly, as well as existing tools, algorithms, and techniques  
175 related to chimera detection and genome quality assessment. The chapter aims to  
176 highlight the strengths, limitations, and research gaps in current approaches that  
177 motivate the development of the present study.

#### 178 2.1 The Mitochondrial Genome

179 Mitochondrial genome (mtDNA) is a small, typically circular molecule found in  
180 most eukaryotes. It encodes essential genes involved in oxidative phosphorylation  
181 and energy metabolism. Because of its conserved structure, mtDNA has become  
182 a valuable genetic marker for studies in population genetics and phylogenetics  
183 (Anderson et al., 1981; Boore, 1999). In animal species, the mitochondrial genome

184 ranges from 15–20 kilobase and contains 13 protein-coding genes, 22 tRNAs, and  
185 two rRNAs arranged compactly without introns (Gray, 2012). In comparison to  
186 nuclear DNA, the ratio of the number of copies of mtDNA is higher and has  
187 simple organization which make it particularly suitable for genome sequencing  
188 and assembly studies (Dierckxsens et al., 2017).

### 189 **2.1.1 Mitochondrial Genome Assembly**

190 Mitochondrial genome assembly refers to the reconstruction of the complete mito-  
191 chondrial DNA (mtDNA) sequence from raw or fragmented sequencing reads. It is  
192 conducted to obtain high-quality, continuous representations of the mitochondrial  
193 genome that can be used for a wide range of analyses, including species identi-  
194 fication, phylogenetic reconstruction, evolutionary studies, and investigations of  
195 mitochondrial diseases. Because mtDNA evolves rapidly, its assembled sequence  
196 provides valuable insights into population structure, lineage divergence, and adap-  
197 tive evolution across taxa (Boore, 1999). Compared to nuclear genome assembly,  
198 assembling the mitochondrial genome is often considered more straightforward but  
199 still encounters technical challenges such as the formation of chimeric reads. Com-  
200 monly used tools for mitogenome assembly such as GetOrganelle and MITObim  
201 operate under the assumption of organelle genome circularity, and are vulnerable  
202 when chimeric reads disrupt this circular structure, resulting in assembly errors  
203 (Hahn et al., 2013; Jin et al., 2020).

## 2.2 PCR Amplification and Chimera Formation

PCR plays an important role in NGS library preparation, as it amplifies target DNA fragments for downstream analysis. However as previously mentioned, the amplification process can also introduce chimeric reads which compromises the quality of the input reads supplied to sequencing or assembly workflows. Chimeras typically arise when incomplete extension occurs during a PCR cycle. This causes the DNA polymerase to switch from one template to another and generate hybrid recombinant molecules (Judo et al., 1998). Artificial chimeras are produced through such amplification errors, whereas biological chimeras occur naturally through genomic rearrangements or transcriptional events.

In the context of amplicon-based sequencing, the presence of chimeras can inflate estimates of genetic or microbial diversity and may cause misassemblies during genome reconstruction. Qin et al. (2023) has reported that chimeric sequences may account for more than 10% of raw reads in amplicon datasets. This artifact tends to be most prominent among rare operational taxonomic units (OTUs) or singletons, which are sometimes misinterpreted as novel diversity, further causing the complication of microbial diversity analyses (Gonzalez, Zimmermann, & Saiz-Jimenez, 2004). As such, determining and minimizing PCR-induced chimera formation is vital for improving the quality of mitochondrial genome assemblies, and ensuring the reliability of amplicon sequencing data.

## 2.3 Existing Traditional Approaches for Chimera Detection

Several computational tools have been developed to identify chimeric sequences in NGS datasets. These tools generally fall into two categories: reference-based and de novo approaches. Reference-based chimera detection, also known as database-dependent detection, is one of the earliest and most widely used computational strategies for identifying chimeric sequences in amplicon-based community studies. These methods rely on the comparison of each query sequence against a curated, high-quality database of known, non-chimeric reference sequences (Edgar et al., 2011).

On the other hand, the de novo chimera detection, also referred to as reference-free detection, represents an alternative computational paradigm that identifies chimeric sequences without reliance on external reference databases. This method infer chimeras based on internal relationships among the sequences present within the dataset itself, making it particularly advantageous in studies of under explored or taxonomically diverse communities where comprehensive reference databases are unavailable or incomplete (Edgar, 2016; Edgar et al., 2011). The underlying assumption on this method is that during PCR, true biological sequences are generally more abundant as they are amplified early and dominate the read pool, whereas chimeric sequences appear later and are generally less abundant. The de novo approach leverage this abundance hierarchy, treating the most abundant sequences as supposed parents and testing whether less abundant sequences can be reconstructed as mosaics of these templates. Compositional and structural similarity are also evaluated to check whether different regions of a candidate



248 sequence correspond to distinct high-abundance sequences.

249 In practice, many modern bioinformatics pipelines combine both paradigms  
250 sequentially: an initial de novo step identifies dataset-specific chimeras, followed  
251 by a reference-based pass that removes remaining artifacts relative to established  
252 databases (Edgar, 2016). These two methods of detection form the foundation of  
253 tools such as UCHIME and later UCHIME2.

### 254 **2.3.1 UCHIME**

255 Developed by Edgar et al. (Edgar et al., 2011), UCHIME is one of the most widely  
256 used computational tools for detecting chimeric sequences in amplicon sequencing  
257 data. The UCHIME algorithm detects chimeras by evaluating how well a query  
258 sequence (Q) can be explained as a mosaic of two parent sequences (A and B)  
259 from a reference database. The query sequence is first divided into four non-  
260 overlapping segments or chunks. Each chunk is independently searched against a  
261 reference database that is assumed to be free of chimeras. The best matches to  
262 each segment are collected, and from these results, two candidate parent sequences  
263 are identified, typically the two sequences that best explain all chunks of the query.  
264 Then a three-way alignment among the query (Q) and the two parent candidates  
265 (A and B) is done. From this alignment, UCHIME attempts to find a chimeric  
266 model (M) which is a hypothetical recombinant sequence formed by concatenating  
267 fragments from A and B that best match the observed Q

## 268 **Chimeric Alignment and Scoring**

269 To decide whether a query is chimeric, UCHIME computes several alignment-  
270 based metrics between Q, its top hit (T, the most similar known sequence), and  
271 the chimeric model (M). The key differences are measured as: dQT or the number  
272 of mismatches between the query and the top hit as well as dQM or the number  
273 of mismatches between the query and the chimeric model. From these, a chimera  
274 score is calculated to quantify how much better the chimeric model fits the query  
275 compared to a single parent. If the model's similarity to Q exceeds a defined  
276 threshold (typically  $\geq 0.8\%$  better identity), the sequence is reported as chimeric.  
277 A higher score indicates stronger evidence of chimerism, while lower scores suggest  
278 that the sequence is more likely to be authentic.

279 In de novo mode, UCHIME applies an abundance-driven strategy. Only se-  
280 quences at least twice as abundant as the query are considered as potential parents.  
281 Non-chimeric sequences identified at each step are added iteratively to a growing  
282 internal database for subsequent queries.

## 283 **Limitations of UCHIME**

284 Although UCHIME was a significant advancement in chimera detection, it has  
285 notable limitations. According to (Edgar, 2016) and the UCHIME practical notes  
286 (Edgar, n.d), many of the accuracy results reported in the original 2011 paper  
287 were overly optimistic due to unrealistic benchmark designs that assumed com-  
288 plete reference coverage and perfect sequence quality. In practice, UCHIME's  
289 accuracy can decline when (1) the reference database is incomplete or contains

erroneous entries; (2) low-divergence chimeras are present, as these closely resemble genuine biological variants; (3) sequence datasets include residual sequencing errors, leading to spurious alignments or misidentification; and (4) the abundance ratio between parent and chimera is distorted by amplification bias. Additionally, UCHIME tends to misclassify sequences as non-chimeric when parent sequences are missing from the database. These limitations motivated the development of UCHIME2.

### 2.3.2 UCHIME2

To overcome the limitations of its predecessor, UCHIME2 (Edgar, 2016) introduced several methodological and algorithmic refinements that significantly enhanced the accuracy and reliability of chimera detection. One major improvement lies in its approach to uncertainty handling. In earlier versions, sequences with limited reference support were often incorrectly classified as non-chimeric, increasing the likelihood of false negatives. UCHIME2 addresses this issue by designating such ambiguous sequences as “unknown,” thereby providing a more conservative and reliable classification framework.

Another notable advancement is the introduction of multiple application-specific modes that allow users to tailor the algorithm’s performance to the characteristics of their datasets. The following parameter presets: denoised, balanced, sensitive, specific, and high-confidence, enable researchers to optimize the balance between sensitivity and specificity according to the goals of their analysis.

312 In comparative evaluations, UCHIME2 demonstrated superior detection per-  
313 formance, achieving sensitivity levels between 93% and 99% and lower overall  
314 error rates than earlier versions or other contemporary tools such as DECIPHER  
315 and ChimeraSlayer. Despite these advances, the study also acknowledged a fun-  
316 damental limitation in chimera detection: complete error-free identification is  
317 theoretically unattainable. This is due to the presence of “perfect fake models,”  
318 wherein genuine non-chimeric sequences can be perfectly reconstructed from other  
319 reference fragments. This underscore the uncertainty in differentiating authentic  
320 biological sequences from artificial recombinants based solely on sequence similar-  
321 ity, emphasizing the need for continued methodological refinement and cautious  
322 interpretation of results.

### 323 **2.3.3 CATch**

324 As previously mentioned, UCHIME (Edgar et al., 2011) relied on alignment-based  
325 sequences in amplicon data. However, researchers soon observed that different al-  
326 gorithms often produced inconsistent predictions. A sequence might be identified  
327 as chimeric by one tool but classified as non-chimeric by another, resulting in  
328 unreliable filtering outcomes across studies.

329 To address these inconsistencies, Mysara, Saeys, Leys, Raes, and Monsieus  
330 (2015) developed the Classifier for Amplicon Tool Chimeras (CATCh), which rep-  
331 resents the first ensemble machine learning system designed for chimera detection  
332 in 16S rRNA amplicon sequencing. Rather than depending on a single detec-  
333 tion strategy, CATCh integrates the outputs of several established tools, includ-  
334 ing UCHIME, ChimeraSlayer, DECIPHER, Pintail, and Perseus. The individual

335 scores and binary decisions generated by these tools are used as input features for  
336 a supervised learning model. The algorithm employs a Support Vector Machine  
337 (SVM) with a Pearson VII Universal Kernel (PUK) to determine optimal weight-  
338 ings among the input features and to assign each sequence a probability of being  
339 chimeric.

340        Benchmarking in both reference-based and de novo modes demonstrated signif-  
341 icant performance improvements. CATCh achieved sensitivities of approximately  
342 85 percent in reference-based mode and 92 percent in de novo mode, with corre-  
343 sponding specificities of approximately 96 percent and 95 percent. These results  
344 indicate that CATCh detected 7 to 12 percent more chimeras than any individual  
345 algorithm while maintaining high precision.

### 346 **2.3.4 ChimPipe**

347 Among the available tools for chimera detection, ChimPipe is a pipeline developed  
348 to identify chimeric sequences such as biological chimeras. It uses both discordant  
349 paired-end reads and split-read alignments to improve the accuracy and sensitivity  
350 of detecting biological chimeras (Rodriguez-Martin et al., 2017). By combining  
351 these two sources of information, ChimPipe achieves better precision than meth-  
352 ods that depend on a single type of indicator.

353        The pipeline works with many eukaryotic species that have available genome  
354 and annotation data (Rodriguez-Martin et al., 2017). It can also predict multiple  
355 isoforms for each gene pair and identify breakpoint coordinates that are useful  
356 for reconstructing and verifying chimeric transcripts. Tests using both simulated

357 and real datasets have shown that ChimPipe maintains high accuracy and reliable  
358 performance.

359 ChimPipe lets users adjust parameters to fit different sequencing protocols or  
360 organism characteristics. Experimental results have confirmed that many chimeric  
361 transcripts detected by the tool correspond to functional fusion proteins, demon-  
362 strating its utility for understanding chimera biology and its potential applications  
363 in disease research (Rodriguez-Martin et al., 2017).

## 364 **2.4 Machine Learning Approaches for Chimera** 365 **and Sequence Quality Detection**

366 Traditional chimera detection tools rely primarily on heuristic or alignment-based  
367 rules. Recent advances in machine learning (ML) have demonstrated that models  
368 trained on sequence-derived features can effectively capture compositional and  
369 structural patterns in biological sequences. Although most existing ML systems  
370 such as those used for antibiotic resistance prediction, taxonomic classification,  
371 or viral identification are not specifically designed for chimera detection, they  
372 highlight how data-driven models can outperform similarity-based heuristics by  
373 learning intrinsic sequence signatures. In principle, ML frameworks can integrate  
374 indicators such as k-mer frequencies, GC-content variation and split-alignment  
375 metrics to identify subtle anomalies that may indicate a chimeric origin (Arango  
376 et al., 2018; Liang, Bible, Liu, Zou, & Wei, 2020; Ren et al., 2020).

### 377 2.4.1 Feature-Based Representations of Genomic Se- 378 quences

379 In genomic analysis, feature extraction converts DNA sequences into numerical  
380 representations suitable for ML algorithms. A common approach is k-mer fre-  
381 quency analysis, where normalized k-mer counts form the feature vector (Vervier,  
382 Mahé, Tournoud, Veyrieras, & Vert, 2015). These features effectively capture lo-  
383 cal compositional patterns that often differ between authentic and chimeric reads.  
384 In particular, deviations in k-mer profiles between adjacent read segments can  
385 serve as a compositional signature of template-switching events. Additional de-  
386 scriptors such as GC content and sequence entropy can further distinguish se-  
387 quence types; in metagenomic classification and virus detection, k-mer-based fea-  
388 tures have shown strong performance and robustness to noise (Ren et al., 2020;  
389 Vervier et al., 2015). For chimera detection specifically, abrupt shifts in GC or k-  
390 mer composition along a read can indicate junctions between parental fragments.  
391 Windowed feature extraction enables models to capture these discontinuities that  
392 rule-based algorithms may overlook.

393 Machine learning models can also leverage alignment-derived features such as  
394 the frequency of split alignments, variation in mapping quality, and local cover-  
395 age irregularities. Split reads and discordant read pairs are classical indicators  
396 of genomic junctions and have been formalized in probabilistic frameworks for  
397 structural-variant discovery that integrate multiple evidence types (Layer, Hall, &  
398 Quinlan, 2014). Similarly, long-read tools such as Sniffles employ split-alignment  
399 and coverage anomalies to accurately localize breakpoints (Sedlazeck et al., 2018).  
400 Modern aligners such as Minimap2 (Li, 2018) output supplementary (SA tags) and

secondary alignments as well as chaining and alignment-score statistics that can be summarized into quantitative predictors for machine-learning models. These alignment-signal features are particularly relevant to PCR-induced mitochondrial chimeras, where template-switching events produce reads partially matching distinct regions of the same or related genomes. Integrating such cues within a supervised-learning framework enables artifact detection even in datasets lacking complete or perfectly assembled references.

A further biologically grounded descriptor is the length of microhomology at putative junctions. Microhomology refers to short, shared sequences, often in the range of a few to tens of base pairs that are near breakpoints where template-switching events typically happen. Studies of double strand break repair and structural variation have demonstrated that the length of microhomology correlates with the likelihood of microhomology-mediated end joining (MMEJ) or fork-stalled template-switching pathways (Sfeir & Symington, 2015). In the context of PCR-induced chimeras, template switching during amplification often leaves short identical sequences at the junction of two concatenated fragments. Quantifying the longest exact suffix-prefix overlap at each candidate breakpoint thus provides a mechanistic signature of chimerism and complements both compositional (k-mer) and alignment (SA count) features.

## 2.5 Synthesis of Chimera Detection Approaches

To provide an integrated overview of the literature discussed in this chapter, Table 2.1 summarizes the major chimera detection studies, their methodological



<sup>423</sup> approaches, and their known limitations.

Table 2.1: Summary of Existing Methods and Research Gaps

Method/Study	Scope/Approach	Limitations
Reference-based Chimera Detection	Compares query sequences against curated, non-chimeric reference databases; identifies mosaic sequences by evaluating similarity to known templates.	Depends heavily on completeness and quality of reference databases; often fails when novel taxa or missing parent sequences are present; reduced accuracy for low-divergence chimeras.
De novo Chimera Detection	Identifies chimeras using only internal dataset relationships; relies on abundance patterns and compositional similarity; reconstructs sequences as mosaics of high-abundance parents.	Assumes true sequences are more abundant—fails when amplification bias distorts abundance; struggles with evenly abundant parental sequences; can misclassify highly similar true variants.
UCHIME	Alignment-based chimera detection; segments query sequence, identifies parent candidates, performs 3-way alignment, and computes chimera scores; supports both reference-based and de novo modes.	Accuracy inflated in original benchmarks; suffers under incomplete databases; poor performance on low-divergence chimeras; sensitive to sequencing errors; misclassifies when parents are missing.
UCHIME2	Improved uncertainty handling; classifies ambiguous sequences as unknown; offers multiple sensitivity/specificity modes; more robust with incomplete references; higher sensitivity (93–99%).	Cannot achieve perfect accuracy due to “perfect fake models”; genuine variants may be indistinguishable from artificial recombinants; theoretical detection limit remains.
CATCh	First ML ensemble tool for 16S chimera detection; integrates outputs of UCHIME, ChimeraSlayer, DECIPHER, Pintail, Perseus via SVM classifier; significantly improves sensitivity and specificity.	Depends on performance of underlying tools; ML model limited to features they output; ensemble can still misclassify in datasets with extreme novelty or low coverage.
ChimPipe	Pipeline for detecting fusion genes and transcript-derived chimeras in	Designed for RNA-seq, not amplicons; needs high-quality genome

424 Across existing studies, no single approach reliably detects all forms of chimeric  
425 sequences, particularly those generated by PCR-induced template switching in  
426 mitochondrial genomes. Reference-based tools perform poorly when parental se-  
427 quences are absent; de novo methods rely strongly on abundance assumptions;  
428 alignment-based systems show reduced sensitivity to low-divergence chimeras; and  
429 ensemble methods inherit the limitations of their component algorithms. RNA-  
430 seq-oriented pipelines likewise do not generalize well to organelle data. Although  
431 machine learning approaches offer promising feature-based detection, they are  
432 rarely applied to mitochondrial genomes and are not trained specifically on PCR-  
433 induced organelle chimeras. These limitations indicate a clear research gap: the  
434 need for a specialized, feature-driven classifier tailored to mitochondrial PCR-  
435 induced chimeras that integrates k-mer composition, split-alignment signals, and  
436 micro-homology features to achieve more accurate detection than current heuristic  
437 or alignment-based tools.

## Chapter 3

# Research Methodology

This chapter outlines the steps involved in completing the study, including data gathering, generating simulated mitochondrial Illumina reads, preprocessing and indexing the data, developing a bioinformatics pipeline to extract key features, applying machine learning algorithms for chimera detection, and validating and comparing model performance.

### 3.1 Research Activities

As illustrated in Figure 3.1, this study carried out a sequence of procedures to detect PCR-induced chimeric reads in mitochondrial genomes. The process began with collecting a mitochondrial reference sequence of *Sardinella lemuru* from the National Center for Biotechnology Information (NCBI) database, which was used as a reference for generating simulated clean and chimeric reads. These reads were subsequently indexed and mapped. These datasets will go through a bioin-

452 formatics pipeline that includes k-mer extraction and homology-based filtering to  
 453 prepare the data for model construction. The machine learning model will subse-  
 454 quently be trained and tested using the processed datasets to assess its precision  
 455 and accuracy. The model will undergo refinement and retraining until it meets the  
 456 required performance threshold, after which it will proceed to validation, testing,  
 457 and deployment.

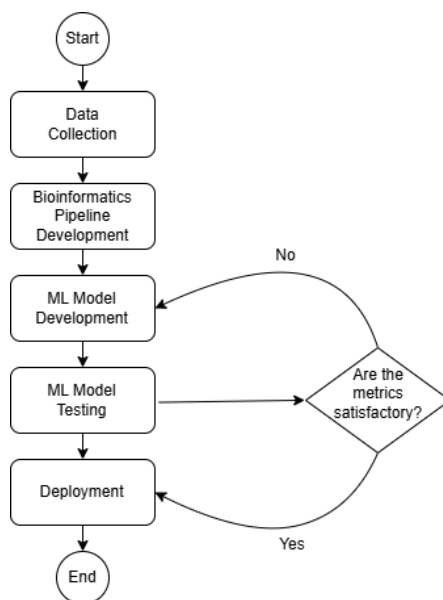


Figure 3.1: Process Diagram of Special Project

### 458 3.1.1 Data Collection

459 The mitochondrial genome reference sequence of *S. lemuru* was obtained from the  
 460 NCBI database (accession number NC\_039553.1) in FASTA format. This sequence  
 461 served as the basis for generating simulated reads for model development.

462 This step is scheduled to begin in the first week of November 2025 and is  
 463 expected to be completed by the last week of November 2025, with a total duration

464 of approximately one (1) month.

## 465 **Data Preprocessing**

466 To reduce manual repetition, all steps in the simulation and preprocessing pipeline  
467 were executed using a custom script in Python (Version 3.11). The script runs  
468 each stage, including read simulation, reference indexing, mapping, and alignment  
469 processing, in a fixed sequence.

470 Sequencing data were simulated from the NCBI reference genome using **wgsim**  
471 (Version 1.13). First, 10,000 paired-end reads (R1 and R2) were generated from  
472 the original reference (`original_reference.fasta`) and designated as clean reads  
473 using the command:

```
474 wgsim -1 150 -2 150 -r 0 -R 0 -X 0 -e 0.001 -N 10000 \  
475         original_reference.fasta ref1.fastq ref2.fastq
```

476 The command parameters are as follows:

- 477 • **-1** and **-2**: read lengths of 150 base pairs for each paired-end read.
- 478 • **-r**, **-R**, **-X**: mutation rate, fraction of indels, and indel extension probability,  
479 all set to a default value of 0.
- 480 • **-e**: base error rate, set to 0.001 to simulate realistic sequencing errors.
- 481 • **-N**: number of read pairs, set to 10,000.

482 Chimeric sequences were then generated from the same NCBI reference using a  
483 separate Python script. Two non-adjacent segments were randomly selected such  
484 that their midpoint distances fell within specified minimum and maximum thresh-  
485 olds. The script attempts to retain microhomology, or short identical sequences  
486 at segment junctions, to mimic PCR-induced template switching. The resulting  
487 chimeras were written to `chimera_reference.fasta`, with headers recording seg-  
488 ment positions and microhomology length. The `chimera_reference.fasta` file  
489 was subsequently processed with `wgsim` to simulate 10,000 paired-end chimeric  
490 reads (`chimeric1.fastq` and `chimeric2.fastq`) using the same command for-  
491 mat.

492 Next, a `minimap2` index of the reference genome was created using:

```
493 minimap2 -d ref.mmi original_reference.fasta
```

494 Minimap2 (Version 2.28) is a tool used to map reads to a reference genome.  
495 The index `ref.mmi` of the original reference sequence is required by `minimap2` for  
496 efficient read mapping. Mapping allows extraction of alignment features from each  
497 read, which will be used as input for the machine learning model. The simulated  
498 clean and chimeric reads were then mapped to the reference index as follows:

```
499 minimap2 -ax sr -t 8 ref.mmi ref1.fastq ref2.fastq > clean.sam
```

```
500 minimap2 -ax sr -t 8 ref.mmi \  
501 chimeric1.fastq chimeric2.fastq > chimeric.sam
```

502 Here, `-ax sr` specifies short-read alignment mode, and `-t 8` uses 8 CPU

503 threads. The resulting clean and chimeric SAM files contain the alignment posi-  
504 tions of each read relative to the original reference genome.

505 The SAM files were then converted to BAM format, sorted, and indexed using  
506 `samtools` (Version 1.20):

```
507 samtools view -bS clean.sam -o clean.bam
508 samtools view -bS chimeric.sam -o chimeric.bam
509
510 samtools sort clean.bam -o clean.sorted.bam
511 samtools index clean.sorted.bam
512
513 samtools sort chimeric.bam -o chimeric.sorted.bam
514 samtools index chimeric.sorted.bam
```

515 BAM files are the compressed binary version of SAM files, which enables faster  
516 processing and reduced storage. Sorting will arrange reads by genomic coordi-  
517 nates, and indexing will allow detection of supplementary alignments (SA) as a  
518 feature for the machine learning model.

519 The results of this process will be used for feature extraction. Once the primary  
520 features have been extracted from the reads, a custom script will be created to  
521 merge them into a single dataset and assign class labels: clean reads as “0” and  
522 chimeric reads as “1”. The final dataset will contain 10,000 clean reads and 10,000  
523 chimeric reads (a total of 20,000 entries) to ensure equal representation of both  
524 classes. The merged dataset will be saved in TSV (`.tsv`) format and subsequently  
525 split so that 80% are used for training and 20% for testing.



526 This whole process is scheduled to start in the first week of November 2025  
527 and is expected to be completed by the last week of November 2025, with a total  
528 duration of approximately one (1) month.

### 529 **3.1.2 Bioinformatics Tools Pipeline**

530 A bioinformatics pipeline will be developed and implemented to extract the neces-  
531 sary analytical features. This pipeline will function as a reproducible and modular  
532 workflow that accepts FASTQ and BAM/SAM file inputs, processes them using  
533 tools such as `samtools` and `jellyfish` (Version 2.3.1), and produces tabular fea-  
534 ture matrices (TSV) for downstream machine learning. To ensure correctness  
535 and adherence to best practices, bioinformatics experts at the PGC Visayas will  
536 be consulted to validate the pipeline design, feature extraction logic, and overall  
537 data integrity. This stage of the study is scheduled to begin in the first week of  
538 January 2026 and conclude by the last week of February 2026, with an estimated  
539 total duration of approximately two (2) months.

540 The bioinformatics pipeline focuses on three principal features from the simu-  
541 lated and aligned sequencing data: (1) supplementary alignment flag (SA count),  
542 (2) k-mer composition difference between read segments, and (3) microhomology  
543 length at potential junctions. Each of these features captures a distinct biological  
544 or computational signature associated with PCR-induced chimeras.

## 545 **Supplementary Alignment Flag**

546 Supplementary alignment information will be assessed using the mapped and  
547 sorted BAM files (`clean.sorted.bam` and `chimeric.sorted.bam`) generated  
548 from the data preprocessing stage. Alignment summaries will be checked using  
549 `samtools flagstat` to obtain preliminary quality-control statistics, including  
550 counts of primary, secondary, and supplementary (SA) alignments.

551 Both BAM files will be converted to SAM format for detailed inspection of  
552 reads in each file:

```
553 samtools view -h clean.sorted.bam -o clean.sorted.sam
```

```
554 samtools view -h chimeric.sorted.bam -o chimeric.sorted.sam
```

555 The SAM output will be checked for reads containing the `SA:Z` flag, as it  
556 denotes supplementary alignments. Reads exhibiting these or substantial soft-  
557 clipped regions will be considered strong candidates for chimeric artifacts. A  
558 custom Python script would be created to extract the alignment-derived features  
559 and relevant metadata including mapping quality, SAM flag information, CIGAR-  
560 based clipping, and alignment coordinates. These extracted attributes would then  
561 be organized and compiled into a TSV (`.tsv`) file.

## 562 **K-mer Composition Difference**

563 Chimeric reads often comprise fragments from distinct genomic regions, resulting  
564 in a compositional discontinuity between segments. Comparing k-mer frequency  
565 profiles between the left and right halves of a read allows detection of such abrupt

566 compositional shifts, independent of alignment information. This will be obtained  
567 using Jellyfish, a fast k-mer counting software. For each read, the sequence will  
568 be divided into two segments, either at the midpoint or at empirically determined  
569 breakpoints inferred from supplementary alignment data, to generate left and right  
570 sequence segments. Jellyfish will then compute k-mer frequency profiles (with  $k =$   
571 5 or 6) for each segment. The resulting k-mer frequency vectors will be normalized  
572 and compared using distance metrics such as cosine similarity or Jensen–Shannon  
573 divergence to quantify compositional disparity between the two halves of the same  
574 read. The resulting difference scores will be stored in a structured TSV file.

## 575 **Micro-homology Length**

576 The micro-homology length will be computed using a custom Python script that  
577 detects the longest exact suffix–prefix overlap within  $\pm 30$  base pairs surround-  
578 ing a candidate breakpoint. This analysis identifies the number of consecutive  
579 bases shared between the end of one segment and the beginning of another. The  
580 presence and length of such micro-homology are classic molecular signatures of  
581 PCR-induced template switching, where short identical regions (typically 3–15  
582 base pairs) promote premature termination and recombination of DNA synthesis  
583 on a different template strand. Quantifying micro-homology allows assessment of  
584 whether the suspected breakpoint reflects PCR artifacts or true biological variants.  
585 Each read will therefore be annotated with its corresponding micro-homology  
586 length, overlap sequence, and GC content.

587 After extracting the three primary features, all resulting TSV files will be  
588 joined using the read identifier as a common key to generate a unified feature ma-

trix. Additional read-level metadata such as read length, mean base quality, and number of clipped bases will also be included to provide contextual information. This consolidated dataset will serve as the input for subsequent machine-learning model development and evaluation.

### 3.1.3 Machine Learning Model Development

After feature extraction, the per-read feature matrices for clean and chimeric reads were merged into a single dataset. Each row corresponded to one paired-end read, and columns encoded alignment-structure features (e.g., supplementary alignment count and spacing between segments), CIGAR-derived soft-clipping statistics (e.g., left and right soft-clipped length, total clipped bases), k-mer composition discontinuity between read segments, and microhomology descriptors near candidate junctions. The resulting feature set was restricted to quantities that can be computed from standard BAM/FASTQ files in typical mitochondrial sequencing workflows.

The labelled dataset was randomly partitioned into training (80%) and test (20%) subsets using stratified sampling to preserve the 1:1 ratio of clean to chimeric reads. Model development and evaluation were implemented in Python (Version 3.11) using the `scikit-learn`, `xgboost`, `lightgbm`, and `catboost` libraries. A broad panel of classification algorithms was then benchmarked on the training data to obtain a fair comparison of different model families under identical feature conditions. The panel included: a trivial dummy classifier, L2-regularized logistic regression, a calibrated linear support vector machine (SVM),  $k$ -nearest neighbours, Gaussian Naïve Bayes, decision-tree ensembles (Random Forest, Ex-

612 tremely Randomized Trees, and Bagging with decision trees), gradient boosting  
613 methods (Gradient Boosting, XGBoost, LightGBM, and CatBoost), and a shallow  
614 multilayer perceptron (MLP).

615 For each model, five-fold stratified cross-validation was performed on the train-  
616 ing set. In every fold, four-fifths of the data were used for fitting and the remaining  
617 one-fifth for validation. Mean cross-validation accuracy, precision, recall, F1-score  
618 for the chimeric class, and area under the receiver operating characteristic curve  
619 (ROC-AUC) were computed to summarize performance and rank candidate meth-  
620 ods. This baseline screen allowed comparison of linear, probabilistic, neural, and  
621 ensemble-based approaches and identified tree-based ensemble and boosting mod-  
622 els as consistently strong performers relative to simpler baselines.

### 623 **3.1.4 Model Benchmarking, Hyperparameter Optimiza-** 624 **tion, and Evaluation**

625 Model selection and refinement proceeded in two stages. First, the cross-validation  
626 results from the broad panel were used to identify a subset of competitive mod-  
627 els for more detailed optimization. Specifically, ten model families were carried  
628 forward: L2-regularized logistic regression, calibrated linear SVM, Random For-  
629 est, ExtraTrees, Gradient Boosting, XGBoost, LightGBM, CatBoost, Bagging  
630 with decision trees, and a shallow MLP. This subset spans both linear and non-  
631 linear decision boundaries, but emphasizes ensemble and boosting methods, which  
632 showed superior F1 and ROC-AUC in the initial benchmark.

633 Second, hyperparameter optimization was conducted for each of the ten se-

634 lected models using randomized search with five-fold stratified cross-validation  
635 (`RandomizedSearchCV`). For tree-based ensembles, the search space included the  
636 number of trees, maximum depth, minimum samples per split and leaf, and the  
637 fraction of features considered at each split. For boosting methods, key hyper-  
638 parameters such as the number of boosting iterations, learning rate, tree depth,  
639 subsampling rate, and column subsampling rate were tuned. For the MLP, the  
640 number and size of hidden layers, learning rate, and  $L_2$  regularization strength  
641 were varied. In all cases, the primary optimisation criterion was the F1-score of  
642 the chimeric class, averaged across folds.

643 For each model family, the hyperparameter configuration with the highest  
644 mean cross-validation F1-score was selected as the best-tuned estimator. These  
645 tuned models were then refitted on the full training set and evaluated once on the  
646 held-out test set to obtain unbiased estimates of performance. Test-set metrics in-  
647 cluded accuracy, precision, recall, F1-score for the chimeric class, and ROC-AUC.  
648 Confusion matrices and ROC curves were generated for the top-performing mod-  
649 els to characterise common error modes, such as false negatives (missed chimeric  
650 reads) and false positives (clean reads incorrectly labelled as chimeric). The final  
651 model or small set of models for downstream interpretation was chosen based on  
652 a combination of test-set F1-score, ROC-AUC, and practical considerations such  
653 as model complexity and ease of deployment within a bioinformatics pipeline.

### 654 **3.1.5 Feature Importance and Interpretation**

655 To relate model decisions to biologically meaningful signals, feature-importance  
656 analyses were performed on the best-performing tree-based models. Two comple-

mentary approaches were used. First, built-in importance measures from ensemble methods (e.g., split-based importances in Random Forest and Gradient Boosting) were examined to obtain an initial ranking of features based on their contribution to reducing impurity. Second, model-agnostic permutation importance was computed on the test set by repeatedly permuting each feature column while keeping all others fixed and measuring the resulting decrease in F1-score. Features whose permutation led to a larger performance drop were interpreted as more influential for chimera detection.

For interpretability, individual features were grouped into four conceptual families: (i) supplementary alignment and alignment-structure features (e.g., SA count, spacing between alignment segments, strand consistency), (ii) CIGAR-derived soft-clipping features (e.g., left and right soft-clipped length, total clipped bases), (iii) k-mer composition discontinuity features (e.g., cosine distance and Jensen–Shannon divergence between k-mer profiles of read segments), and (iv) microhomology descriptors (e.g., microhomology length and local GC content around putative breakpoints). Aggregating permutation importance scores within each family allowed assessment of which biological signatures contributed most strongly to the classifier’s performance. This analysis provided a basis for interpreting the trained models in terms of known mechanisms of PCR-induced template switching and for identifying which alignment- and sequence-derived cues are most informative for distinguishing chimeric from clean mitochondrial reads.

### 678 **3.1.6 Validation and Testing**

679 Validation will involve both internal and external evaluations. Internal validation  
680 will be achieved through five-fold cross-validation on the training data to verify  
681 model generalization and reduce variance due to random sampling. External  
682 validation will be achieved through testing on the 20% hold-out dataset derived  
683 from the simulated reads, which will serve as an unbiased benchmark to evaluate  
684 how well the trained models generalize to unseen data. All feature extraction and  
685 preprocessing steps will be performed using the same bioinformatics pipeline to  
686 ensure consistency and comparability across validation stages.

687 Comparative evaluation across all candidate algorithms, including SVM, de-  
688 cision trees, logistic regression, Random Forest, gradient boosting, and others,  
689 will determine which models demonstrate the highest predictive performance and  
690 computational efficiency under identical data conditions. Their metrics will be  
691 compared to identify the which algorithms are most suitable for further refine-  
692 ment.

### 693 **3.1.7 Documentation**

694 Comprehensive documentation will be maintained throughout the study to en-  
695 sure transparency and reproducibility. All stages of the research, including data  
696 gathering, preprocessing, feature extraction, model training, and validation, will  
697 be systematically recorded in a .README file in the GitHub repository. For each  
698 analytical step, the corresponding parameters, software versions, and command  
699 line scripts will be documented to enable exact replication of results.



700 The repository structure will follow standard research data management  
 701 practices, with clear directories for datasets and scripts. Computational  
 702 environments will be standardized using Conda, with an environment file  
 703 (`environment.arm.yml`) specifying dependencies and package versions to main-  
 704 tain consistency across systems.

705 For manuscript preparation and supplementary materials, Overleaf (L<sup>A</sup>T<sub>E</sub>X)  
 706 will be used to produce publication-quality formatting and consistent referencing.

## 707 3.2 Calendar of Activities

708 Table 3.1 presents the project timeline in the form of a Gantt chart, where each  
 709 bullet point corresponds to approximately one week of planned activity.

Table 3.1: Timetable of Activities

Activities (2025)	Nov	Dec	Jan	Feb	Mar	Apr	May
Data Collection and Simulation	• • • •						
Bioinformatics Tools Pipeline			• • • •	• • • •			
Machine Learning Development			• •	• • • •	• • • •	• •	
Testing and Validation						• •	• • • •
Documentation	• • • •	• • • •	• • • •	• • • •	• • • •	• • • •	• • • •

## 710 References

- 711 Anderson, S., Bankier, A., Barrell, B., Bruijn, M., Coulson, A., Drouin, J., ...  
712 Young, I. (1981, 04). Sequence and organization of the human mitochondrial  
713 genome. *Nature*, 290, 457-465. doi: 10.1038/290457a0
- 714 Arango, G., Garner, E., Pruden, A., Heath, L., Vikesland, P., & Zhang, L. (2018,  
715 02). Deeparg: A deep learning approach for predicting antibiotic resistance  
716 genes from metagenomic data. *Microbiome*, 6. doi: 10.1186/s40168-018  
717 -0401-z
- 718 Bentley, D. R., Balasubramanian, S., Swerdlow, H. P., Smith, G. P., Milton, J.,  
719 Brown, C. G., ... Smith, A. J. (2008). Accurate whole human genome  
720 sequencing using reversible terminator chemistry. *Nature*, 456(7218), 53–  
721 59. doi: 10.1038/nature07517
- 722 Boore, J. L. (1999). Animal mitochondrial genomes. *Nucleic Acids Research*,  
723 27(8), 1767–1780. doi: 10.1093/nar/27.8.1767
- 724 Cameron, S. L. (2014). Insect mitochondrial genomics: Implications for evolution  
725 and phylogeny. *Annual Review of Entomology*, 59, 95–117. doi: 10.1146/  
726 annurev-ento-011613-162007
- 727 Dierckxsens, N., Mardulyn, P., & Smits, G. (2017). Novoplasty: de novo assembly  
728 of organelle genomes from whole genome data. *Nucleic Acids Research*,

729 45(4), e18. doi: 10.1093/nar/gkw955

730 Edgar, R. C. (2016). Uchime2: improved chimera prediction for amplicon se-

731 quencing. *bioRxiv*. Retrieved from [https://api.semanticscholar.org/](https://api.semanticscholar.org/CorpusID:88955007)

732 CorpusID:88955007

733 Edgar, R. C. (n.d). Uchime in practice. Retrieved from [https://www.drive5](https://www.drive5.com/usearch/manual7/uchime_practical.html)

734 .com/usearch/manual7/uchime\_practical.html

735 Edgar, R. C., Haas, B. J., Clemente, J. C., Quince, C., & Knight, R. (2011).

736 Uchime improves sensitivity and speed of chimera detection. *Bioinformatics*,

737 27(16), 2194–2200. doi: 10.1093/bioinformatics/btr381

738 Glenn, T. C. (2011). Field guide to next-generation dna sequencers. *Molecular*

739 *Ecology Resources*, 11(5), 759–769. doi: 10.1111/j.1755-0998.2011.03024.x

740 Gonzalez, J. M., Zimmermann, J., & Saiz-Jimenez, C. (2004, 09). Evalu-

741 ating putative chimeric sequences from pcr-amplified products. *Bioin-*

742 *formatics*, 21(3), 333-337. Retrieved from [https://doi.org/10.1093/](https://doi.org/10.1093/bioinformatics/bti008)

743 [bioinformatics/bti008](https://doi.org/10.1093/bioinformatics/bti008) doi: 10.1093/bioinformatics/bti008

744 Gray, M. W. (2012). Mitochondrial evolution. *Cold Spring Harbor perspectives*

745 *in biology*, 4. Retrieved from [https://doi.org/10.1101/cshperspect](https://doi.org/10.1101/cshperspect.a011403)

746 [.a011403](https://doi.org/10.1101/cshperspect.a011403) doi: 10.1101/cshperspect.a011403

747 Hahn, C., Bachmann, L., & Chevreux, B. (2013). Reconstructing mitochondrial

748 genomes directly from genomic next-generation sequencing reads—a baiting

749 and iterative mapping approach. *Nucleic Acids Research*, 41(13), e129. doi:

750 10.1093/nar/gkt371

751 Jin, J.-J., Yu, W.-B., Yang, J., Song, Y., dePamphilis, C. W., Yi, T.-S., & Li,

752 D.-Z. (2020). Getorganelle: a fast and versatile toolkit for accurate de

753 novo assembly of organelle genomes. *Genome Biology*, 21(1), 241. doi:

754 10.1186/s13059-020-02154-5

755 Judo, M. S. B., Wedel, W. R., & Wilson, B. H. (1998). Stimulation and sup-  
756 pression of pcr-mediated recombination. *Nucleic Acids Research*, *26*(7),  
757 1819–1825. doi: 10.1093/nar/26.7.1819

758 Labrador, K., Agmata, A., Palermo, J. D., Ravago-Gotanco, R., & Pante, M. J.  
759 (2021). Mitochondrial dna reveals genetically structured haplogroups of  
760 bali sardinella (*sardinella lemuru*) in philippine waters. *Regional Studies in*  
761 *Marine Science*, *41*, 101588. doi: 10.1016/j.rsma.2020.101588

762 Layer, R., Hall, I., & Quinlan, A. (2014, 10). Lumpy: A probabilistic framework  
763 for structural variant discovery. *Genome Biology*, *15*. doi: 10.1186/gb-2014-  
764 -15-6-r84

765 Li, H. (2018, 05). Minimap2: pairwise alignment for nucleotide sequences. *Bioin-*  
766 *formatics*, *34*(18), 3094-3100. Retrieved from [https://doi.org/10.1093/](https://doi.org/10.1093/bioinformatics/bty191)  
767 [bioinformatics/bty191](https://doi.org/10.1093/bioinformatics/bty191) doi: 10.1093/bioinformatics/bty191

768 Liang, Q., Bible, P. W., Liu, Y., Zou, B., & Wei, L. (2020, 02). Deepmi-  
769 crobes: taxonomic classification for metagenomics with deep learning. *NAR*  
770 *Genomics and Bioinformatics*, *2*(1), lqaa009. Retrieved from [https://](https://doi.org/10.1093/nargab/lqaa009)  
771 [doi.org/10.1093/nargab/lqaa009](https://doi.org/10.1093/nargab/lqaa009) doi: 10.1093/nargab/lqaa009

772 Metzker, M. L. (2010). Sequencing technologies — the next generation. *Nature*  
773 *Reviews Genetics*, *11*(1), 31–46. doi: 10.1038/nrg2626

774 Mysara, M., Saeys, Y., Leys, N., Raes, J., & Monsieurs, P. (2015). Catch,  
775 an ensemble classifier for chimera detection in 16s rRNA sequencing stud-  
776 ies. *Applied and Environmental Microbiology*, *81*(5), 1573-1584. Retrieved  
777 from <https://journals.asm.org/doi/abs/10.1128/aem.02896-14> doi:  
778 10.1128/AEM.02896-14

779 Qin, Y., Wu, L., Zhang, Q., Wen, C., Nostrand, J. D. V., Ning, D., ... Zhou, J.  
780 (2023). Effects of error, chimera, bias, and gc content on the accuracy of

781 amplicon sequencing. *mSystems*, 8(6), e01025-23. Retrieved from [https://](https://journals.asm.org/doi/abs/10.1128/msystems.01025-23)  
 782 [journals.asm.org/doi/abs/10.1128/msystems.01025-23](https://journals.asm.org/doi/abs/10.1128/msystems.01025-23) doi: 10.1128/  
 783 [msystems.01025-23](https://journals.asm.org/doi/abs/10.1128/msystems.01025-23)  
 784 Qiu, X., Wu, L., Huang, H., McDonel, P. E., Palumbo, A. V., Tiedje, J. M., &  
 785 Zhou, J. (2001). Evaluation of pcr-generated chimeras, mutations, and het-  
 786 eroduplexes with 16s rna gene-based cloning. *Applied and Environmental*  
 787 *Microbiology*, 67(2), 880–887. doi: 10.1128/AEM.67.2.880-887.2001  
 788 Ren, J., Song, K., Deng, C., Ahlgren, N., Fuhrman, J., Li, Y., ... Sun, F. (2020,  
 789 01). Identifying viruses from metagenomic data using deep learning. *Quan-*  
 790 *titative Biology*, 8. doi: 10.1007/s40484-019-0187-4  
 791 Rodriguez-Martin, B., Palumbo, E., Marco-Sola, S., Griebel, T., Ribeca, P.,  
 792 Alonso, G., ... Djebali, S. (2017, 01). Chimpipes: Accurate detection of  
 793 fusion genes and transcription-induced chimeras from rna-seq data. *BMC*  
 794 *Genomics*, 18. doi: 10.1186/s12864-016-3404-9  
 795 Rognes, T., Flouri, T., Nichols, B., Quince, C., & Mahé, F. (2016). Vsearch: a  
 796 versatile open source tool for metagenomics. *PeerJ*, 4, e2584. doi: 10.7717/  
 797 [peerj.2584](https://doi.org/10.7717/peerj.2584)  
 798 Sedlazeck, F., Rescheneder, P., Smolka, M., Fang, H., Nattestad, M., von Haeseler,  
 799 A., & Schatz, M. (2018, 06). Accurate detection of complex structural  
 800 variations using single-molecule sequencing. *Nature Methods*, 15. doi: 10  
 801 .1038/s41592-018-0001-7  
 802 Sfeir, A., & Symington, L. S. (2015). Microhomology-mediated end joining: A  
 803 back-up survival mechanism or dedicated pathway? *Trends in Biochemical*  
 804 *Sciences*, 40(11), 701-714. Retrieved from [https://www.sciencedirect](https://www.sciencedirect.com/science/article/pii/S0968000415001589)  
 805 [.com/science/article/pii/S0968000415001589](https://www.sciencedirect.com/science/article/pii/S0968000415001589) doi: [https://doi.org/](https://doi.org/10.1016/j.tibs.2015.08.006)  
 806 [10.1016/j.tibs.2015.08.006](https://doi.org/10.1016/j.tibs.2015.08.006)

807 Vervier, K., Mahé, P., Tournoud, M., Veyrieras, J.-B., & Vert, J.-P. (2015,  
808 11). Large-scale machine learning for metagenomics sequence classifica-  
809 tion. *Bioinformatics*, 32(7), 1023-1032. Retrieved from [https://doi.org/](https://doi.org/10.1093/bioinformatics/btv683)  
810 [10.1093/bioinformatics/btv683](https://doi.org/10.1093/bioinformatics/btv683) doi: 10.1093/bioinformatics/btv683  
811 Willette, D., Bognot, E., Mutia, M. T., & Santos, M. (2011). *Biology and ecology*  
812 *of sardines in the philippines: A review* (Vol. 13; Tech. Rep. No. 1). NFRDI  
813 Technical Paper Series. Retrieved from [https://nfrdi.da.gov.ph/tpjf/](https://nfrdi.da.gov.ph/tpjf/etc/Willette%20et%20al.%20Sardines%20Review.pdf)  
814 [etc/Willette%20et%20al.%20Sardines%20Review.pdf](https://nfrdi.da.gov.ph/tpjf/etc/Willette%20et%20al.%20Sardines%20Review.pdf)