
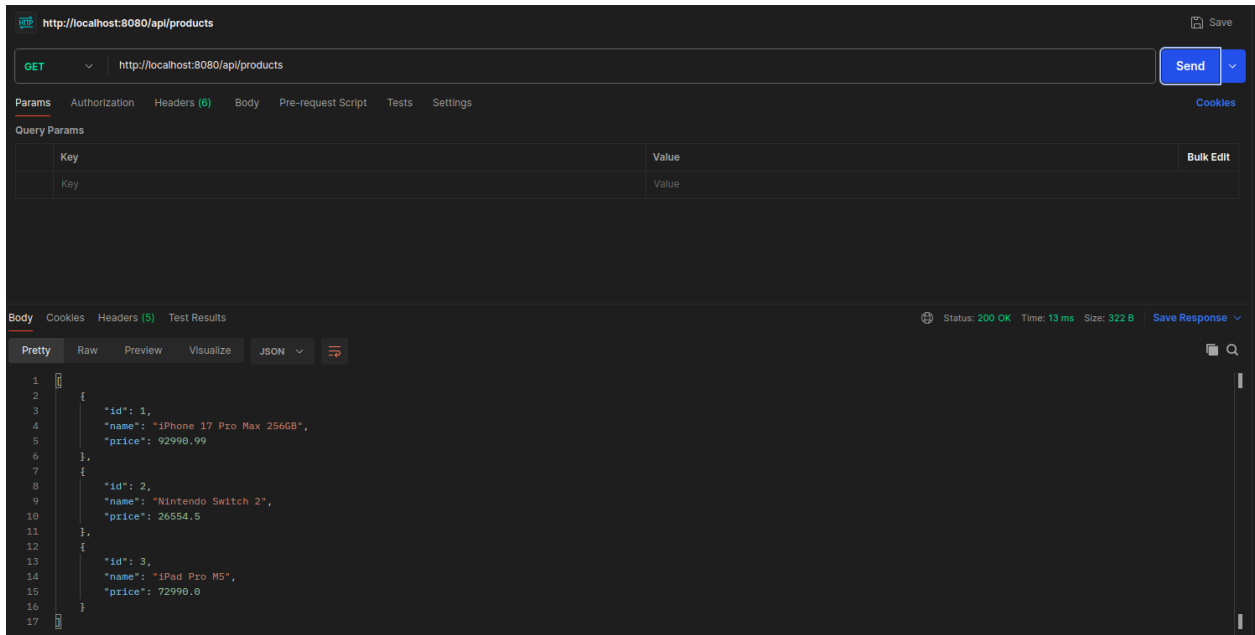


Postman Screenshots

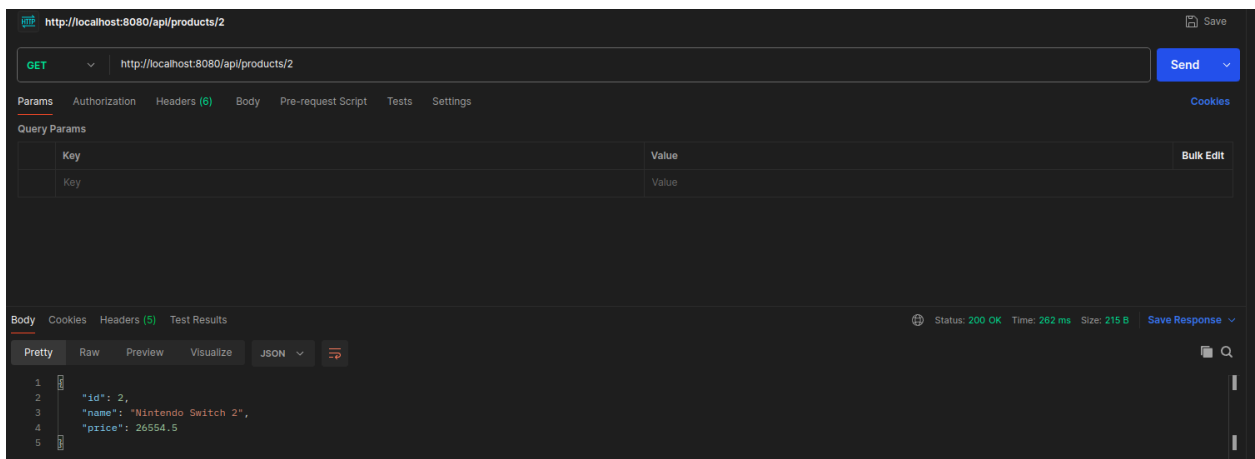


GET /api/products


cURL equivalent: `curl -X GET http://localhost:8080/api/products`

GET /api/products/{id} (Available)

cURL equivalent: `curl -X GET http://localhost:8080/api/products/2`

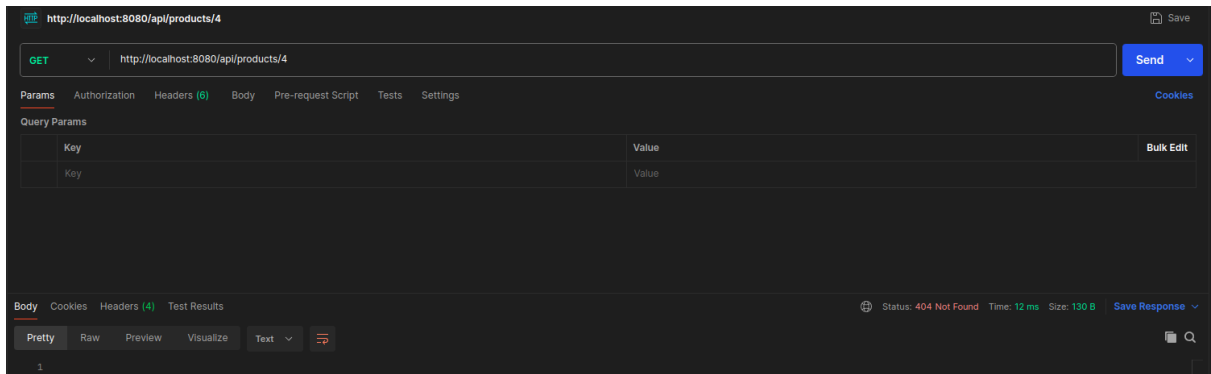


GET /api/products/{id} (Null)

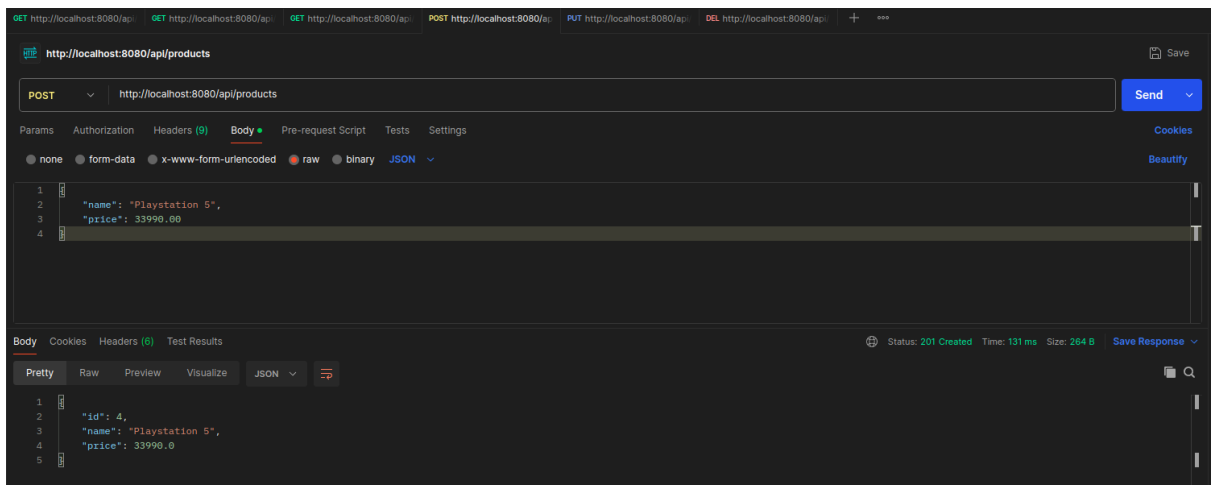


POST /api/products

cURL equivalent: `curl -X POST http://localhost:8080/api/products \`
`-H "Content-Type: application/json" \`
`-d '{"name":"PlayStation 5","price":32990.00}'`

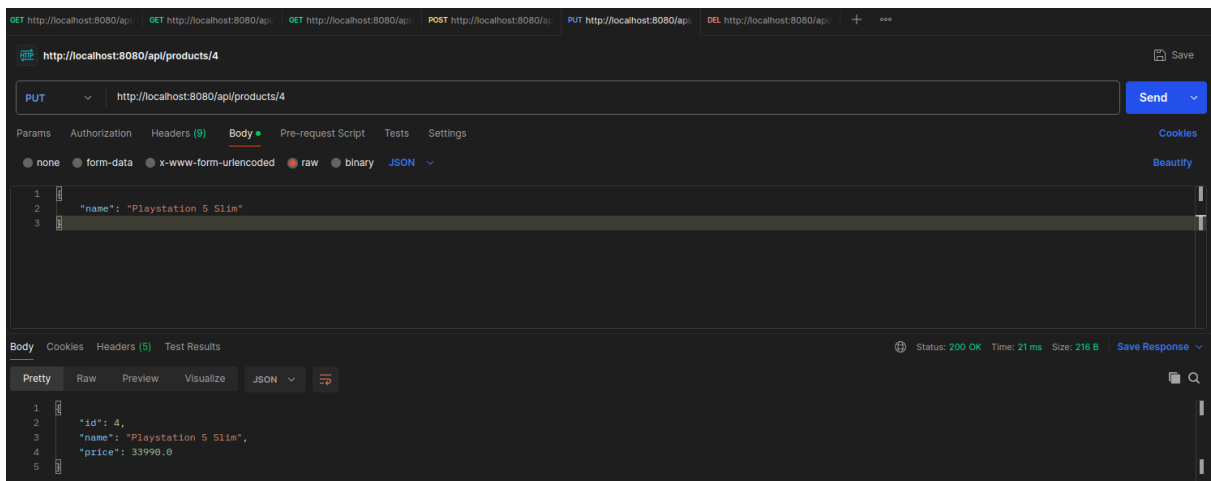

PUT /api/products{id}

cURL equivalent: `curl -X PUT http://localhost:8080/api/products/1 \`
`-H "Content-Type: application/json" \`
`-d '{"price":45999.00}'`

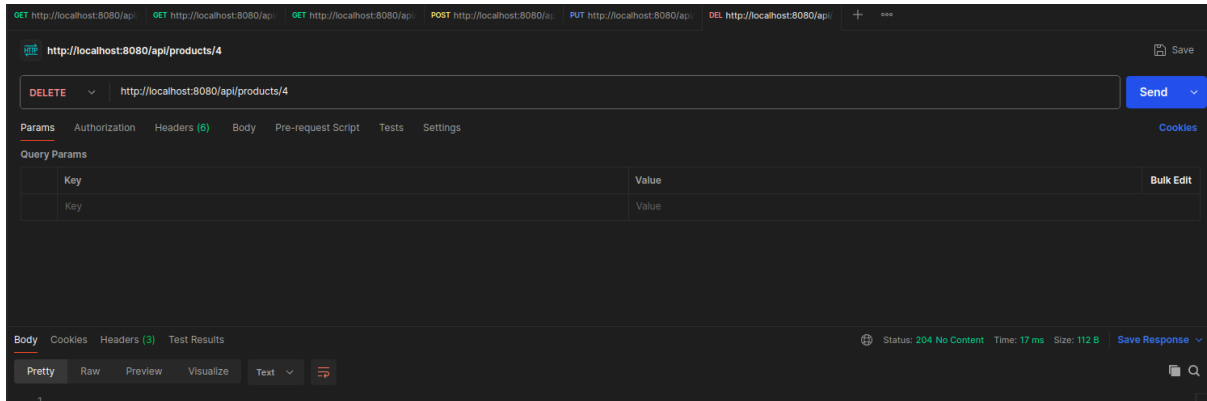

`DELETE /api/products/{id}`
cURL equivalent: `curl -X DELETE http://localhost:8080/api/products/4`