


TP-2: le service de messagerie R303

1.1-

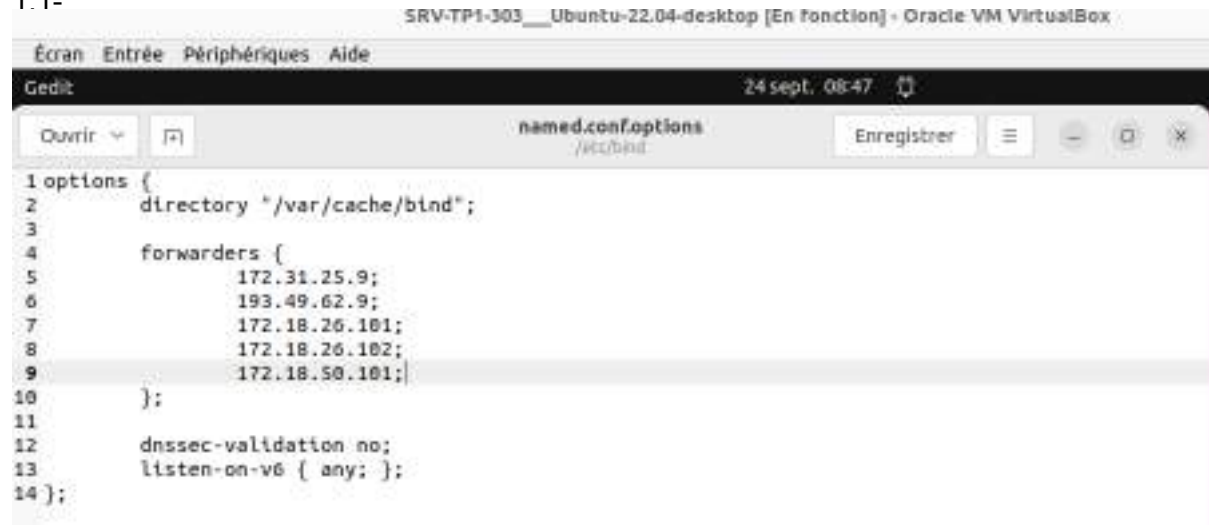

```
1 options {
2     directory "/var/cache/bind";
3
4     forwarders {
5         172.31.25.9;
6         193.49.62.9;
7         172.18.26.101;
8         172.18.26.102;
9         172.18.50.101;
10    };
11
12    dnssec-validation no;
13    listen-on-v6 { any; };
14};
```

2. je vérifie ensuite sur le client en faisant dig google.com, je vois qu'il n'y a aucune erreur (noerror)

1.2

1. → apt update ou apt-get update

→ apt install postfix

ensuite on sélectionne site internet on entre le nom de notre serveur comme nom pour la boîte mail

2.

See /usr/share/postfix/main.cf.dist for a commented, more complete version

Debian specific: Specifying a file name will cause the first
line of that file to be used as the name. The Debian default
is /etc/mailname.
#myorigin = /etc/mailname

smtpd_banner = \$myhostname ESMTP \$mail_name (Ubuntu)
biff = no

appending .domain is the MUA's job.
append_dot_mydomain = no

Uncomment the next line to generate "delayed mail" warnings
#delay_warning_time = 4h

readme_directory = no

```
# See http://www.postfix.org/COMPATIBILITY\_README.html -- default to 3.6 on
# fresh installs.
compatibility_level = 3.6
```

```
# TLS parameters
smtpd_tls_cert_file=/etc/ssl/certs/ssl-cert-snakeoil.pem
smtpd_tls_key_file=/etc/ssl/private/ssl-cert-snakeoil.key
smtpd_tls_security_level=may
```

```
smtp_tls_CApath=/etc/ssl/certs
smtp_tls_security_level=may
smtp_tls_session_cache_database = btree:${data_directory}/smtp_scache
```

```
smtpd_relay_restrictions = permit_mynetworks permit_sasl_authenticated
defer_unauth_destination
myhostname = ns-serveur.UNKNOWN
alias_maps = hash:/etc/aliases
alias_database = hash:/etc/aliases
mydestination = $myhostname, ns-serveur, localhost.localdomain, , localhost
relayhost =
mynetworks = 127.0.0.0/8 [::ffff:127.0.0.0]/104 [::1]/128
mailbox_size_limit = 0
recipient_delimiter = +
inet_interfaces = all
inet_protocols = all
```

```
postconf | grep -E 'myhostname|mydomain'
```

```
cat /etc/passwd | grep user2
```