


Host Metrics


The dashboard visualizes host metrics collected by node_exporter. (based on: https://grafana.com/grafana/dashboards/1860)





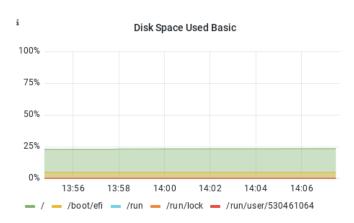

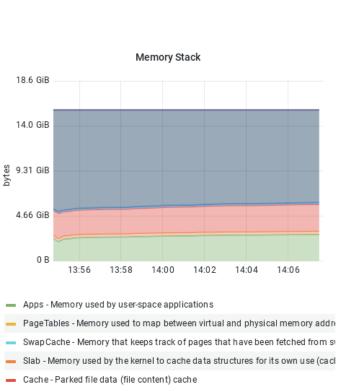

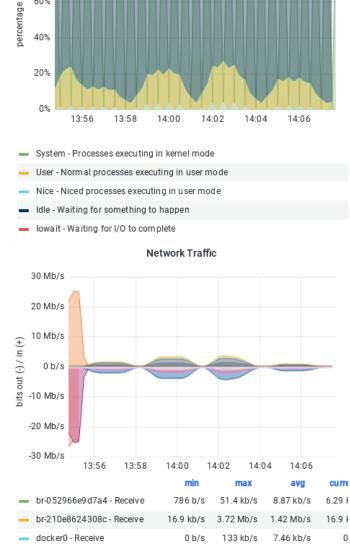

3.29 kb/s

203 b/s

25.2 Mb/s

104 kb/s

1.46 Mb/s

14.6 kb/s

4.86 k

515

CPU

100%


80%

60%

ens4 - Receive

Io - Receive



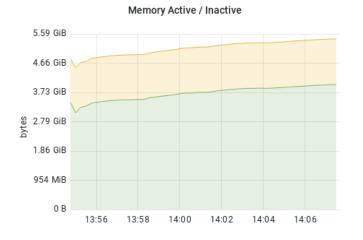



- Inactive Memory which has been less recently used. It is more eligible to be re
- Active Memory that has been used more recently and usually not reclaimed u



Memory Committed

- Committed_AS Amount of memory presently allocated on the system
- CommitLimit Amount of memory currently available to be allocated on the sy



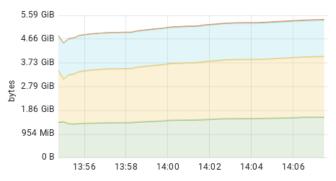


- Inactive_file File-backed memory on inactive LRU list
- Inactive_an on Anonymous and swap cache on inactive LRU list, including tm;
- Active_file File-backed memory on active LRU list
- Active_anon Anonymous and swap cache on active least-recently-used (LRU)

Memory Writeback and Dirty




- Writeback Memory which is actively being written back to disk
- WritebackTmp Memory used by FUSE for temporary writeback buffers
- Dirty Memory which is waiting to get written back to the disk

Memory Shared and Mapped

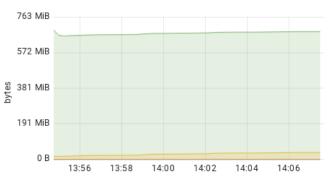

- Mapped Used memory in mapped pages files which have been mmaped, such
- Shmem Used shared memory (shared between several processes, thus includ
- ShmemHugePages Memory used by shared memory (shmem) and tmpfs allo
- ShmemPmdMapped Ammount of shared (shmem/tmpfs) memory backed by


Memory Slab

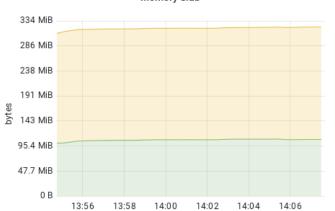



- SUnreclaim Part of Slab, that cannot be reclaimed on memory pressure
- SReclaimable Part of Slab, that might be reclaimed, such as caches


10 20

104.

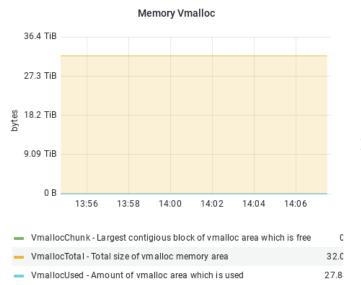


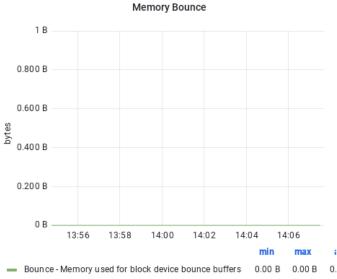


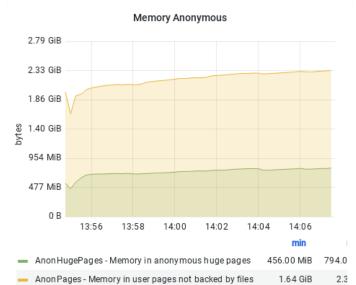


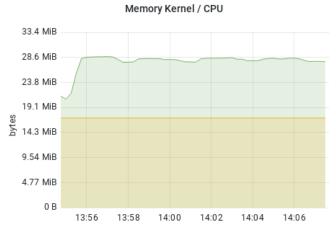










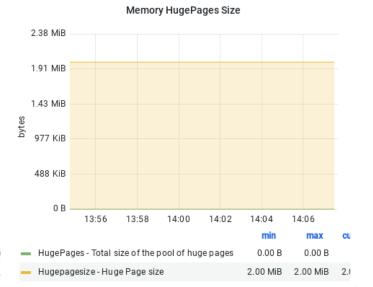


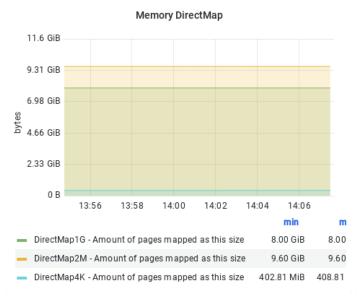

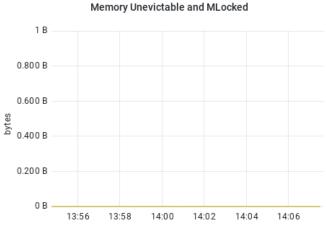



Unevictable - Amount of unevictable memory that can't be swapped out for a v
MLocked - Size of pages locked to memory using the mlock() system call

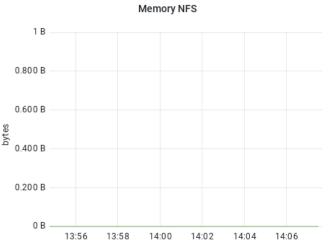


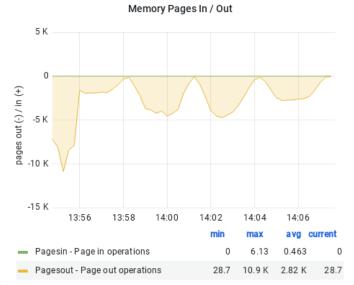


NFS Unstable - Memory in NFS pages sent to the server, but not yet committed to

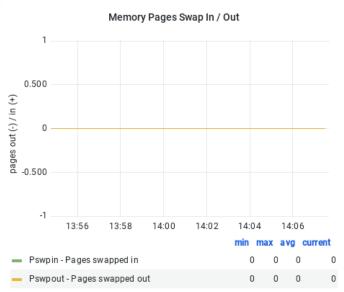


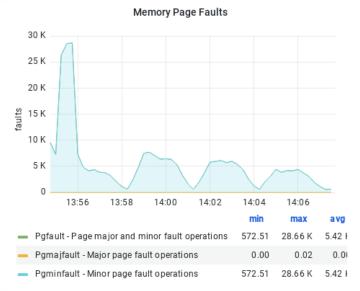


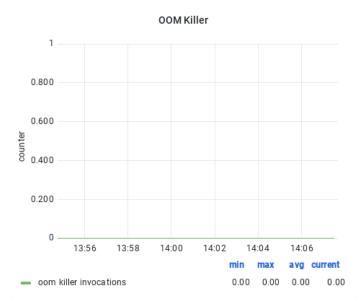


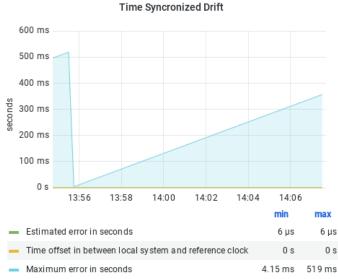





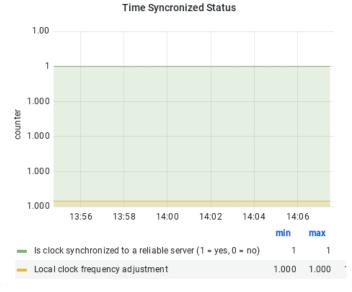


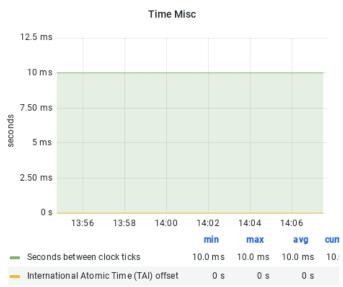


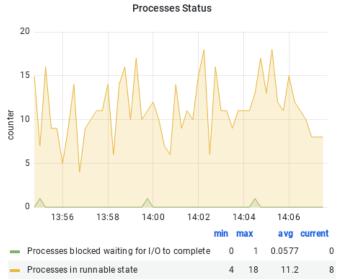


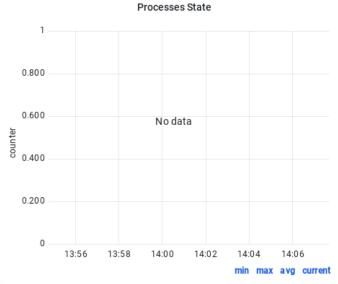


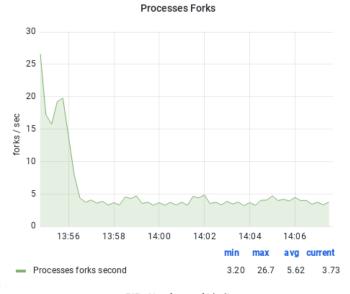


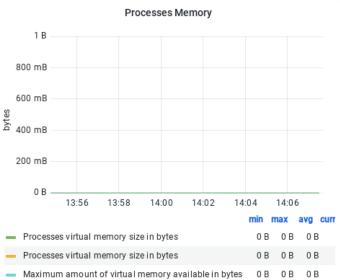


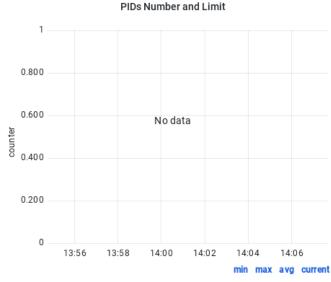


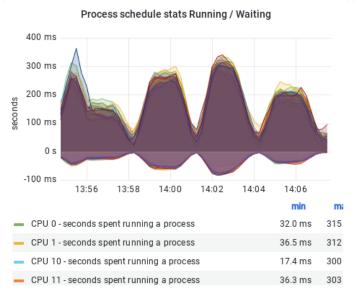


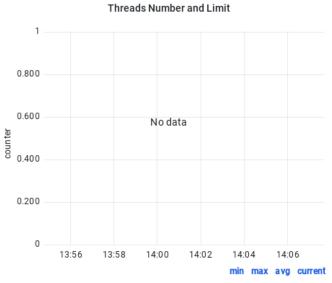


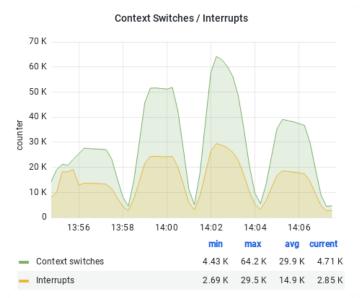


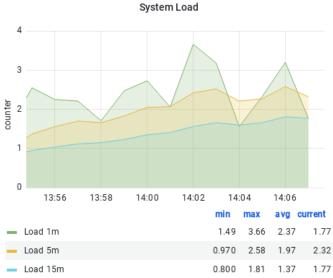

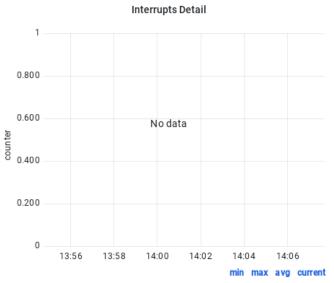

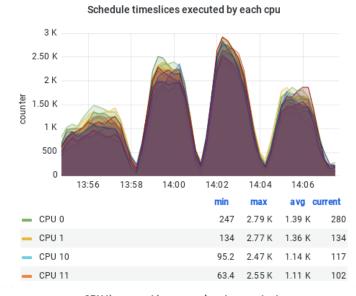


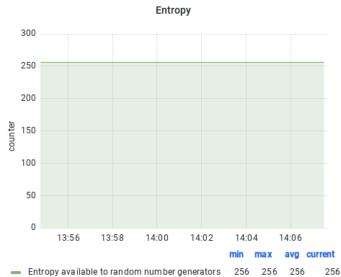


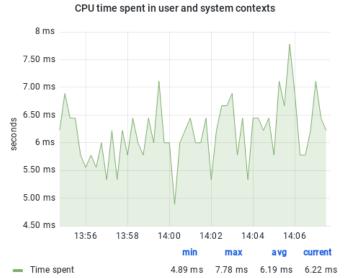








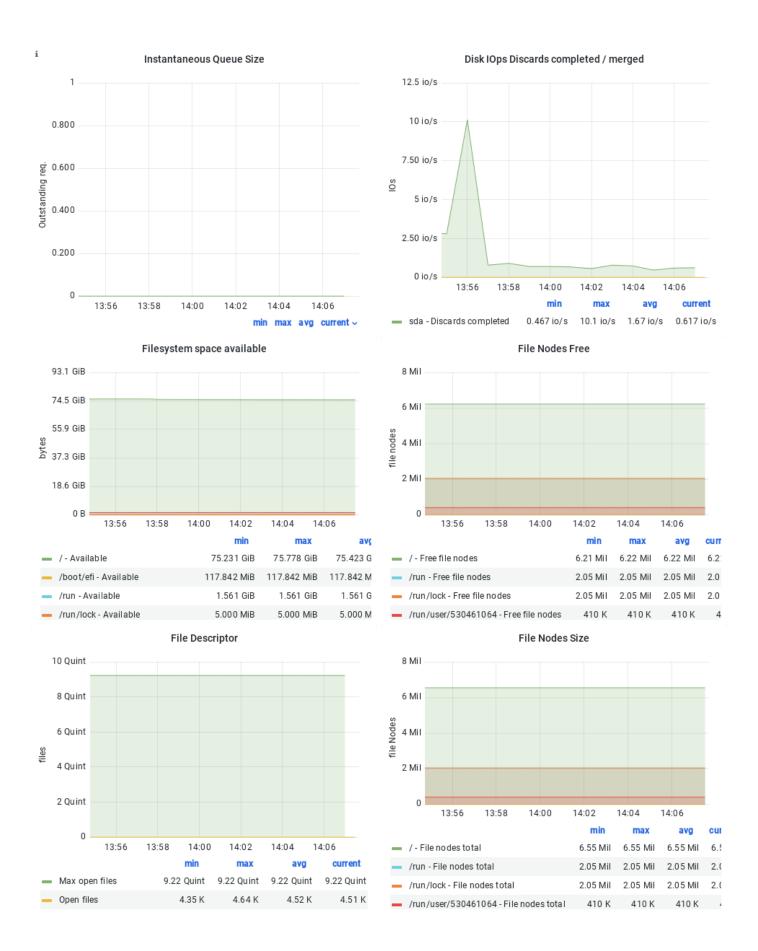


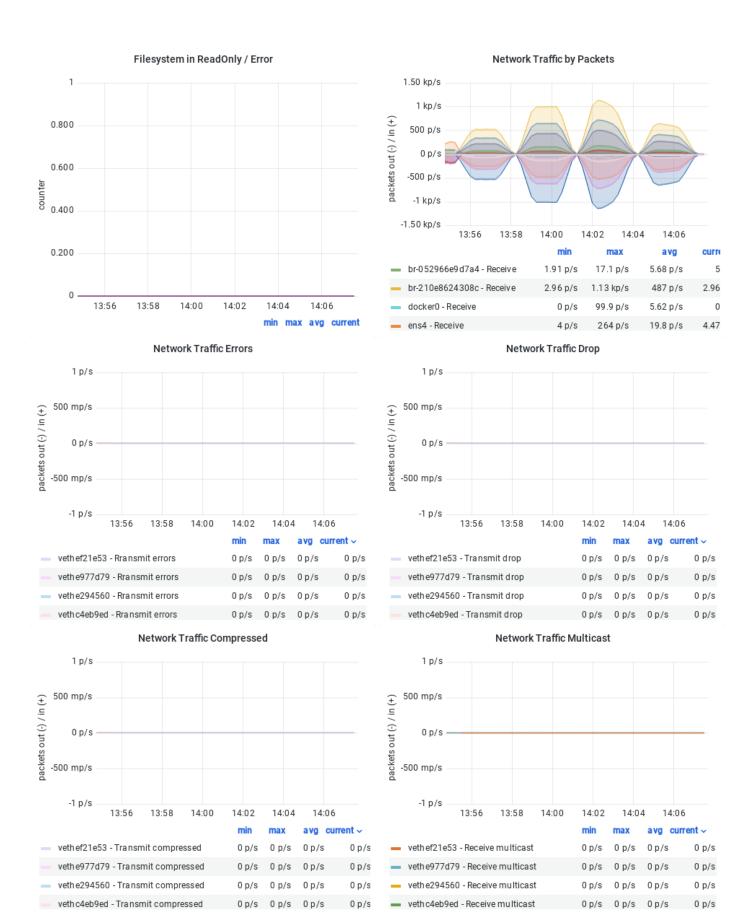


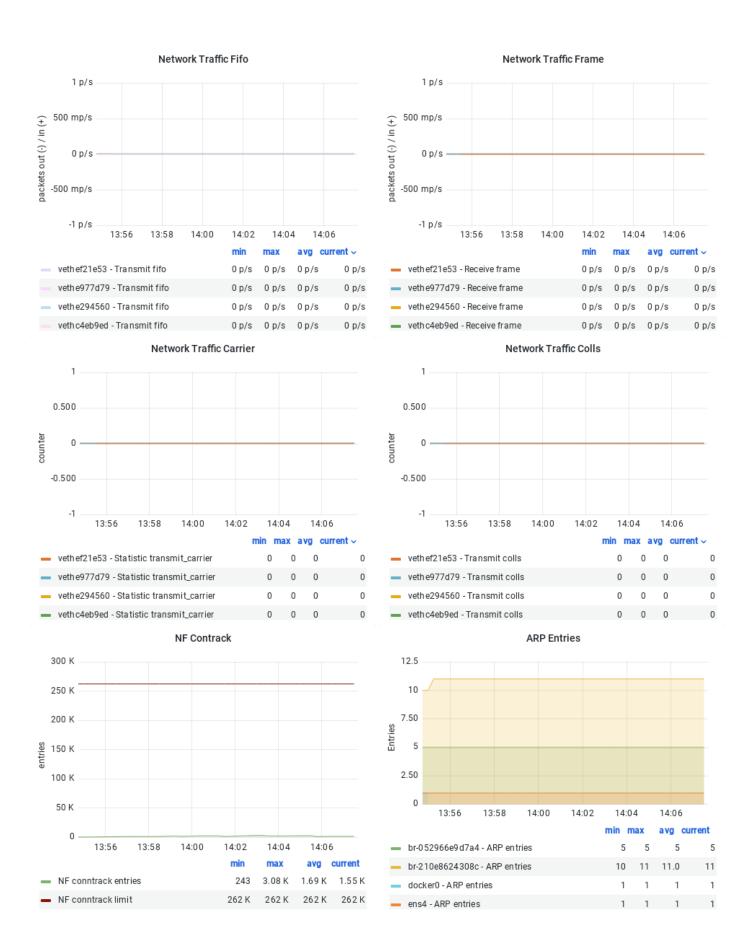


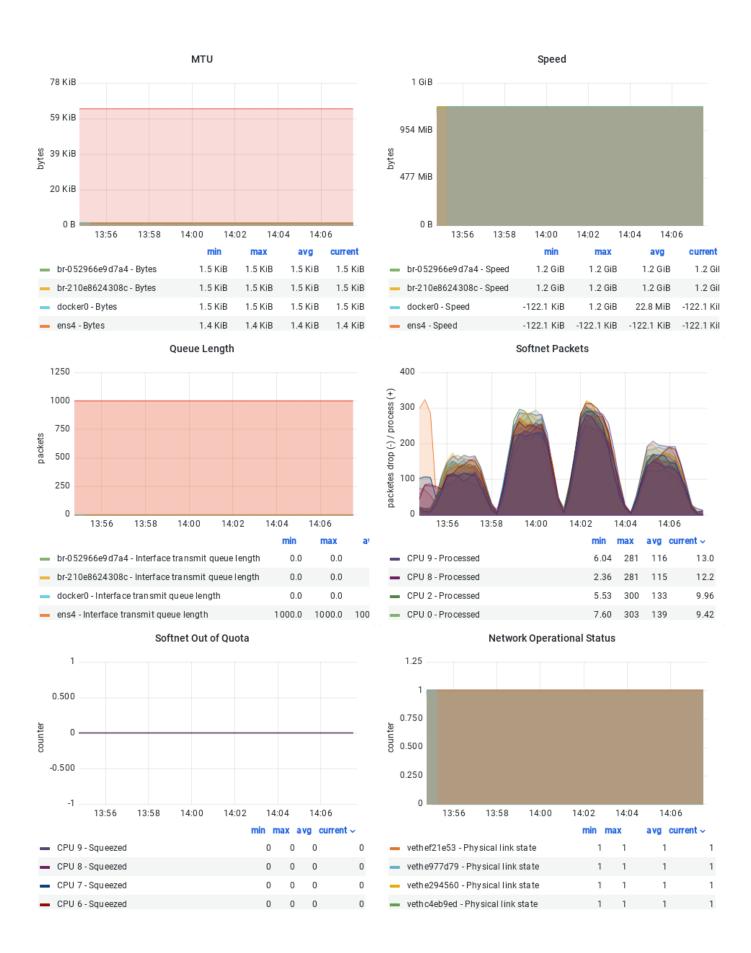


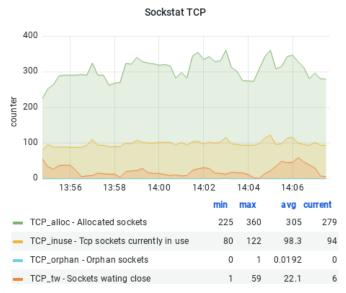


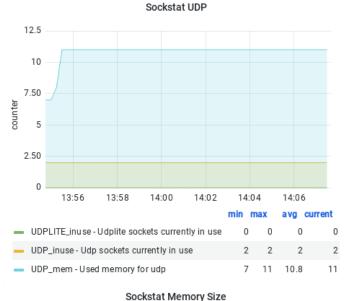


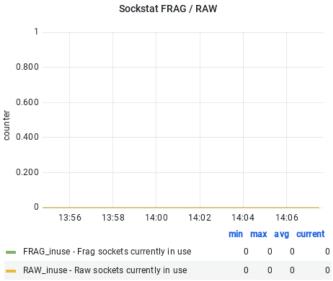


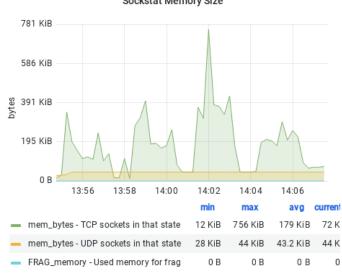

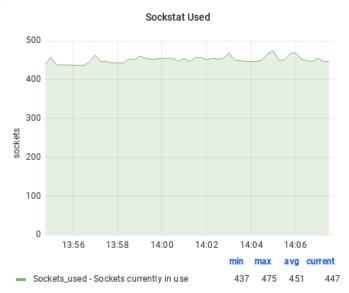

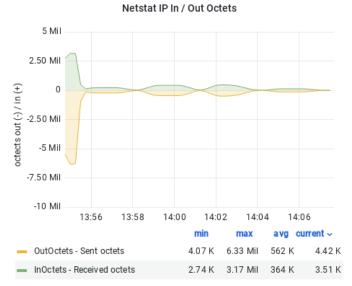

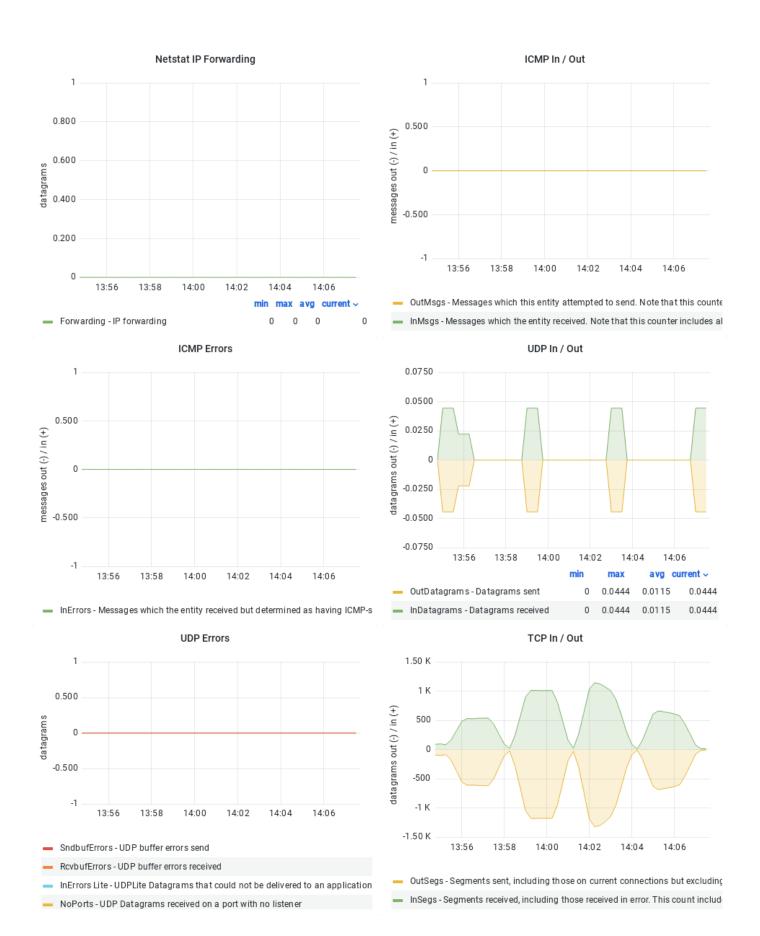

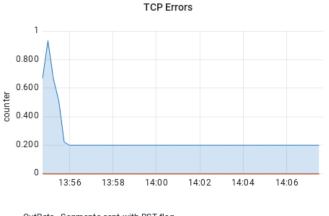



InErrs - Segments received in error (e.g., bad TCP checksums)


RetransSegs - Segments retransmitted - that is, the number of TCP segments tr

TCPSynRetrans - SYN-SYN/ACK retransmits to break down retransmissions in

100 80 60 connections 40 20 0 13:56 13:58 14:00 14:02 14:04 14:06

TCP Connections


CurrEstab - TCP connections for which the current state is either ESTABLISHED

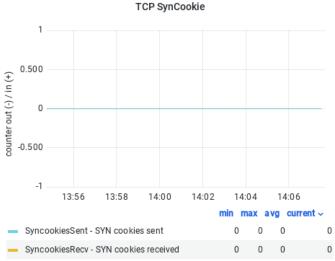

SyncookiesFailed - Invalid SYN cookies received



0 0 0 0

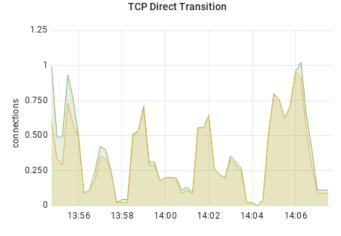

ActiveOpens - TCP connections that have made a direct transition to the SYN-S PassiveOpens - TCP connections that have made a direct transition to the SYN

