

# Brain Tumor Detection using Machine Learning Models


Submitted by:

Brahmajit Das  
(183313-21-0044, 313-1111-0852-18)

*in fulfillment for the award of the degree*

**Bachelor of Science (Honours)**

**COMPUTER SCIENCE**

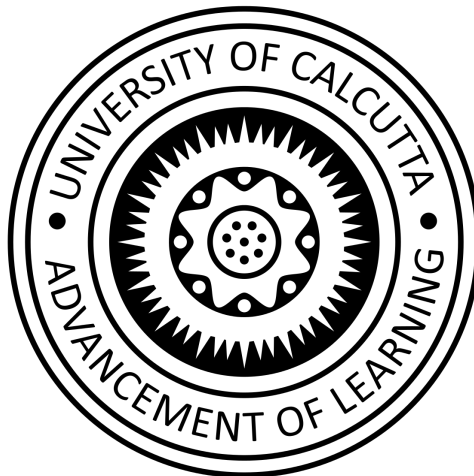


**Under the supervision**

**of Prof. *Kajari Bhattacharjee***

**Gurudas College,  
Department of Computer Science**

**Calcutta University**

**Kolkata, India**

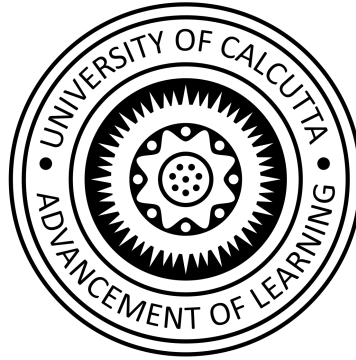

## Certificate

*This is to certify that research project entitled*

### **Brain Tumor detect using Machine Learning models**

is a bona fide work done by student ***Brahmajit Das*** ( 183313-21-0044, 313-1111-0852-18 ); under our supervision, in fulfillment of the requirements for the award of Degree of Bachelor of Science (Honours) with specialization in Computer Science from Gurudas College, University of Calcutta in the year 2021, at the examination under CBCS Semester System.

---

Prof. **Kajari Bhattacharjee**  
**Project Guide**  
Department of Computer Science  
Gurudas College, C.U.

---

Prof. **Srijeeta Chakrabarti**  
**Head of Department**  
Department of Computer Science  
Gurudas College, C.U.

Date: \_\_\_\_\_

# Acknowledgement

*I take this opportunity to express profound sense of gratitude and respect to all those who helped me throughout the duration of this project.*

*First and foremost, I would like to thank my supervisor of this project, Prof. **Kajari Bhattacharjee**, for her valuable time and guidance. Her willingness to motivate me has contributed tremendously to my project.*

*I would also like to thank Prof. **Srijeeta Chakrabarti**, Head of Department of Computer Science, for providing with a good environment and facilities to work on this project.*

*I regret any inadvertent omissions.*

---

**Brahmajit Das** - 183313-21-0044

Semester VI (Honours)

Gurudas College

University of Calcutta

Kolkata - 700 054

# Contents

|          |  |           |
|----------|--|-----------|
| <b>1</b> | <b>Abstract</b>                        | <b>1</b>  |
| <b>2</b> | <b>Introduction</b>                    | <b>2</b>  |
| 2.1      | domain description . . . . .           | 2         |
| 2.2      | motivation . . . . .                   | 2         |
| 2.3      | scope of work . . . . .                | 3         |
| 2.3.1    | deliverables . . . . .                 | 3         |
| 2.4      | scope . . . . .                        | 3         |
| <b>3</b> | <b>Background</b>                      | <b>4</b>  |
| <b>4</b> | <b>Methodology</b>                     | <b>6</b>  |
| 4.1      | Image Acquisition . . . . .            | 6         |
| 4.2      | Preprocessing . . . . .                | 6         |
| 4.3      | Feature Extraction . . . . .           | 7         |
| 4.4      | Classification . . . . .               | 8         |
| 4.5      | Convolutional Neural Network . . . . . | 8         |
| 4.5.1    | Architecture . . . . .                 | 8         |
| 4.5.2    | Convolutional Layer . . . . .          | 9         |
| 4.5.3    | Pooling Layer . . . . .                | 9         |
| 4.5.4    | ReLU Layer . . . . .                   | 9         |
| 4.5.5    | Fully Connected Layer . . . . .        | 9         |
| 4.5.6    | Loss Layer . . . . .                   | 10        |
| 4.5.7    | Receptive field . . . . .              | 10        |
| 4.5.8    | Weights . . . . .                      | 10        |
| 4.6      | VGG 16 . . . . .                       | 10        |
| 4.6.1    | Architecture . . . . .                 | 10        |
| 4.6.2    | Configuration . . . . .                | 11        |
| 4.7      | ResNet 50 . . . . .                    | 11        |
| 4.7.1    | Residual Learning . . . . .            | 11        |
| 4.7.2    | Network Architecture . . . . .         | 12        |
| <b>5</b> | <b>Implementation</b>                  | <b>13</b> |
| 5.1      | Assumptions and Dependencies . . . . . | 13        |
| 5.2      | Implementation Methods . . . . .       | 13        |
| <b>6</b> | <b>Experimental Result</b>             | <b>14</b> |
| <b>7</b> | <b>Conclusion and Future Work</b>      | <b>17</b> |
| <b>8</b> | <b>Appendix</b>                        | <b>18</b> |
| 8.1      | Tensorflow Implementation . . . . .    | 18        |
| 8.2      | CNN . . . . .                          | 18        |
| 8.3      | VGG 16 . . . . .                       | 20        |
| 8.4      | ResNet 50 . . . . .                    | 21        |
| 8.5      | Prediction . . . . .                   | 22        |
| 8.6      | fast.ai Implementation . . . . .       | 24        |
| 8.7      | CNN . . . . .                          | 24        |
| 8.8      | VGG 16 . . . . .                       | 26        |
| 8.9      | ResNet 50 . . . . .                    | 28        |
|          | <b>References</b>                      | <b>31</b> |

# Chapter 1

## Abstract

Tumors are cancerous or non-cancerous mass or growth of abnormal cells in brain. Tumors can start in brain, or cancer elsewhere in the body can spread to brain. There are many way to control the occurrence of these abnormal cells. A tumor can be denoted as a malformed mass of tissues wherein the cells multiply abruptly and ceaselessly, that is there is no control over the growth of the cells.

The process of Image segmentation is adopted for extracting abnormal tumor region within the brain. In the MRI (magnetic resonance image), segmentation of brain tissue holds very significant in order to identify the presence of outlines concerning the brain tumor. There is abundance of hidden information in stored in the Health care sector. With appropriate use of accurate data mining classification techniques, early prediction of any disease can be effectively performed.

The project examines list of risk factors that are being traced out in brain tumor surveillance systems. Also the method proposed assures to be highly efficient and precise for brain tumor detection, classification and segmentation. To achieve this precise automatic or semi-automatic methods are needed. The project proposes an automatic segmentation method that relies upon *CNN (Convolution Neural Networks)* , *VGG 16* and *Resnet 50* , determining small 7 x 7 kernels. By incorporating this single technique, segmentation and classification is accomplished. CNN (a ML technique) from NN (Neural Networks) wherein it has layer based for results classification.

Various levels involved in the proposed mechanisms are:

1. Data collection
2. Pre-processing
3. Average filtering
4. Segmentation
5. Feature extraction
6. CNN (or any other model) via classification and identification. By utilizing the DM (data mining) techniques, significant relations and patterns from the data can be extracted. The techniques of ML (machine learning) and Data mining are being effectively employed for brain tumor detection and prevention at an early stage.

# Chapter 2

## Introduction

### 2.1 Domain Description

1. **Neurological Examination:** It is a series of test to measures the function of the patients nervous system and also his/her physical and mental alertness.
2. **Machine Learning:** Machine learning approaches address these problems by mainly using hand-crafted features (or pre-defined features). As an initial step in this kind of segmentation, the key information is extracted from the input image using some feature extraction algorithm, and then a discriminative model is trained to recognize the tumor from normal tissues. The designed machine learning techniques generally employ hand-crafted features with various classifiers, such as random forest, support vector machine (SVM), fuzzy clustering. The designed methods and features extraction algorithms have to extract features, edge-related details, and other necessary information—which is time-consuming. Moreover, when boundaries between healthy tissues and tumors are fuzzy/vague, these methods demonstrate poorer performances.
3. **Brain Scan:** Brain scan is a picture of the internal structure of the brain. A specialized machine takes a scan in the same way as a digital camera takes a photograph. Using computer technology, a scan compiles an image of the brain by photographing it from various angles. Some types of scan uses contrast agent (or contrast dye), which helps the doctor to see the difference between normal and abnormal brain tissues.

MRI (Magnetic Resonance Imaging): It is a scanning device that uses magnetic field and computer to capture images of the brain on films. It does not use x-rays. It provides pictures from various planes, which permits doctor to create a three-dimensional image of the tumor. The MRI detects signals emitted from normal and abnormal tissues, providing clear images of almost all tumors.

### 2.2 Motivation

The motivation is to develop a software with better segmentation capability for use in medical imaging to detect diseases like brain tumor. Image segmentation has been identified as the key problem of medical image analysis and remains a popular and challenging area of research. Image segmentation is increasingly used in many clinical and research applications to analyze medical imaging datasets; which motivated us to present a snapshot of dynamically changing field of medical image segmentation.

CT (Computed Tomography), MRI (Magnetic Resonance Imaging), PET (Positron Emission Tomography) etc. generates a large amount of image information. With the improved technology, not only does the size and resolution of the images grow but also the number of dimensions increases. In the future, we would like to have algorithms which can automatically detect diseases, lesions and tumors, and highlight their locations in the large pile of images.

The motivation of this work is to increase patient safety by providing better and more precise data for medical decision.

## **2.3 Scope of Work**

### **2.3.1 Deliverables**

- Working program to take an MRI scan as input and predict presence of tumorous cells with  $\geq 90\%$  accuracy.

## **2.4 Scope**

- The working program has external dependencies ( libraries ) and it's expected to have a them installed for the program to work.

### **Timeline**

- **April 27, 2021** Project Assigned
- **May 2, 2021** Project finalized by supervisor, and group is divided into groups of two.
- **May 3, 2021** Data collection started.
- **May 12, 2021** Project Repository created and coding is started.
- **July 7, 2021** Coding is finished, documentation is started.
- **Just 21, 2021** Documentation complete.

### **Reports**

- Constantly updating and pushing code to repository.
- Both teams staying in touch with each other to keep up with each others progress.
- Report back to supervisor every once a week.

## Chapter 3

# Background

Natarajan [13] proposed brain tumor detection method for MRI brain images. The MRI brain images are first preprocessed using median filter, then segmentation of image is done using threshold segmentation and morphological operations are applied and then finally, the tumor region is obtained using image subtraction technique. This approach gives the exact shape of tumor in MRI brain image. Joshi [9] proposed brain tumor detection and classification system in MR images by first extracting the tumor portion from brain image, then extracting the texture features of the detected tumor using Gray Level Co-occurrence Matrix (GLCM) and then classified using neuro-fuzzy classifier. Amin and Mageed [18] proposed neural network and segmentation base system to automatically detect the tumor in brain MRI images. The Principal Component Analysis (PCA) is used for feature extraction and then Multi-Layer Perceptron (MLP) is used to classify the extracted features of MRI brain image. The average recognition rate is 88.2% and peak recognition rate is 96.7%. Sapra [19] proposed image segmentation technique to detect brain tumor from MRI images and then Probabilistic Neural Network (PNN) is used for automated brain tumor classification in MRI scans. PNN system proposed handle the process of brain tumor classification more accurately. Suchita and Lalit [5] proposed unsupervised neural network learning technique for classification of brain MRI images. The MRI brain images are first preprocessed which include noise filtering, edge detection, then the tumor is extracted using segmentation. The texture features are extracted using Gray-Level Co-occurrence Matrix (GLCM) and then Self-Organizing Maps (SOM) are used to classify the brain as normal or abnormal brain, that is, whether it contains tumor or not. Rajeshwari and Sharmila [16] proposed preprocessing techniques which are used to improve the quality of MRI image before using it in an application. The average, median and Wiener filters are used for noise removal and interpolation based Discrete Wavelet Transform (DWT) technique is used for resolution enhancement. The Peak Signal to Noise Ratio (PSNR) is used for evaluation of these techniques.

George and Karnan [3] proposed MRI image enhancement technique based on Histogram Equalization and Center Weighted Median (CWM) filter as they are used to enhance the MRI image more effectively. Daljit Singh et al. [2] proposed a hybrid technique for automatic classification of MRI images by first extracting the features using Principal Component Analysis (PCA) and Gray-Level Co-occurrence Matrix (GLCM) and then extracted features are fed as an input to Support Vector Machine (SVM) classifier which classifies the brain image as normal or abnormal. Gadpayle and Mahajani [1] proposed brain tumor detection and classification system. The tumor is extracted using segmentation and then texture features are extracted using GLCM and finally the BPNN and KNN classifiers are used to classify the MRI brain image into normal or abnormal brain. The accuracy is 70% using KNN classifier and 72.5% by using BPNN classifier. Shasidhar et al. in [20] proposed modified Fuzzy C-Means (FCM) algorithm for MR brain tumor detection. The texture features are extracted from brain MR image and then modified FCM algorithm is used for brain tumor detection. The average speed-ups of as much as 80 times a traditional FCM algorithm is obtained using the modified FCM algorithm. The modified FCM algorithm is a fast alternative to the traditional FCM technique. Rajesh and Malar [15] proposed brain MR image classification based on Rough set theory and feed-forward neural network classifier. The features are extracted from MRI images using Rough set theory. The selected features are fed as input to Feed Forward Neural Network classifier which differentiates between normal and abnormal brain and the accuracy of about 90% is obtained.

Ramteke and Monali [17] proposed automatic classification of brain MR images in two classes Normal and Abnormal based on image features and automatic abnormality detection. The Statistical texture feature set is obtained from normal and abnormal images and then KNN classifier is used for classifying image. The KNN obtains 80% classification rate. Xuan and Liao [22] proposed statistical structure analysis based tumor segmentation technique. The intensity-based, symmetry-based and texture-based features are extracted from MR image. Then, classification technique using AdaBoost is used to classify the MR image into normal tissues and abnormal images. The average accuracy of about 96.82% is achieved. Othman



et al. in [14] proposed Probabilistic neural network technique for brain tumor classification. Firstly, the features are extracted using the principal component analysis (PCA) and the classification is performed using Probabilistic Neural Network (PNN). Ibrahim et al. in [8] proposed Neural Network technique for the classification of the magnetic resonance human brain images. The features are extracted using principal Component Analysis (PCA) and then Back- Propagation Neural Network is used as a classifier to classify MRI brain images as normal or abnormal. The classification accuracy of about 96.33% is obtained. Jafari and Shafaghi [10] proposed a hybrid approach for brain tumor detection in MR images based on Support Vector Machines(SVM). The texture and intensity features are used. The accuracy of about 83.22% is achieved and is more robust.

Thus from extensive literature survey we found that most of the current brain tumor detection system uses texture, symmetry and intensity as features. Texture features are important property of brain as texture perception has a very important aspect in the human visual system of recognition and interpretation [12]. Here, we propose extracting texture features like energy, contrast, correlation, Homogeneity [6]. Gray Level Co-occurrence Matrix is used for extraction of texture features.

Further we propose the use of ML algorithms to overcome the drawbacks of traditional classifiers. We investigate and compare the performance of two machine learning algorithms namely MLP and Naive Bayes in this work. Since these ML algorithms are found to perform well in most of the pattern classification tasks. Neural networks are useful as they can learn complex mappings between input and output. They are capable of solving much more complicated classification tasks. However, when certain rules cannot be modeled exactly, the concept of probability is used, which is the basis for Naive Bayes classification.

# Chapter 4

## Methodology

As per literature survey, it was found that automated brain tumor detection is very necessary as high accuracy is needed when human life is involved. Automated detection of tumor in MR images involves feature extraction and classification using machine learning algorithm. In this paper, a system to automatically detect tumor in MR images is proposed as shown in Figure 4.1

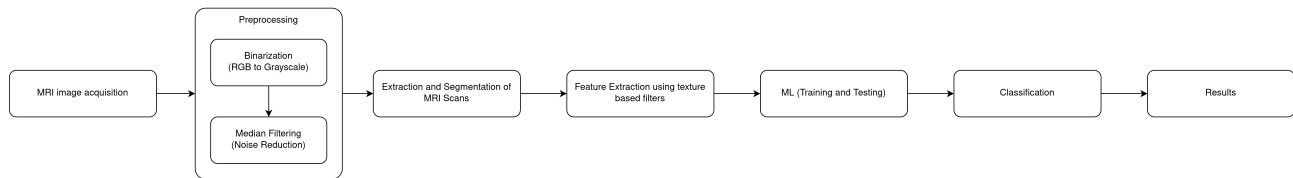


Figure 4.1: Proposed Methodology

### 4.1 Image Acquisition

The MRI brain images are acquired and are given as input to pre-processing stage. The sample brain MR images are shown in Figure 4.2.

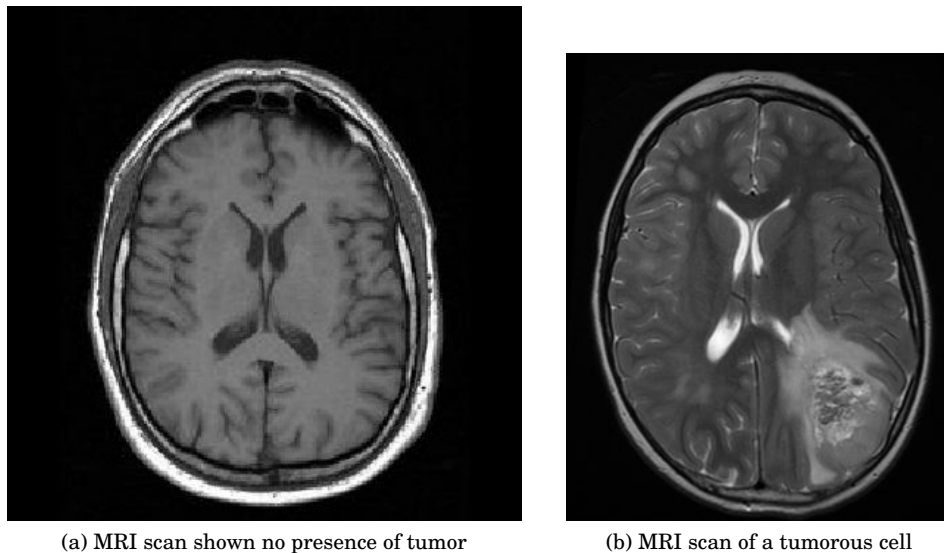


Figure 4.2: MRI Scans

### 4.2 Preprocessing

Preprocessing is needed as it provides improvement in image data which enhances some of the image features which are important for further processing. The pre-processing steps that are applied to MR image

are as follows:

1. The RGB MR image is converted to gray scale image and then median filter is applied for noise removal from brain MR images as shown in Figure 4.3b. The noise is to removed for further processing as high accuracy is needed.
2. Then edges are detected from filtered image using canny edge detection as shown in Figure 4.3c. The edge detected image is needed for segmentation of the image
3. Then watershed segmentation is done for finding the location of the tumor in the brain image as shown in Figure 4.3d. Segmentation is the process of dividing an image into multiple segments. The aim of segmentation is to change representation of image into something which is more easy to analyze. The result of watershed segmentation is label image. In label image, all the different objects identified will have different pixel values , all the pixels of first object will have value 1, all the pixels of second object will have value 2 and so on.

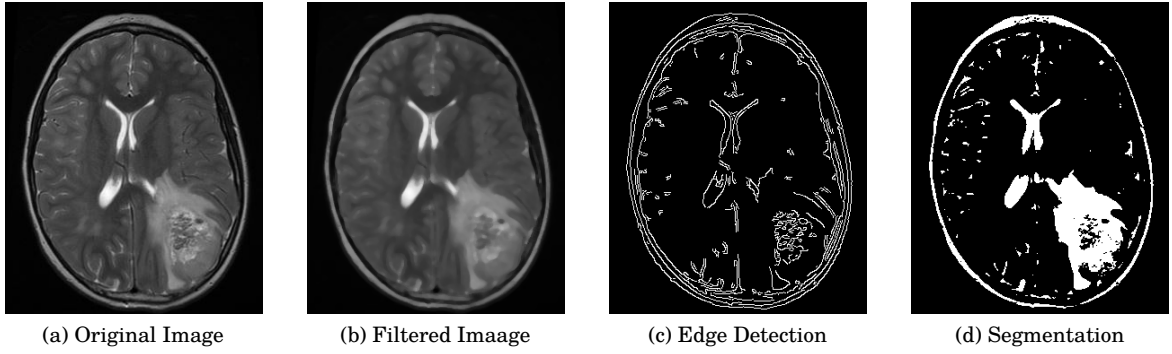


Figure 4.3: preprocessing operations

### 4.3 Feature Extraction

When input to an algorithm is very large and redundant to be processed, it is transformed into reduced representative set of features called feature vector. Transformation of input data into set of features is called feature extraction. In this step, the important features needed for image classification are extracted. The segmented brain MR image is used and texture features are extracted from the segmented image which shows the texture property of the image. These features are extracted using Gray Level Co-occurrence Matrix (GLCM) as it is robust method with high performance.

The GLCM features are extracted as follows:

1. Energy: It gives a measure of textural uniformity, that is, measure of pixel pair repetitions.

$$E = \sum_{i=0}^{N_g-1} \sum_{j=0}^{N_g-1} p(i, j)^2 \text{ here, range} = [0, 1] \quad (4.1)$$

2. Contrast: It gives a measure of intensity contrast between a pixel and its neighbor over the whole image.

$$Con = \sum_{n=0}^{N_g-1} n^2 \sum_{i=0}^{N_g-1} \sum_{j=0}^{N_g-1} p(i, j)^2 \text{ here, range} = [0, 1] \quad (4.2)$$

3. Correlation: It gives a measure of how correlated a pixel to its neighbor over the whole image.

$$C = \frac{1}{\sigma^x \sigma^y} \sum_{i=0}^{N_g-1} \sum_{j=0}^{N_g-1} (i, j) p(i, j)^2 - \mu_x \mu_y \text{ here, range} = [-1, 1] \quad (4.3)$$

4. Homogeneity: It gives a measure of closeness of distribution of elements in GLCM to GLCM diagonal.

$$H = \sum_{i=0}^{N_g-1} \sum_{j=0}^{N_g-1} \frac{p(i, j)}{1 + (\text{mod } i, j)} \text{ here, range} = [0, 1] \quad (4.4)$$

## 4.4 Classification

The Machine learning algorithms are used for classification of MR brain image either as normal or abnormal. The major aim of ML algorithms is to automatically learn and make intelligent decisions. The feature set formed by above specified method was applied to Multi-Layer Perceptron (MLP) and Naive Bayes for classification. MLP is a feed forward artificial neural network model that maps sets of input data into a set of appropriate output. It is known as feed forward because it does not contain any cycles and network output depends only on the current input instance. In MLP, each node is a neuron with a nonlinear activation function. It is based on supervised learning technique. Learning take place by changing connection weights after each piece of data is processed, based on the amount of error in the target output as compared to the expected result. The goal of the learning procedure is to minimize error by improving the current values of the weight associated with each edge. Because of this backward changing process of the weights, model is named as back-propagation.

Naive bayes is a supervised learning as well as statistical method for classification. It is simple probabilistic classifier based on Bayes theorem. It assumes that the value of a particular feature is unrelated to the presence or absence of any other feature. The prior probability and likelihood are calculated in order to calculate the posterior probability. The method of maximum posterior probability is used for parameter estimation. This method requires only a small amount of training data to estimate the parameters which are needed for classification. The time taken for training and classification is less.

For classification three models are used; **CNN**, **VGG 16** and **Resnet 50**.

## 4.5 Convolutional Neural Network

CNN or Convolutional Neural Network a class of artificial neural network, most commonly applied to analyze visual imagery. They are also known as shift invariant or space invariant artificial neural networks (SIANN), based on the shared-weight architecture of the convolution kernels or filters that slide along input features and provide translation equivariant responses known as feature maps. Counter-intuitively, most convolutional neural networks are only equivariant, as opposed to invariant, to translation. They have applications in image and video recognition, recommender systems, image classification, image segmentation, medical image analysis, natural language processing, brain-computer interfaces, and financial time series.

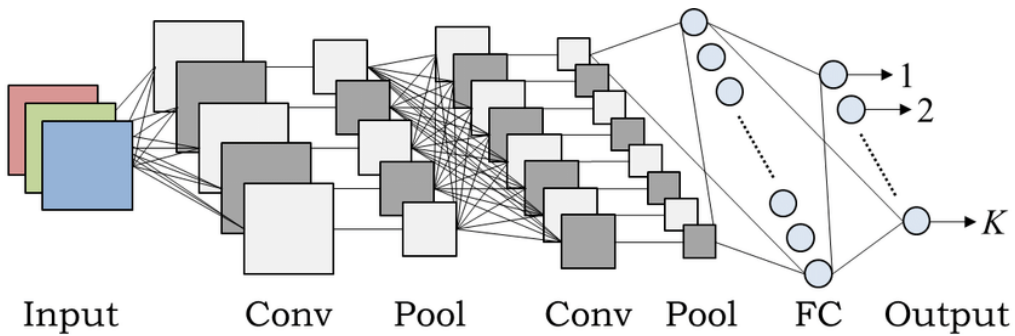


Figure 4.4: CNN architecture

### 4.5.1 Architecture

A convolutional neural network consists of an input layer, hidden layers and an output layer. In any feed-forward neural network, any middle layers are called hidden because their inputs and outputs are masked by the activation function and final convolution. In a convolutional neural network, the hidden layers include layers that perform convolutions. Typically this includes a layer that performs a dot product of the convolution kernel with the layer's input matrix. This product is usually the Frobenius inner product, and its activation function is commonly ReLU. As the convolution kernel slides along the input matrix for

the layer, the convolution operation generates a feature map, which in turn contributes to the input of the next layer. This is followed by other layers such as pooling layers, fully connected layers, and normalization layers [4].

### 4.5.2 Convolutional Layer

:

In a CNN, the input is a tensor with a shape: (number of inputs) x (input height) x (input width) x (input channels). After passing through a convolutional layer, the image becomes abstracted to a feature map, also called an activation map, with shape: (number of inputs) x (feature map height) x (feature map width) x (feature map channels). A convolutional layer within a CNN generally has the following attributes:

- Convolutional filters/kernels defined by a width and height (hyper-parameters).
- The number of input channels and output channels (hyper-parameters). One layer's input channels must equal the number of output channels (also called depth) of its input.
- Additional hyperparameters of the convolution operation, such as: padding, stride, and dilation.

Convolutional layers convolve the input and pass its result to the next layer. This is similar to the response of a neuron in the visual cortex to a specific stimulus.

### 4.5.3 Pooling Layer

:

Convolutional networks may include local and/or global pooling layers along with traditional convolutional layers. Pooling layers reduce the dimensions of data by combining the outputs of neuron clusters at one layer into a single neuron in the next layer. Local pooling combines small clusters, tiling sizes such as 2 x 2 are commonly used. Global pooling acts on all the neurons of the feature map. There are two common types of pooling in popular use: max and average. Max pooling uses the maximum value of each local cluster of neurons in the feature map, while average pooling takes the average value.

### 4.5.4 ReLU Layer

:

ReLU is the abbreviation of rectified linear unit, which applies the non-saturating activation function

$$f(x) = \max(0, x) \quad (4.5)$$

.It effectively removes negative values from an activation map by setting them to zero. It introduces nonlinearities to the decision function and in the overall network without affecting the receptive fields of the convolution layers.

Other functions can also be used to increase nonlinearity, for example the saturating hyperbolic tangent

$$f(x) = \tanh(x) \quad f(x) = |\tanh(x)| \quad (4.6)$$

and the sigmoid function

$$\sigma(x) = (1 + e^{-x})^{-1} \quad (4.7)$$

ReLU is often preferred to other functions because it trains the neural network several times faster without a significant penalty to generalization accuracy [11].

### 4.5.5 Fully Connected Layer

After several convolutional and max pooling layers, the final classification is done via fully connected layers. Neurons in a fully connected layer have connections to all activations in the previous layer, as seen in regular (non-convolutional) artificial neural networks. Their activations can thus be computed as an affine transformation, with matrix multiplication followed by a bias offset (vector addition of a learned or fixed bias term).

### 4.5.6 Loss Layer

The "loss layer", or "loss function", specifies how training penalizes the deviation between the predicted output of the network, and the true data labels (during supervised learning). Various loss functions can be used, depending on the specific task.

The Softmax loss function is used for predicting a single class of  $K$  mutually exclusive classes. Sigmoid cross-entropy loss is used for predicting  $K$  independent probability values in  $[0, 1]$ . Euclidean loss is used for regressing to real-valued labels  $(-\infty, \infty)$ .

### 4.5.7 Receptive field

In neural networks, each neuron receives input from some number of locations in the previous layer. In a convolutional layer, each neuron receives input from only a restricted area of the previous layer called the neuron's receptive field. Typically the area is a square (e.g. 5 by 5 neurons). Whereas, in a fully connected layer, the receptive field is the entire previous layer. Thus, in each convolutional layer, each neuron takes input from a larger area in the input than previous layers. This is due to applying the convolution over and over, which takes into account the value of a pixel, as well as its surrounding pixels. When using dilated layers, the number of pixels in the receptive field remains constant, but the field is more sparsely populated as its dimensions grow when combining the effect of several layers.

### 4.5.8 Weights

Each neuron in a neural network computes an output value by applying a specific function to the input values received from the receptive field in the previous layer. The function that is applied to the input values is determined by a vector of weights and a bias (typically real numbers). Learning consists of iteratively adjusting these biases and weights.

The vector of weights and the bias are called filters and represent particular features of the input (e.g., a particular shape). A distinguishing feature of CNNs is that many neurons can share the same filter. This reduces the memory footprint because a single bias and a single vector of weights are used across all receptive fields that share that filter, as opposed to each receptive field having its own bias and vector weighting.

## 4.6 VGG 16

VGG 16 is a significantly more accurate ConvNet architecture, which not only achieves state-of-the-art accuracy on ILSVRC classification and localisation tasks, but are also applicable to other image recognition datasets, where they achieve excellent performance even when used as a part of a relatively simple pipeline (e.g. deep features classified by a linear SVM without fine-tuning) [21, p. 1].

### 4.6.1 Architecture

During training, the input to our ConvNets is a fixed-size  $224 \times 224$  RGB image. The only pre-processing we do is subtracting the mean RGB value, computed on the training set, from each pixel. The image is passed through a stack of convolutional (conv.) layers, where we use filters with a very small receptive field:  $3 \times 3$  (which is the smallest size to capture the notion of left/right, up/down, center). In one of the configurations we also utilise  $1 \times 1$  convolution filters, which can be seen as a linear transformation of the input channels (followed by non-linearity). The convolution stride is fixed to 1 pixel; the spatial padding of conv. layer input is such that the spatial resolution is preserved after convolution, i.e. the padding is 1 pixel for  $3 \times 3$  conv. layers. Spatial pooling is carried out by five max-pooling layers, which follow some of the conv. layers (not all the conv. layers are followed by max-pooling). Max-pooling is performed over a  $2 \times 2$  pixel window, with stride 2.

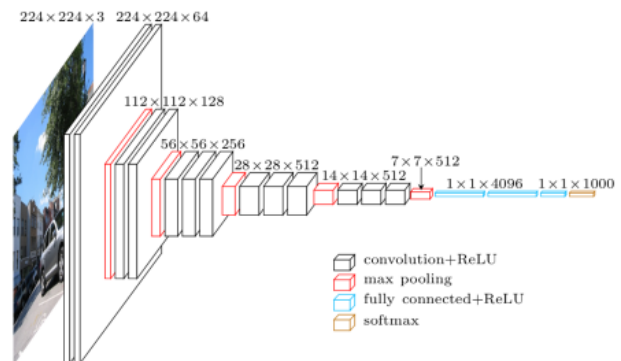


Figure 4.5: VGG Architecture

A stack of convolutional layers (which has a different depth in different architectures) is followed by three Fully-Connected (FC) layers: the first two have 4096 channels each, the third performs 1000-way ILSVRC classification and thus contains 1000 channels (one for each class). The final layer is the soft-max layer. The configuration of the fully connected layers is the same in all networks.

All hidden layers are equipped with the rectification (ReLU) non-linearity. We note that none of our networks (except for one) contain Local Response Normalisation (LRN) normalisation: as will be shown in Sect. 4, such normalisation does not improve the performance on the ILSVRC dataset, but leads to increased memory consumption and computation time. [21, p. 1]

## 4.6.2 Configuration

The ConvNet configurations, evaluated in this paper, are outlined in Figure 4.6, one per column. In the following we will refer to the nets by their names (A–E). All configurations follow the generic design presented in Section 4.6.1 and differ only in the depth: from 11 weight layers in the network A (8 conv. and 3 FC layers) to 19 weight layers in the network E (16 conv. and 3 FC layers). The width of conv. layers (the number of channels) is rather small, starting from 64 in the first layer and then increasing by a factor of 2 after each max-pooling layer, until it reaches 512. [21, p. 3]

| ConvNet Configuration               |                        |                               |  |  |   |
|-------------------------------------|------------------------|-------------------------------|--|--|---|
| A                                   | A-LRN                  | B                             | C  | D  | E   |
| 11 weight layers                    | 11 weight layers       | 13 weight layers              | 16 weight layers                           | 16 weight layers                           | 19 weight layers  |
| input ( $224 \times 224$ RGB image) |                        |                               |  |  |   |
| conv3-64                            | conv3-64<br>LRN        | conv3-64<br><b>conv3-64</b>   | conv3-64<br>conv3-64                       | conv3-64<br>conv3-64                       | conv3-64<br>conv3-64                                    |
| maxpool                             |                        |                               |  |  |   |
| conv3-128                           | conv3-128              | conv3-128<br><b>conv3-128</b> | conv3-128<br>conv3-128                     | conv3-128<br>conv3-128                     | conv3-128<br>conv3-128                                  |
| maxpool                             |                        |                               |  |  |   |
| conv3-256<br>conv3-256              | conv3-256<br>conv3-256 | conv3-256<br>conv3-256        | conv3-256<br>conv3-256<br><b>conv1-256</b> | conv3-256<br>conv3-256<br><b>conv3-256</b> | conv3-256<br>conv3-256<br>conv3-256<br><b>conv3-256</b> |
| maxpool                             |                        |                               |  |  |   |
| conv3-512<br>conv3-512              | conv3-512<br>conv3-512 | conv3-512<br>conv3-512        | conv3-512<br>conv3-512<br><b>conv1-512</b> | conv3-512<br>conv3-512<br><b>conv3-512</b> | conv3-512<br>conv3-512<br>conv3-512<br><b>conv3-512</b> |
| maxpool                             |                        |                               |  |  |   |
| conv3-512<br>conv3-512              | conv3-512<br>conv3-512 | conv3-512<br>conv3-512        | conv3-512<br>conv3-512<br><b>conv1-512</b> | conv3-512<br>conv3-512<br><b>conv3-512</b> | conv3-512<br>conv3-512<br>conv3-512<br><b>conv3-512</b> |
| maxpool                             |                        |                               |  |  |   |
| FC-4096                             |                        |                               |  |  |   |
| FC-4096                             |                        |                               |  |  |   |
| FC-1000                             |                        |                               |  |  |   |
| soft-max                            |                        |                               |  |  |   |

Figure 4.6: VGG16 configuration

## 4.7 ResNet 50

### 4.7.1 Residual Learning

Let us consider  $H(x)$  as an underlying mapping to be fit by a few stacked layers (not necessarily the entire net), with  $x$  denoting the inputs to the first of these layers. If one hypothesizes that multiple nonlinear layers can asymptotically approximate complicated functions, then it is equivalent to hypothesize that they can asymptotically approximate the residual functions, i.e.,  $H(x) - x$  (assuming that the input and output are of the same dimensions). So rather than expect stacked layers to approximate  $H(x)$ , we explicitly let these layers approximate a residual function

$$F(x) = H(x) - x \quad (4.8)$$

The original function thus becomes  $F(x) + x$ . Although both forms should be able to asymptotically approximate the desired functions (as hypothesized), the ease of learning might be different [7, p. 3].



| layer name | output size | 18-layer  | 34-layer  | 50-layer  | 101-layer  | 152-layer  |
|------------|-------------|---|---|---|--|--|
| conv1      | 112×112     | 7×7, 64, stride 2   |   |   |  |  |
|            |             | 3×3 max pool, stride 2  |   |   |  |  |
| conv2_x    | 56×56       | $\begin{bmatrix} 3 \times 3, 64 \\ 3 \times 3, 64 \end{bmatrix} \times 2$   | $\begin{bmatrix} 3 \times 3, 64 \\ 3 \times 3, 64 \end{bmatrix} \times 3$   | $\begin{bmatrix} 1 \times 1, 64 \\ 3 \times 3, 64 \\ 1 \times 1, 256 \end{bmatrix} \times 3$    | $\begin{bmatrix} 1 \times 1, 64 \\ 3 \times 3, 64 \\ 1 \times 1, 256 \end{bmatrix} \times 3$     | $\begin{bmatrix} 1 \times 1, 64 \\ 3 \times 3, 64 \\ 1 \times 1, 256 \end{bmatrix} \times 3$     |
| conv3_x    | 28×28       | $\begin{bmatrix} 3 \times 3, 128 \\ 3 \times 3, 128 \end{bmatrix} \times 2$ | $\begin{bmatrix} 3 \times 3, 128 \\ 3 \times 3, 128 \end{bmatrix} \times 4$ | $\begin{bmatrix} 1 \times 1, 128 \\ 3 \times 3, 128 \\ 1 \times 1, 512 \end{bmatrix} \times 4$  | $\begin{bmatrix} 1 \times 1, 128 \\ 3 \times 3, 128 \\ 1 \times 1, 512 \end{bmatrix} \times 4$   | $\begin{bmatrix} 1 \times 1, 128 \\ 3 \times 3, 128 \\ 1 \times 1, 512 \end{bmatrix} \times 8$   |
| conv4_x    | 14×14       | $\begin{bmatrix} 3 \times 3, 256 \\ 3 \times 3, 256 \end{bmatrix} \times 2$ | $\begin{bmatrix} 3 \times 3, 256 \\ 3 \times 3, 256 \end{bmatrix} \times 6$ | $\begin{bmatrix} 1 \times 1, 256 \\ 3 \times 3, 256 \\ 1 \times 1, 1024 \end{bmatrix} \times 6$ | $\begin{bmatrix} 1 \times 1, 256 \\ 3 \times 3, 256 \\ 1 \times 1, 1024 \end{bmatrix} \times 23$ | $\begin{bmatrix} 1 \times 1, 256 \\ 3 \times 3, 256 \\ 1 \times 1, 1024 \end{bmatrix} \times 36$ |
| conv5_x    | 7×7         | $\begin{bmatrix} 3 \times 3, 512 \\ 3 \times 3, 512 \end{bmatrix} \times 2$ | $\begin{bmatrix} 3 \times 3, 512 \\ 3 \times 3, 512 \end{bmatrix} \times 3$ | $\begin{bmatrix} 1 \times 1, 512 \\ 3 \times 3, 512 \\ 1 \times 1, 2048 \end{bmatrix} \times 3$ | $\begin{bmatrix} 1 \times 1, 512 \\ 3 \times 3, 512 \\ 1 \times 1, 2048 \end{bmatrix} \times 3$  | $\begin{bmatrix} 1 \times 1, 512 \\ 3 \times 3, 512 \\ 1 \times 1, 2048 \end{bmatrix} \times 3$  |
|            | 1×1         | average pool, 1000-d fc, softmax  |   |   |  |  |
| FLOPs      |             | 1.8×10 <sup>9</sup>   | 3.6×10 <sup>9</sup>   | 3.8×10 <sup>9</sup>   | 7.6×10 <sup>9</sup>  | 11.3×10 <sup>9</sup>   |

Figure 4.7: resnet50 configuration

## 4.7.2 Network Architecture

The plain/residual network was tested as follows:

### Plain Network

Our plain baselines are mainly inspired by the philosophy of VGG nets. The convolutional layers mostly have 3×3 filters and follow two simple design rules:

1. for the same output feature map size, the layers have the same number of filters
2. if the feature map size is halved, the number of filters is doubled so as to preserve the time complexity per layer.

We perform downsampling directly by convolutional layers that have a stride of 2. The network ends with a global average pooling layer and a 1000-way fully-connected layer with softmax. The total number of weighted layers are 34. It is worth noticing that our model has fewer filters and lower complexity than VGG nets. Our 34-layer baseline has 3.6 billion FLOPs (multiply-adds), which is only 18% of VGG-19 (19.6 billion FLOPs) [7, p. 3] .

### Residual Network

Based on the above plain network, we insert shortcut connections which turn the network into its counterpart residual version. The identity shortcuts can be directly used when the input and output are of the same dimensions. When the dimensions increase, we consider two options:

1. The shortcut still performs identity mapping, with extra zero entries padded for increasing dimensions. This option introduces no extra parameter
2. The projection shortcut is used to match dimensions (done by 1×1 convolutions).

For both options, when the shortcuts go across feature maps of two sizes, they are performed with a stride of 2 [7, p. 4] .

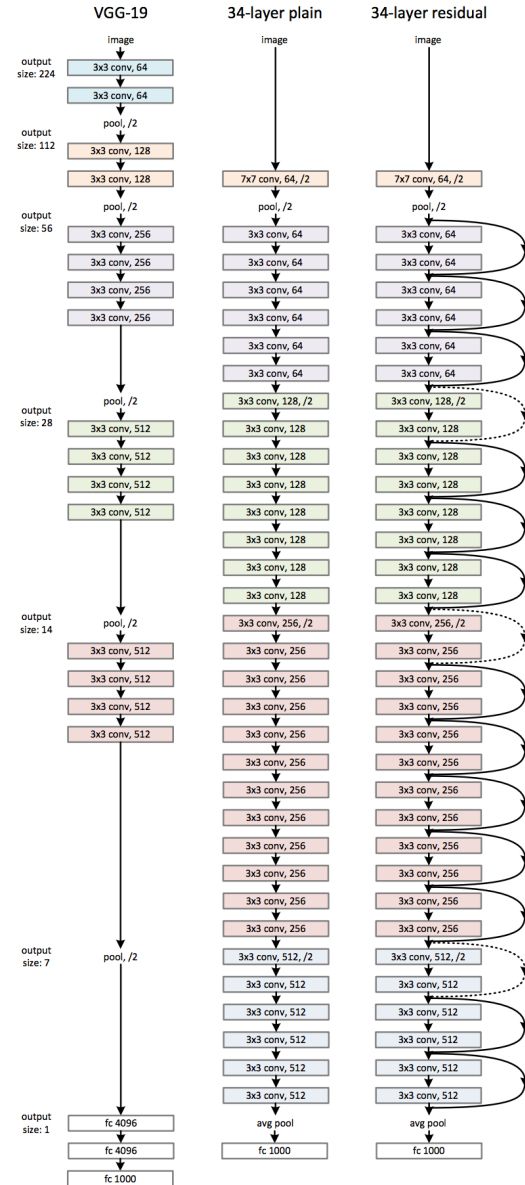


Figure 4.8: Resnet Architecture



# Chapter 5

## Implementation

### 5.1 Assumptions and Dependencies

It is assumed that the MRI scans are collected and processed before feeding into the module.

The program is dependent on external modules and are expected to be pre-installed on the system. The modules namely include:

- fast.ai
- tensorflow
- OpenCV
- matplotlib

### 5.2 Implementation Methods

After acquiring the data, the data is classified into two classes (binary class) of yes, consisting of tumorous cell and no, not consisting tumorous cells. A second batch of images is kept separate for prediction, the prediction batch.

Next three machine learning models are created. A **CNN** or a convolutional neural network, **VGG 16** and **Resnet 50**. The models are implemented in both fast.ai and tensorflow, to be compared later.

While training the images are resized to  $(150 \times 150)$  and augmented at runtime, thus removing bias as much as possible. Since there are only two possible classes (yes and no), a binary class is sufficient; dividing the images into training and testing (validation set) in 80 : 20 ratio. Giving us 2603 and 650 images for the *yes* and *no* classes, respectively.

After training is complete the models are then evaluated (further discussed in Chapter 6 )

## Chapter 6

# Experimental Result

The evaluated models are plotted on graph for better understanding of data.

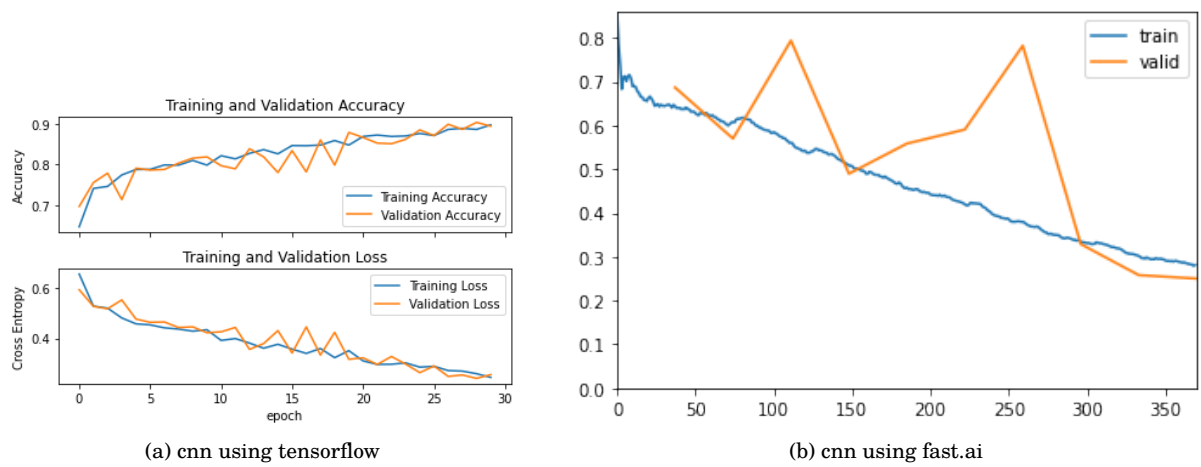


Figure 6.1: CNN implemented in fast.ai and tensorflow



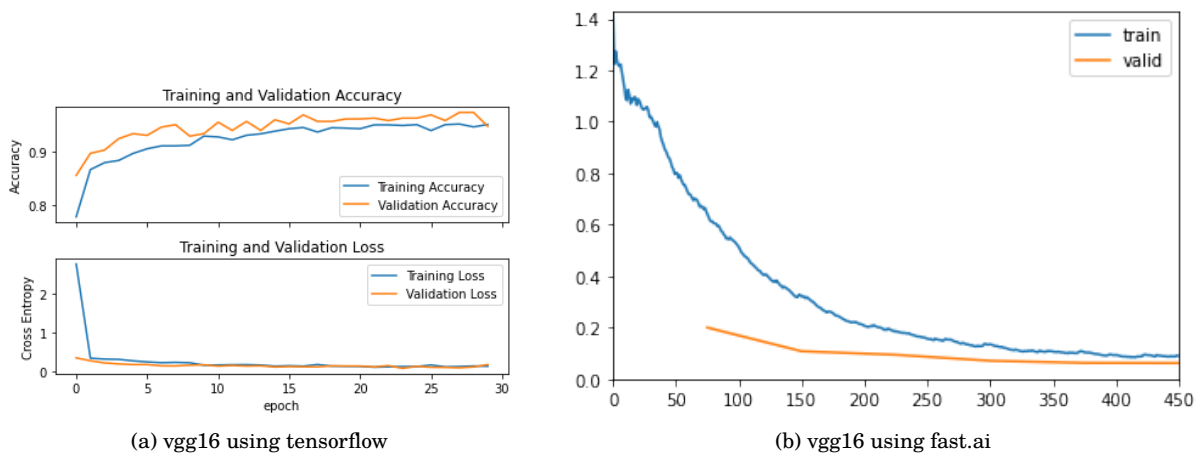


Figure 6.2: VGG16 implemented in fast.ai and tensorflow

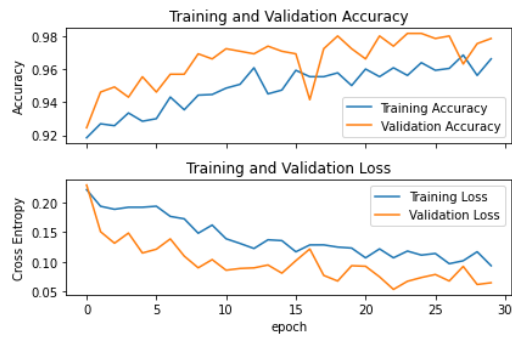

(a) resnet50 using tensorflow

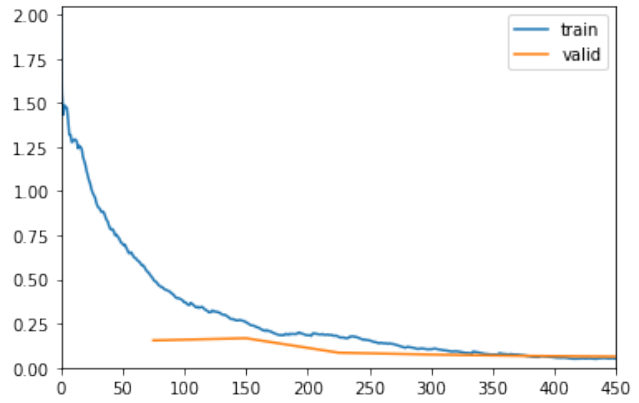


(b) resnet50 using fast.ai

Figure 6.3: Resnet 50 implemented in fast.ai and tensorflow


We have achieved around 96% and 98% accuracy for for the VGG16 and ResNet, respectively; using *tensorflow*, and 97% (98% after unfreezing) and 97% (99% after unfreezing) using *fast.ai*. While using CNN accuracy was almost same when implemented by the both the libraries.

There are lot of room for improvement but due to time and hardware constrains we were able to only implement till such.

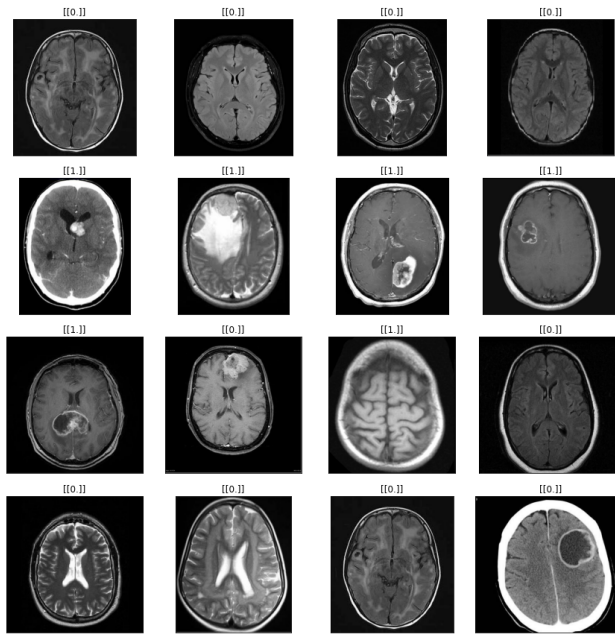

(a) prediction made by VGG16 implemented in tensorflow

Prediction/Actual/Loss/Probability

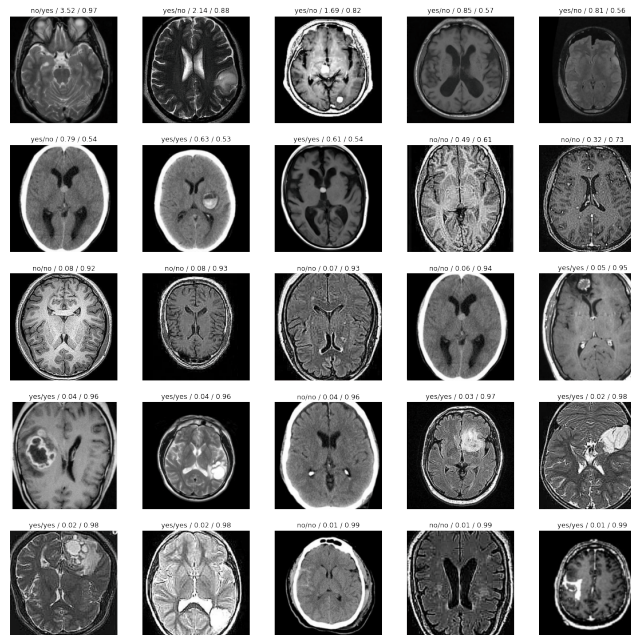

(b) prediction made by ResNet50 implemented in fast.ai

Figure 6.4: Comparing Predictions made by models

As it can be seen from Figure 6.4 there are some false positives in our predictions.

## **Chapter 7**

# **Conclusion and Future Work**

# Chapter 8

## Appendix

### 8.1 Tensorflow Implementation

### 8.2 CNN

```
import tensorflow as tf
from tensorflow.keras.preprocessing.image import ImageDataGenerator
from tensorflow.keras.models import Sequential
from tensorflow.keras.layers import Flatten, Dropout, Dense
from matplotlib import pyplot as plt

training_dataset_directory = '/content/dataset/training'
testing_dataset_directory = '/content/dataset/testing'

train_datagen = ImageDataGenerator(
    rotation_range=20,
    width_shift_range=0.2,
    height_shift_range=0.2,
    horizontal_flip=True,
    vertical_flip=True,
    rescale=1. / 255,
    fill_mode='nearest',
    validation_split=0.2
)

img_size = (150, 150)
img_shape = img_size + (3,)

training_set = train_datagen.flow_from_directory(
    training_dataset_directory,
    target_size=img_size,
    class_mode='binary',
    subset='training'
)

testing_set = train_datagen.flow_from_directory(
    testing_dataset_directory,
    target_size=img_size,
    class_mode='binary',
    subset='validation'
)

model = tf.keras.models.Sequential()
model.add(
    tf.keras.layers.Conv2D(
        16,
```

```

        (3, 3),
        activation='relu',
        input_shape=(150, 150, 3)
    )
)
model.add(
    tf.keras.layers.MaxPool2D(2, 2)
)

model.add(
    tf.keras.layers.Conv2D(
        32,
        (3, 3),
        activation='relu'
    )
)
model.add(
    tf.keras.layers.MaxPool2D(2, 2)
)

model.add(
    tf.keras.layers.Conv2D(
        64,
        (3, 3),
        activation='relu'
    )
)
model.add(
    tf.keras.layers.MaxPool2D(2, 2)
)

model.add(
    tf.keras.layers.Flatten()
)
model.add(
    tf.keras.layers.Dense(
        512,
        activation='relu'
    )
)
model.add(
    tf.keras.layers.Dense(
        1, activation='sigmoid'
    )
)

model.summary()

model.compile(
    optimizer='Adam',
    loss='binary_crossentropy',
    metrics=['accuracy'],
)

history = model.fit(
    training_set,
    epochs=30,
    verbose=1,
    validation_data=testing_set
)

```

## 8.3 VGG 16

```
import tensorflow as tf
from tensorflow.keras.preprocessing.image import ImageDataGenerator
from tensorflow.keras.applications.vgg16 import VGG16, preprocess_input
from tensorflow.keras.models import Sequential
from tensorflow.keras.layers import Flatten, Dropout, Dense
from matplotlib import pyplot as plt

training_dataset_directory = '/content/dataset/training'
testing_dataset_directory = '/content/dataset/testing'

train_datagen = ImageDataGenerator(
    rotation_range=20,
    width_shift_range=0.2,
    height_shift_range=0.2,
    horizontal_flip=True,
    vertical_flip=True,
    preprocessing_function=preprocess_input,
    validation_split=0.2
)

img_size = (150, 150)
img_shape = img_size + (3,)
random_seed = 123

training_set = train_datagen.flow_from_directory(
    training_dataset_directory,
    target_size=img_size,
    class_mode='binary',
    subset='training'
)

testing_set = train_datagen.flow_from_directory(
    testing_dataset_directory,
    target_size=img_size,
    class_mode='binary',
    subset='validation'
)

img_size = (150, 150)
img_shape = img_size + (3,)
random_seed = 123

vgg16 = VGG16(
    weights='imagenet',
    include_top=False,
    input_shape=img_shape
)

num_classes = 1
model = Sequential()
model.add(vgg16)
model.add(Flatten())
model.add(Dense(256, activation='relu'))
model.add(Dropout(0.5))
model.add(Dense(num_classes, activation='sigmoid'))
model.layers[0].trainable = False
model.summary()

model.compile()
```



```

        loss='binary_crossentropy',
        optimizer='Adam',
        metrics=['accuracy']
    )

    epochs = 30
    history = model.fit(
        training_set,
        epochs=epochs,
        validation_data=testing_set,
    )

```

## 8.4 ResNet 50

```

from tensorflow.keras.preprocessing.image import ImageDataGenerator
from tensorflow.keras.applications.resnet50 import ResNet50, preprocess_input
from tensorflow.keras.models import Sequential
from tensorflow.keras.layers import Flatten, Dropout, Dense
from tensorflow.keras.optimizers import RMSprop, Adam, SGD
from matplotlib import pyplot as plt

training_dataset_directory = '/content/dataset/training'
testing_dataset_directory = '/content/dataset/testing'

train_datagen = ImageDataGenerator(
    rotation_range=20,
    width_shift_range=0.2,
    height_shift_range=0.2,
    horizontal_flip=True,
    vertical_flip=True,
    preprocessing_function=preprocess_input,
    validation_split=0.2
)

img_size = (150, 150)
img_shape = img_size + (3,)
random_seed = 123

training_set = train_datagen.flow_from_directory(
    training_dataset_directory,
    target_size=img_size,
    batch_size=32,
    class_mode='binary',
    subset='training'
)

testing_set = train_datagen.flow_from_directory(
    testing_dataset_directory,
    target_size=img_size,
    class_mode='binary',
    subset='validation'
)

img_size = (150, 150)
img_shape = img_size + (3,)
random_seed = 123

resnet50 = ResNet50(
    weights='imagenet',
    include_top=False,

```

```

        input_shape=img_shape
    )

    num_classes = 1
    model = Sequential()
    model.add(resnet50)
    model.add(Flatten())
    model.add(Dense(256, activation='relu'))
    model.add(Dropout(0.5))
    model.add(Dense(num_classes, activation='sigmoid'))
    model.layers[0].trainable = False
    model.summary()

    model.compile(
        loss='binary_crossentropy',
        optimizer='Adam',
        metrics=['accuracy']
    )

    epochs = 30
    history = model.fit(
        training_set,
        epochs=epochs,
        validation_data=testing_set,
    )

```

## 8.5 Prediction

```

import tensorflow as tf
from keras_preprocessing.image import img_to_array
from tensorflow.keras.preprocessing.image import ImageDataGenerator
from tensorflow.keras.applications.resnet50 import preprocess_input, decode_predictions
from tensorflow.keras.preprocessing import image
from tensorflow.keras.preprocessing import image_dataset_from_directory
import matplotlib.image as mpimg
from keras.preprocessing import image
import cv2
import os
import glob

import numpy as np
import matplotlib.pyplot as plt

model = tf.keras.models.load_model('/content/gdrive/MyDrive/model/vgg_imp.h5')

training_dataset_directory = '/content/dataset/training'
testing_dataset_directory = '/content/dataset/testing'

train_datagen = ImageDataGenerator(
    rotation_range=20,
    width_shift_range=0.2,
    height_shift_range=0.2,
    horizontal_flip=True,
    vertical_flip=True,
    preprocessing_function=preprocess_input,
    validation_split=0.2
)

img_size = (150, 150)
img_shape = img_size + (3,)

```

```

random_seed = 123

training_set = train_datagen.flow_from_directory(
    training_dataset_directory,
    target_size=img_size,
    class_mode='binary',
    subset='training'
)

testing_set = train_datagen.flow_from_directory(
    testing_dataset_directory,
    target_size=img_size,
    class_mode='binary',
    subset='validation'
)

loss, acc = model.evaluate(training_set)

IMG_SIZE = (150,150)
BATCH_SIZE = 32
new_dataset = image_dataset_from_directory(
    '/content/gdrive/MyDrive/dataset',
    image_size=IMG_SIZE
)

predictions = model.predict(new_dataset, batch_size=BATCH_SIZE)

img_dir = "/content/gdrive/MyDrive/dataset/pred"
data_path = os.path.join(img_dir, '*g')
files = glob.glob(data_path)
data = []
result = []
for f1 in files:
    test_image = image.load_img(f1, target_size = (150, 150))
    test_image = image.img_to_array(test_image)
    test_image = np.expand_dims(test_image, axis = 0)
    images = np.vstack([test_image])
    classes = model.predict(images, batch_size=10)
    classes = np.round(classes)
    data.append(f1)
    result.append(classes)

for x,y in zip(data, result):
    print(x, y)

img = cv2.imread(data[0])
plt.imshow(img)
plt.title(result[0])

L = 4
W = 4
fig, axes = plt.subplots(L, W, figsize = (12,12))
axes = axes.ravel()
for i in np.arange(0, L * W):
    img = cv2.imread(data[i])
    axes[i].imshow(img)
    axes[i].set_title(result[i])
    axes[i].set_xticks([])
    axes[i].set_yticks([])

```

## 8.6 fast.ai Implementation

### 8.7 CNN

```
import numpy as np
import pandas as pd
import torch
import keras
import tensorflow as tf
import os
import gc
import pathlib
from keras.models import Sequential
from keras.layers import Conv2D, MaxPooling2D, Flatten, Dense, Dropout, BatchNormalization
from sklearn.metrics import confusion_matrix
from fastai import *
from fastai.vision.all import *
from fastai.tabular.all import *
from fastai.text.all import *
from fastai.vision.data import ImageDataLoaders
from fastai.vision.models import *
import torchvision.models as models
from fastai.callback.schedule import lr_find
from fastai.callback.schedule import *
from matplotlib import pyplot as plt
from fastai.imports import *
from fastai.torch_core import *
from fastai.learner import *
from sklearn.model_selection import train_test_split
from sklearn.preprocessing import OneHotEncoder

print(os.listdir("/content/drive/MyDrive/Colab Notebooks/samples"))
DATA_DIR = "/content/drive/MyDrive/Colab Notebooks/samples/Brain_Tumor"
os.listdir(f'{DATA_DIR}')

data = ImageDataLoaders.from_folder(
    DATA_DIR,
    train=".",
    valid_pct=0.2,
    ds_tfms=aug_transforms(
        mult=2.0,
        do_flip=True,
        flip_vert=True),
    item_tfms=Resize(224),
    bs=64,
    batch_tfms=Normalize.from_stats(
        *imagenet_stats))

data.show_batch(nrows=4, figsize=(10, 10))

model = nn.Sequential(
    nn.Sequential(
        nn.Sequential(
            nn.Conv2d(3, 64, kernel_size=(3, 3),
                      stride=(1, 1), padding=(1, 1)), nn.ReLU(inplace=True),
            nn.Conv2d(64, 64, kernel_size=(3, 3),
                      stride=(1, 1), padding=(1, 1)), nn.ReLU(inplace=True),
            nn.MaxPool2d(2, stride=2),
            nn.Conv2d(64, 128, kernel_size=(3, 3),
                      stride=(1, 1), padding=(1, 1)), nn.ReLU(inplace=True),
```

```

        nn.Conv2d(128, 128, kernel_size=(3, 3),
                  stride=(1, 1), padding=(1, 1)), nn.ReLU(inplace=True),
        nn.MaxPool2d(2, stride=2),
        nn.Conv2d(128, 256, kernel_size=(3, 3),
                  stride=(1, 1), padding=(1, 1)), nn.ReLU(inplace=True),
        nn.Conv2d(256, 256, kernel_size=(3, 3),
                  stride=(1, 1), padding=(1, 1)), nn.ReLU(inplace=True),
        nn.MaxPool2d(2, stride=2),
        nn.Conv2d(256, 512, kernel_size=(3, 3),
                  stride=(1, 1), padding=(1, 1)), nn.ReLU(inplace=True),
        nn.Conv2d(512, 512, kernel_size=(3, 3),
                  stride=(1, 1), padding=(1, 1)), nn.ReLU(inplace=True),
        nn.Conv2d(512, 512, kernel_size=(3, 3),
                  stride=(1, 1), padding=(1, 1)), nn.ReLU(inplace=True),
        nn.MaxPool2d(2, stride=2),
    ),
),
nn.Sequential(
    AdaptiveConcatPool2d(1),
    nn.Flatten(),
    nn.BatchNorm1d(1024, eps=1e-05, momentum=0.1,
                  affine=True, track_running_stats=True),
    nn.Dropout(p=0.25, inplace=False),
    nn.Linear(in_features=1024, out_features=512, bias=False),
    nn.ReLU(),
    nn.BatchNorm1d(512, eps=1e-05, momentum=0.1,
                  affine=True, track_running_stats=True),
    nn.Dropout(p=0.5, inplace=False),
    nn.Linear(in_features=512, out_features=2, bias=False)
)

learner = Learner(data, model, metrics=[accuracy, error_rate])

learner.summary()

learner.lr_find()

learner.fit_one_cycle(13, lr_max=slice(1e-3), cbs=[ShowGraphCallback()])

learner.export(
    "/content/drive/MyDrive/Colab Notebooks/pretrained_model/cnn/btc4_final.pkl")

interp = ClassificationInterpretation.from_learner(learner)

interp.plot_top_losses(25, figsize=(20, 20))

interp.plot_confusion_matrix(figsize=(8, 8), dpi=60)

```

### Prediction

```

import numpy as np
import pandas as pd
import fastbook
from fastbook import *
import os
import gc
import pathlib
import fastai.losses
import fastai.layers
from sklearn.metrics import confusion_matrix
from fastai import *

```

```

from fastai.vision import *
from fastai.vision.models import *
import torchvision.models as models

learner = load_learner(
    "/content/drive/MyDrive/Colab Notebooks/pretrained_model/cnn/btc4_final.pkl")

def is_true(x):
    if x[0] == 'yes':
        return "Tumor detected."
    else:
        return "Tumor not detected."

img = PILImage.create(
    f"/content/drive/MyDrive/Colab Notebooks/BrainTumor/no/2 no.jpeg")

x = learner.predict(img)

print("Test Result:", is_true(x), "\nProbability:", x[2])

```

## 8.8 VGG 16

```

import numpy as np
import pandas as pd
import torch
import keras
import os
import gc
import pathlib
from sklearn.metrics import confusion_matrix
from fastai import *
from fastai.vision.all import *
from fastai.tabular.all import *
from fastai.text.all import *
from fastai.vision.data import ImageDataLoaders
from fastai.vision.models import *
import torchvision.models as models
from fastai.callback.schedule import lr_find
from fastai.callback.schedule import *
from matplotlib import pyplot as plt
from fastai.imports import *
from fastai.torch_core import *
from fastai.learner import *

print(os.listdir("/content/drive/MyDrive/Colab Notebooks/samples"))
DATA_DIR = "/content/drive/MyDrive/Colab Notebooks/samples/Brain_Tumor"
os.listdir(f'{DATA_DIR}')

data = ImageDataLoaders.from_folder(
    DATA_DIR,
    train=".",
    valid_pct=0.2,
    ds_tfms=aug_transforms(
        mult=1.0,
        do_flip=True,
        flip_vert=True,
        max_warp=0,
        max_rotate=10.0,

```

```

        max_zoom=1.1,
        max_lighting=0.2,
        p_affine=0.75,
        mode='bilinear',
        pad_mode='reflection',
        align_corners=True,
        min_scale=1.0),
    item_tfms=Resize(224),
    bs=64,
    val_bs=None,
    num_workers=0,
    batch_tfms=Normalize.from_stats(
        *imagenet_stats))

data.show_batch(nrows=4, figsize=(10, 10))

learner = cnn_learner(
    data, models.vgg16, metrics=[
        accuracy, error_rate], cbs=[
        ShowGraphCallback()], model_dir="/tmp/model/")

learner.lr_find()

learner.model

learner.fit_one_cycle(
    12,
    lr_max=slice(6.918309955e-4),
    cbs=[
        ShowGraphCallback()])

learner.export(
    "/content/drive/MyDrive/Colab Notebooks/pretrained_model/vgg/btc1.pkl")

learner.unfreeze()

learner.lr_find()

learner.fit_one_cycle(
    10,
    lr_max=slice(2.2908675418875646e-6),
    cbs=[
        ShowGraphCallback()])

learner.export(
    "/content/drive/MyDrive/Colab Notebooks/pretrained_model/vgg/final_vgg/btc1_final.pkl")

interp = ClassificationInterpretation.from_learner(learner)

interp.plot_top_losses(25, figsize=(20, 20))

interp.plot_confusion_matrix(figsize=(8, 8), dpi=60)

```

### Prediction

```

import numpy as np
import pandas as pd
import fastbook
from fastbook import *
import os
import gc
import pathlib

```

```

import fastai.losses
import fastai.layers
from sklearn.metrics import confusion_matrix
from fastai import *
from fastai.vision import *
from fastai.vision.models import *
import torchvision.models as models

learner = load_learner(
    "/content/drive/MyDrive/Colab Notebooks/pretrained_model/vgg/final_vgg/btc_final.pkl")

def is_true(x):
    if x[0] == 'yes':
        return "Tumor detected."
    else:
        return "Tumor not detected."

img = PILImage.create(
    f"/content/drive/MyDrive/Colab Notebooks/BrainTumor/no/2 no.jpeg")

x = learner.predict(img)

print("Test Result:", is_true(x), "\nProbability:", x[2])

```

## 8.9 ResNet 50

```

import numpy as np
import pandas as pd
import torch
import keras
import os
import gc
import pathlib
from sklearn.metrics import confusion_matrix
from fastai import *
from fastai.vision.all import *
from fastai.tabular.all import *
from fastai.text.all import *
from fastai.vision.data import ImageDataLoaders
from fastai.vision.models import *
import torchvision.models as models
from fastai.callback.schedule import lr_find
from fastai.callback.schedule import *
from matplotlib import pyplot as plt
from fastai.imports import *
from fastai.torch_core import *
from fastai.learner import *

print(os.listdir("/content/drive/MyDrive/Colab Notebooks/samples"))
DATA_DIR = "/content/drive/MyDrive/Colab Notebooks/samples/Brain_Tumor"
os.listdir(f'{DATA_DIR}')

data = ImageDataLoaders.from_folder(
    DATA_DIR,
    train=".",
    valid_pct=0.2,
    ds_tfms=aug_transforms(
        mult=1.0,

```



```

do_flip=True,
flip_vert=True,
max_warp=0,
max_rotate=10.0,
max_zoom=1.1,
max_lighting=0.2,
p_affine=0.75,
mode='bilinear',
pad_mode='reflection',
align_corners=True,
min_scale=1.0),
item_tfms=Resize(224),
bs=64,
val_bs=None,
num_workers=0,
batch_tfms=Normalize.from_stats(
    *imagenet_stats))

data.show_batch(nrows=4, figsize=(10, 10))

learner = cnn_learner(
    data, models.resnet50, metrics=[
        accuracy, error_rate], cbs=[
        ShowGraphCallback()], model_dir="/tmp/model/")

learner.lr_find()

learner.model

learner.fit_one_cycle(6, lr_max=slice(8.32e-4), cbs=[ShowGraphCallback()])

learner.export(
    "/content/drive/MyDrive/Colab Notebooks/pretrained_model/resnet/btc2.pkl")

learner.unfreeze()

learner.lr_find()

learner.fit_one_cycle(
    6,
    lr_max=slice(5.754399353463668e-6),
    cbs=[
        ShowGraphCallback()])

learner.fit_one_cycle(4, lr_max=slice(2.7e-5), cbs=[ShowGraphCallback()])

learner.fit_one_cycle(4, lr_max=slice(2.9e-5), cbs=[ShowGraphCallback()])

learner.export(
    "/content/drive/MyDrive/Colab Notebooks/pretrained_model/resnet/final_resnet/btc_final2.pkl")

interp = ClassificationInterpretation.from_learner(learner)

interp.plot_top_losses(25, figsize=(20, 20))

interp.plot_confusion_matrix(figsize=(8, 8), dpi=60)

```

### Prediction

```

import numpy as np
import pandas as pd
import fastbook

```

```

from fastbook import *
import os
import gc
import pathlib
import fastai.losses
import fastai.layers
from sklearn.metrics import confusion_matrix
from fastai import *
from fastai.vision import *
from fastai.vision.models import *
import torchvision.models as models

learner = load_learner(
    "/content/drive/MyDrive/Colab Notebooks/pretrained_model/vgg/final_vgg/btc_final.pkl")

def is_true(x):
    if x[0] == 'yes':
        return "Tumor detected."
    else:
        return "Tumor not detected."

img = PILImage.create(
    f"/content/drive/MyDrive/Colab Notebooks/BrainTumor/no/2 no.jpeg")

x = learner.predict(img)

print("Test Result:", is_true(x), "\nProbability:", x[2])

```

# References

- [1] Yakub Bhanothu, Anandhanarayanan Kamalakannan, and Govindaraj Rajamanickam. “Detection and Classification of Brain Tumor in MRI Images using Deep Convolutional Network”. In: *2020 6th International Conference on Advanced Computing and Communication Systems (ICACCS)*. 2020, pp. 248–252. doi: 10.1109/ICACCS48705.2020.9074375.
- [2] A. Funmilola, Fenwa Olusayo, and A. Elizabeth. “Classification of Abnormalities in Brain MRI Images Using PCA and SVM”. In: 2015.
- [3] E. George. “MRI Brain Image Enhancement Using Filtering Techniques”. In: 2012.
- [4] Aurélien Géron. *Hands-on Machine Learning with Scikit-Learn, Keras, and TensorFlow*. Sebastopol, CA: O’Reilly Media, 2019. ISBN: 978-1-492-03264-9.
- [5] Suchita Goswami and L.K.P. Bhaiya. “Brain Tumour Detection Using Unsupervised Learning Based Neural Network”. In: Apr. 2013, pp. 573–577. ISBN: 978-1-4673-5603-9. doi: 10.1109/CSNT.2013.123.
- [6] Suchita Goswami and Lalit Kumar P. Bhaiya. “Brain Tumour Detection Using Unsupervised Learning Based Neural Network”. In: *2013 International Conference on Communication Systems and Network Technologies*. 2013, pp. 573–577. doi: 10.1109/CSNT.2013.123.
- [7] Kaiming He et al. *Deep Residual Learning for Image Recognition*. 2015. arXiv: 1512.03385 [cs.CV].
- [8] Hussein Ibrahim, Abdelrhman Ahmed, and Yusra Mohamed. “MRI brain image classification using neural networks”. In: Aug. 2013, pp. 253–258. ISBN: 978-1-4673-6231-3. doi: 10.1109/ICCEE.2013.6633943.
- [9] Dipali Joshi, N.K. Rana, and V.M. Misra. “Classification of Brain Cancer using Artificial Neural Network”. In: June 2010, pp. 112–116. doi: 10.1109/ICECTECH.2010.5479975.
- [10] Ahmed Kharrat et al. “A Hybrid Approach for Automatic Classification of Brain MRI Using Genetic Algorithm and Support Vector Machine”. In: *Leonardo Journal of Sciences* 17 (Dec. 2010).
- [11] A. Sutskever Krizhevsky and G. E. I. Hinton. “Imagenet classification with deep convolutional neural networks”. In: 2012, pp. 1097–1105. URL: <https://proceedings.neurips.cc/paper/2012/file/c399862d3b9d6b76c8436e924a68c45b-Paper.pdf>.
- [12] Neelam Marshkole, Bikesh Singh, and A Thoke. “Texture and Shape based Classification of Brain Tumors using Linear Vector Quantization”. In: 30 (Jan. 2011).
- [13] P. Natarajan et al. “Tumor detection using threshold operation in MRI brain images”. In: *2012 IEEE International Conference on Computational Intelligence and Computing Research*. 2012, pp. 1–4. doi: 10.1109/ICCIC.2012.6510299.
- [14] Mohd Fauzi Othman and Mohd Ariffanan Mohd Basri. “Probabilistic Neural Network for Brain Tumor Classification”. In: *2011 Second International Conference on Intelligent Systems, Modelling and Simulation*. 2011, pp. 136–138. doi: 10.1109/ISMS.2011.32.
- [15] T. Rajesh and R. Malar. “Rough set theory and feed forward neural network based brain tumor detection in magnetic resonance images”. In: July 2013, pp. 240–244. ISBN: 978-1-4799-1377-0. doi: 10.1109/ICANMEET.2013.6609287.
- [16] S. Rajeshwari and T. Sharmila. “Efficient quality analysis of MRI image using preprocessing techniques”. In: Apr. 2013, pp. 391–396. ISBN: 978-1-4673-5759-3. doi: 10.1109/CICT.2013.6558127.
- [17] Rakesh Ramteke and Monali Khachane. “Automatic Medical Image Classification and Abnormality Detection Using K- Nearest Neighbour”. In: *International Journal of Advanced Computer Research* Volume-2 Number-4 (Dec. 2012), pp. 190–196.
- [18] Mohammed Abdel-Megeed Mohammed Salem. “Brain Tumor Diagnosis Systems Based on Artificial Neural Networks and Segmentation using MRI”. In: Jan. 2012.

- [19] Pankaj Sapra, Rupinderpal Singh, and Shivani Khurana. “Brain Tumor Detection Using Neural Network”. In.
- [20] Reda Shbib. “MRI Brain Image Segmentation using Modified Fuzzy Logic Clustering (MFLC)”. In: *International Journal of Engineering Research and V8* (June 2019). doi: 10.17577/IJERTV8IS060438.
- [21] Karen Simonyan and Andrew Zisserman. *Very Deep Convolutional Networks for Large-Scale Image Recognition*. 2015. arXiv: 1409.1556 [cs.CV].
- [22] Xiao Xuan and Qingmin Liao. “Statistical Structure Analysis in MRI Brain Tumor Segmentation”. In: *Fourth International Conference on Image and Graphics (ICIG 2007)*. 2007, pp. 421–426. doi: 10.1109/ICIG.2007.181.