

titanic

July 30, 2021


```
[1]: import pandas as pd
     import seaborn as sns
     import matplotlib.pyplot as plt
[3]: this = pd.read_csv("../data/train.csv")
[4]: f, ax = plt.subplots(1, 2, figsize= (18, 8))
     series = this['Survived'].value_counts()
     # print(type(series))
     # print(series)
     series.plot.pie(explode=[0,0.1], autopct='%1.1f%%', ax=ax[0], shadow=True)
     ax[0].set_title('0.Dead vs 1.Survived')
     ax[0].set_ylabel('')
     ax[1].set_title('0.Dead vs 1.Survived')
     sns.countplot('Survived', data=this, ax=ax[1])
    /opt/conda/lib/python3.9/site-packages/seaborn/_decorators.py:36: FutureWarning:
    Pass the following variable as a keyword arg: x. From version 0.12, the only
    valid positional argument will be `data`, and passing other arguments without an
    explicit keyword will result in an error or misinterpretation.
      warnings.warn(
[4]: <AxesSubplot:title={'center':'0.Dead vs 1.Survived'}, xlabel='Survived',
    ylabel='count'>
```

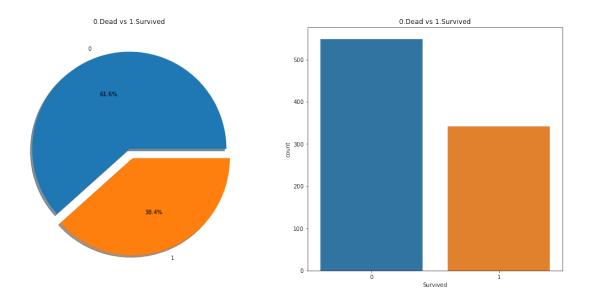


[5]: <AxesSubplot:xlabel='Seat', ylabel='count'>

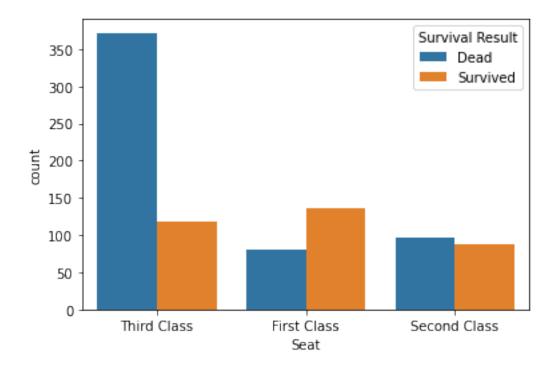

[6]: <AxesSubplot:xlabel='Port', ylabel='count'>

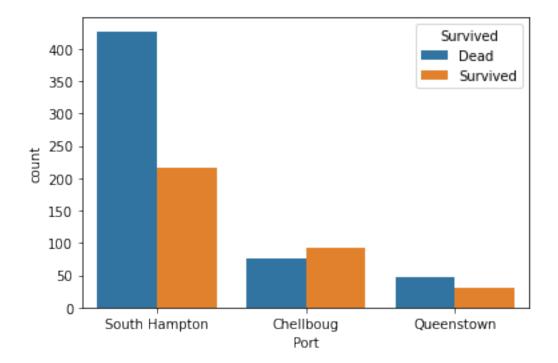

[7]: Text(0.5, 1.0, 'Female 0.Dead vs 1.Survived')

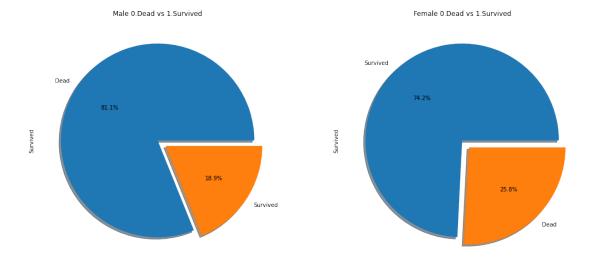

[]: